MIL-C-83723/25B(USAF)
13 July 1976
SUPERSEDING
MIL-C-83723/25A(USAF)
9 November 1971

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (WALL MOUNTING FLANGE, THREADED COUPLING, SOLDER PIN CONTACTS), (SERIES II, CLASS H)

This specification sheet is approved for use by the Engineering and Technical Support Division (AFLC), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

Ⓑ INACTIVE: USE MS3142 OF MIL-C-5015

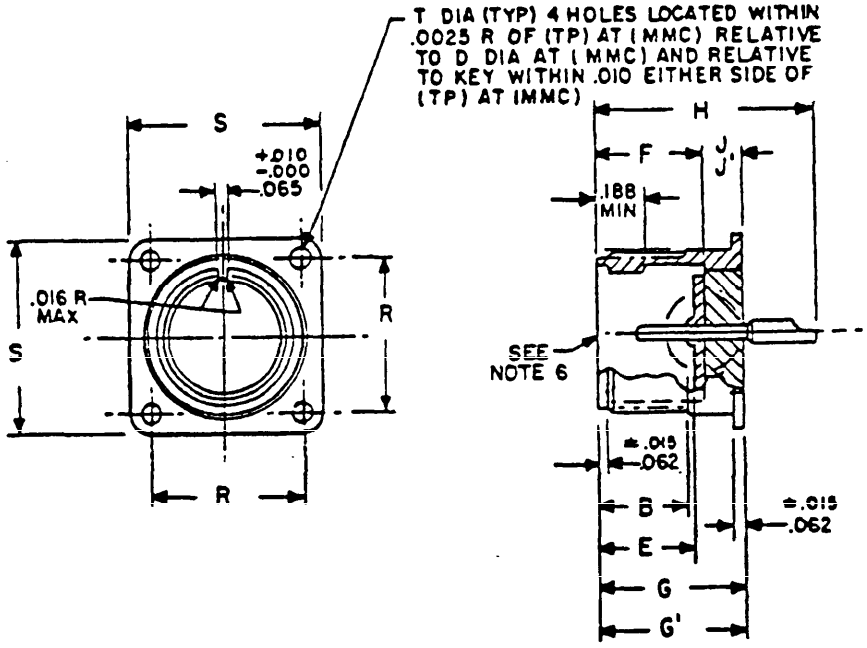


FIGURE 1. CONNECTOR

Ⓑ DENOTES REVISION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

(B) TABLE I. CONNECTOR DIMENSIONS.

SHELL SIZE PART NO. DESIGN	MIL-C 5015 SHELL SIZE	B MIN. USABLE THREAD	E +.000 −.030	F +.031 −.000 INSERT LOCA	G +.000 −.025 SHELL LENGTH	G' +.000 −.025 SHELL LENGTH	H MAX. LENGTH	J ±.005 WEB	J' ±.005 WEB	R ±.005 ⌀ TO ⌀ MTG. HOLE	S ±.031 LENGTH SIDE	T ±.005 MTG. BOLT HOLE
08	8S	.375	.500	.562	.725	N/A	1.127	.125	N/A	.594	.875	.120
10	10S									.719	1.000	
11	10SL									.812	1.094	
13	12S									.906	1.188	
15	14S									.969	1.281	
17	16S									.812	1.094	
12	12	.625	.687	.750	.912		1.416			.906	1.188	
14	14						1.619			.969	1.281	
16	16					1.037	2.001		.250	1.062	1.375	
18	18									1.156	1.500	
20	20									1.250	1.625	
22	22									1.375	1.750	.147
24	24									1.562	2.000	
28	28									1.750	2.250	.173
32	32									1.938	2.500	
36	36											

1. J' WEBB THICKNESS IS USED IN ALL RECEPTACLES, SHELL SIZE 16 AND LARGER WHERE ONE OR MORE CONTACTS ARE SIZE 4 OR LARGER.
2. G' IS LENGTH OF SHELL WHEN J' WEB THICKNESS IS USED.
3. H IS MAXIMUM OVERALL LENGTH FOR RECEPTACLES USING SOLDER CUP CONTACTS.

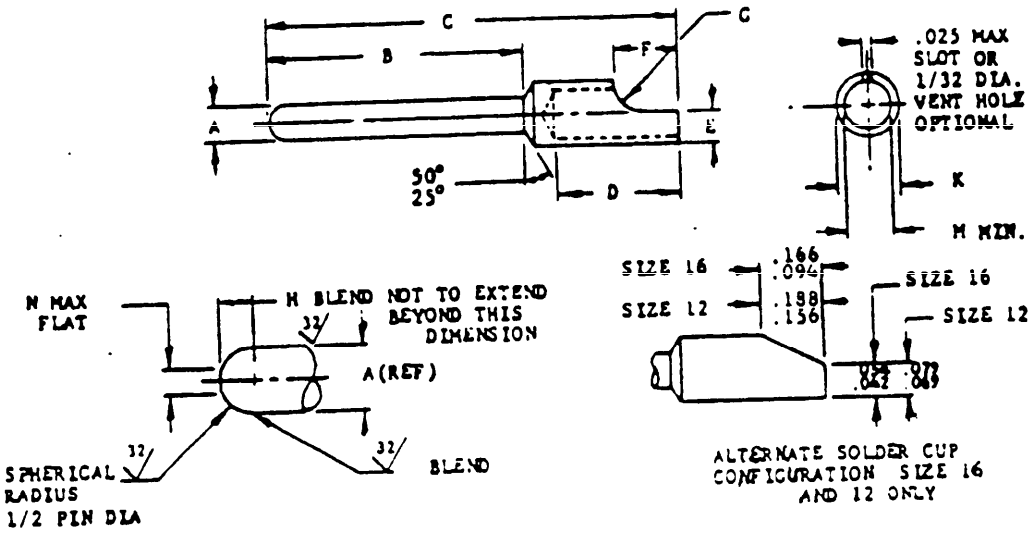


TABLE II. CONTACT DIMENSIONS.

CONTACT SIZE (1)	A DIA.	B	C MAX.	D	E	F	G	H MAX.	K DIA.	M DIA.	N MAX.
16	.0635 .0615	.651 .641	1.003	.313 .250	.054 .042	.166 .094	.250 .125	.032	.116 .096	.069	.015
16 (L)	.0635 .0615	.786 .776	1.043	.313 .250	.054 .042	.166 .094	.250 .125	.032	.116 .096	.069	.015
12	.095 .093	.836 .826	1.291	.438 .375	.079 .069	.188 .156	.250 .187	.048	.150 .130	.112	.015
12 (L)	.095 .093	1.012 1.002	1.468	.438 .375	.079 .069	.188 .156	.250 .187	.048	.150 .130	.112	.015
8	.143 .141	.880 .870	1.494	.563 .500	.128 .118	.266 .234	.260 .240	.072	.259 .243	.205	.015
8 (L)	.143 .141	1.012 1.002	1.619	.563 .500	.128 .118	.266 .234	.260 .240	.072	.259 .243	.205	.015
4 (L)	.226 .224	1.012 1.002	1.876	.688 .625	.191 .181	.327 .297	.510 .490	.105	.397 .370	.328	.110
0 (L)	.358 .356	1.012 1.002	1.876	.688 .625	.267 .247	.327 .297	.510 .490	.139	.550 .510	.464	.240

(1) CONTACTS DENOTED BY (L) ARE USED IN ALL RECEPTACLES WITH J' WEB THICKNESS.

NOTES:
1. All dimensions are in inches and apply after plating.
2. 125 all over per ANSI B46.1 unless otherwise specified.
3. Remove burrs and sharp edges .015 max. x 50°/40° chamfer or .015 R max. unless otherwise specified.
4. Contact diameters concentric within .004 TIR.
5. Receptacle diameters concentric within .010 diameter.
6. For details of connector front end configuration see procurement specification.

FIGURE 2. Hermetic solder cup contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Receptacles mate with MB3723/23.


(B) Contact finish: Gold plate per MIL-G-45204, type II, .000050 inch minimum. A suitable underplate may be used. Silver shall not be used.

Receptacle shell finish: Tin plate per MIL-T-10727, type I, .00010 inch minimum thick (fused) over suitable underplate.

(B) For alternate polarizing positions and insert arrangements, refer to MIL-STD-1651. In alternate positions vitreous seal insert is rotated clockwise from master key in shell to corresponding required alternate position.

Contact solder cup to face perpendicular to vertical center line of insert arrangement within ±15°C.

Part number example:

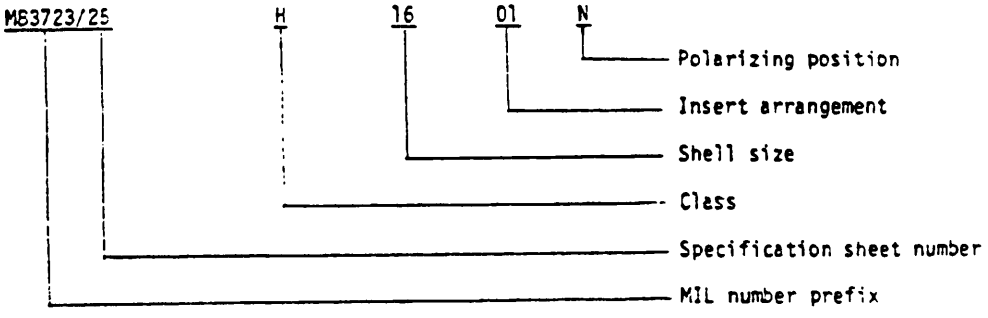

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 15, 17, 99

Preparing activity:
Air Force - 85

(Project 5935-F024-9)

☆U.S GOVERNMENT PRINTING OFFICE: 1976-603-766/6818

Source: https://assist.dla.mil -- Downloaded: 20261O-23T09:19Z
Check the source to verify that this is the current version before use.