
MIL-C-85049/3
16 January 1980
SUPERSEDING
MS17340B
1 June 1966 and
MS90571
25 May 1967

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

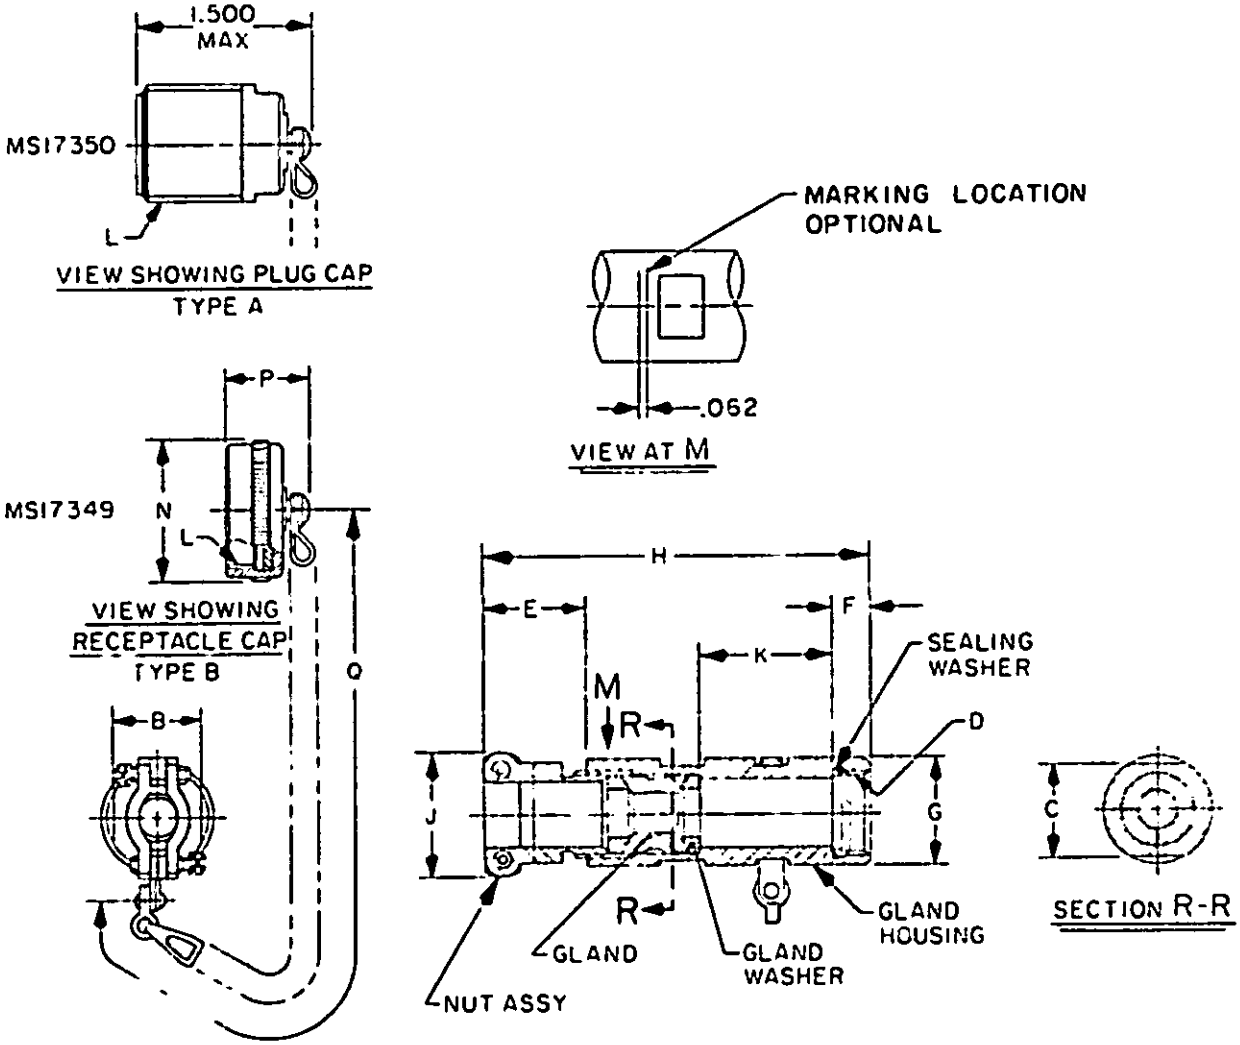

Configuration A. Style 1 cable sealing.

FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check this source to verify that this is the current version before use.


FSC 5935

SIZE NO.	SHELL SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LG MAX	F ±.016	G DIA +.010 -.020	H MAX	J ±.031	K +.015 -.025	L THREAD (PLATED) CLASS 2(A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	0.375	0.281	0.750	0.812	0.7500-20UNEF	0.969	.479	0.938	3.365	1.062	0.621	0.8750-0.1P-0.2L-DS	1.094	0.765	5.00
2	12	.281	.188	.750	.812	.7500-20UNEF	.969		.938	3.365	1.062	.621	.8750-0.1P-0.2L-DS	1.094	.765	
3	14	.438	.344	.875	.938	.8750-20UNEF	.969		1.062	3.678	1.125	.871	1.0000-0.1P-0.2L-DS	1.219	.765	
4	16	.605	.511	1.000	1.062	1.0000-20UNEF	1.062		1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344	.980	
5	16	.530	.436	1.000	1.062	1.0000-20UNEF			1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344		
6	16	.405	.311	1.000	1.062	1.0000-20UNEF			1.188	4.177	1.375	1.121	1.1250-0.1P-0.2L-DS	1.344		
7	18	.625	.531	1.062	1.125	1.1250-18NEF			1.312	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.469		
8		.699	.605													
9		.500	.406													
10	18	.455	.361	1.062	1.125	1.1250-18NEF	1.062		1.312	4.489	1.562		1.2500-0.1P-0.2L-DS	1.469		
11	20	.828	.715	1.188	1.250	1.2500-18NEF	1.125		1.438	4.615	1.688		1.3750-0.1P-0.2L-DS	1.562		
12	20	.562	.449	1.188	1.250	1.2500-18NEF	1.125		1.438	4.615	1.688		1.3750-0.1P-0.2L-DS	1.562		5.00
13	22	.750	.637	1.312	1.375	1.3750-18NEF	1.094		1.562	4.647	1.812		1.5000-0.1P-0.2L-DS	1.688		6.00
14	22	.900	.787	1.312	1.375	1.3750-18NEF	1.094		1.562	4.647	1.812		1.5000-0.1P-0.2L-DS	1.688		
15	22	.805	.692	1.312	1.375	1.3750-18NEF	1.094		1.562	4.647	1.812		1.5000-0.1P-0.2L-DS	1.688		
16	24	1.055	.930	1.546	1.625	1.6250-18NEF	1.281		1.812	4.896	2.125		1.7500-0.1P-0.2L-DS	1.938		
17		1.000	.875													
18		1.109	.984													
19	24	0.880	.755	1.546	1.625	1.6250-18NEF			1.812	4.896	2.125	1.371	1.7500-0.1P-0.2L-DS	1.938		
20	28	1.180	1.055	1.780	1.875	1.8750-16UN			2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219		
21	28	1.230	1.105	1.780	1.875	1.8750-16UN			2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219		
22	28	1.310	1.185	1.780	1.875	1.8750-16UN			2.062	4.959	2.469	1.372	2.0000-0.1P-0.2L-DS	2.219		
23	32	1.455	1.320	2.000	2.062	2.0625-16 UNS			2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469		
24	32	1.531	1.406	2.000	2.062	2.0625-16UNS			2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469		
25	32	1.375	1.250	2.000	2.062	2.0625-16 UNS			2.312	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.469		
26	36	1.656	1.531	2.250	2.312	2.3125-16UNS			2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719		
27	36	1.562	1.437	2.250	2.312	2.3125-16 UNS	1.281	.479	2.562	5.083	2.953	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00

Configuration A. Style 1 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

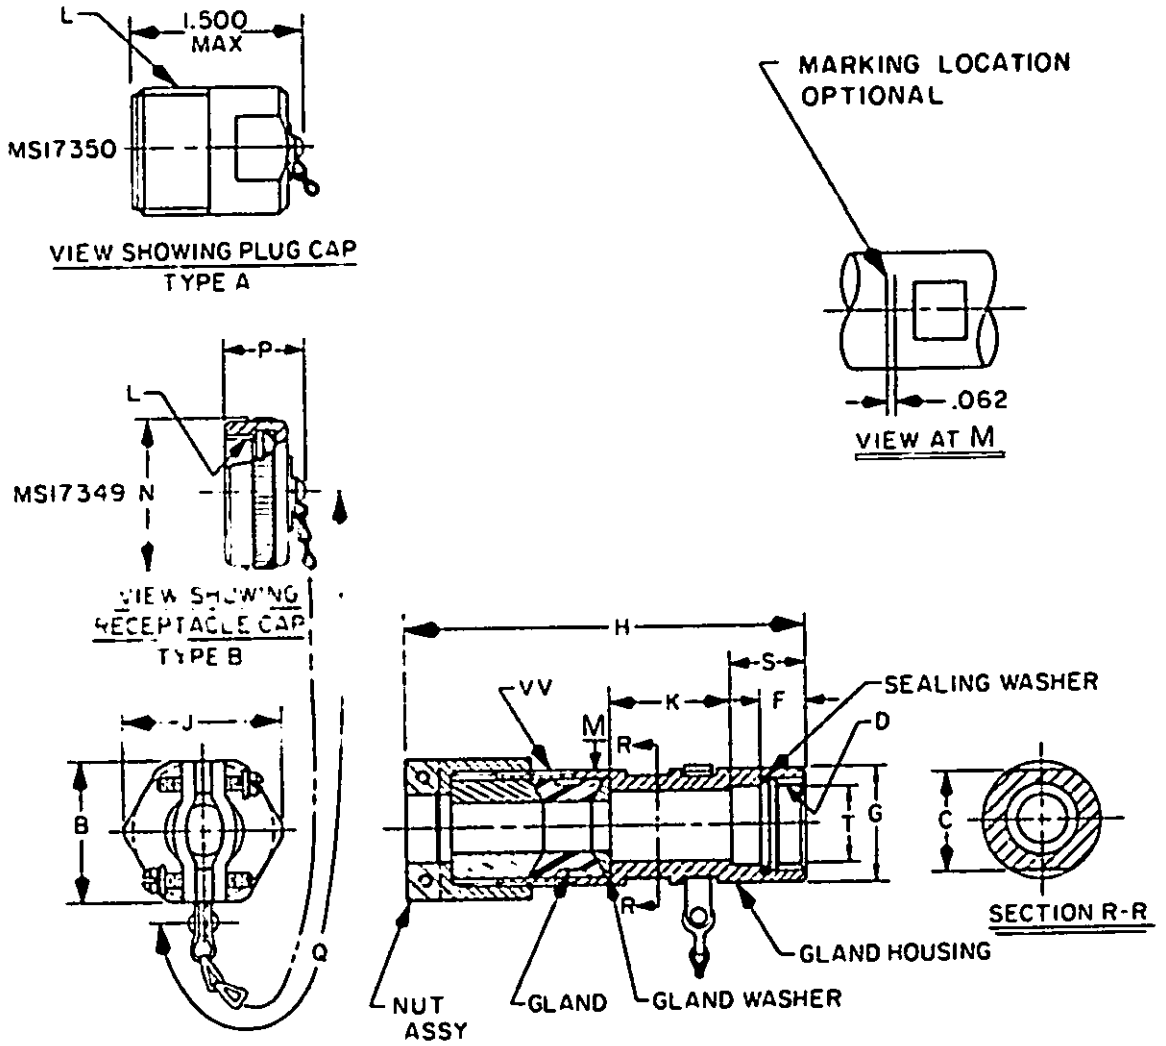

Configuration B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.


SIZE NO.	SHELL SIZE	CABLE RANGE MAX.	CABLE RANGE MIN.	B ±.005	C +.000 -.010	D THREAD CLASS 2B - LH	F ±.016	G DIA. +.010 -.020	H MAX.	J MAX.	K ±.010
1	12	.396	.246	1.094	.812	0.7500-20 UNEF	.479	.938	4.000	1.110	.950
2	14	.521	.321	1.219	.938	0.8750-20 UNEF		1.062	4.100	1.320	1.075
3	16	.646	.446	1.344	1.062	1.0000-20 UNEF		1.188	4.400	1.420	1.200
4	18	.765	.565	1.469	1.125	1.1250-18 NEF		1.312	4.900	1.600	1.325
5	20	.890	.690	1.625	1.250	1.2500-18 NEF		1.438	4.900	1.750	1.325
6	22	1.015	.815	1.750	1.375	1.3750-18 NEF		1.562	4.900	1.900	1.325
7	24	1.180	.980	2.000	1.625	1.6250-18 NEF		1.812	5.000	2.190	1.450
8	28	1.430	1.230	2.250	1.875	1.8750-16 UN		2.062	5.300	2.475	1.700
9	28	1.230	1.030	2.250	1.875	1.8750-16 UN		2.062	5.300	2.475	1.700
10	32	1.670	1.430	2.500	2.062	2.0625-16 N		2.312	5.600	2.715	1.950
11	36	1.860	1.660	2.750	2.312	2.3125-16 N	.479	2.562	5.600	2.900	1.950
12	40	2.110	1.860	3.062	2.562	2.6250-16 UN	.667	2.875	5.725	3.250	1.950

SIZE NO.	SHELL SIZE	L THREAD CLASS 2A/B	N DIA. MAX.	P MAX.	Q WITHIN ONE LINK	S ±.010	T DIA. ±.005	VV GLAND THREADS CLASS 2 - LH
1	12	0.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.9375-20 UNEF
2	14	1.0000-0.1P-0.2L-DS	1.219	.765		1.425	.726	1.0625-18 UNEF
3	16	1.1250-0.1P-0.2L-DS	1.344	.980		1.605	.845	1.1875-18 NEF
4	18	1.2500-0.1P-0.2L-DS	1.469				.970	1.3125-18 NEF
5	20	1.3750-0.1P-0.2L-DS	1.562		5.00		1.095	1.4375-18 NEF
6	22	1.5000-0.1P-0.2L-DS	1.688		6.00		1.220	1.5625-18 NEF
7	24*	1.7500-0.1P-0.2L-DS	1.938				1.470	1.8125-16 N
8	28	2.0000-0.1P-0.2L-DS	2.219				1.713	2.0625-16 N
9	28	2.0000-0.1P-0.2L-DS	2.219				1.713	2.0625-16 N
10	32	2.2500-0.1P-0.2L-DS	2.469				1.900	2.3125-16 N
11	36	2.5000-0.1P-0.2L-DS	2.719				2.150	2.5000-16 UN
12	40	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.8750-16 UN

Configuration B. Style 2 cable sealing - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

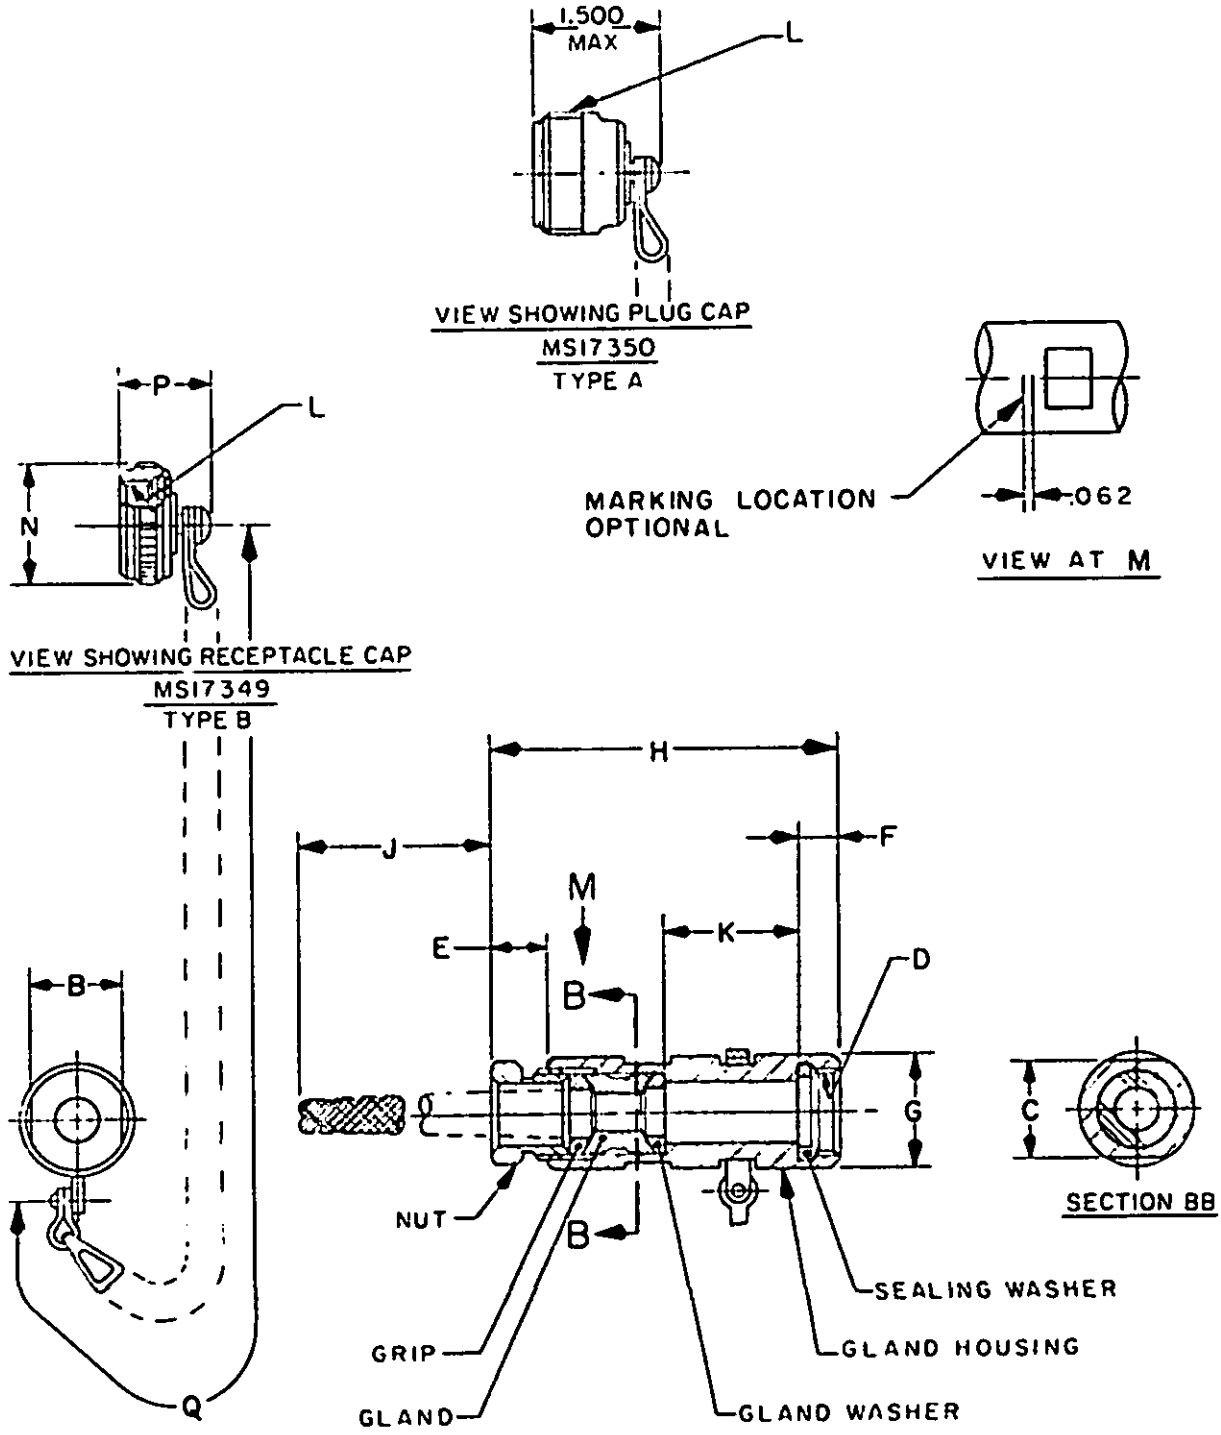

Configuration C. Style 3 cable sealing and gripping.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

SIZE NO.	SHELL SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LG MAX	F ±.016	G DIA +.010 -.020	H MAX	J APPROX FREE LG	K +.015 -.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	.337	.281	.750	.812	.7500-20UNEF	.539	.479	.938	2.935	3.344	.621	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	.281	.219	.750	.812	.7500-20UNEF	.539	↑	.938	2.935	2.844	.621	.8750-	1.094	.765	↑
3	14	.438	.400	.875	.938	.8750-20UNEF	.539		1.062	3.248	4.344	.871	1.0000-	1.219	.765	
4	16	.605	.511	1.000	1.062	1.0000-20UNEF	.597		1.188	3.712	5.188	1.121	1.1250-	1.344	.980	
5	16	.530	.436	1.000	1.062	1.0000-20UNEF	↑		1.188	3.712	4.688	1.121	1.1250-	1.344	↑	
6	16	.405	.316	1.000	1.062	1.0000-20UNEF			1.188	3.712	3.688	1.121	1.1250-	1.344		
7	18	.699	.605	1.062	1.125	1.1250-18UNEF			1.312	4.024	6.188	1.371	1.2500-	1.469		
8	18	.625	.560	1.062	1.125	1.1250-18UNEF	↓		1.312	4.024	6.188	↑	1.2500-	1.469		
9	18	.455	.361	1.062	1.125	1.1250-18UNEF	.597		1.312	4.024	4.188		1.2500-	1.469		
10	20	.828	715	1.125	1.250	1.2500-18UNEF	.625		1.438	4.115	6.688		1.3750-	1.562		↓
11	20	.562	.449	1.125	1.250	1.2500-18UNEF	.625		1.438	4.115	5.188		1.3750-	1.562		5.00
12	22	.900	.787	1.250	1.375	1.3750-18UNEF	.597		1.562	4.150	7.188		1.5000-	1.688		6.00
13	22	.750	.637	1.250	1.375	1.3750-18UNEF	↑		1.562	4.150	6.688		1.5000-	1.688		↑
14	24	1.109	.984	1.500	1.625	1.6250-18UNEF			1.812	4.212	7.688		1.7500-	1.938		
15	24	1.000	.875	1.500	1.625	1.6250-18UNEF			1.812	4.212	7.188	↓	1.7500-	1.938		
16	24	.880	.755	1.500	1.625	1.6250-18UNEF			1.812	4.212	6.688	1.371	1.7500-	1.938		
17	28	1.310	1.185	1.750	1.875	1.8750-16UN			2.062	4.275	8.688	1.372	2.0000-	2.219		
18	28	1.230	1.105	1.750	1.875	1.8750-16UN			2.062	4.275	8.188	1.372	2.0000-	2.219		
19	28	1.180	1.055	1.750	1.875	1.8750-16UNS			2.062	4.275	8.188	1.372	2.0000-	2.219		
20	32	1.531	1.406	2.000	2.062	2.0625-16UNS			2.312	4.337	10.688	1.371	2.2500-	2.469		
21	32	1.445	1.320	2.000	2.062	2.0625-16UN			2.312	4.337	9.688	1.371	2.2500-	2.469		
22	32	1.375	1.250	2.000	2.062	2.0625-16UN			2.312	4.337	9.688	1.371	2.2500-	2.469		
23	36	1.656	1.531	2.250	2.312	2.3125-16UN	↓	↓	2.562	4.399	12.688	1.370	2.5000-	2.719	↓	↓
24	36	1.562	1.437	2.250	2.312	2.3125-16UN	.597	.479	2.562	4.399	11.188	1.370	2.5000-0.1P-0.2L-DS	2.719	.980	6.00

Configuration C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	1.375	34.92	2.125	53.98	2.953	75.01	4.150	105.41	4.896	124.36
.020	.51	1.420	36.07	2.190	55.63	3.248	82.50	4.177	106.10	4.900	124.46
.031	.79	1.438	36.53	2.312	58.72	3.250	82.55	4.212	106.98	4.959	125.96
.938	23.83	1.562	39.67	2.469	62.71	3.365	85.47	4.275	108.58	5.000	127.00
1.062	26.97	1.600	40.64	2.475	62.86	3.678	93.42	4.337	110.16	5.021	127.53
1.110	28.19	1.688	42.88	2.562	65.07	3.712	94.28	4.399	111.73	5.083	129.11
1.125	28.58	1.750	44.45	2.625	66.68	4.000	101.60	4.400	111.76	5.300	134.62
1.188	30.18	1.812	46.02	2.715	68.96	4.024	102.21	4.489	114.02	5.600	142.24
1.312	33.32	1.900	48.26	2.900	73.66	4.100	104.14	4.615	117.22	5.725	145.42
1.320	33.53	2.062	52.37	2.935	74.55	4.115	104.52	4.647	118.03		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Accessories shall be designated type A and B.

- Type A is for use with MS 17344.
- Type B is for use with MS17343, MS17345, and MS17347.

The backshell, cap and chain is considered the complete accessory to be supplied.

Material and finish: See table I.


Connectors and their associated accessories shall be of the same finish.

TABLE I. Material and finish.


Component	Material	Finish
Accessory body and cap	High grade aluminum alloy in accordance with MIL-C-85049	A, W
Chain	Corrosion resistant steel, Type II, Class 3, Trade number 8 of RR-C-271	Passivated
Gasket and gland	Rubber, in accordance with MIL-R-3065	

Part number: See examples below:

For styles 1 and 2:

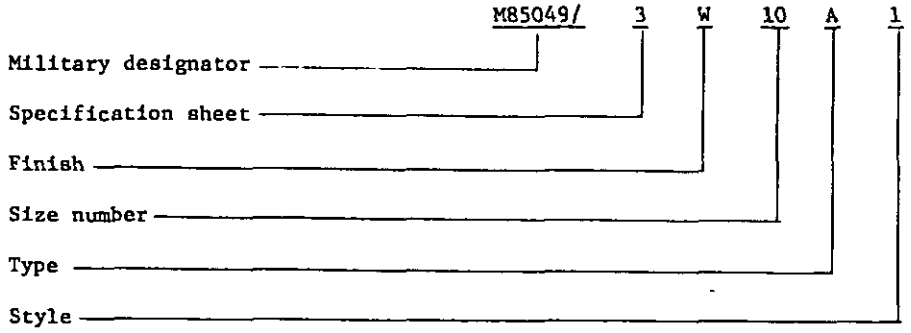

For style 3:

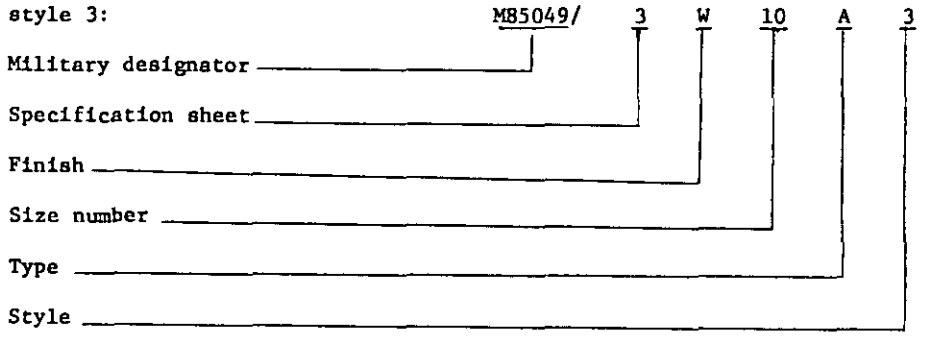

Simplified assembly instructions shall be packaged with each accessory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.


Application:
These accessories are for use with connectors specified on MS17343, MS17344, MS17345 and MS17347.


-Styles 1 and 3 are for use with classes R and C.
-Style 2 is for use with classes R, C and J.

Qualification:
See MIL-C-85049, category 1A.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

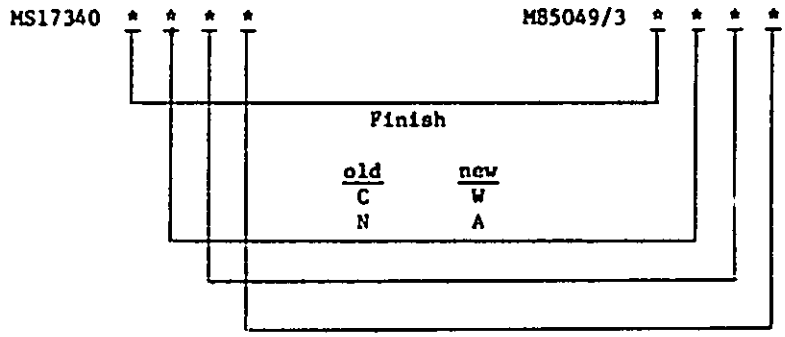

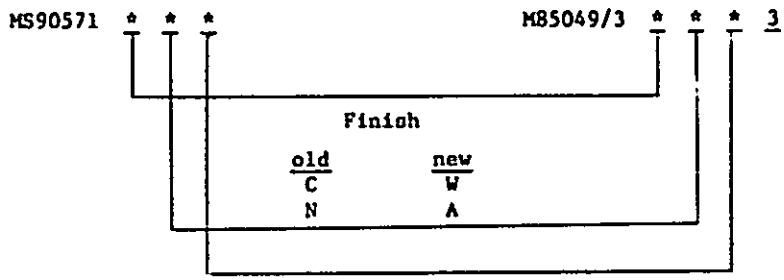

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3067-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.