MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4C (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

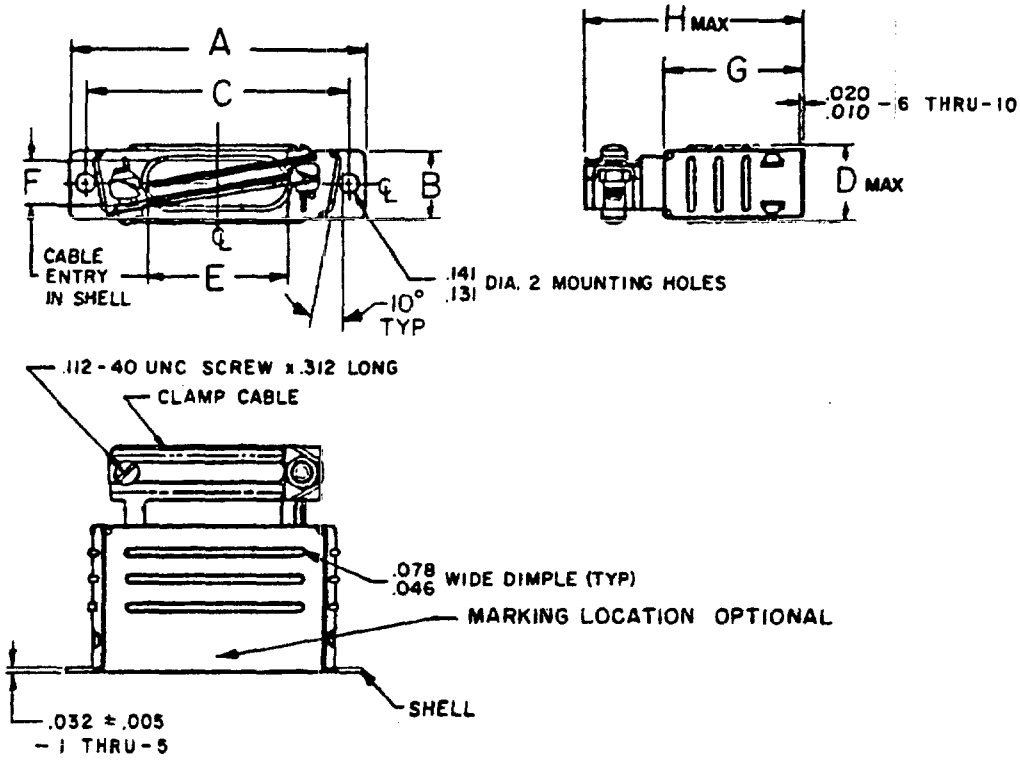


FIGURE 1. Configurations and dimensions

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.


Part number		Shell size	A	B	C	D	E	F	G	H
Steel	Nonmagentic									
M85049/48-1-1	M85049/48-1-6	1	1.218 1.188	.514 .469	.989 .979	.578 MAX	.390 .360	.390 .360	.765 .735	1.250 1.187
M85049/48-1-2	M85049/48-1-7	2	1.546 1.516	.514 .469	1.317 1.307	.578 MAX	.728 .698	.327 .297	.765 .735	1.250 1.187
M85049/48-1-3	M85049/48-1-8	3	2.093 2.063	.514 .469	1.857 1.847	.578 MAX	1.015 .985	.327 .297	1.015 .985	1.563 1.500
M85049/48-1-4	M85049/48-1-9	4	2.733 2.703	.514 .469	2.505 2.495	.578 MAX	1.390 1.360	.327 .297	1.015 .985	1.563 1.500
M85049/48-1-5	M85049/48-1-10	5	2.640 2.610	.623 .578	2.411 2.401	.687 MAX	1.421 1.391	.421 .391	1.140 1.110	1.688 1.625

INCHES	MM	INCHES	MM
1.187	30.15	1.625	41.28
1.188	30.18	1.688	42.88
1.218	30.94	2.063	52.40
1.250	31.75	2.093	53.16
1.500	38.10	2.610	66.29
1.516	38.51	2.640	67.06
1.546	39.27	2.703	68.66
1.563	39.70	2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

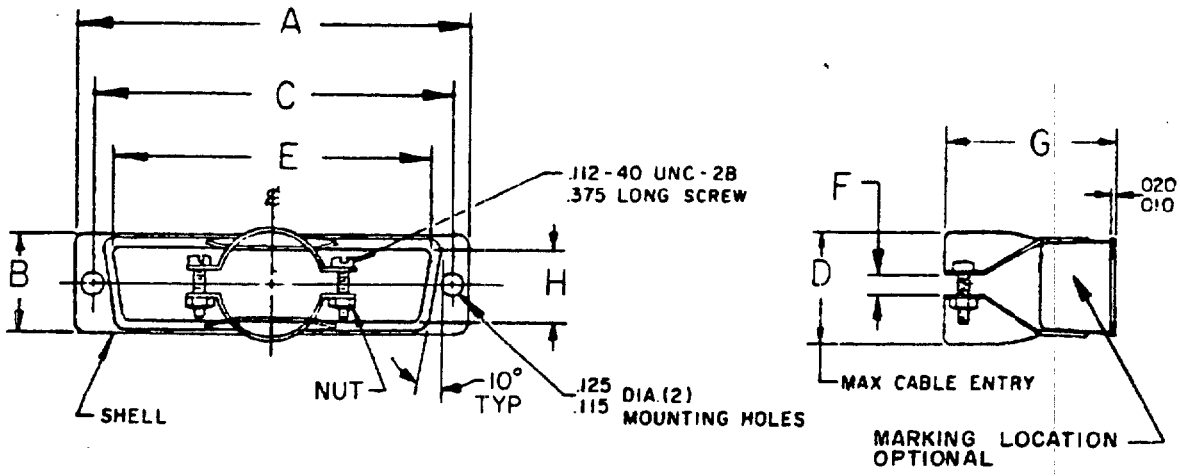


Part number		Shell								
Steel	Nonmagnetic	size	A	B	C	D	E	F	G	H
M85049/48-2-1	M85049/48-2-6	1	1.223 1.193	.515 .485	.989 .979	.406	.676 .646	.140 .110	1.061 1.001	.359 .329
M85049/48-2-2	M85049/48-2-7	2	1.546 1.516	.515 .485	1.317 1.307	.406	.999 .969	.140 .110	1.061 1.001	.359 .329
M85049/48-2-3	M85049/48-2-8	3	2.093 2.063	.515 .485	1.857 1.847	.593	1.530 1.500	.202 .172	1.092 1.032	.359 .329
M85049/48-2-4	M85049/48-2-9	4	2.733 2.703	.515 .485	2.505 2.495	.718	2.186 2.156	.265 .235	1.092 1.032	.359 .329
M85049/48-2-5	M85049/48-2-10	5	2.640 2.610	.624 .594	2.411 2.401	.812	2.108 2.078	.327 .297	1.092 1.032	.453 .423

INCHES	MM	INCHES	MM
.010	.25	.989	25.12
.020	.51	.999	25.37
.110	2.79	1.001	25.43
.112	2.84	1.032	26.21
.115	2.92	1.061	26.95
.125	3.18	1.092	27.74
.140	3.56	1.193	30.30
.172	4.37	1.223	31.06
.202	5.13	1.307	33.20
.235	5.97	1.317	33.45
.265	6.73	1.500	38.10
.297	7.54	1.516	38.51
.327	8.31	1.530	38.86
.329	8.36	1.546	39.27
.359	9.12	1.847	46.91
.375	9.53	1.857	47.17
.406	10.31	2.063	52.40
.423	10.74	2.078	52.78
.453	11.51	2.093	53.16
.485	12.32	2.108	53.54
.515	13.08	2.156	54.76
.593	15.06	2.186	55.52
.594	15.09	2.401	60.99
.624	15.85	2.411	61.24
.646	16.41	2.495	63.37
.676	17.17	2.505	63.63
.718	18.24	2.610	66.29
.812	20.62	2.640	67.06
.969	24.61	2.703	68.66
.979	24.87	2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Configurations and dimensions

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

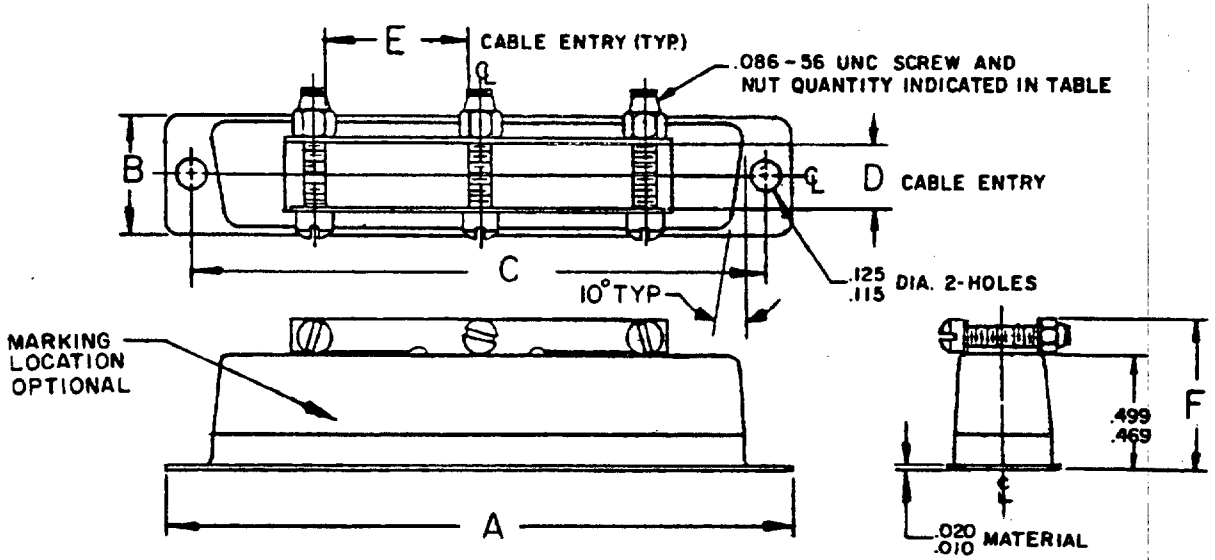

Part number		Shell	No. of						
Steel	Nonmagnetic	size	screws	A	B	C	D	E	F
M85049/48-3-2	M85049/48-3-7	2	2	1.546 1.516	.515 .485	1.317 1.307	.311 .281	.327 .297	.679 .609
M85049/48-3-3	M85049/48-3-8	3	2	2.093 2.063	.515 .485	1.857 1.847	.311 .281	.811 .781	.679 .609
M85049/48-3-4	M85049/48-3-9	4	3	2.733 2.703	.515 .485	2.505 2.495	.311 .281	.702 .672	.679 .609
M85049/48-3-5	M85049/48-3-10	5	3	2.640 2.610	.624 .594	2.411 2.401	.405 .375	.702 .672	.703 .685

INCHES	MM
.485	12.32
.515	13.08
.594	15.09
.624	15.85
1.516	38.51
1.546	39.27
2.063	52.40
2.093	53.16
2.610	66.29
2.640	67.06
2.703	68.66
2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figures 1, 2, and 3.
Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the accessory.
Material and finish: See table I.

TABLE I. Material and finish.

Part name	Material 1/	Finish
Nut	300 series stainless steel or brass	Yellow chromate over cadmium in accordance with QQ-P-416, type II, class 2 or zinc per QQ-Z-325, type II, .0003 minimum thickness
Screw	300 series stainless steel or brass	
Shell	Low carbon sheet steel, SAE 1010 or soft rolled brass in accordance with QQ-B-613, comp. 2, anl. temper	

1/ See part number for material type.

Part number: See examples below:

For figure 1:

M85049/ 48 - 1 - 10

Military designator
Specification sheet
Figure
Dash number (see figure 1)

For figure 2:

M85049/ 48 - 2 - 10

Military designator
Specification sheet
Figure
Dash number (see figure 2)

For figure 3:

M85049/ 48 - 3 - 10


Military designator
Specification sheet
Figure
Dash number (see figure 3)

Source: https://assist.dla.mil Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Qualification:
See MIL-C-85049, category 4C.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

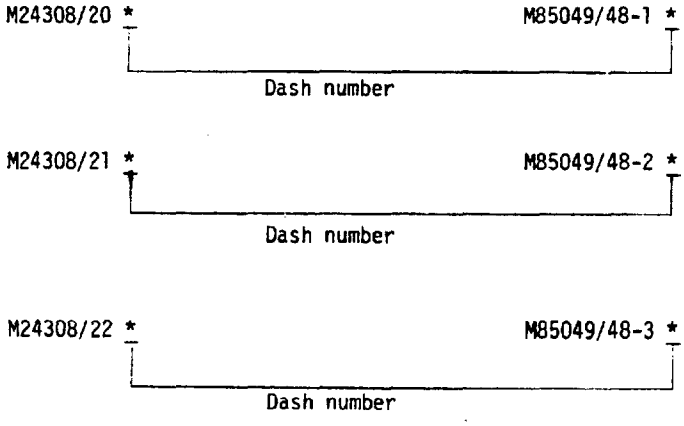

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3067-34)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-C-85049/43

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*.

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

5/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.