MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, 45°, CATEGORY 4C
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3
AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

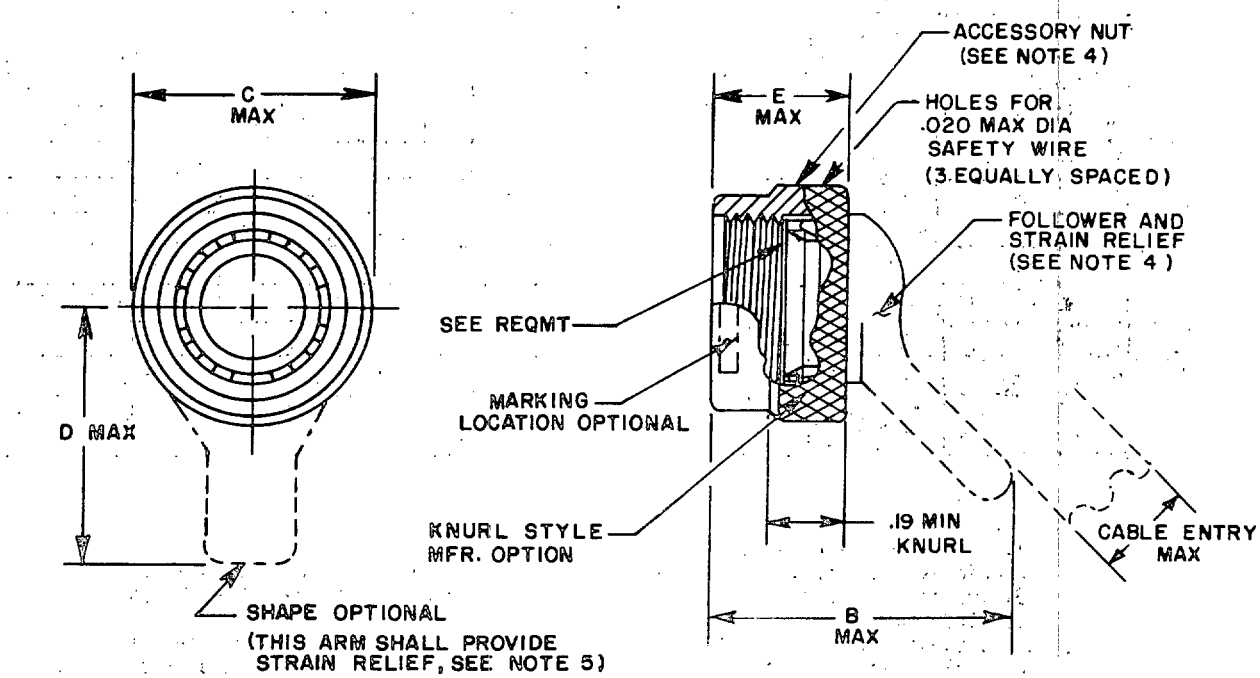


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.260	6.60	1.200	30.48
.365	9.27	1.239	31.47
.501	12.73	1.290	32.77
.540	13.72	1.300	33.02
.657	16.69	1.310	33.27
.702	17.83	1.370	34.80
.779	19.79	1.378	35.00
.782	19.86	1.379	35.03
.904	22.96	1.400	35.56
.937	23.80	1.440	36.58
1.029	26.14	1.500	38.10
1.050	26.67	1.631	41.43
1.110	28.19	1.750	44.45
1.144	29.06	1.979	50.03

Table I Dimensions

Dash number	For connector shell size (REF)				B max	C dia max	D max	E max	Cable entry max
	MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III					
03	3				1.110	.782	1.110	.540	.260
08		8	8S	8	1.110	.657	1.110	.540	.260
10		10	10S, 10SL	10	1.110	.782	1.110	.540	.365
12	7	12	12, 12S	12	1.110	.937	1.110	.540	.501
14	12	14	14, 14S	14	1.290	1.050	1.200	.540	.575
16	19	16	16, 16S	16	1.290	1.239	1.200	.540	.700
18	27	18	18	18	1.310	1.378	1.300	.540	.779
20	37	20	20	20	1.310	1.500	1.300	.540	.904
22		22	22	22	1.310	1.631	1.400	.540	1.029
24		24	24	24	1.370	1.750	1.400	.540	1.144
28			28		1.440	1.970	1.500	.702	1.379

NOTES:
1. Dimensions are in inches.
2. Tolerances shall be : .xx = ±.03 and .xxx = ±.015 angular tolerances x = ±2.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Complete strain relief unit consists of accessory nut and a follower with strain relief arm. The accessory nut shall be captivated to the follower and free to rotate.
5. Strain relief unit is used with MS3367-1-X plasitc strap, MIL-T-713 lacing twine or MIL-T-43435 lacing tape or equivalent, not supplied with the backshell.
6. This clamp will not accommodate connectors using size 8, 4 and 0 contacts.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MS3155.

Material:
Accessory nut and follower - aluminum alloy in accordance with MIL-C-85049.
Tie mount - polyamide (optional).
Fastener - stainless steel (optional).

Finish: A, W

Part number: See example below:

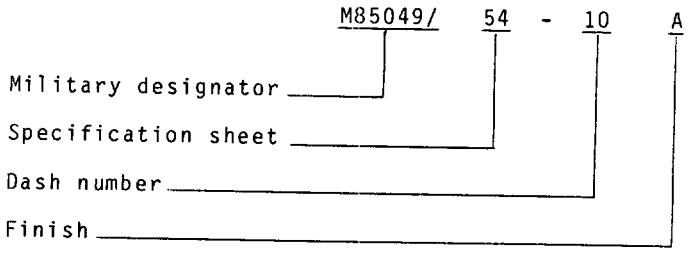

QUALIFICATION:
See MIL-C-85049, category 4C, cable pullout not applicable.
QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN. 47522.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-50)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-85049/54

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.