MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, N, R, S, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83723.


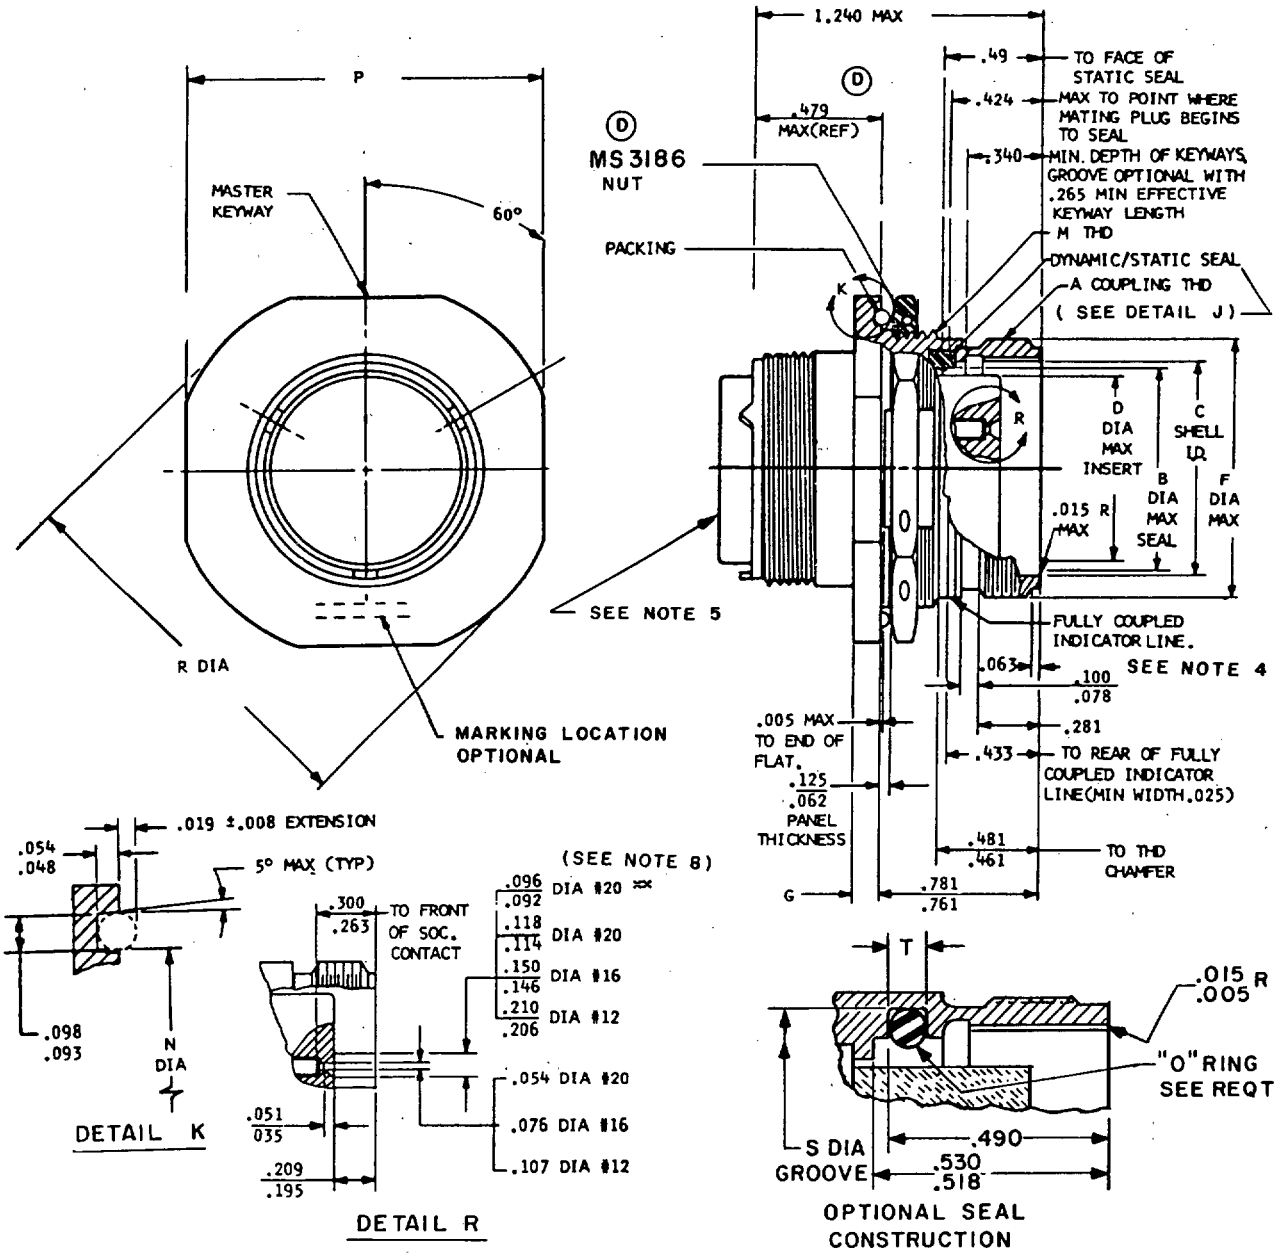



FIGURE 1. Classes A, G, K, R and W.

(D) denotes changes


AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

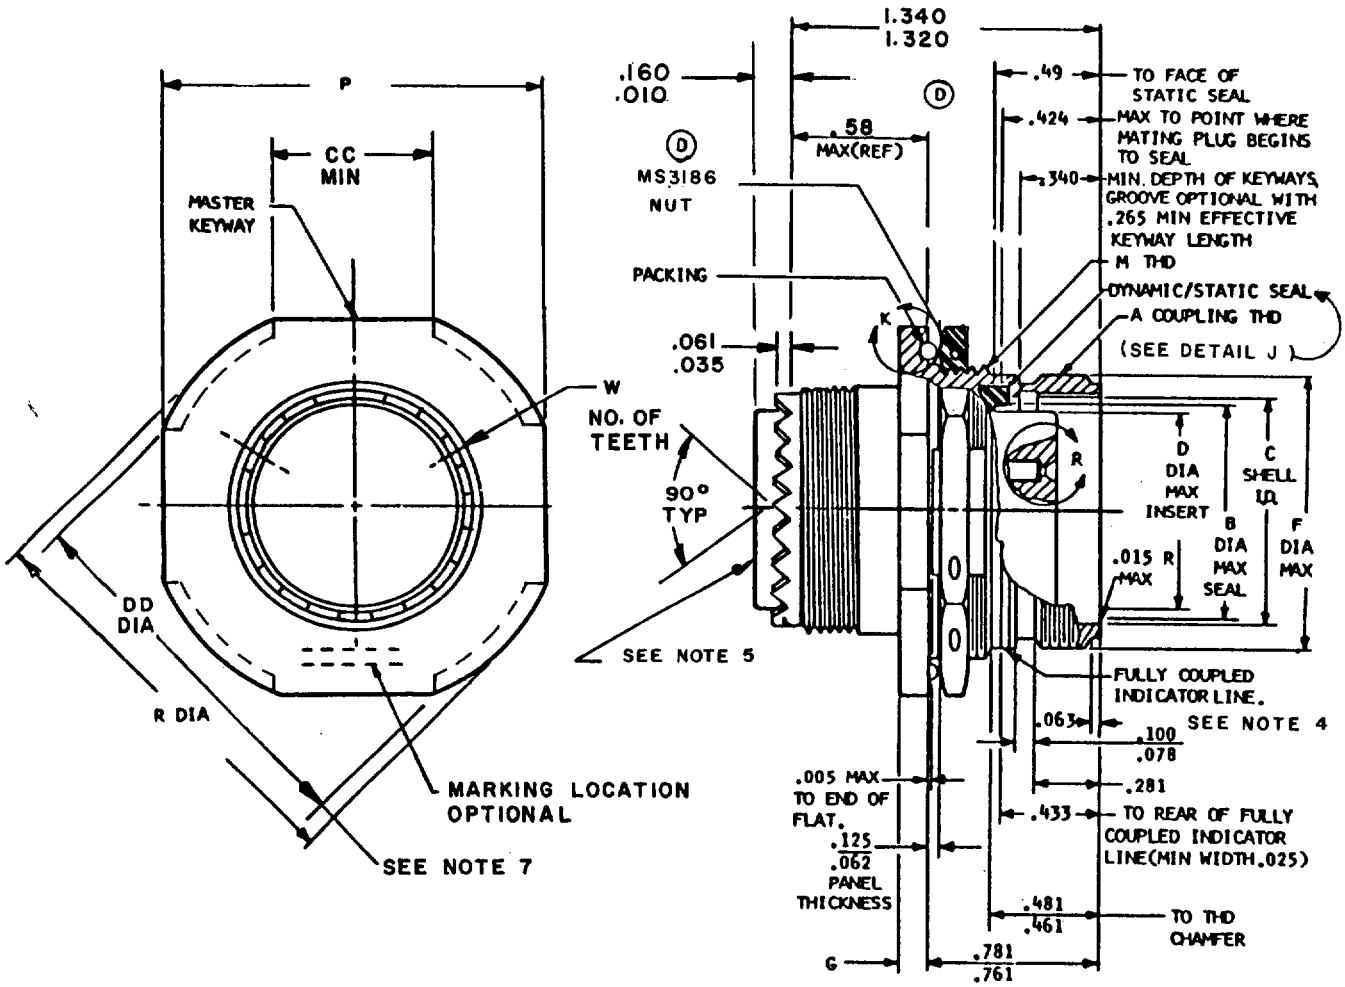


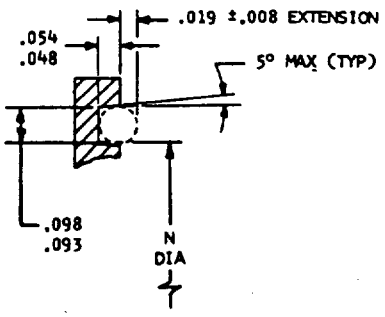

DETAIL K

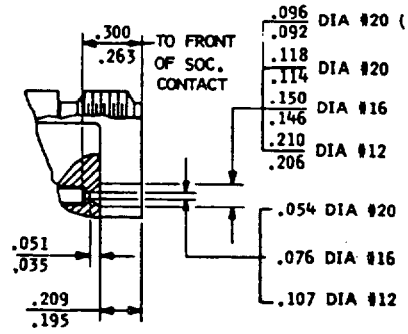

DETAIL R

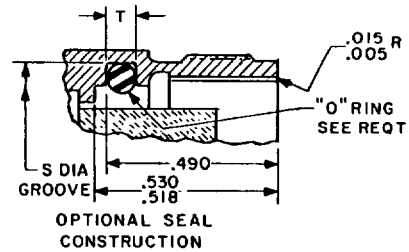

DETAIL J

FIGURE 2. Classes N and S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Connector dimensions.


Shell size	A thread	B	C	D	F	G	M thread	N	P	R	S +.005 -.000	T
8	.562-24 UNEF-2A	.398	.418 .413	.290	.562	.137 .097	.625-20 UN-2A	.670	.980 .949	1.078 1.047	.490	.076 .071
10	.688-24 UNEF-2A	.519	.535 .530	.388	.696	.137 .097	.750-20 UNEF-2A	.796	1.104 1.073	1.192 1.161	.636	.089 .084
12	.875-20 UNEF-2A	.689	.705 .700	.558	.875	.137 .097	.938-20 UNEF-2A	.984	1.291 1.260	1.380 1.349	.806	"
14	.938-20 UNEF-2A	.758	.774 .769	.627	.936	.137 .097	1.000-20 UNEF-2A	1.046	1.391 1.360	1.516 1.485	.875	"
16	1.062-18 UNEF-2A	.885	.901 .896	.772	1.062	.137 .097	1.125-18 UNEF-2A	1.171	1.516 1.485	1.641 1.610	1.002	"
18	1.188-18 UNEF-2A	.991	1.007 1.002	.860	1.187	.137 .097	1.250-18 UNEF-2A	1.296	1.641 1.610	1.766 1.735	1.108	"
20	1.312-18 UNEF-2A	1.116	1.132 1.127	.985	1.312	.137 .097	1.375-18 UNEF-2A	1.482	1.766 1.735	1.954 1.923	1.233	"
22	1.438-18 UNEF-2A	1.241	1.257 1.252	1.110	1.437	.148 .128	1.500-18 UNEF-2A	1.609	1.954 1.923	2.078 2.047	1.358	"
24	1.562-18 UNEF-2A	1.366	1.382 1.377	1.235	1.562	.168 .128	1.625-18 UNEF-2A	1.732	2.079 2.048	2.182 2.152	1.483	.089 .084

FIGURE 3. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.



PANEL CUTOUT

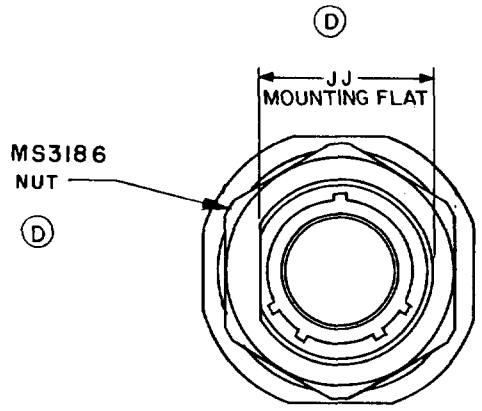

Ⓓ Connector dimensions - Continued.

Shell size	W	FF	EE	CC	DD	JJ
8	12	.635	.605	.443	.991	.596 .590
10	15	.760	.730	.443	1.107	.721 .715
12	21	.947	.917	.482	1.295	.908 .902
14	24	1.010	.980	.596	1.357	.971 .965
16	30	1.135	1.105	.622	1.482	1.096 1.090
18	33	1.260	1.229	.646	1.607	1.220 1.214
20	36	1.385	1.354	.648	1.795	1.345 1.339
22	39	1.510	1.479	.701	1.920	1.470 1.464
24	42	1.635	1.604	.726	2.045	1.595 1.589

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	.13	.281	7.14	.730	18.54	1.105	28.07	1.385	35.18
.008	.20	.290	7.37	.758	19.25	1.107	28.12	1.391	35.33
.010	.25	.300	7.62	.760	19.30	1.108	28.14	1.421	36.09
.015	.38	.340	8.64	.761	19.33	1.110	28.19	1.437	36.50
.019	.48	.388	9.86	.769	19.53	1.116	28.35	1.455	36.96
.025	.64	.398	10.11	.772	19.61	1.127	28.63	1.464	37.19
.035	.89	.413	10.49	.774	19.66	1.132	28.75	1.470	37.34
.048	1.22	.418	10.62	.781	19.84	1.135	28.83	1.475	37.46
.051	1.30	.424	10.77	.795	20.19	1.142	29.01	1.482	37.64
.054	1.37	.433	11.00	.796	20.22	1.161	29.49	1.483	37.67
.061	1.55	.443	11.25	.806	20.47	1.171	29.74	1.485	37.72
.062	1.57	463	11.71	.829	21.06	1.187	30.15	1.510	38.35
.063	1.60	.79	12.17	.860	21.84	1.192	30.28	1.516	38.51
.071	1.80	.481	12.22	.875	22.22	1.205	30.61	1.545	39.24
.076	1.93	.482	12.24	.885	22.48	1.214	30.84	1.562	39.67
.078	1.98	.49	12.4	.896	22.76	1.220	30.99	1.579	40.11
.084	2.13	.490	12.45	.901	22.89	1.229	31.22	1.589	40.36
.089	2.26	.518	13.16	.902	22.91	1.233	31.32	1.595	40.51
.092	2.34	.519	13.18	.908	23.06	1.235	31.37	1.604	40.74
.093	2.36	.530	13.46	.917	23.29	1.240	31.50	1.607	40.82
.096	2.44	.535	13.59	.920	23.37	1.241	31.52	1.609	40.87
.097	2.46	.558	14.17	.936	23.77	1.252	31.80	1.610	40.89
.098	2.49	.562	14.27	.947	24.05	1.257	31.93	1.635	41.53
.100	2.54	.58	14.7	.949	24.10	1.260	32.00	1.641	41.68
.107	2.72	.590	14.99	.954	24.23	1.291	32.79	1.671	42.44
.109	2.77	.596	15.14	.965	24.51	1.295	32.89	1.705	43.31
.114	2.90	.605	15.37	.971	24.66	1.296	32.92	1.732	43.99
.118	3.00	.622	15.80	.980	24.89	1.312	33.32	1.735	44.07
.125	3.18	.627	15.93	.984	24.99	1.320	33.53	1.766	44.86
.128	3.25	.635	16.13	.985	25.02	1.329	33.76	1.795	45.59
.137	3.48	.636	16.15	.991	25.17	1.339	34.01	1.829	46.46
.146	3.71	.646	16.41	1.002	25.45	1.3420	34.04	1.920	48.77
.148	3.76	.670	17.02	1.007	25.58	1.345	34.16	1.923	48.84
.150	3.81	.684	17.37	1.010	25.65	1.349	34.26	1.954	49.63
.160	4.06	.689	17.50	1.046	26.57	1.354	34.39	2.045	51.94
.168	4.27	.696	17.68	1.047	26.59	1.357	34.47	2.047	51.99
.195	4.95	.700	17.78	1.062	26.97	1.358	34.49	2.048	52.02
.206	5.23	.701	17.81	1.073	27.25	1.360	34.54	2.078	52.78
.209	5.31	.705	17.91	1.078	27.38	1.366	24.70	2.079	52.81
.210	5.33	.715	18.16	1.090	27.69	1.377	34.98	2.152	54.66
.263	6.68	.721	18.31	1.096	27.84	1.380	35.05	21.82	55.42
.265	6.73	.726	18.44	1.104	28.04	1.382	35.10		

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1°.
4. Coupling indicator line shall be color coded blue.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-38723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. Phantomed configuration optional.
8. See table I for contact cavities requiring this dimension.

FIGURE 3. Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figures 1 and 3 for classes A, G, K, R, and W. See figures 2 and 3 for classes N and S.

This connector mates with MIL-C-83723/87, MIL-C-83723/92, MIL-C-83723/96, and MIL-C-83723/98.

Insert arrangements: See MIL-STD-1554.

"O" ring: See MIL-C-83723.

Part number example:

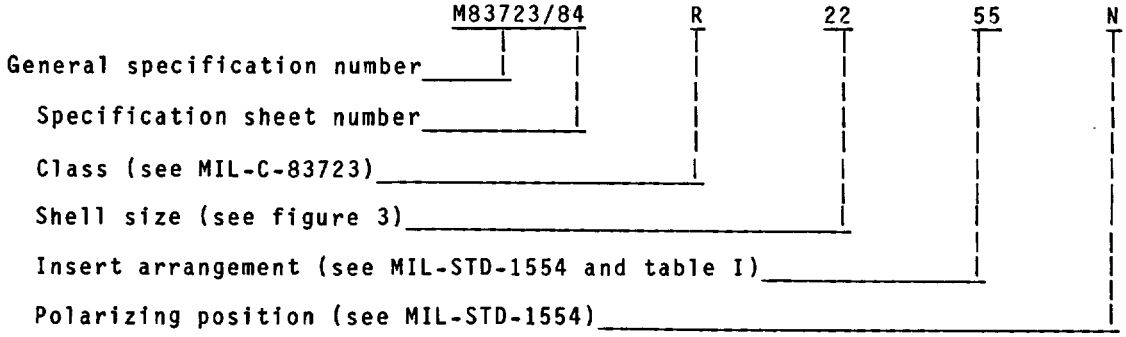

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3559-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.