MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, STRAIGHT PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83723.

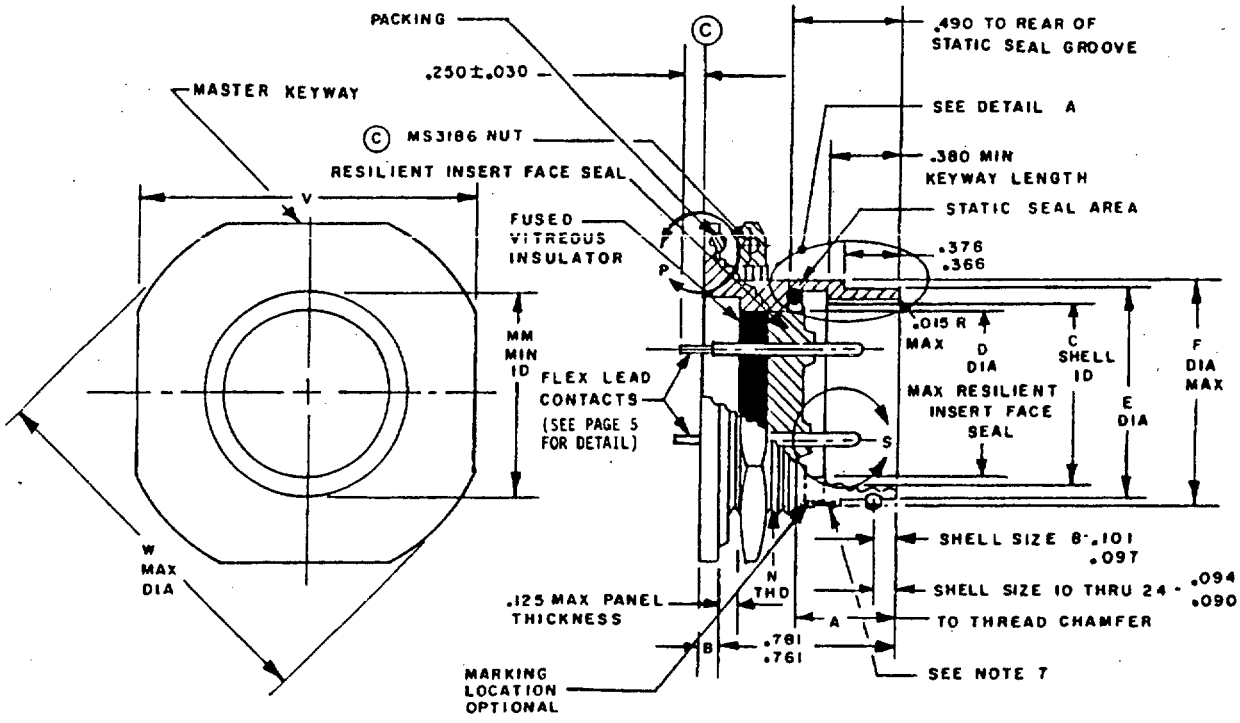



FIGURE 1. Dimensions and configurations.

Ⓒ denotes changes


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

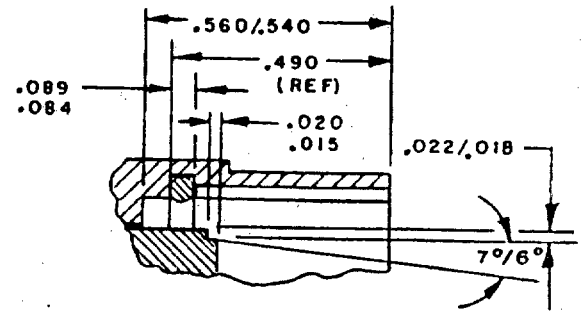

DETAIL A

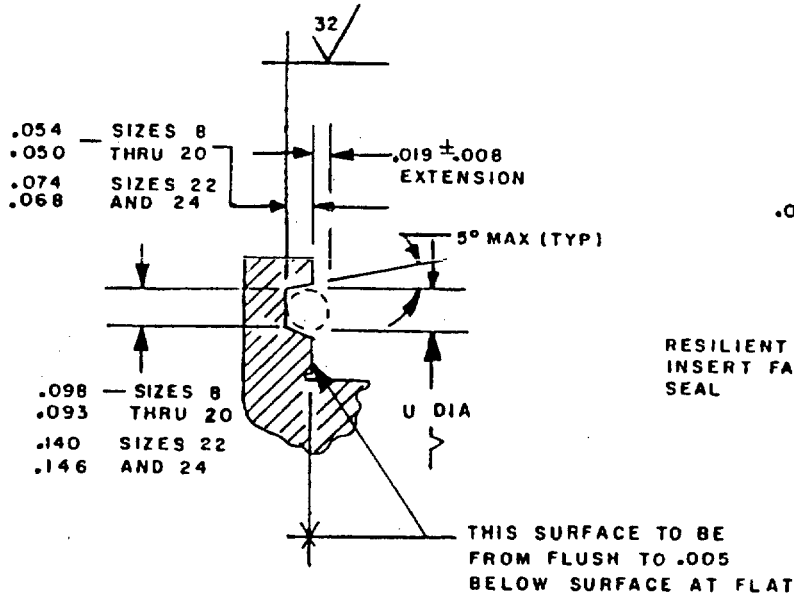

DETAIL P

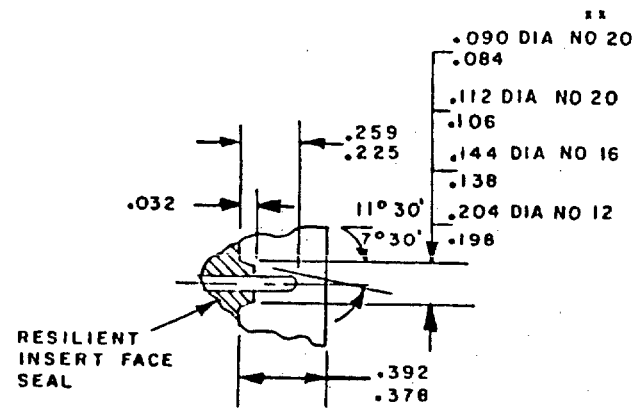

DETAIL S

** SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Connector dimensions

Shell size	A	B	C	D	E	F	N thread	U	V	W
8	.481 .461	.137 .097	.428 .433	.312	.536 .531	.561	.625-20 UN-2A	.670	.984 .974	1.068
10	.481 .461	.137 .097	.530 .535	.388	.659 .654	.696	.750-20 UNEF-2A	.777	1.109 1.099	1.192
12	.481 .461	.137 .097	.700 .705	.558	.829 .824	.875	.9375-20 UNEF-2A	.965	1.296 1.286	1.380
14	.481 .461	.137 .097	.769 .774	.627	.898 .893	.935	1.000-20 UNEF-2A	1.090	1.396 1.386	1.505
16	.481 .461	.137 .097	.896 .901	.772	1.025 1.020	1.062	1.125-20 UN-2A	1.215	1.521 1.511	1.630
18	.481 .461	.137 .097	1.002 1.007	.860	1.131 1.126	1.187	1.250-18 UNEF-2A	1.340	1.646 1.636	1.756
20	.481 .461	.137 .097	1.127 1.132	.985	1.256 1.251	1.312	1.375-18 UNEF-2A	1.465	1.771 1.761	1.860
22	.481 .461	.168 .128	1.252 1.257	1.110	1.381 1.376	1.437	1.500-18 UNEF-2A	1.574	1.959 1.949	2.068
24	.481 .461	.168 .128	1.377 1.382	1.235	1.506 1.501	1.562	1.625-18 UNEF-2A	1.699	2.084 2.074	2.160

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.


© Connector dimensions.


Shell size	EE	FF	MM	JJ
8	.605	.635	.493	.596 .590
10	.730	.760	.555	.721 .715
12	.917	.947	.743	.908 .902
14	.980	1.010	.805	.971 .965
16	1.105	1.135	.931	1.096 1.090
18	1.229	1.260	1.055	1.220 1.214
20	1.354	1.385	1.243	1.345 1.339
22	1.479	1.510	1.305	1.470 1.464
24	1.604	1.635	1.493	1.595 1.589

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

ENGAGING END OF CONTACTS

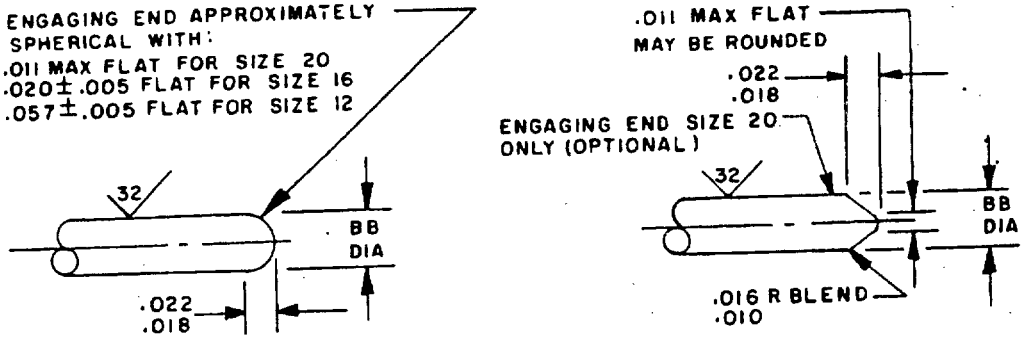

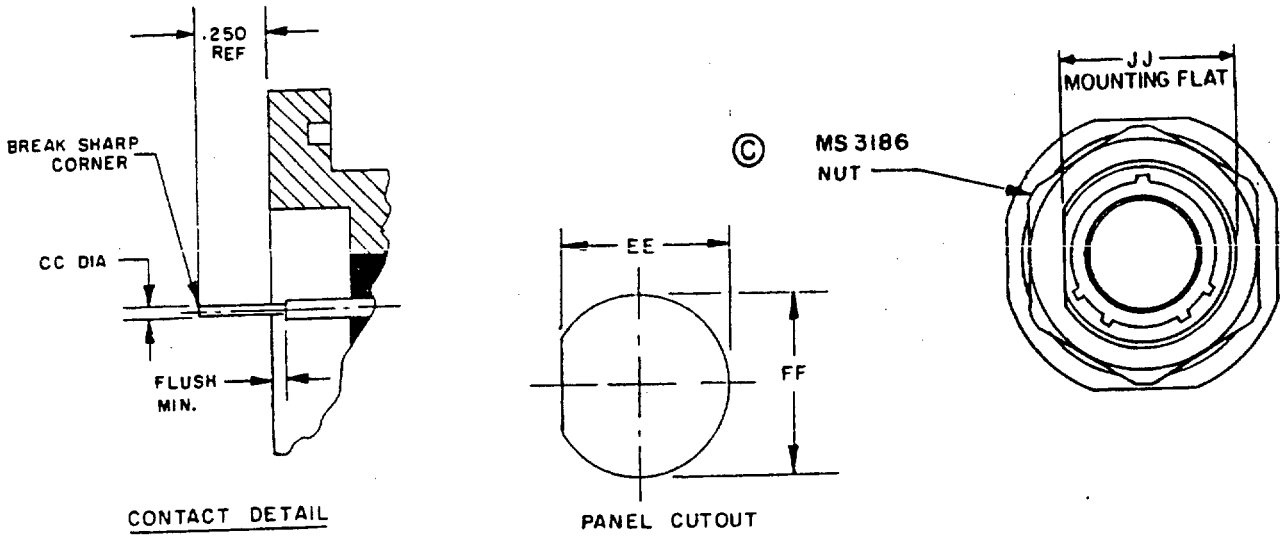

Dimensions of contact engaging end.

Cont size	BB	CC
20	.041 .039	.0345 .0315

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.000050	.00	.259	6.58	.772	19.61	1.099	27.91	1.386	35.20
.003	.08	.312	7.92	.774	19.66	1.105	28.07	1.396	35.46
.004	.10	.366	9.30	.777	19.74	1.108	28.14	1.421	36.09
.005	.13	.376	9.55	.781	19.84	1.109	28.17	1.422	36.12
.008	.20	.378	9.60	.795	20.19	1.110	28.19	1.432	36.37
.010	.25	.380	9.65	.805	20.45	1.114	28.30	1.437	36.50
.011	.28	.388	9.86	.816	20.73	1.126	28.60	1.452	36.88
.015	.38	.392	9.96	.824	20.93	1.127	28.63	1.455	36.96
.016	.41	.428	10.87	.826	20.98	1.131	28.73	1.464	37.19
.018	.46	.433	11.00	.828	21.03	1.132	28.75	1.465	37.21
.019	.48	.461	11.71	.829	21.06	1.135	28.83	1.470	37.34
.020	.51	.474	12.04	.860	21.84	1.140	28.96	1.475	37.47
.022	.56	.481	12.22	.875	22.23	1.142	29.01	1.493	37.92
.0315	.80	.484	12.29	.893	22.68	1.172	29.77	1.501	38.13
.032	.81	.490	12.45	.898	22.81	1.182	30.02	1.505	38.23
.0345	.88	.493	12.52	.900	22.86	1.187	30.15	1.506	38.25
.039	.99	.530	13.46	.901	22.89	1.192	30.28	1.510	38.35
.041	1.04	.531	13.49	.902	22.91	1.202	30.53	1.511	38.38
.050	1.27	.535	13.59	.908	23.06	1.214	30.84	1.521	38.63
.054	1.37	.536	13.61	.917	23.29	1.215	30.86	1.545	39.24
.057	1.45	.540	31.72	.918	23.32	1.220	30.99	1.562	39.67
.062	1.57	.553	14.05	.920	23.37	1.225	31.12	1.569	39.85
.068	1.73	.558	14.17	.931	23.65	1.235	31.37	1.574	39.98
.074	1.88	.560	14.22	.935	23.75	1.243	31.57	1.578	40.08
.084	2.13	.561	14.25	.942	23.93	1.250	31.75	1.579	40.11
.089	2.26	.578	14.68	.947	24.05	1.251	31.78	1.589	40.36
.090	2.29	.586	14.88	.952	24.18	1.252	31.80	1.595	40.51
.091	2.31	.590	14.99	.953	24.21	1.256	31.90	1.596	40.54
.093	2.36	.596	15.14	.954	24.23	1.257	31.93	1.600	40.64
.094	2.39	.602	15.29	.956	24.28	1.260	32.00	1.630	41.40
.097	2.46	.605	15.37	.965	24.51	1.286	32.66	1.635	41.53
.098	2.49	.620	15.75	.970	24.64	1.295	32.89	1.636	41.55
.101	2.57	.627	15.93	.971	24.66	1.296	32.92	1.642	41.71
.106	2.69	.635	16.13	.974	24.74	1.298	32.97	1.646	41.81
.109	2.77	.654	16.61	.980	24.89	1.305	33.15	1.671	42.44
.112	2.84	.659	16.74	.984	24.99	1.308	33.22	1.699	43.15
.122	3.10	.670	17.02	.985	25.02	1.312	33.32	1.705	43.31
.125	3.18	.696	17.68	.988	25.10	1.328	33.73	1.752	44.50
.128	3.25	.700	17.78	1.002	25.45	1.329	33.76	1.761	44.73
.137	3.48	.705	17.91	1.007	25.54	1.339	34.01	1.771	44.98
.138	3.51	.715	18.16	1.010	25.65	1.340	34.03	1.795	45.59
.140	3.56	.721	18.31	1.020	25.91	1.345	34.16	1.829	46.46
.144	3.66	.730	18.54	1.025	26.04	1.346	34.19	1.860	47.24
.146	3.71	.743	18.87	1.048	26.62	1.350	34.29	1.892	48.06
.159	4.04	.746	18.95	1.055	26.80	1.376	34.95	1.949	49.50
.168	4.27	.748	19.00	1.058	26.87	1.377	34.98	1.959	49.76
.198	5.03	.756	19.20	1.062	26.97	1.380	35.05	2.068	52.53
.204	5.18	.760	19.30	1.068	27.13	1.381	35.08	2.074	52.68
.225	5.72	.761	19.33	1.090	27.69	1.382	35.10	2.084	52.93
.250	6.35	.769	19.53	1.096	27.84	1.385	35.18	2.160	54.86

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

NOTES: (Notes 1 through 6 applicable to contacts only).
1. Contact finish: Gold plate .000050 inch mininum. In accordance with MIL-G- 45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
2. Dimensions are in inches. Dimensions apply after plating.
3. 63 all over per ANSI B46. 1-62 unless otherwise specified.
4. Remove all burrs and sharp edges .003 to .005 R.
5. Diameters to be concentric within .004 TIR.
6. Diameters in the same cross-sectional plane to be concentric with each other within .003 TIR.
7. Polarizing stripe shall be color coded blue.
8. Three pins to be located within .004 either side of (TP) relative to master polarizing keyway.
9. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles $\pm 1/2^{\circ}$.
10. Metric equivalents are given for general information.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, 3
10	-6	1, 2, 3, 4, 5, 6

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/75 and MIL-C-83723/77.

For insert arrangements see MIL-STD-1554 and table I.

Part number example:

M83723/94	H	22	55	N

General specification number

Specification sheet number

Class (see MIL-C-83723)

Shell size (see figure 1)

Insert arrangement (see MIL-STD-1554 and table I)

Polarizing position (see MIL-STD-1554)

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3559-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.