INCH-POUND

MIL-PRF-83536/17B
15 November 2021
SUPERSEDING
MIL-PRF-83536/17A
14 November 1997

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, AC COILS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83536.


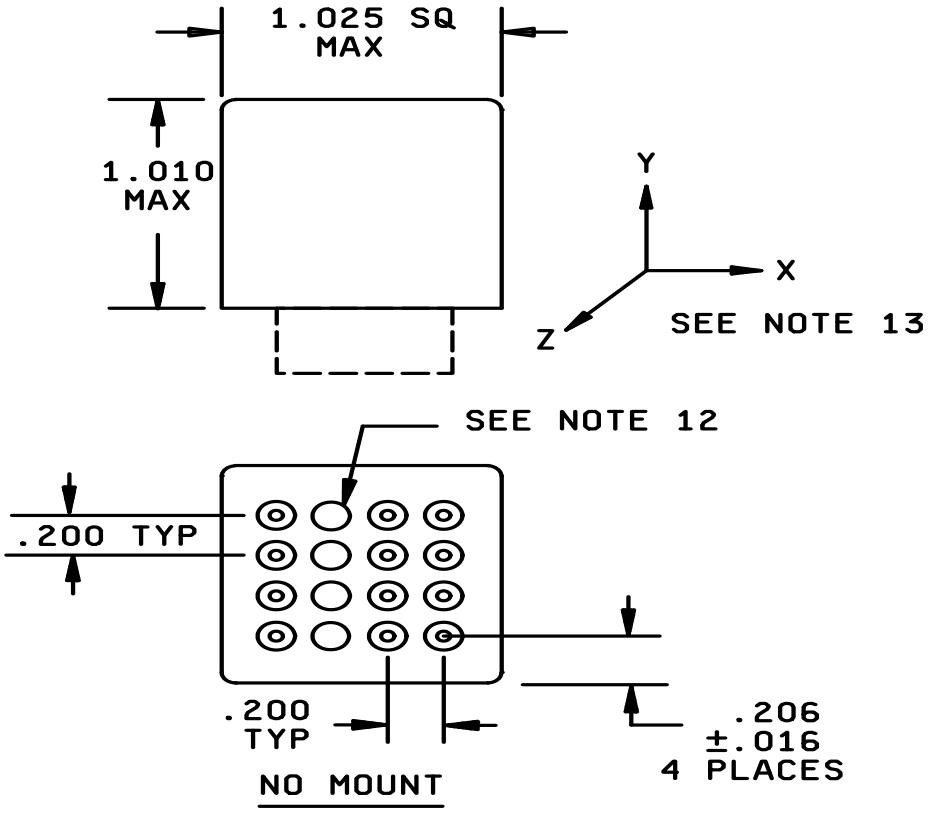


FIGURE 1. Dimensions and configurations.

AMSC N/A FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

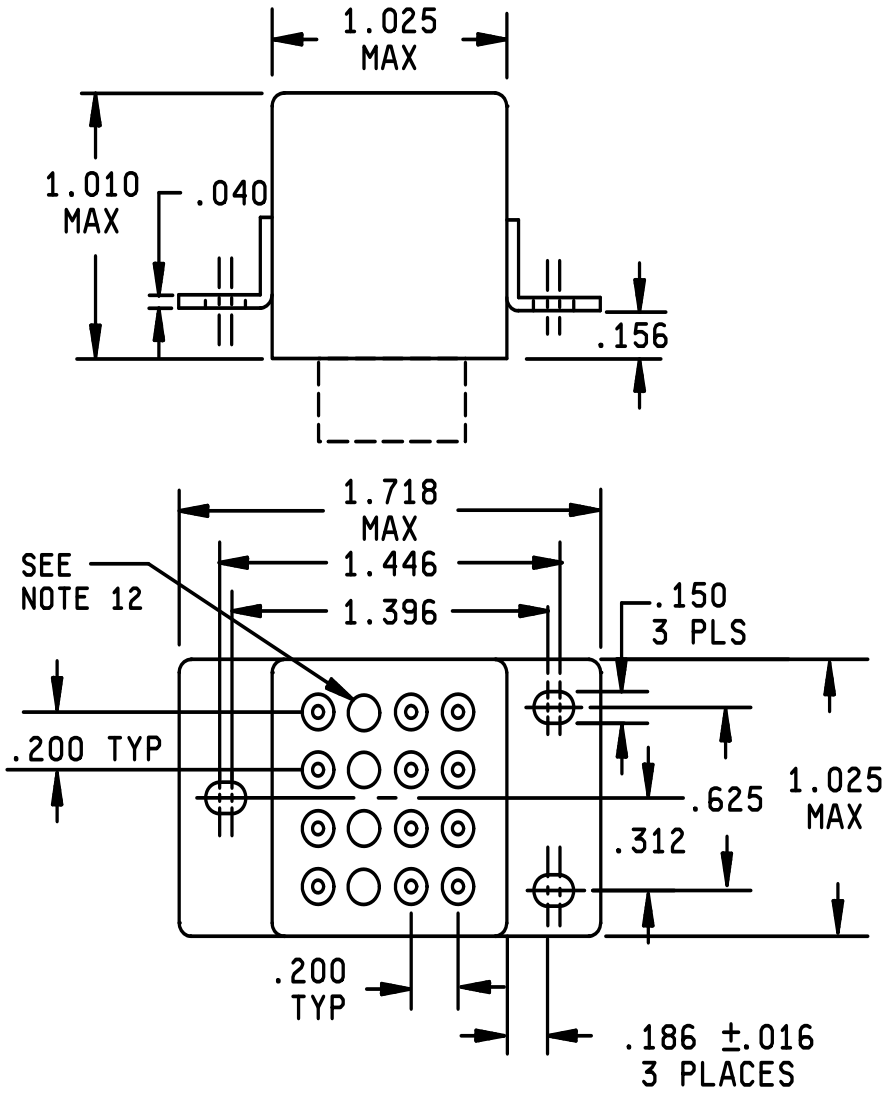

RAISED VERTICAL FLANGE MOUNT (RVFM)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

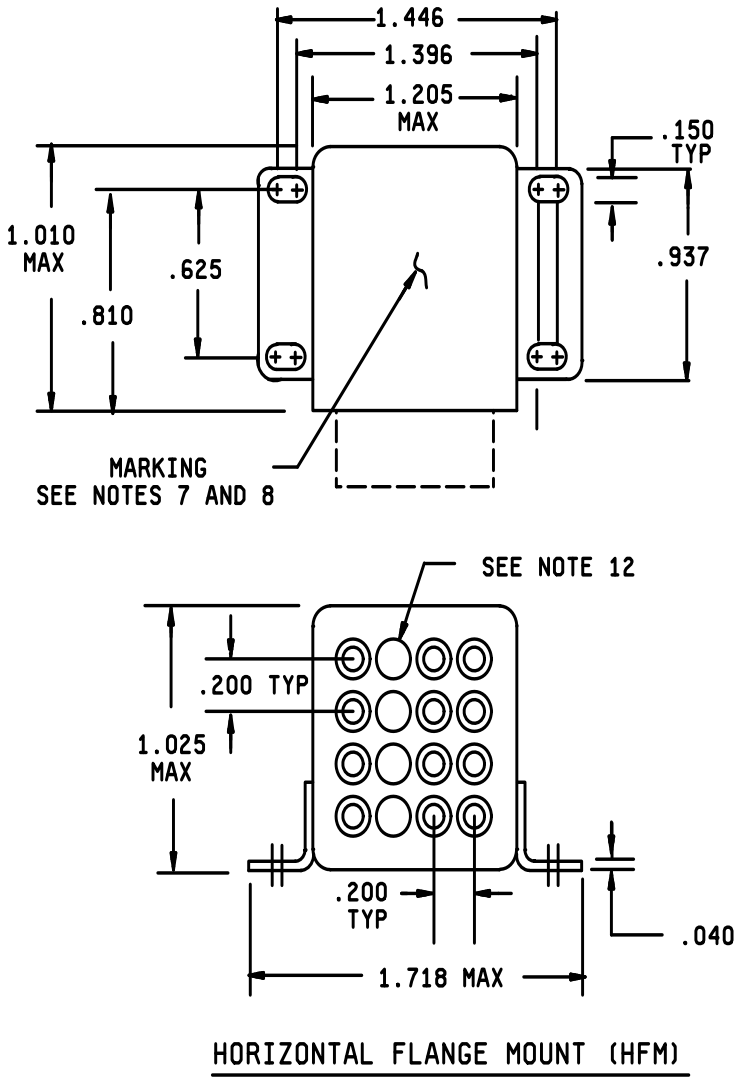


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

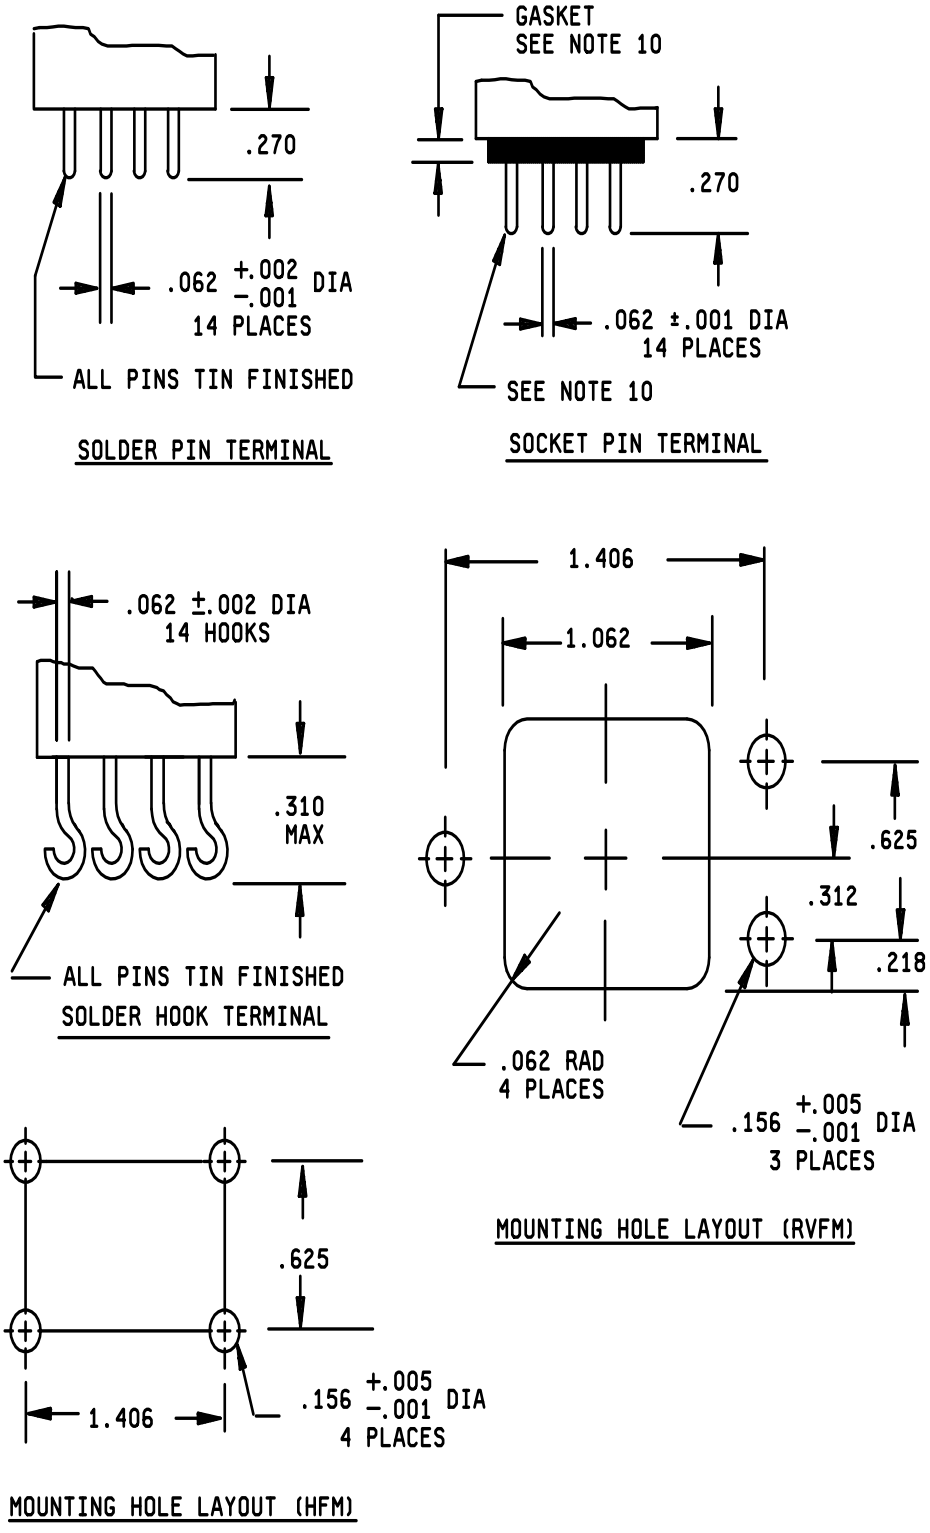


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

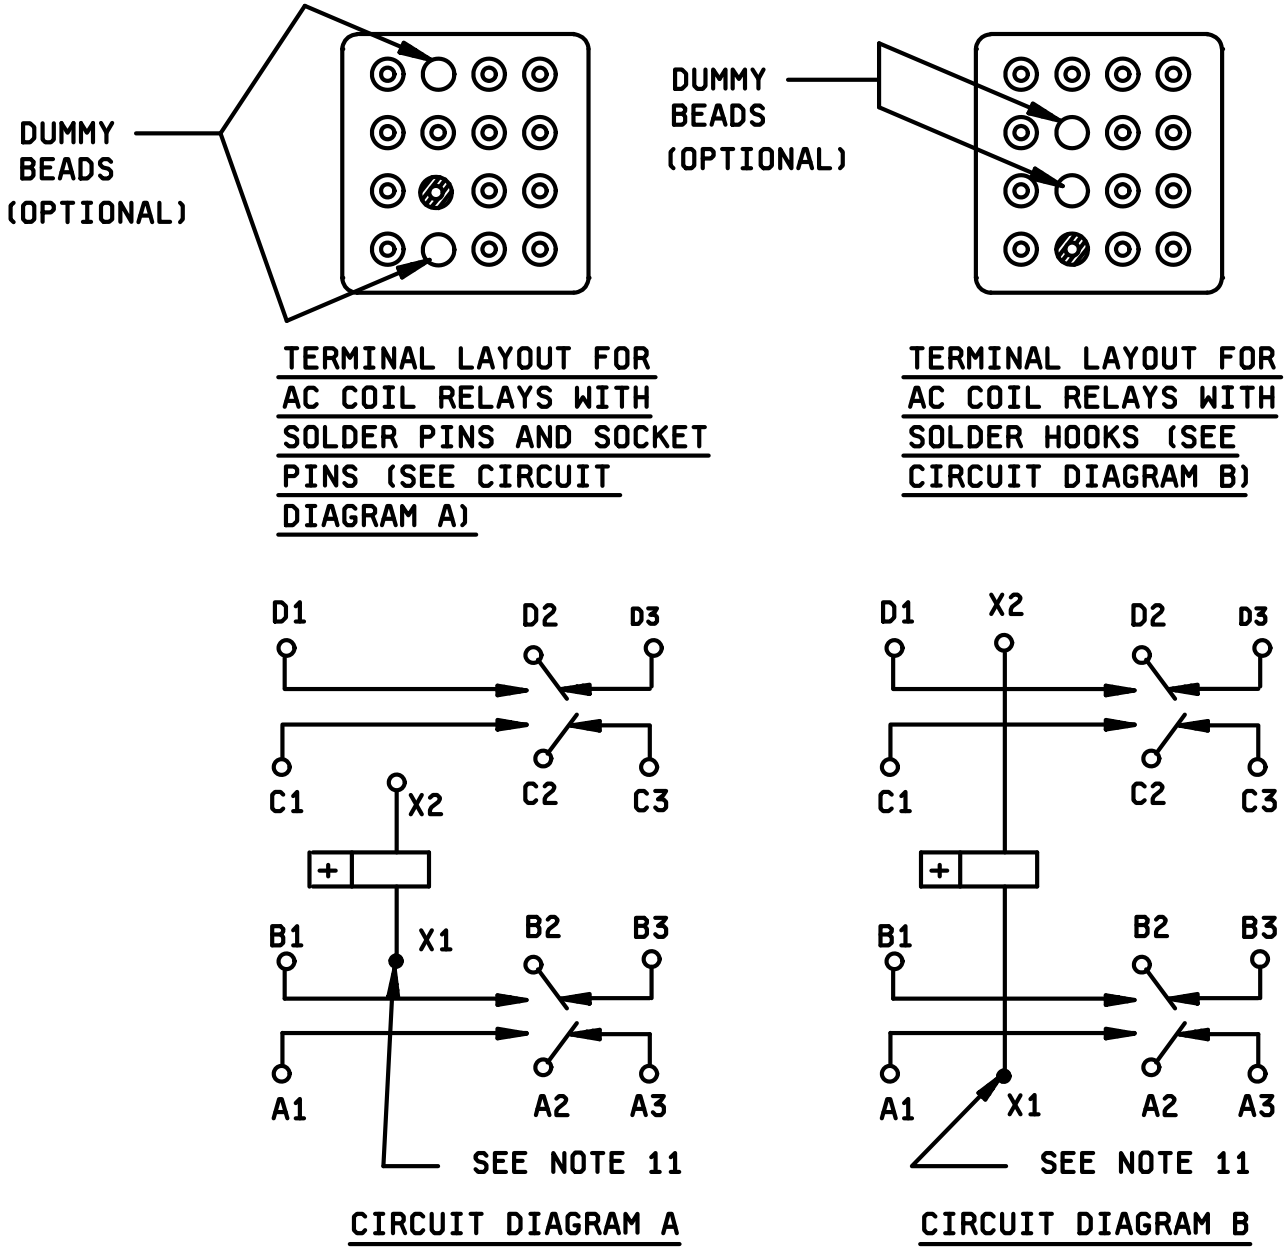


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.172	4.37	.937	23.80
.002	0.05	.200	5.08	1.010	25.65
.005	0.13	.218	5.54	1.025	26.04
.040	1.02	.270	6.86	1.062	26.97
.050	1.27	.310	7.87	1.396	35.46
.062	1.57	.312	7.92	1.406	35.71
.150	3.81	.625	15.88	1.446	36.73
.156	3.96	.810	20.57	1.718	43.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
5. These relays are polarized monostable.
6. Permanent magnet drive consists of a permanent magnet with its flux path switched and combined with the electromagnet flux.
7. Applicable to horizontal flange mount only. The circuit diagram, manufacturer's PIN, and the military PIN shall be marked on the near side. The remaining portion of the nameplate data shall be marked on the far side.
8. Applicable to horizontal flange mount only. Relays shall be marked with the manufacturer's name or CAGE code and date code. Marking shall be with the bottom of the print adjacent to the near side.
9. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Socket pin terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.
10. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 15 to 35, thickness .050 ±.005. Gasket material according to SAE-AMS3332 has been considered acceptable. Gaskets are not supplied with track mount relays.
11. Indicated terminals shall be identified by contrasting beads.
12. For coil pin orientation, see figure 1.
13. Plane of critical motion for vibration and shock is Y-axis.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.


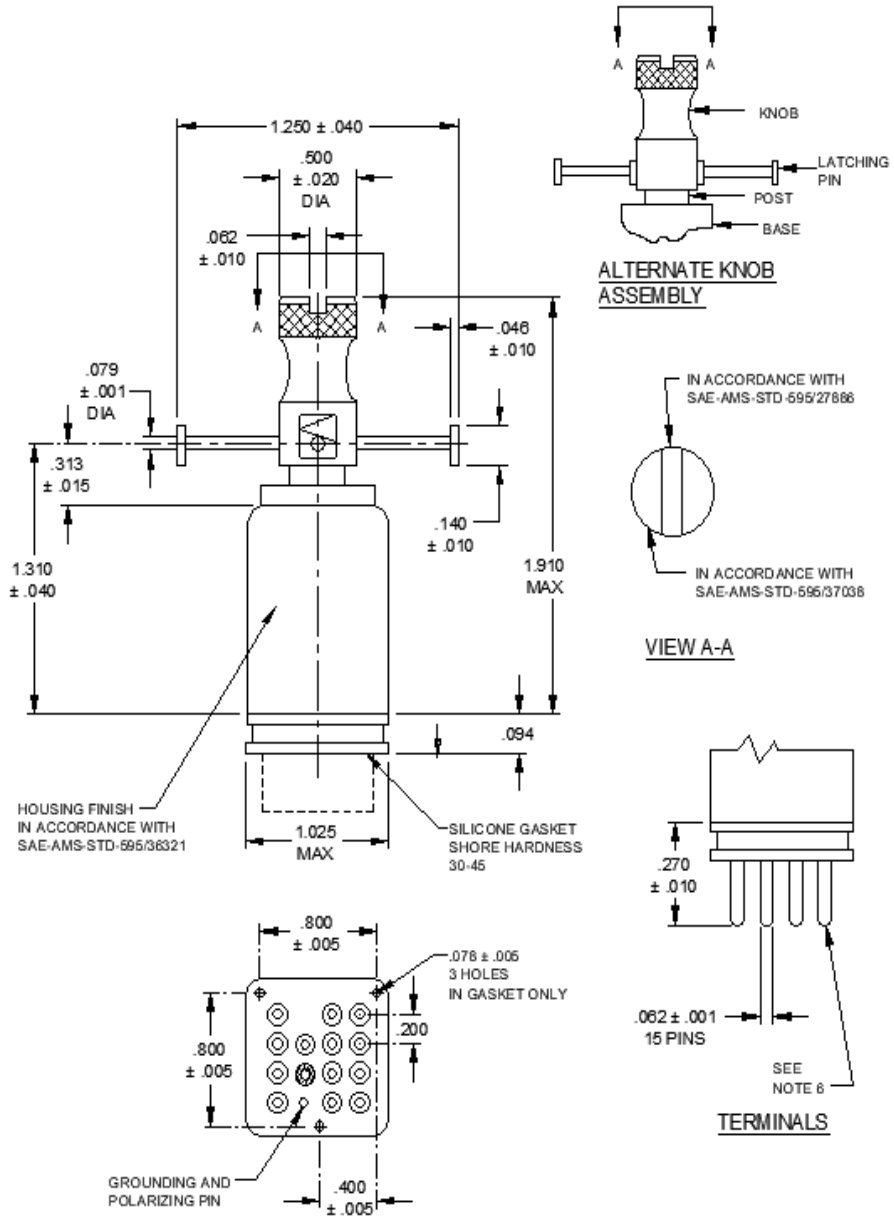


FIGURE 2. Outline dimensions and configuration, track mount (see notes 7 and 8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

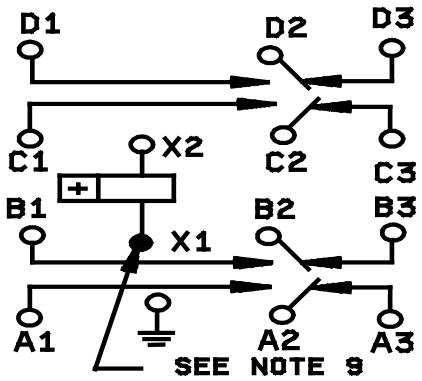

CIRCUIT DIAGRAM (TRACK MOUNT)

Inches	mm	Inches	mm
.001	0.03	.140	3.56
.005	0.13	.200	5.08
.010	0.25	.270	6.86
.015	0.38	.313	7.95
.020	0.51	.400	10.16
.040	1.02	.500	12.70
.046	1.17	.800	26.32
.062	1.57	1.025	26.04
.078	1.98	1.250	31.75
.079	2.01	1.310	33.27
.094	2.39	1.910	48.51

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Permanent magnet drive consists of a permanent magnet with its flux path switched and combined with the electromagnetic flux.
5. Terminal numbers shall not appear on the header. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
6. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Socket pin terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.
7. Track mount base, knob, and post shall be corrosion resistant. One way of ensuring corrosion resistance is to nickel plate stainless steel 303 with 100 microinches minimum thickness per McDonnell Douglas PS 13112 (Deutsch Relays, Inc. Patent number 3.790,915) or equivalent 100 microinches thick minimum.
8. Track mount relay shall be capable of mating with M6106/4 "Bracket and Socket Assembly", configuration III. The latching pin shall be capable of withstanding an axial pull of 35 pounds, in a direction away from the knob, without any degradation. The rotation of the knob mechanism shall be restricted such that the latching pins cannot be placed on the side opposite the M6106/4 bracket cutouts.
9. Indicated terminals shall be identified by a contrasting bead.

FIGURE 2. Outline dimensions and configuration, track mount (see notes 7 and 8) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

10. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Socket pin terminals shall be gold plated. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.

FIGURE 2. Outline dimensions and configuration, track mount (see notes 7 and 8) - Continued.

REQUIREMENTS:

Contact data:

Load ratings: See table I.

Low level: 10 to 50 μA at 10 to 50 mV dc or peak ac.

Intermediate current: Applicable.

Mixed loads: Applicable.

TABLE I. Rated contact load and cycles (amperes per pole).

Type of load (high level)	Cycles x 10^3	28 V dc	115 V ac 1 phase 400 Hz	115 V ac 1 phase 50/60 Hz 1/	115/200 V ac 3 phase 400 Hz	115/200 V ac 3 phase 50/60 Hz 1/
Resistive	100	10	10	2.5	10	2.5
Inductive	20	8	8	N/A	8	N/A
Inductive	10	N/A	N/A	2.5	N/A	2.5
Motor	100	4	4	2	4	2
Lamp	100	2	2	1	N/A	N/A

1/ For 50/60 Hz rating, rupture and overload are not applicable and life for each load shall be 10,000 cycles.

Life: 100,000 cycles, unless otherwise specified (see table I).

Contact voltage drop and resistance:

Initial contact voltage drop: 0.100 volt maximum. Rated resistive current at 6 V dc or peak ac. Relays shall not make or break this load.

Initial contact resistance: 0.010 ohm maximum. 50 mA max at 6 V dc or peak ac.

High level life (contact voltage drop):

During life: 10 percent open circuit voltage maximum.

After life: 0.125 volt maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

Intermediate current (contact resistance):

During intermediate current: 3 ohms maximum.

After intermediate current: 0.150 ohm maximum.

Low level (contact resistance):

During low level: 100 ohms maximum.

After low level: 0.150 ohm maximum at 100 mA and 28 V dc.Contact bounce: 1.0 millisecond maximum.

Contact stabilization time: 2.5 milliseconds maximum.

Overload current: 40 amperes dc (60 amperes ac).

Rupture current: 50 amperes dc, 80 amperes ac.

Time current relay characteristics: See table II.

TABLE II. Time current relay characteristics. 1/

Successive application	Amperes	Time
1	15	1 hour
2	50	5.0 seconds
3	100	1.2 seconds
4	250	0.2 second
5	350	0.1 second

1/ All relays shall withstand overload and fault currents. Relays must be able to sustain five applications (make and carry only) of power concurrently on adjacent poles at each of five different current levels in the sequence listed in table II. Separate relays shall be tested at 28 V dc and 115/200 V ac, 400 Hz 3-phase. Cooling time between successive applications shall be 30 minutes. Tests shall be performed on both normally open and normally closed contacts. There shall be no failures or evidence of welding or sticking and relays shall pass contact voltage drop at the conclusion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

Coil data 1/ 2/: See table III.

Operate time: 20 milliseconds maximum, 15 milliseconds maximum (track mount) with rated coil voltage over the temperature range.

Release time: 50 milliseconds maximum from rated coil voltage over the temperature range.

Duty rating: Continuous.

Coil transient suppression: Not applicable.

Neutral screen: Not applicable.

1/ CAUTION: Due to possible interaction of relay magnetic fields, the following spacing requirements, as a minimum, shall be considered in dense packaging situations:

a. Row to row assisting fields: .125 (3.18 mm).
b. Row to row opposing fields: .188 (4.78 mm).
c. Side to side alternating fields: .062 (1.57 mm).
d. Side to side like fields: .125 (3.18 mm).

2/ Track mount relays shall have the pickup, hold, and dropout voltage, and timing tests, performed with a MIL-DTL-12883/51 bracket placed around the relay housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

TABLE III. Dash numbers and characteristics. 1/

Dash number 2/			Mount	Coil data												
				At 25°C							Over temperature range			Maximum pickup voltage	
Solder pin	Solder hook	Socket pin		Coil voltage (V ac) 3/		Frequency (Hz)	Coil current amps (max)	Specified pickup voltage (V ac)4/	Specified hold voltage (V ac)4/	Specified dropout voltage (V ac) 4/	Specified pickup voltage (V ac) 4/	Specified hold voltage (V ac) 4/	Specified dropout test (V ac) 4/	High temperature test	Continuous current
				Rated	Max										
	001	002	RVFM	115	122	400	.04	73	24	7	90	30	5	95.4	105
003	004	005	RVFM	115	122	50/400	.04	73	30	7	90	40	5	95.4	105
	006		HFM	115	122	400	.04	73	24	7	90	30	5	95.4	105
	007		HFM	115	122	50/400	.04	73	30	7	90	40	5	95.4	105
008	009		No mount	115	122	50/400	.04	73	30	7	90	40	5	95.4	105
		010	Track	115	122	400	.04	73	24	7	90	30	5	95.4	105

1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications.
2/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number. Failure rate level (percent per 10,000 cycles): L, 3.0; M, 1.0; P, 0.1; R, 0.01. Example: 001L, 002R.
3/ CAUTION: The use of any coil voltages less than the rated coil voltage will compromise the operation of the relay.
4/ Pickup, hold, and dropout voltages as shown are for test purposes only and are not to be used for design criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

Electrical data:

Insulation resistance:

Initial: 100 megohms minimum at 500 V dc.

After life or environmental tests: 100 megohms minimum at 500 V dc (track mount), 50 megohms minimum at 500 V dc (all others).

Dielectric withstanding voltage 3/:

	Track mount		All others	
	Coil to case	All other points	Coil to case	All other points
Sea level:				
Initial	1050	1500	1000	1250
After life:	1050	1250	1000	1000
Altitude:				
At 80,000 feet	350	350	350	350
At 300,000 feet	---	---	500	500

Maximum leakage current (track mount only): 100 microamperes rms.

Environmental characteristics:

Temperature range: -70°C to +125°C.

Maximum altitude rating: 300,000 feet, 80,000 feet for track mount.

Shock (specified pulse): Applicable, MIL-STD-202-213, test condition C, 200 g's for 6 ±1 ms, except horizontal flange mount peak g value shall be 100 g's for 6 ±1 ms. Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Vibration (sinusoidal): Applicable, MIL-STD-202-204, 30 g's except frequency range shall be 10 to 3,000 Hz. Horizontal flange mount shall be 20 g's, 57 to 3,000 Hz. Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Vibration (random): Applicable to qualification and group C inspection. Test in accordance with MIL-STD-202-214, test condition IG (0.4 g^2/Hz, 50 to 2000 Hz); for horizontal flange mount test condition IE (0.2 g^2/Hz). Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

3/ Dielectric may be improved by suitable insulation of terminals and wiring after installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

Vibration (random): Applicable to track mount only. Applicable to qualification only. Test in accordance with MIL-STD-202-214, test condition IG, 1.5 hours per axis. Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Acceleration: Applicable, except 15 g's.

Physical data:

Dimensions and configurations: See figure 1.

Weight: 0.17 pound (77 grams), 0.20 pound (90.6 grams) track mount.

Terminal strength:

Solder hook terminals:

Pull force: 10 pounds ±1.0 pound.

Bend: Not applicable to leads .047 (1.19 mm) and larger.

Twist: Not applicable.

Solder pin terminals:

Pull force: For .062 diameter terminals: 10 pounds ±1.0 pound.

Bend: Not applicable to leads .047 (1.19 mm) and larger.

Twist: Not applicable.

Socket pin terminals:

Pull force: For .062 diameter terminals: 10 pounds ±1.0 pound.

Bend: Not applicable to leads .047 (1.19 mm) and larger.

Twist: Not applicable.

Terminal solderability: Applicable to solder pin and solder hook terminals only.

Seal: Hermetic.

Marking: Applicable.

Part or Identifying Number (PIN): M83536/17 (dash number from table III and suffix letter designating failure rate level).

Qualification inspection:

Qualification inspection and sample size: See table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Qualification inspection and sample size 1/.

Single submission	Group submission	
18 units plus 1 open unit for level L at C = 0 33 units plus 1 open unit for level M at C = 0 Qualification inspection as applicable	M83536/17-005 " " M83536/17-002 M83536/17-004 M83536/17-006 M83536/17-010 M83536/17-009	18 units plus 1 open unit for level L at C = 0 33 units plus 1 open unit for level M at C = 0 Qualification inspection as applicable 2 units, qualification inspection table, group II, shock, vibration, acceleration, terminal strength, and seal 2 units, qualification inspection table, group II

1/ The number of units required for qualification testing shall be increased as required in group V, table II of MIL-PRF-83536, if the contractor elects to test the number of units permitting one or more failures. Prior to performance of qualification testing, the relay manufacturer shall preselect the sampling plan.

Supersession data: See table V.

TABLE V. Supersession data.

Superseded PIN	Replacement PIN M83536/17-
MS27400- 7	001
8	002
11	001
12	002
20	006
22	006
26	004
27	007
28	005
32	004
33	007
34	005
39	003
48	009
49	008
50	009
51	008
M6106/2- 002	010

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-83536, this document references the following:
ASTM-B488 MIL-DTL-12883/51 MIL-STD-202-213
MIL-STD-202-204 MIL-STD-202-214 SAE-AMS3332 SAE-AMS-STD-595/27886, /37038, /36321
MCDONNELL DOUGLAS PS 13112

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5945-2021-037)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.