REVIEW INTEREST: DCSC, 69
USER INTEREST: TD, ATAC

FED. SUP CLASS
2805

SIDES OF RING GROOVES MUST RUN TRUE WITH PISTON PIN BORE WITHIN .002 T.I.R.

RING LANDS MAY LOCALLY SHOW 4° EFFECT OF CAM GRINDING SKIRT.

PISTON SKIRT IS GROUND TAPERED .0005 - .0015 (.0010 DESIRED) MAX. DIA. AT BOTTOM OF SKIRT.

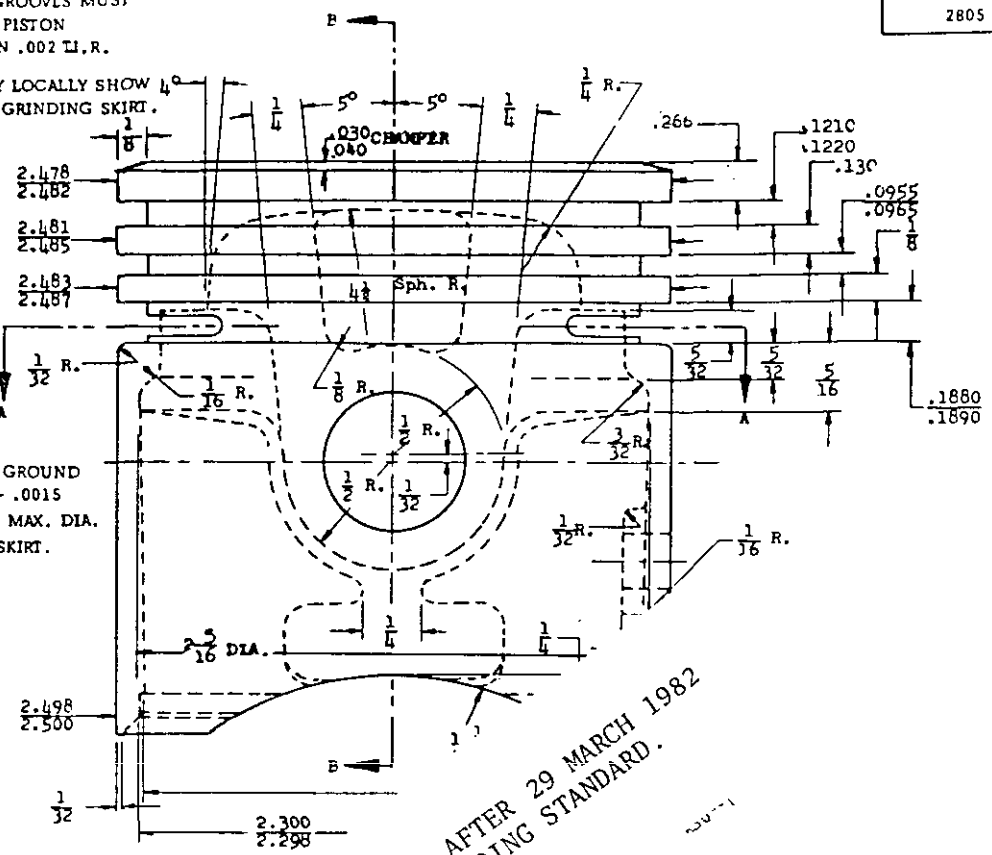

© CANCELED AFTER 29 MARCH 1982
NO SUPERSEDING STANDARD.

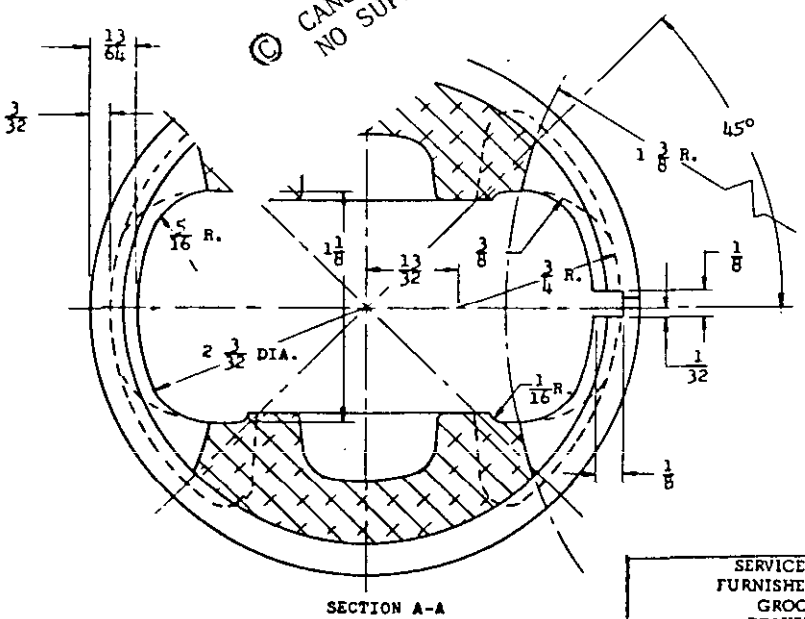

SECTION A-A

WT. OF FINISHED PISTON: 227 ±3 GRAMS.

SERVICE PISTON TO BE FURNISHED WITH PISTON RING GROOVE INSERT:
MS 13846-1 REQUIRES MS13802-4
MS 13846-2 REQUIRES MS13802-5
MS 13846-3 REQUIRES MS13802-6

PART NO. MS 13846-1

(B) ENTIRE STANDARD REVISED

APPROVED 20 OCTOBER 1955 REVISED (A) 30 JANUARY 1957 (B) 15 DEC 1965 © 29 MARCH 1982

P.A. MO (ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE: 2-1/2" x 2-5/8"	MILITARY STANDARD MS 13846
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES	SHEET 1 OF 5

DD FORM 672-1 (Cancelled)

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.