FED. SUP CLASS
5930

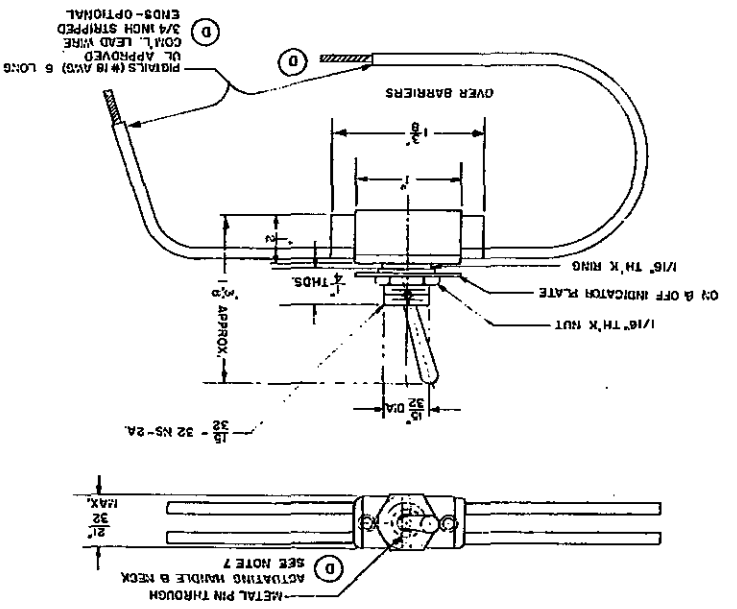

REQUIREMENTS:

1. Switches shall be 3 ampere, 250 volt, double pole, "on-off" action.
2. Material of the box shall be molded or laminated phenolic.
3. Two switches for each 1,000 switches or fraction thereof furnished on each Government order and two switches for each 1,000 switches or fraction thereof purchased by shipbuilding contractors for installations on ships shall be tested for 6,000 operations under rated load and voltage, and shall withstand this test without failure of any part thereof.
4. Commercial tolerances acceptable.
5. Screw-thread Handbook H28 applies.
6. Fire Underwriter's approval required.
7. To increase safety, switch operating handle shall be pinned to the neck of the switch by a metal pin in the approximate position shown.
- (D) 8. On watertight applications where boot is used the "on-off" indicator plate cannot be used.
- (D) 9. Minor variations in manufacture from that shown are acceptable.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bid.

(D)

MS part No.	Federal Stock Number
MS16569-1	5930-719-9659

(D) Denotes changes.

(Project 5930-N360)

APPROVED 4 November 1957 REVISED (C) 11 March 1966 (D) 22 February 1972

P.A. SHIPS Other Cust	(D) TITLE Switch, Toggle, Double Pole, Single Throw (For Use In Lighting Fixtures)	MILITARY STANDARD MS 16569(SHIPS)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672N LIMITED COORDINATION *PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:58Z
Check the source to verify that this is the current version before use.