FED. SUP CLASS
5930

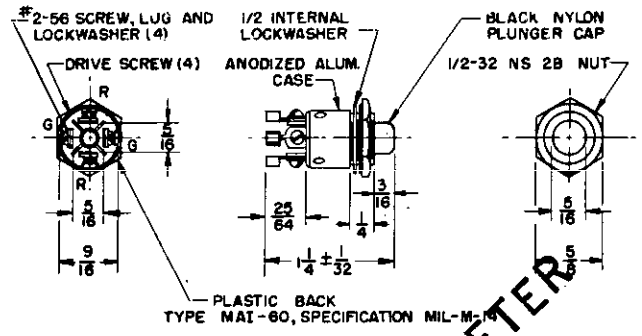

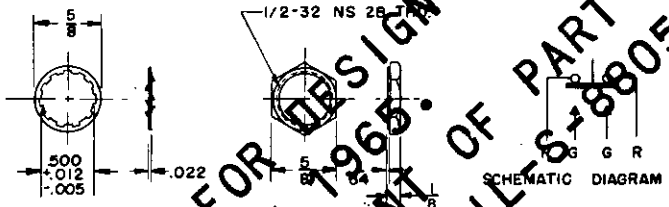

DETAIL OF LOCKWASHER

DETAIL OF

DASH NO	RATINGS VOLTS	AMPS. IND.	OPERATIONS
-1	120 A.C.	15@0.5 PF	40,000
-2	120 D.C	1@.007HENRY	40,000
-5	230 D.C.	.005AMPS @ 2.5 HENRIES	5000

© INACTIVE FOR DESIGN AFTER 26 FEBRUARY 1965. FOR PROCUREMENT OF PART NUMBER MS16712-1 USE MIL-S-8805/20.

REQUIREMENTS:

1. WEIGHT 0.020 POUND APPROXIMATELY.
2. TOTAL PLUNGER TRAVEL 0.085 APPROXIMATELY.
3. OPERATING PRESSURE 3-1/2 ± 1 POUND.
4. TERMINALS PAINTED AS INDICATED IN END VIEW.
   R = RED, NORMALLY CLOSED CIRCUIT
   G = GREEN, NORMALLY OPEN CIRCUIT.
5. SHALL WITHSTAND HIGH IMPACT SHOCK OF SPECIFICATION MIL-S-901 WITH NO MOMENTARY CLOSING OF THE NORMALLY OPEN CONTACTS.
6. VIBRATION: SHALL WITHSTAND VIBRATION TESTS, TYPE I OF STANDARD MIL-STD-167, EXCEPT THAT THE VARIABLE FREQUENCY TEST SHALL BE OMITTED.

NOTES:

1. REFERENCE DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
2. FOR DESIGN FEATURES PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. ~~The MS part number consists of the MS number as shown and the dash number.~~

MS Part No. MS 16712-1

Project 5930-N117SH

APPROVED 11 AUG. 1958 REVISED (A) 3 JAN 1962 (B) 21 MAR 1962 (C) 26 Feb 1965

P.A. SHIPS Other Cust	TITLE: SWITCH, PUSH, SNAP ACTION MOMENTARY-2 CIRCUIT	MILITARY STANDARD MS 16712 (SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

This standard has been approved by the Bureau of Ships, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.