(B) FED. SUP CLASS 4130/4810

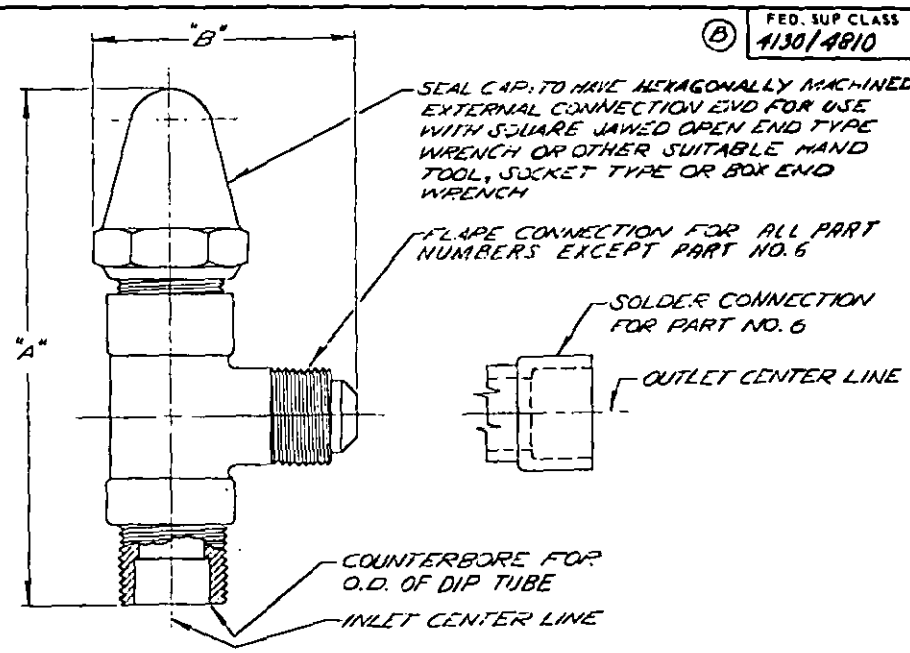

VALVE DIMENSIONS IN INCHES

DASH NO.	SIZE INLET NPT	SIZE OUTLET O.D. FLARE	SIZE OUTLET O.D. SOLDER	A (MAX)	B (MAX)
(C) -1	1/4	1/4	—	3 5/8	1 5/8
-2	3/8	3/8	—	4	2
-3	3/8	1/2	—	4 1/4	2
-4	1/2	1/2	—	4 1/2	2 1/4
-5	1/2	5/8	—	5	2 1/2
-6	3/4	—	7/8	6	2 1/2
-7	1/2	3/8	—	4 1/2	2 1/4

TYPE: ANGLE, PACKED, BACK-SEATING OR NON-BACK-SEATING KEY OPERATED PLUG ELEMENT, WITH GASKETED SEAL CAP, VAVLE STEM SHANK TO BE 3/16, 1/4 OR 5/16 INCH SQUARE SHAPE.

MATERIALS: VALVE BODY AND SEAL CAP-BRASS OR STEEL.

RING GASKET - SOFT COPPER.

VALVE STEM (INCLUDING INTEGRAL PLUG): COMMERICAL BRONZE OR STEEL TREATED TO RESIST CORROSION.

OPERATING CONDITIONS: A. MAXIMUM OPERATING PRESSURE: 350 PSIG.
B. MAXIMUM OPERATING TEMPERATURE: 200 F.

CONNECTION ENDS: INLET: MALE PIPE THREAD IN ACCORDANCE WITH MS-33656.
OUTLET: A. FLARE TUBE MALE THREAD IN ACCORDANCE WITH MS-33873.
B. SOLDER TUBE FEMALE SOCKET IN ACCORDANCE WITH MS-33925 FOR O.D. TUBE SIZE 7/8 INCH.

NOTES:

1. DIMENSIONS IN INCHES.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
4. THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.
(C) 5. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17243-1.

(A) ADDED SIZE 7

APPROVED 13 MARCH 1961 REVISED (A) 1 OCT 1968 (B) 13 JAN 76 (C) 13 APR 78

Preparing Activity: ME
Army
Navy
DLA
User: MC
GS

This Military Standard is approved by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. ARMY - GL Other Cust NAVY - YD USAF - 99	TITLE VALVES, ANGLE, SHUT-OFF, PACKED, RECEIVER, REFRIGERANT-12	MILITARY STANDARD MS 17243
PROCUREMENT SPECIFICATION MIL-V-22554	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.