FED. SUP CLASS
1650

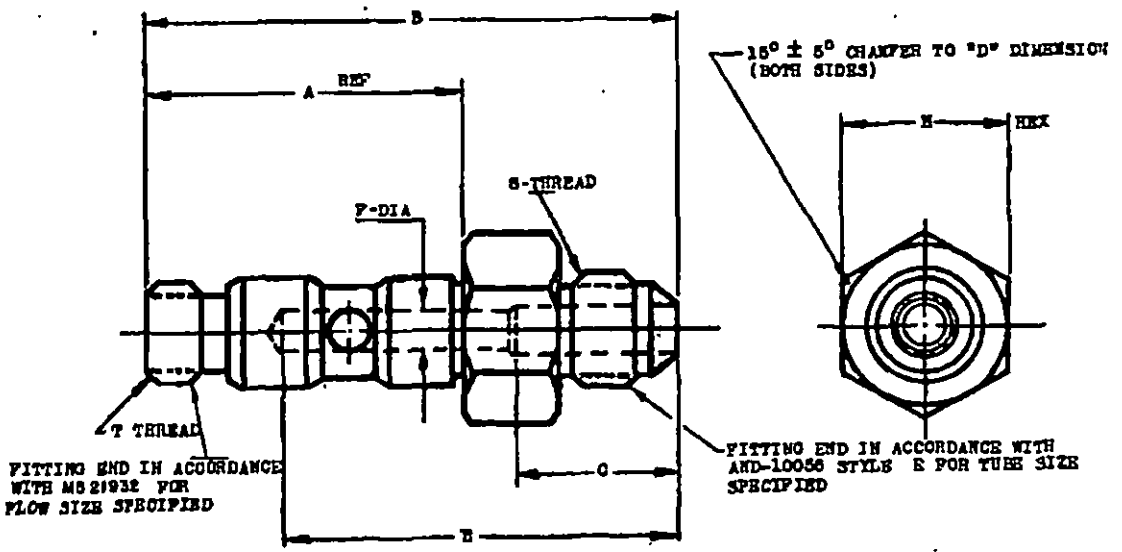

LOW FLOW SIZE MS PART NUMBER	TUBE O.D.	THREAD S (REF)	THREAD T (REF)	A (REF.)	B	± C ±.062	D +.000 −.015	± E ±.062	± F ±.003	H HEX
MS 21949 −3L	3/16	5/8-24 UNF-3A	7/16-20 UNF-3A	1.438	2.229	-----	.621	1.625	.128	.621 .628
MS 21949 −4L	1/4	7/16-20 UNF-3A	7/16-20 UNF-3A	1.438	2.332	-----	.684	1.750	.172	.684 .691
MS 21949 −5L	5/16	1/2-20 UNF-3A	7/16-20 UNF-3A	1.438	2.394	.750	.746	1.812	.203	.746 .753
MS 21949 −6L	3/8	9/16-18 UNF-3A	7/16-20 UNF-3A	1.438	2.431	.750	.871	1.812	.203	.871 .878
MS 21949 −8L	1/2	3/4-16 UNF-3A	7/16-20 UNF-3A	1.438	2.532	.750	.996	1.937	.203	.996 1.003

(A)

HIGH FLOW SIZE MS PART NUMBER	TUBE O.D.	THREAD S (REF)	THREAD T (REF)	A (REF)	B	± C ±.062	D +.000 −.015	± E ±.062	± F ±.003	H HEX
MS 21949 −6H	3/8	9/16-18 UNF-3A	9/16-18 UNF-3A	1.688	2.681	-----	.871	2.000	.297	.871 .878
MS 21949 −8H	1/2	3/4-16 UNF-3A	9/16-18 UNF-3A	1.688	2.782	-----	.996	2.125	.391	.996 1.003
MS 21949 −10H	5/8	7/8-14 UNF-3A	9/16-18 UNF-3A	1.668	2.883	.937	1.121	2.188	.422	1.121 1.128

MATERIAL: ALUMINUM ALLOY BAR 248 SPECIFICATION QQ-A-268 TEMPER T4 OR TEMPER T4 ARTIFICIALLY AGED.
FINISH: SEE PROCUREMENT SPECIFICATION
ALL OUTSIDE MACHINED SURFACES 125 MICROINCHES R.M.S. MAX. ALL INSIDE 250 MAX. UNLESS OTHERWISE NOTED.
FITTINGS SHALL BE FREE FROM ALL HANDING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
INSTALL PER MS 21931.
EXAMPLE OF PART NUMBER: MS21949-4L BOLT, 1/4 TUBING, LOW FLOW.
(A) MS21949-6H BOLT, 1/2 TUBING, HIGH FLOW.

THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 FEB 1956 REVISED (A) 13 MAY 1966

P, A, AS

PROCUREMENT SPECIFICATION MIL-P-5509

MILITARY STANDARD

BOLT-CLUSTER FITTING SINGLE PORT-FLARE

MS 21949 (AS)

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.