NOTICE WHEN GOVERNMENT DRAWINGS SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION THE U S GOV'T THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER AND THE FACT THAT THE GOV'T MAY HAVE FORMULATED FURNISHED OR IN ANY WAY SUPPLIED THE SAID DRAWINGS SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO

THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT ACTIVITY. ALL OTHER MILITARY ... IES ARE REQUIRED TO EMPLOY THIS STAN. ... PARLE

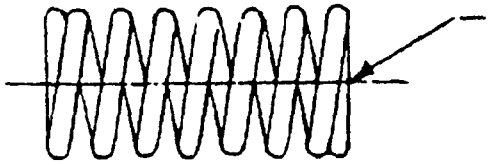

Close ends and grind square with axis

MS PART NUMBER	TOTAL COILS	Active COILS	I D 010	WIRE DIA	APPROX Free Length	RATE PER IN	LBS Load at .550 in.
MS24697-1	8-½	6-½	.233	.047	.755	47 lbs	9.9 5%
MS24697-2	10	8	.230	040	.875	23 lbs	7.6 5%
MS24697-3	11	9	.235	035	.945	12 lbs	4.8 5%

Material: Corrosion resistant steel, 17-7PH, Comp C
Dimensions in inches unless otherwise specified. Tolerances:
Decimals ± .005, Fractions ± 1/64
No permanent set allowable at solid length
Spring must withstand 500° Fahrenheit continuously

Referenced documents shall be the issue in effect on the date of Invitation For Bid

This Standard takes precedence over documents referenced herein

P A / OTHER DIST: USAF	TITLE: SPRING-CONNECTOR RACK AND PANEL, MINIATURE	Military Standard MS 24697 (USAF)
PMI/REQUIREMENT SPEC: MIL-C-26518	SUPERSEDES	SHEET 1 OF 1

DD Form 672-1 (Limited coordination)
1 Sep 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.