INCH-POUND
MIL-PRF-62430A(AT)
26 July 1996
SUPERSEDING
MIL-H-62430(AT)
26 May 1988

PERFORMANCE SPECIFICATION

HARNESS ASSEMBLY, THERMOCOUPLE

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers three (3) types of thermocouple harness assemblies, hereinafter referred to as the harness.

1.2 Classification. Harness are of the following types (see 6.2):

Type I	-	Differentiating characteristics in accordance with Drawing 12302361 and as specified herein.
Type II	-	Differentiating characteristics in accordance with Drawing 12302362 and as specified herein.
Type III	-	Differentiating characteristics in accordance with Drawing 12302363 and as specified herein.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6685

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue to the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

P-C-437	- Cleaning Compound, High Pressure (Steam) Cleaner.
A-A-52557	- Fuel Oil, Diesel.

DEPARTMENT OF DEFENSE

MIL-T-5624	- Turbine Fuel, Aviation, Grades JP-4, JP-5, and JP-5/JP-8 ST.
MIL-H-6083	- Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
MIL-L-23699	- Lubricating Oil, Aircraft Turbine Engine, Synthetic Base, NATO Code Number O-156.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810	- Environmental Test Methods.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094).

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings , and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY

12284516	- Rear Engine, Sub-Assembly.
12302361	- Harness Assembly, Thermocouple.
12302362	- Harness Assembly, Thermocouple.
12302363	- Harness Assembly, Thermocouple.

(Copies of the above drawings are available from the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASQC Z1.4	- Sampling Procedures and Tables for Inspection by Attributes (DOD Adopted).
ANSI/SAE AS478	- Identification Marking Methods. (DOD Adopted.)

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E230	- Standard Temperature - Electromotive Force (EMF) Tables for Standardized Thermocouples

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, W. Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Differentiating characteristics. The harnesses shall conform to the following (see 4.5):

Type I	-	Differentiating characteristics in accordance with Drawing 12302361 and as specified herein.
Type II	-	Differentiating characteristics in accordance with Drawing 12302362 and as specified herein.
Type III	-	Differentiating characteristics in accordance with Drawing 12302363 and as specified herein.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein and as noted on the applicable drawing. Materials not designated on the drawing or specifically covered by this specification shall be uniform in quality and free from imperfections or defects which affect their serviceability (see 4.5.1). Thermocouple conductors, sockets, connector inserts, and potting material shall be impervious to the environments and conditions encountered during service.

3.3.1 Fluid resistance. All materials used in the harness shall be impervious to fluids in accordance with P-C-437, A-A-52527, MIL-T-5624, MIL-H-6083, and MIL-L-23699 (see 4.5.1).

3.3.2 Corrosion resistance. All external surfaces shall have corrosion resistance at least equivalent to anodized aluminum. Also, there should be no direct contact between dissimilar metals (see 4.5.1).

3.3.3 Thermocouple wire. The thermocouple wire shall be chromel and alumel and shall have an accuracy of ± 0.75 percent from 752 to 1832 degrees Fahrenheit (°F) (400 to 1000 degrees Celsius (°C)) (see 4.5.1).

3.3.4 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs (see 4.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3.4 Design and construction.

3.4.1 Configuration. The harness shall conform to the applicable drawing (see 4.5.1 and 4.5.2).

3.4.1.1 Schematic arrangement. The schematic arrangement for the harness shall be as defined on the applicable drawing (see 4.5.1 and 4.5.2).

3.4.1.2 Interface definition. Electrical and mechanical interfaces shall be as defined on the applicable harness drawing and Drawing 12284516 (see 4.5.1 and 4.5.2).

3.4.2 Weight. The weight of the harness shall not exceed 1.0 pounds (lb) (454 grams (g)) (see 4.5.1 and 4.5.2).

3.4.3 Thermocouple probes. Thermocouple probes shall be closed and ungrounded with a recovery factor of less than 0.75 (see 4.5.1 and 4.5.2).

3.5 Performance.

3.5.1 Individual circuit resistance. The individual circuit resistance between connector contact A and any other contact (except F) at 70°F (21°C), shall be in accordance with the following (see 4.5.2):

a. Type I - 3.19 to 3.67 ohms.
b. Type II - 5.04 to 5.80 ohms.
c. Type III - 5.37 to 6.17 ohms.

3.5.2 Average circuit resistance. The average circuit resistance between connector contact A and all other contacts (except F) shorted together at 70°F (21°C) shall be in accordance with the following (see 4.5.2):

a. Type I - 1.92 to 2.28 ohms.
b. Type II - 3.43 to 3.95 ohms.
c. Type III - 3.69 to 4.25 ohms.

3.5.3 Insulation resistance. The insulation resistance between the circuits and connector shells and outer braid shall be not less than 25 000 ohms at 250 volts direct current (Vdc) (see 4.5.3).

3.5.4 Output signal. The individual thermocouples shall have an output signal in accordance with ASTM E230 (see 4.5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

3.5.4.1 Output signal accuracy. Each individual thermocouple shall produce an output signal within ± 11°F (± 6°C) of the applied temperature, when the thermocouple junction is subjected to an applied temperature of 1112 ± 18°F (600 ± 10°C) (see 4.5.4.1).

3.5.5 Leakage. The full length of sensing probe sheath shall be free of flaws or holes that would allow fuel leakage to enter the inner insulation. The leakage rate shall not exceed 1.83 cubic inches per minute (in^3/min) (3000 cubic centimeters per minute (cm^3/min)) at 200 ± 10 pounds per square inch (psi) (1379 ± 69 kilopascals (kPa)) (see 4.5.2).

3.6 Environmental conditions.

3.6.1 High temperature. The harness shall meet the specified performance requirements when exposed to the following temperatures (see 4.5.5.1 and 4.5.5.1.1):

a. Electrical connectors - not greater than 400°F (204°C).
b. Harness and leads - not greater than 1200°F (649°C).
c. Thermocouple probes - 1800 ± 50°F (982 ± 28°C).

3.6.2 Low temperature. The harness shall meet the specified performance requirements when exposed to a temperature of -60°F (-51°C) (see 4.5.5.2).

3.6.3 Altitude. The harness shall meet the specified performance requirements when exposed to an altitude of 1300 feet (ft) (396 meters (m)) below sea level to 10 000 ft (3048 m) above sea level (see 4.5.5.3).

3.6.4 Humidity. The harness shall meet the specified performance requirements, and shall evidence no corrosion or other defects which would affect the function or structural strength, when exposed to 0 to 100 percent (%) relative humidity (see 4.5.5.4).

3.6.5 Salt fog. The harness shall meet the specified performance requirements when exposed to a salt fog (see 4.5.5.5).

3.6.6 Sand and dust. The harness shall meet the specified performance requirements when exposed to blowing dust (fine sand) (see 4.5.5.6).

3.6.7 Fungus. The harness shall not promote the growth of fungus (see 4.5.5.7).

3.6.8 Vibration. The harness shall meet the specified performance requirements when subjected to vibration having levels in accordance with figure 1 from 25 to 500 to 25 Hertz (Hz) (see 4.5.5.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

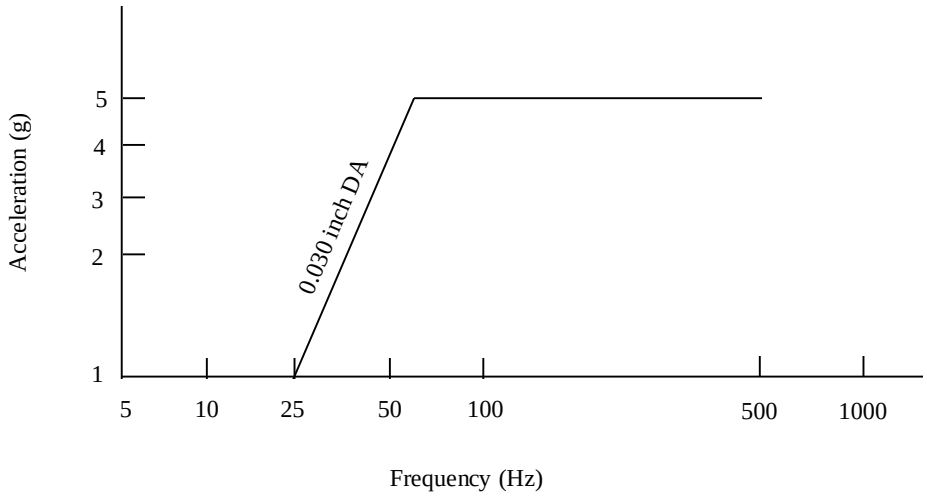

FIGURE 1. Peak vibration envelope.

3.6.9 Gun-firing shock. The harness shall meet the specified performance requirements without malfunction when subjected to shocks of 55 ± 5.5 gravity units (g) (539 ±54 meters per second squared (m/s^2)) for 2.5 ± 0.2 milliseconds (ms) duration in any direction (see 4.5.5.9).

3.6.10 Ballistic shock. The harness shall meet the specified performance requirements without malfunction when subjected to half sine wave shock pulses of 200 ± 20 g (1960 ± 196 m/s^2) for 0.5 ± 0.1 ms duration in any direction (see 4.5.5.10).

3.6.11 Basic shock. The harness shall meet the specified performance requirements without malfunction when subjected to half sine wave shock pulses of 30 ± 3 g (294 ±29 m/s^2) for 18 ms duration in any direction (see 4.5.5.11).

3.6.12 Submergence. The harness shall meet performance requirements after submergence in water (see 4.5.5.12).

3.7 Identification marking. Identification marking shall be in accordance with ANSI/SAE AS478 and as noted on the applicable drawing (see 4.5.2).

4. VERIFICATION

4.1 Classification of inspection. Inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspections (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

1. Examination (4.4.2)
2. Acceptance tests (see 4.4.3).

4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed under the following conditions:

a. Temperature - 73 ± 18°F (23 ± 10°C).
b. Pressure - 28.5 +2/-3 inches (in.) (725 +50/-75) millimeters (mm)) mercury (Hg).
c. Relative humidity - 50 ± 30%.

4.2.1 Test tolerances. Unless otherwise specified (see 6.2), test conditions, as indicated by instrumentation, shall not deviate from the conditions specified herein by more than the following:

a. Temperature
   Under 100°F (38°C) - ± 4°F (± 2°C).
   Over 100°F (38°C) - ± 4%.
b. Pressure - ± 5%.
c. Relative humidity - ± 5%.
d. Vibration amplitude
   Random - ± 3 decibels at resonance and ± 1 decibel elsewhere.
   Sinusoidal - ± 2%.
e. Vibration frequency - ± 2%.
f. Shock - ± 5%.
g. Acceleration - ± 5%.
h. Voltage, current, and time
   Value specified as whole number - ± 0.5.
   Value specified to 1 decimal place - ± 0.05.
   Value specified to 2 decimal places - ± 0.005.

4.3 First article inspection. Unless otherwise specified (see 6.2), the Government shall select three harnesses produced under the production contract for first article inspection. First article samples shall be inspected as specified in table I. Approval of the first article samples by the Government shall not relieve the contractor of his obligation to supply harnesses that are fully representative of those inspected as first article samples. Any changes or deviation of the production units from the first article samples shall be subject to the approval of the contracting officer (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of inspections.

Title	Requirement	Inspection	First article	Quality conformance	
				Examination	Acceptance (100%)
Materials and construction	3.3 thru 3.4.3	4.5.1	X		
Defects (see table II)	3.4.1 thru 3.5.2, 3.5.5, and 3.7	4.5.2	X	X	
Insulation resistance	3.5.3	4.5.3	X		X
Output signal	3.5.4	4.5.4	X		X
Output signal accuracy	3.5.4.1	4.5.4.1	X		X
High temperature	3.6.1	4.5.5.1	X		
Low temperature	3.6.2	4.5.5.2	X		
Altitude	3.6.3	4.5.5.3	X		
Humidity	3.6.4	4.5.5.4	X		
Salt fog	3.6.5	4.5.5.5	X		
Sand and dust	3.6.6	4.5.5.6	X		
Fungus	3.6.7	4.5.5.7	X		
Vibration	3.6.8	4.5.5.8	X		
Gun-firing shock	3.6.9	4.5.5.9	X		
Ballistic shock	3.6.10	4.5.5.10	X		
Basic shock	3.6.11	4.5.5.11	X		
Submergence	3.6.12	4.5.5.12	X		

4.3.1 Failure. Deficiencies found during, or as a result of, first article inspection shall be cause for rejection.

4.4 Quality conformance inspections.

4.4.1 Sampling for examination. Sampling for quality conformance inspection shall be done in accordance with general inspection level II of ANSI/ASQC Z1.4.

4.4.2 Examination. The harnesses shall be examined for the defects listed in table II. One or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects.

Category	Defect	Method of examination
Major:		
101	Assembly incomplete (see 3.4.1).	Visual
102	Dimensions affecting interchangeability out of tolerance (see 3.4.1).	SIE1/
103	Weight not as specified (see 3.4.2).	SIE
104	Thermocouple probes not as specified (see 3.4.3).	Visual/SIE
105	Individual circuit resistance not as specified (see 3.5.1).	SIE
106	Average circuit resistance not as specified (see 3.5.2).	SIE
107	Sensing probe sheath leakage greater than specified (see 3.5.5).	SIE
Minor:		
201	Dimensions not affecting interchangeability out of tolerance (see 3.4.1).	SIE
202	Marking improper (see 3.7).	Visual

1/ SIE = Standard Inspection Equipment.

4.4.3 Acceptance tests (100%). Each harness shall be subjected to the acceptance tests specified in table I.

4.4.3.1 Failure. Failure of any harness to pass any of the acceptance tests shall be cause for rejection of the failed item.

4.5 Methods of inspection.

4.5.1 Materials and construction. Conformance to 3.3 through 3.4.3 shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.5.2 Defects. Conformance to 3.1, 3.4 through 3.5.2, 3.5.5, and 3.7 shall be determined by examination for the defects listed in table II. Examination shall be visual, tactile, or by measurement with SIE. Nonconformance shall be cause for rejection.

4.5.3 Insulation resistance. To determine conformance to 3.5.3, the insulation resistance between the individual circuits and connector shells and outer braid shall be measured at an applied potential of 250 Vdc. Nonconformance shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

4.5.4 Output signal. To determine conformance to 3.5.4, the output signal of the individual thermocouples shall be measured under the conditions specified in ASTM E230. Nonconformance shall be cause for rejection.

4.5.4.1 Output signal accuracy. To determine conformance to 3.5.4.1, each individual thermocouple junction shall be subjected to an applied temperature of 1112 ± 18°F (600 ± 10°C) and the output signal measured. Nonconformance shall be cause for rejection.

4.5.5 Environmental tests. The harness shall be subjected to the environmental tests specified herein. After completion of each environmental test, the performance tests specified in 4.5.3 through 4.5.4.1 and inspections 104 through 106 of table II shall be repeated. Prior to conducting the environmental tests, the harness shall be subjected to an accelerated aging temperature of 392°F (200°C) for 168 hours.

4.5.5.1 High temperature. To determine conformance to 3.6.1a and 3.6.1b, the harness shall be subjected to the high temperature test of MIL-STD-810, method 501.3, procedure I, except steps 2 and 3 shall be omitted and the temperatures specified in 3.6.1 shall apply. The harness shall be maintained at the temperatures for an 8 hour period. Nonconformance shall be cause for rejection.

4.5.5.1.1 Thermocouple probe cycling. To determine conformance to 3.6.1c, upon completion of the high temperature test, the thermocouple probes shall be subjected to not less than 8000 cycles from a room temperature of 77°F (25°C) to 1800 ± 50°F (982 ± 28°C). Nonconformance shall be cause for rejection.

4.5.5.2 Low temperature. To determine conformance to 3.6.2, the harness shall be subjected to the low temperature test of MIL-STD-810, method 502.3, procedure I, except steps 2 and 3 shall be omitted. The harness shall be placed dry in a temperature chamber with the ambient temperature maintained at -60 ± 10°F (-51 ± 6°C) for 4 hours. Nonconformance shall be cause for rejection.

4.5.5.3 Altitude range. To determine conformance to 3.6.3, the harness shall be subjected to an atmospheric pressure of 31.19 in. (792 mm) of Hg (1300 ft (396 m) below sea level), after which the harness shall be subjected to an atmospheric pressure of 20.01 in. (508 mm) Hg (10 000 ft (3048 m) above sea level). Nonconformance shall be cause for rejection.

4.5.5.4 Humidity. To determine conformance to 3.6.4, the harness shall be subjected to the humidity test of MIL-STD-810, method 507.3, procedure II. At the conclusion of the humidity test, the harness shall be dried without forced convection for 12 hours in air at less than 70°F (21°C) with not less than 50% relative humidity and then subjected to the performance tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

After this, the harness shall be disassembled and inspected. Nonconformance shall be cause for rejection.

4.5.5.5 Salt fog. To determine conformance to 3.6.5, the harness shall be subjected to the salt fog test of MIL-STD-810, method 509.3, procedure I. Nonconformance shall be cause for rejection.

4.5.5.6 Sand and dust. To determine conformance to 3.6.6, the harness shall be subjected to the sand and dust test of MIL-STD-810, method 510.3, procedure I. Nonconformance shall be cause for rejection.

4.5.5.7 Fungus. To determine conformance to 3.6.7, the harness shall be tested in accordance with MIL-STD-810, method 508.4, procedure I. Nonconformance shall be cause for rejection.

4.5.5.8 Vibration. To determine conformance to 3.6.8, the harness shall be mounted using the installed interface configuration for its intended application, or equivalent, and subjected to the test of MIL-STD-810, method 514.4, procedure I, except that the conditions of 3.6.8 shall apply. A 20 minute logarithmic resonant sweep shall be conducted in each of three mutually perpendicular axes, from 25 to 500 to 25 Hz, to identify up to four of the most severe resonant frequencies along each axis. A resonant dwell shall then be conducted for 20 minutes at each of the four resonant frequencies, for a total of 100 minutes in each axis. If less than four resonant frequencies are encountered, the balance of the 100 minutes vibration time in each axis shall be spent cycling the harness over the specified frequency range. Nonconformance shall be cause for rejection.

4.5.5.9 Gun-firing shock. To determine conformance to 3.6.9, the harness shall be mounted using the installed interface configuration for its intended application, or equivalent, and subjected to the test of MIL-STD-810, method 516.4, procedure VII, except that conditions of 3.6.9 shall apply. A total of three half sine wave shock pulses shall be applied in both directions along each of three mutually perpendicular axes. Peak amplitude shall be 55 $\pm$ 5.5 g (539 $\pm$ 54 m/s^2) for 2.5 $\pm$ 0.2 ms. Nonconformance shall be cause for rejection.

4.5.5.10 Ballistic shock. To determine conformance to 3.6.10, the harness shall be tested in accordance with MIL-STD-810, method 516.4, procedure VII, except that conditions of 3.6.10 shall apply. The harness shall be mounted normally in a nonoperational mode and subjected to three half sine wave shocks of 200 $\pm$ 20 g (1960 $\pm$ 196 m/s^2) for 0.5 $\pm$ 0.1 ms in each direction along each of three mutually perpendicular axes. Nonconformance shall be cause for rejection.

4.5.5.11 Basic shock. To determine conformance to 3.6.11, the harness shall be mounted using the installed interface configuration for its intended application, or equivalent, and subjected

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

to the test of MIL-STD-810, method 516.4, procedure VII, except that conditions of 3.6.11 shall apply. A total of three half sine wave shock pulses shall be applied in both directions along each of three mutually perpendicular axes. Peak amplitude shall be 30 ± 3 g (294 ± 29 m/s^2) for 18 ms. Nonconformance shall be cause for rejection.

4.5.5.12 Submergence. To determine conformance to 3.6.12, all electrical fittings shall be capped and the harness shall be immersed in 70°F (21°C) water at a depth of 6 ft (183 centimeters (cm)) for 1 hour. Within 2 hours after completion, the harness shall be subjected to the performance tests of 4.5.3 through 4.5.4.1. Nonconformance shall be cause for rejection.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The harness covered by this specification is intended to be used to generate signals required for measurement of gas temperature at the power turbine stator entry on the AGT 1500 gas turbine engine.

6.1.1 Item definition. The harness consists of an integral four probe harness, lead, and output connector assembly. Individual readout signal for each thermocouple is available at the output connector. The individual circuit electrical resistance need not be the same.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, revision, and date of this specification.
b. Title, number, revision, and date of applicable drawings.
c. Type of harness required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

d. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
e. First article inspection, if required (see 3.2).
f. If inspection conditions are other than as specified (see 4.2).
g. If test tolerances are other than as specified (see 4.2.1).
h. If first article sample size is other than as specified (see 4.3).
i. Packaging requirements (see 5.1).

6.3 Subject term (key word) listing.

Alumel
Chromel
Circuit resistance
Engine, gas turbine

6.4 Part or identifying number (PIN).

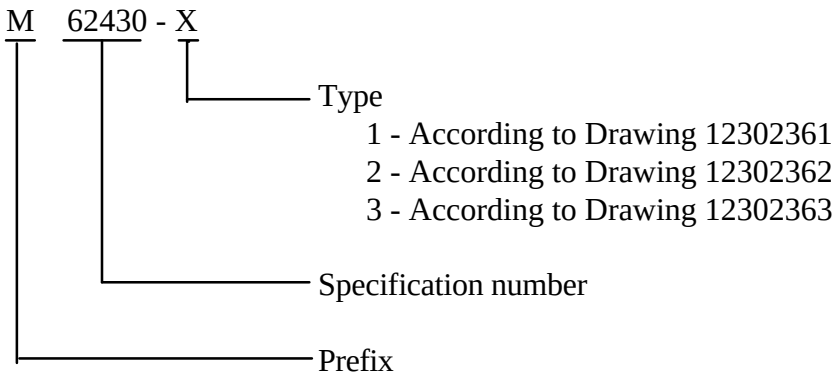

6.5 Supersession data. This specification supersedes AVCO Lycoming Specification E2137C SCN-1, dated 2 February 1993.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 6685-0932)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.