MILITARY SPECIFICATION SHEET


POST, BINDING, ELECTRICAL (UNINSULATED).

TYPE PB04DB01

The complete requirements for procuring the binding posts described herein shall consist of this document and the latest issue of Specification MIL-P-55149.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

NOT FOR NEW DESIGN. FOR REPLACEMENT PURPOSES ONLY

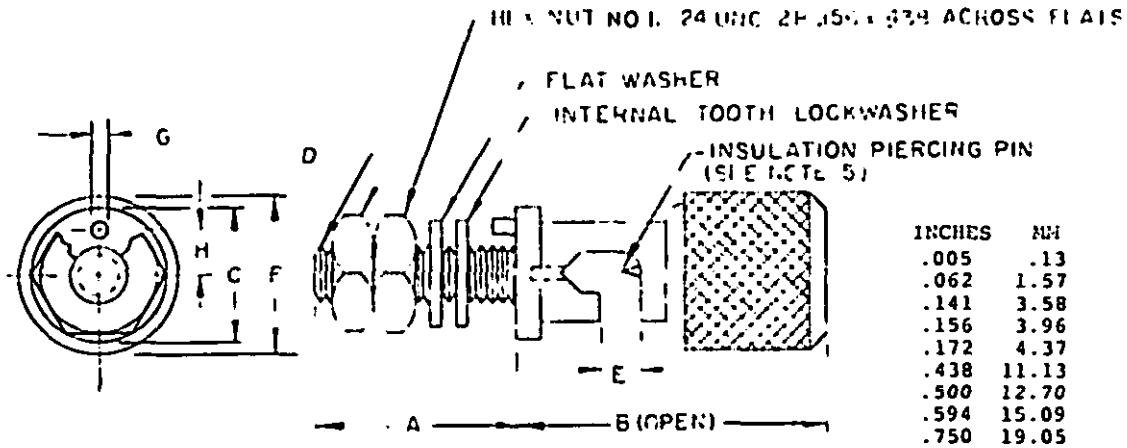

INCHES	MM
.005	.13
.062	1.57
.141	3.58
.156	3.96
.172	4.37
.438	11.13
.500	12.70
.594	15.09
.750	19.05
1.156	29.36

Type designation	Dimensions								Used on panel thickness (Reference information)
	A	B	C	D	E	F	G ±0.005	H	
PB04DB01	.750	1.156	.500	12-24 UNC-2A	.141	.594	0.062	.172	.062min

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx ±.015(.38 mm).
4. Drawing depicts only general characteristics and is not intended to limit specific manufacturing processes. Shape of cap is optional.
5. The insulation piercing pin shall be hardened steel ground to a sharp point after hardening.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Moisture resistance: Not applicable.

Temperature cycling: Not applicable.

Contact resistance: Applicable.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MI, AT
Navy - AS
Air Force -
DSA - GS

User activities:
Army - WC
Navy - OS, SH, MC
Air Force - 17

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-0630)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.