MILITARY SPECIFICATION

PRESSURE CARTRIDGE
PARTS FOR AND LOADING, ASSEMBLING AND PACKING

This Amendment forms a part of Military Specification MIL-P-63315(AR), DATED 24 July 1979.

PAGE 2

2.1, Add: "PRODUCT DRAWINGS" above P/N 9292613 - Pressure Cartridge.
Add: "INSPECTION EQUIPMENT DRAWINGS"
9344011 Pressure Test Fixture

PAGE 3

3.4, "550 PSIG" was "450 PSIG"
"Pressure test fixture" was "T Bomb"
"0.122 ± 1%" was "0.049"
"25 MS" was "50 MS"
"2100 PSIG" was "2400 PSIG"

PAGE 6

Table I. First Article Inspection
Insulation Resistance, Thermal Shock, Vibration, Function
Delete - (AQL) 0-1
No Fire - Delete (AQL) 0-1
Cold "(-40°F)" was "(-35°F)"; "50(b)" was "100(b)"; delete 0-1
Hot "50(b)" was "100(b)"; delete 0-1
Add: "Ambient (70°F ± 10°F) 100b 3.4 4.5.8.3"

PAGE 16

4.4.2.9, Add: "102 Moisture content of intermediate charge, 3.3, 4.5.1"

FSC: 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

PAGE 17

4.4.2.10:

103 "Electrodes" was "lead wires"
110 "180" was "200"
111 Delete
112 Cold temperature "(-40°F)" was "(-35°F)"; "60" was "80"
Hot temperature "60" was "80"
Add: Ambient "(70°F ± 10°F) 60(a) (b) 3.4 4.5.8.3"
113 Add: "Length of electrodes, min 0.40% 3.2 Gage"
Notes: a. "Samples for the output test . . . ." was "Samples for the test . . . ."
b. "60-0-1", "60-1-2" was "80-0-1", "80-1-2"

PAGE 19

4.5.1, correct "calcium".

PAGE 20

4.5.5.h, Change: ".... 4.5.6 and 4.5.7." to ".... 4.5.6 and 4.5.8.3."

PAGE 21

4.5.7, Delete:

4.5.8.1, change: "minus 35°F" to "minus 40°F".

Delete in first sentence:

"fixture with the configuration of Fig 2 which simulates the volume of the sensor system as ...."

And substitute:

"pressure test fixture (Dwg 9344011 or equivalent) with an internal volume . . . ."

Delete starting on 12th line:

"The fixture shall be cleaned after each shot or as required."

And substitute:

"Equipment, calibration, test and cleaning for internal volume maintainability procedures shall be in accordance with Dwg 9344011."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

Add:

"4.5.8.3 Ambient temperature ($70^{o}F \pm 10^{o}F$). The pressure cartridge shall be tested using the procedure specified in 4.5.8.1 except no conditioning temperature shall be made for compliance with the requirements specified in 3.4. If any pressure cartridge fails to function and/or more than one (1) pressure/time failure occurs, the lot shall be rejected. (Destructive test) A record of each firing shall be kept. See 6.7."

PAGE 22

6.1.a, change: "XM74" to "M74".

6.4, change: "DRDAR-QAA-Q" to "DRDAR-QAA-M".

PAGE 23

6.5.1, change: "DRDAR-QAA-Q" to "DRDAR-QAA-M".

6.7, change: "DRDAR-QAA-Q" to "DRDAR-QAA-M".

PAGE 24

Delete Fig. 1

Substitute: "Revised Fig 1 ", see "Page 4 of 4"

PAGE 25

Delete Fig. 2 - Pressure Test Setup (Suggested).

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project No.: 1345-A-138

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

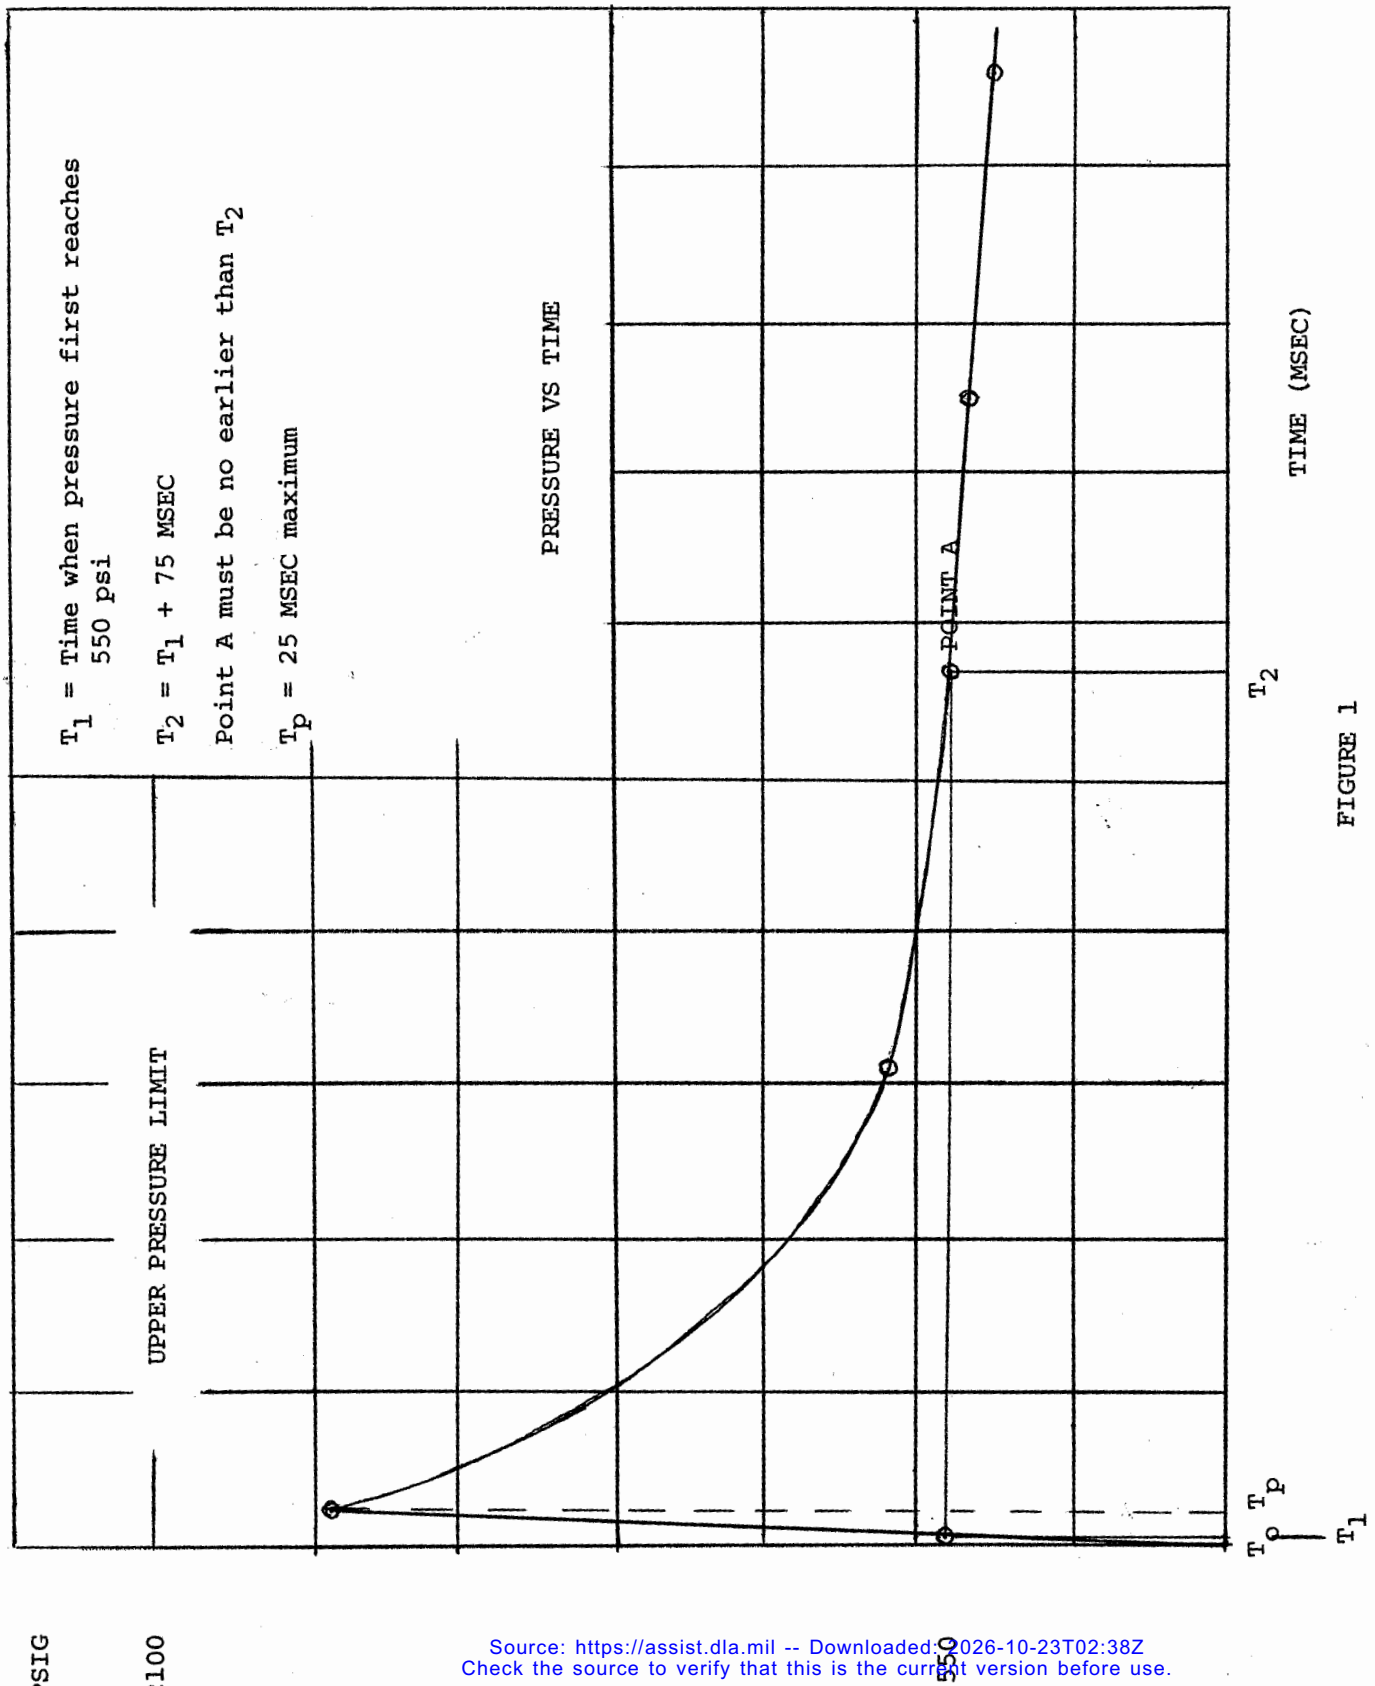

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.