AA-A-700C
February 9, 1973

SUPERSEDING
Int. Fed. Spec. AA-A-00700B(GSA-FSS)
September 5, 1970

FEDERAL SPECIFICATION

ASH RECEIVER, TOBACCO, (CIGARETTE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of ash receiver for cigarettes (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Folding, Fiberboard, Corrugated, Triple Wall.

Federal Standards:

Fed. Std. No. 66 - Steel: Chemical Composition and Hardenability.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of the specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

FSC 9920

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classificaiton.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, a sample of the item shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials, dimensions, and construction. Materials, dimensions, and construction of the ash receiver shall conform with table I and figure I. The bowl and handle shall be fabricated of one piece of seamless material specified in table I.

3.2.1 Ash receiver clamping force. The ash receiver spring clip assembly shall develop a clamping force sufficient to withstand the normal pressure required to extinguish a burning cigarette (see 4.4.1).

3.2.2 Cigarette snuffing and safety requirements. The ash receiver rest shall snuff a burning cigarette and shall not permit a cigarette stub to fall on the floor when tested in accordance with 4.4.2.

3.3 Dimensional tolerances. Dimensional tolerances of ash receiver components shall be in accordance with table I and figure I.

3.4 Plating. The entire metal assembly shall be plated with nickel and/or chromium.

3.5 Optional materials. When specified (see 6.2), polished stainless steel (0.035" thickness) or brass (minimum thickness 0.05") plated with nickel and/or chromium may be used for the fabrication of the body, handle, and lever.

3.6 Marking for identification. The manufacturer's name or trademark of such characters easily identifiable with the manufacturer shall be indented or embossed on the outside bottom of the bowl. The handle shall be stamped with letters as shown on figure I.

3.7 Workmanship. The finished ash receivers shall be clean, well made, and free from any defects which may affect appearance or servicability.

TABLE I. Materials, dimensions, and construction

Item no. See figure I.	Nomenclature	Quantity	Material, referenced specification or standard, hardness	Dimensions, inches*
1	Bowl and handle	1	Steel	See figure I. thickness 0.035
			Optional materials: stainless steel (polished) brass	thickness 0.035 thickness 0.05
2	Spring	1	C 1095 spring steel Fed. Std. No. 66 Rockwell C 43 - 45	1/2 x 3 x 0.024
3	Lever	1	Steel	0.035 x 1 x 4-1/2
			Optional materials: stainless steel (polished) brass	thickness 0.035 thickness 0.05

TABLE I. Materials, dimensions, and construction (cont.)

Item no. See figure I.	Nomenclature	Quantity	Material, referenced specification or standard, hardness	Dimensions, inches*
4	Rivets	4 (min.)		Oval head tubular 1/8 diameter
			Optional fastening Equivalent spot welds	
5	Rest	1	Cold rolled steel	0.093 x 1/2
6	Grommet	1	Rubber	

*Tolerance for decimal dimensions ± 0.005"
*Tolerance for fractional dimensions ± 1/64"

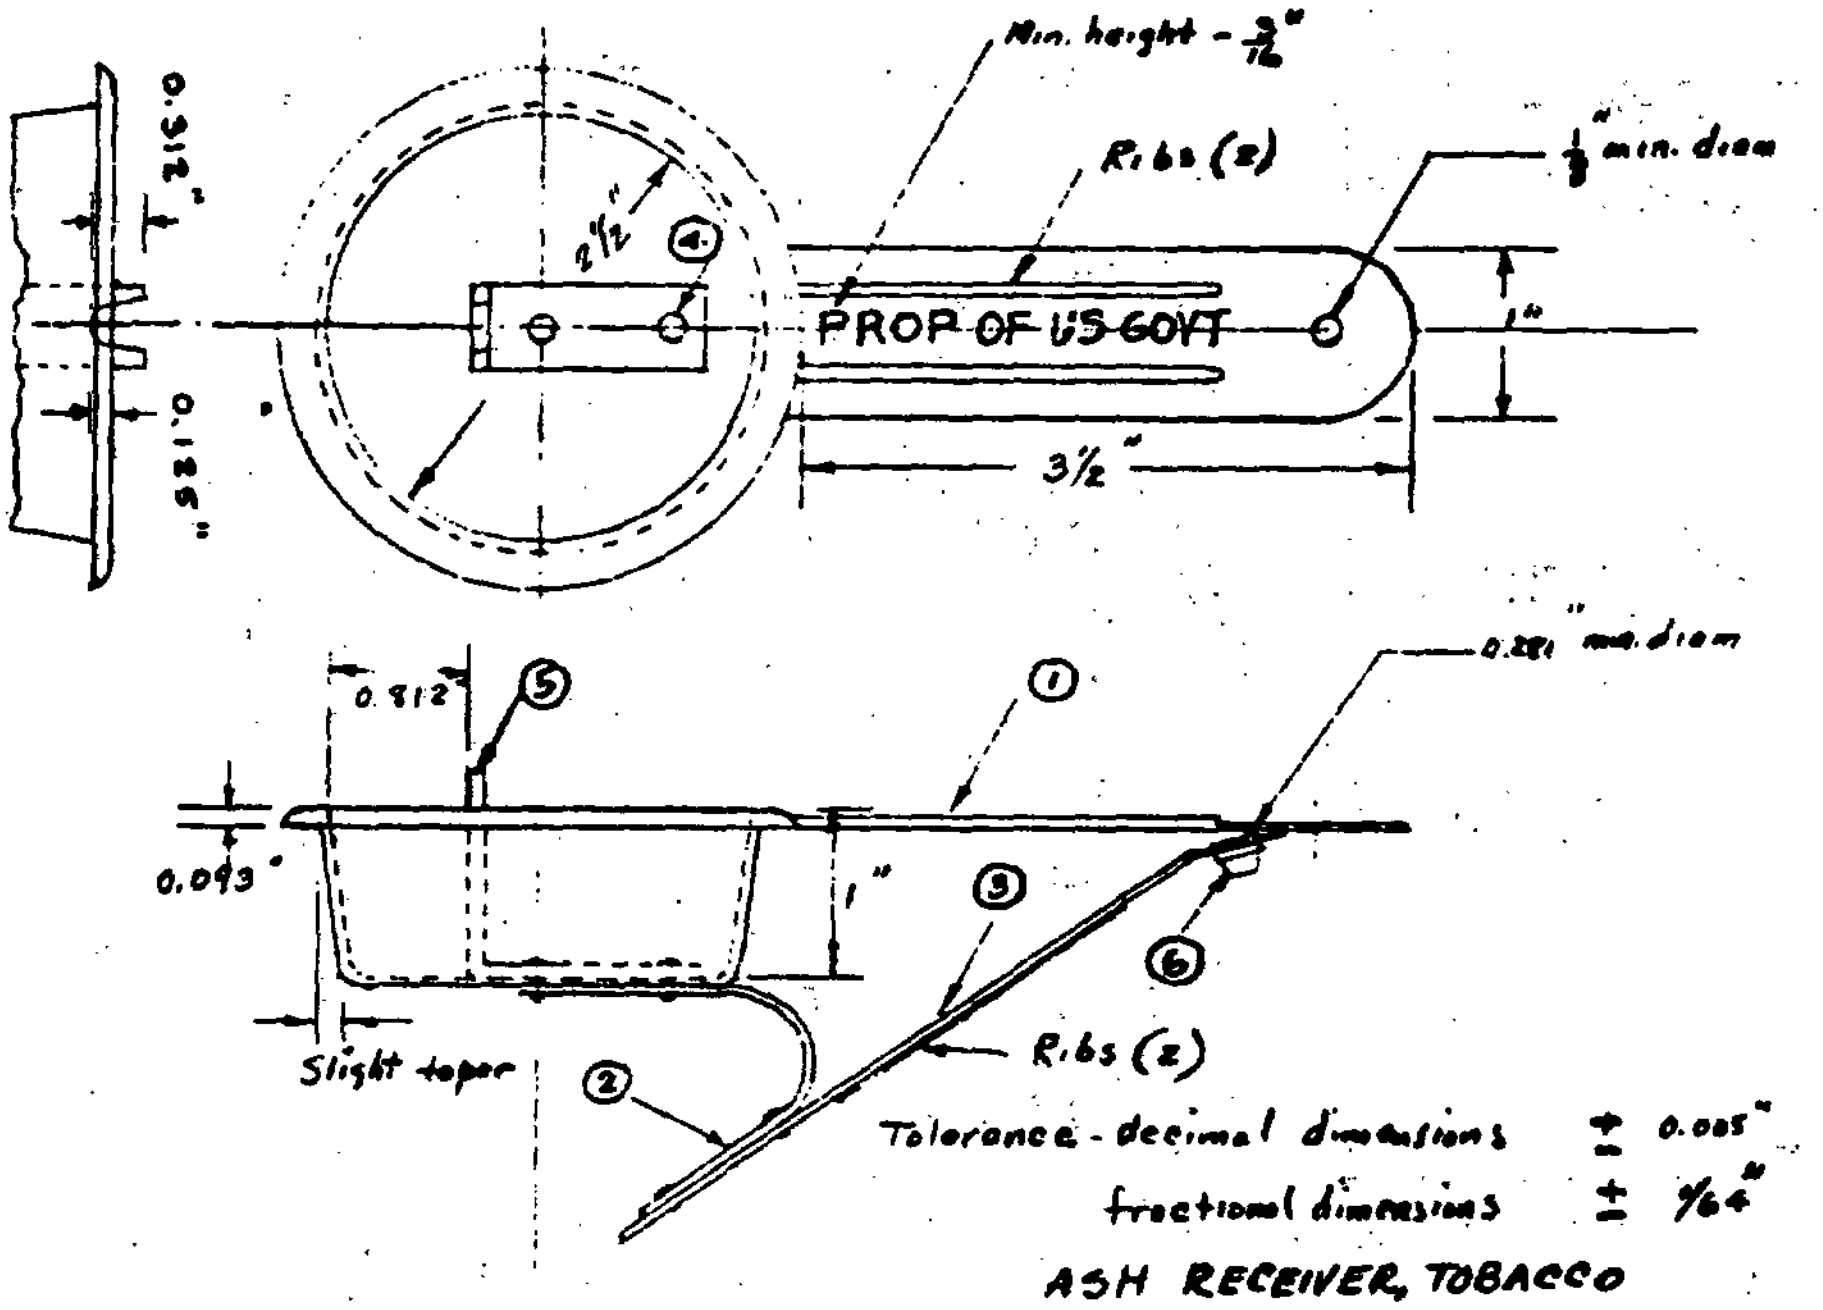
Min. height - 3/16"
Ribs (2)
1/8" min. diam
0.312"
2 1/2"
④
PROP OF US GOVT
1"
0.185"
3 1/2"
0.812
⑤
①
0.281" min. diam
0.093"
1"
③
⑥
Slight taper
Ribs (2)
②
Tolerance - decimal dimensions ± 0.005"
fractional dimensions ± 1/64"
ASH RECEIVER, TOBACCO

Figure 1

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required it shall be examined for defects listed in 4.3.2.1, dimensions specified, and tested as specified in 4.4.1 and 4.4.2.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated. All ash receivers offered for delivery at one time shall be considered a lot for purposes of inspection.

4.3.1 Component and material inspection. In accordance with 4.1, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.3.2 End item inspection.

4.3.2.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects in table II and acceptable quality levels (AQL's) specified in 4.3.2.3. The lot size shall be expressed in units of ash receivers for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely fabricated ash receiver.

TABLE II. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Metal parts not chromium and/or nickel plated (as applicable).	X	
	Plating not uniformly and completely applied.	X	
	Uncoated edges or end.	X	
	Stain or corrosion.		X
	Evidence of rust.	X	
Construction and workmanship	No design specified.		X
	Malformed, damaged, twisted, or distorted.	X	
	Dents, buckled, or wrinkled.		X
	Burrs or sharp edges that may cause injury.	X	
Identification marking	Omitted, incomplete, illegible, characters not correct size, not indented, or embossed or in wrong direction.		X
	Distortion or penetration on inside of bowl caused by indenting or embossing.		X

4.3.2.2 Dimensional examination. Inspection shall be made of ash receivers for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect.

4.3.2.3 Inspection levels and AQLs. The AQL's expressed in defects per hundred units, and inspection levels shall be as follows:

For examination in	Inspection level	AQL	
		Major	Totals
4.3.2.1..................	II	4.0	10.0
4.3.2.2..................	S-2	---	6.5

4.3.2.4 Testing of the end item. Tests shall be performed in accordance with 4.4.1 and 4.4.2 to meet the requirements of 3.2.1 and 3.2.2. The inspection level S-2 of MIL-STD-105 and AQL 4.0 defects per hundred units, applicable to individual unit requirements shall apply.

4.3.3 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing, and marking requirements comply with section 5. Defects shall be scored in accordance with table III. For examination of contents the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

TABLE III. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.

4.4 Tests.

4.4.1 Cigarette extinguishing test. Clamp the ash receiver to a flat surfaced object having a minimum thickness of 1/4 inch and a maximum thickness of 1-1/2 inches. After pressing and extinguishing a burning cigarette against the inner bottom surface of the ash receiver bowl, the ash receiver shall meet the requirements of 3.2.1.

4.4.2 Cigarette snuffing and safety test. Fully engage another burning cigarette with the rest slot and bowl rim. The ash receiver shall meet the requirements of 3.2.2.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, C, as specified (see 6.2).

5.1.1 Level A. Seventy-two ash receivers shall be packed in a close-fitting box conforming to PPP-B-636, W5c. Each box shall be fitted with slotted partitions or preformed molded pulp to form an individual cell for each receiver. The slotted partitions shall be made of the same type of material as the box. The box shall be closed and strapped in accordance with the appendix to the box specification.

5.1.1.1 Additional packing. When specified (see 6.2), the fiberboard boxes may be overpacked in close-fitting boxes conforming to PPP-B-585, class 3; PPP-B-591, class II; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-640, class 2, grade B. The boxes shall be closed and strapped in accordance with the applicable specification or appendix thereto. The gross weight shall not exceed 200 pounds. Strapping of the fiberboard boxes will not be required when they are overpacked.

5.1.2 Level B. Seventy-two ash receivers shall be packed as specified in 5.1.1 except the box shall be class domestic and the strapping is not required. Alternatively, the slotted partitions shall be made of chipboard not less than 0.030 inches thick.

5.1.3 Level C. The ash receivers shall be packed in containers to insure carrier acceptance and safe delivery to their destination in compliance with National Motor Freight Classification or Uniform Freight Classification.

5.2 Markings.

5.2.1 Civil Agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Ash receivers covered by this specification are intended for temporary clamping to shelves or tables and having a finger pressure release.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) First article sample required (see 3.1).
(c) Optional material required (see 3.5).
(d) Level of packing required (see 5.1).
(e) Additional packing required (see 5.1.1.1).

User activities:	Preparing activity:
Army - AN, CD, GL Navy - GH, HD, PA Air Force - TG	GSA-FSS

Civil Agency Coordinating Activities:

POSTAL-POS
VA-DMS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.