[INCH-POUNDS]
AA-A-700D
July 26, 1990
SUPERSEDING
AA-A-700C
February 9, 1973

FEDERAL SPECIFICATION

ASH RECEIVERS, TOBACCO, (CIGARETTE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers one type of ash receiver used for the collection of cigarette and tobacco wastes (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of document. The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Standards:

FED-STD-66 - Steel: Chemical Composition and Hardenability.
FED-STD-123 - Marking for Shipment (Civil-Agencies).
FED-STD-376 - Preferred Metric Units for General use by the Federal Government.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Industrial Engineering Group (7FXEI), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 9920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Copies of military specifications and standards may be obtained from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

ASTM Standard:

B 209 - Standard Specification for Aluminum and Aluminum-alloy Sheet and Plate.

Application for copies should be addressed to ASTM, 1916 Race Street Philadelphia, PA 19103.

National Motor Freight Traffic Association, Inc. Agent

National Motor Freight Classification.

Application for copies should be addressed to the National Motor Traffic Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.

Uniform Classification Committee, Agent

Uniform Freight Classification.

Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, IL 60606.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2.3 Order of Precedence. In the event of a conflict between the text of this specification and the references specified herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First Article. When specified (see 6.2), before production is commenced, a sample of the item shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.3.3. The approval of the first article sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The first article sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material, dimensions, and construction. Materials, dimensions, and construction of the ash receiver shall conform with table I and figure I. The bowl and handle shall be fabricated of one piece of seamless material specified in table I.

3.2.1 Ash receiver clamping force. The ash receiver spring clip assembly shall develop a clamping force sufficient to withstand the normal pressure required to extinguish a burning cigarette (see 4.5.1).

3.2.2 Cigarette extinguishing and safety requirements. The cigarette rest shall be of such size and design as to firmly hold cigarettes in place and cause automatic extinguishing of neglected burning cigarettes and shall not permit a cigarette stub to fall from holder when tested in accordance with 4.5.2.

3.3 Dimensional tolerances. Dimensional tolerances of ash receiver components shall be in accordance with table I and figure I.

3.4 Plating. The entire metal assembly shall be plated with nickel-chromium or chromium.

3.4.1 Optional materials. When specified (see 6.2), polished stainless steel (thickness 0.035 inch) or brass (minimum thickness 0.05 inch) plated with nickel-chromium or chromium may be used for the fabrication of the body, handle, and lever.

3.4.2 Optional material plating. When specified (see 6.2), polished stainless steel used for the fabrication of the body, handle, and lever does not require nickel-chromium or chromium plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.5 Marking for identification. The manufacturer's name or trademark of such characters easily identifiable with the manufacturer shall be indented or embossed on the outside bottom of the bowl. The handle shall be indented or embossed with letters as shown on figure I.

3.6 Workmanship. The ash receivers shall be clean, smooth, free from sharp edges, projections or sharp corners which may injure the hands or scratch polished wood surfaces on which they clamp.

3.7 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(b) Preparation for delivery inspection (see 4.6).
(c) First article inspection (see 4.3.3).

4.2.1 Quality conformance inspection. Quality conformance inspection shall be performed on the sample ash receivers selected in accordance with 4.3. This inspection shall include the examination of 4.4 and the tests of 4.5.

4.2.2 Inspection lot. All units of the same type and style, offered to the Government at one time, shall be considered a lot for purpose of inspection. The sample unit shall be one complete ash receiver.

4.3 Sampling. A random sample of ash receivers shall be selected from each lot in accordance with MIL-STD-1Ø5.

4.3.1 Sampling for examination. Examination of the ash receivers shall be based on inspection level I, and an Acceptable Quality Level (AQL) of 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

4.3.2 Sampling for tests. Tests of the ash receivers shall be based on inspection level S-2 and an AQL of 2.5 percent defective.

4.3.3 First article inspection. When a first article sample is required it shall be examined for defects listed in 4.4, dimensions as specified in table I, and test as specified in 4.5.

4.4 Examination. Each sample selected in accordance with 4.3.1 shall be examined for defects listed in Table II, using dimensions listed in table I.

4.5 Tests. Each sample selected in accordance with 4.3.2 shall be tested to determine compliance with this specification. Tests shall be conducted as specified in 4.5.1 through 4.5.2.

4.5.1 Clamping force. Clamp the ash receiver to a flat surfaced object having a minimum thickness of 1/4 inch and a maximum thickness of 1-1/2 inches. After pressing and extinguishing a burning cigarette against the inner bottom surface of the receiver bowl, the ash receiver shall meet the requirements of 3.2.1.

4.5.2 Extinguishing. Place a lighted cigarette in the rest slot and bowl rim, with the burning portion nearest the rest slot. Permit the cigarette to burn in this position until it is extinguished by the holder (see 3.2.2).

4.6 Preparation for delivery inspection. A random sample of unit, intermediate and shipping containers (as applicable) shall be selected from each lot and examined for conformance with the preservation, packaging, packing, labeling and marking required in the contract or order. Samples shall be selected in accordance with Inspection level S-2, AQL 6.5 expressed in terms of defects per hundred unit.

5. PREPARATION FOR DELIVERY 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.1 Preservation, packaging, packing, labeling and marking. The preservation, packaging, packing, labeling and marking shall be as specified in the contract or order.

5.2 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with FED-STD-123 or MIL-STD-129, as applicable (see 6.2).

6. NOTES

6.1 Intended use. Ash receivers covered by this specification are intended for temporary clamping to shelves or tables and having a finger pressure release.

6.2 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) First article sample required (see 3.1).
(c) Optional material required (see 3.5).
(c) Levels of packaging and packing required (see 5.1).
(d) Marking required (see 5.2).

TABLE I.

Materials, Dimensions, and Construction

Item No. See Figure I	Nomenclature	Qty	Material, referenced Spec. or std, hardness	Dimensions, inches*
1	Bowl & Handle	1	Steel Optional materials: Stainless steel - Brass -	figure I thickness Ø.Ø35 thickness Ø.Ø35 thickness Ø.Ø5
2	Spring	1	1Ø95 - spring steel Fed. Std No. 66 Rockwell C 43 - 45	1/2 X 3 X Ø.Ø24
3	Lever	1	Steel Optional materials: Stainless steel - Brass -	1 X 4.5 thickness Ø.Ø35 thickness Ø.Ø35 thickness Ø.Ø5
4	Rivets	4 (min)	Optional fastening Equivalent spot welds	Oval head tubular 1/8 inch diameter
5	Rest	1	Cold rolled steel	Ø.Ø93 X 1/2
6	Grommet	1	Rubber	

*Tolerance for decimal dimensions ± Ø.ØØ5 inch.
*Tolerance for fractional dimensions ± 1/64 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II.
Classification of defects

Examine	Defects	Classification Major	Classification Minor
Finish:	Metal parts not chromium and/or nickel plated (as applicable).	X	
	Plating not uniformly and completely applied.	X	
	Uncoated edges or end.	X	
	Stain or corrosion.		X
	Evidence of rust.	X	
Construction and Workmanship:	Not design specified.	X	
	Malformed, damaged, twisted, or distorted.	X	
	Dents, buckled, or wrinkled.		X
	Burrs or sharp edges that may cause injury.	X	
Identification Marking:	Omitted, incomplete, illegible, characters not correct size, not indented, or embossed or in wrong direction.		X
	Distortion or penetration on inside of bowl caused by indenting or embossing.		X

MILITARY INTEREST:

NONE: DOD has waived coordination on revisions and amendments to the Federal specification until further notice.

CIVIL AGENCY INTEREST:

POSTAL - USPS
VA - OSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

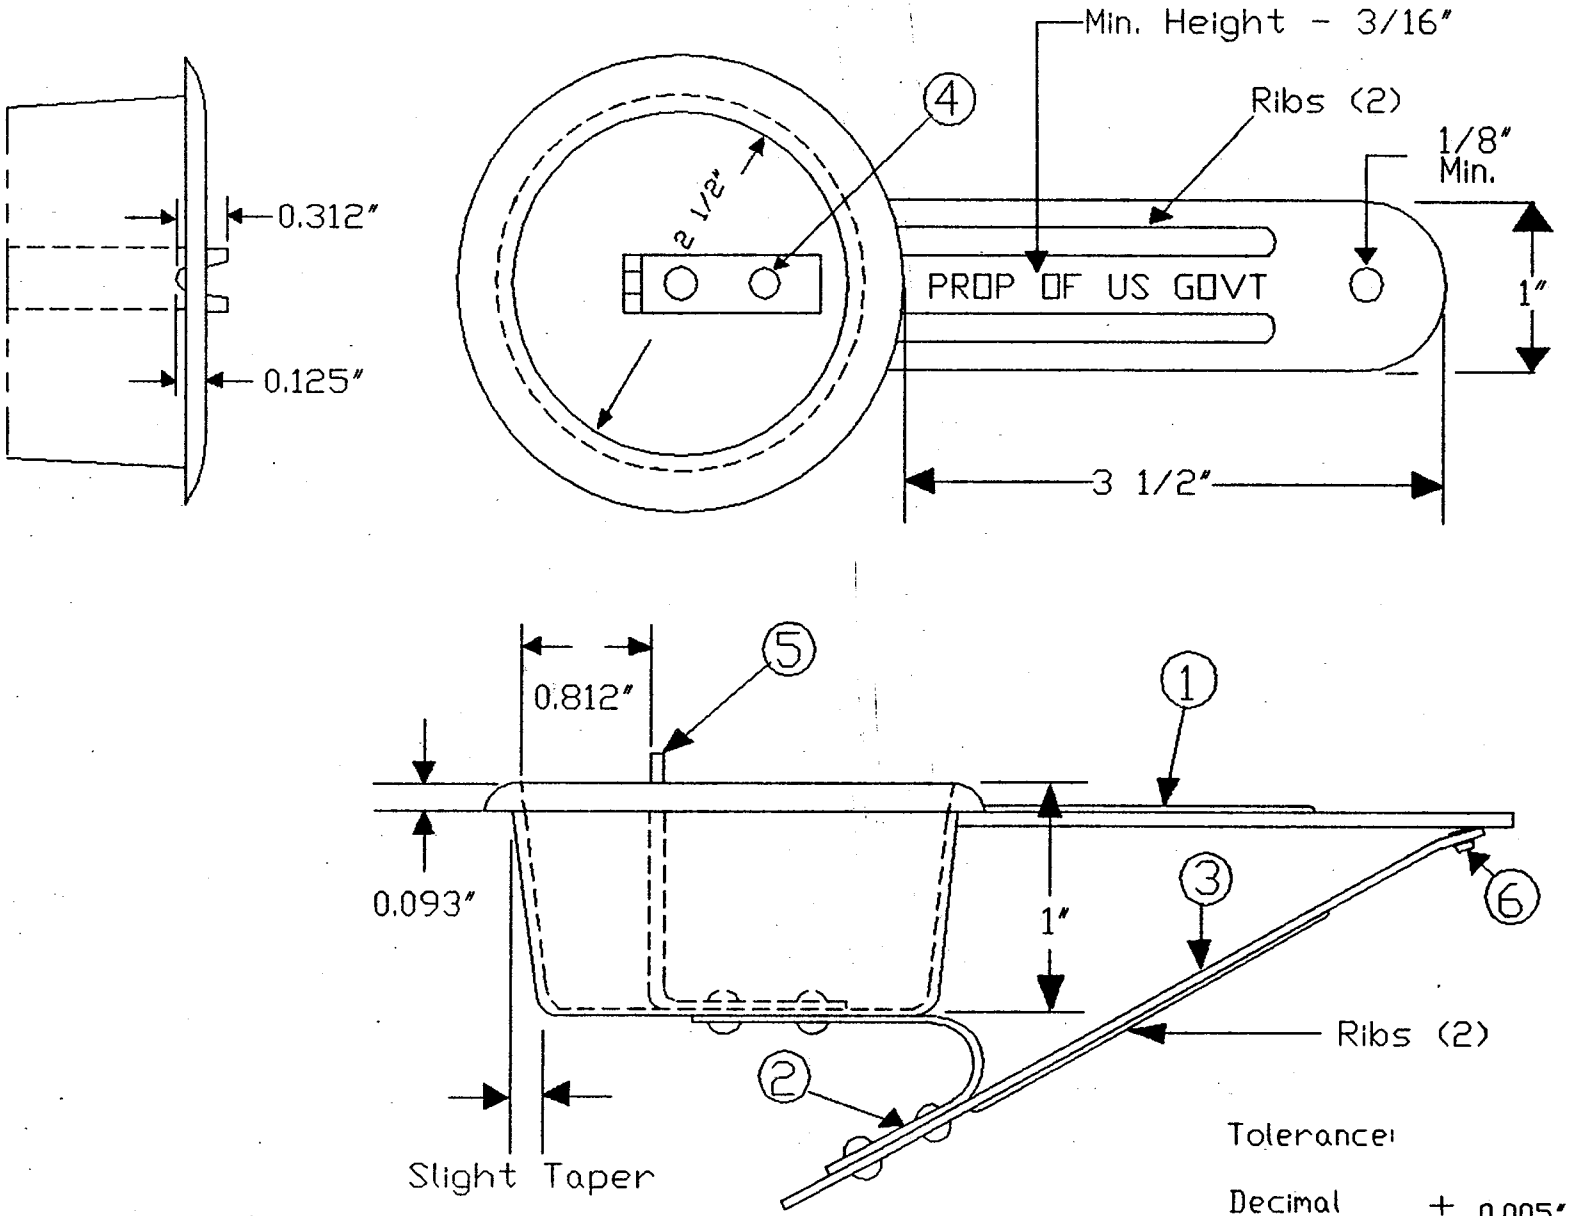


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.