AA-A-710C
February 8, 1973
SUPERSEDING
Fed. Spec. AA-A-710B
March 7, 1966

FEDERAL SPECIFICATION

ASH RECEIVER, TOBACCO, (DESK TYPE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers ash receivers used for the collection of cigarette and tobacco wastes.

1.2 Classification. Ash receivers covered by this specification shall be furnished in the following types and styles, as specified (see 6.2):

Type I - glass.
  Style a - round, 8 inch.
  Style b - square, 6 inch.
  Style c - square, 4-1/2 inch.

Type II - plastic.
  Style a - one-piece construction.
  Style b - two-piece construction.

Type III - metal.
  Style a - two-piece construction.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Setup.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver. San Francisco, Los Angeles, and Seattle, WA.

FSC 9920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of the specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street N.W. Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Design. The receiver shall be symmetrical in shape, and neat in appearance. Cigarette rests shall be so designed as to prevent cigarettes from rolling or falling outwardly off the receivers, and shall slope slightly toward the ash container.

3.2 Material.

3.2.1 Glass. Type I ash receivers shall be made of colorless or colored glass, as specified (see 6.2).

3.2.2 Plastic. Type II ash receivers shall be nonburnable, lightweight, easily cleaned, and consist essentially of phenol-formaldehyde resin combined in the uncured or partially cured condition with filler pigments and dyes to obtain desired properties. Type II receivers shall not burn, char, or blister when tested in accordance with 4.4.5.

3.2.3 Metal. Type III ash receivers shall be made of aluminum or aluminum alloy commercially designated as 1100-0 or 3003-0 and shall conform to the design and dimensions shown in figures 2 and 3. The metal shall be capable of being formed to required shapes without fracture.

3.3 Type I glass, style a, round 8 inch. The receiver shall be round in shape. All surfaces shall be smooth. The junction of the sides and bottom shall be rounded on the inside and outside, except on the outside bottom there may be a slightly raised smooth continuous edge on which the receiver rests. The top edge of the receiver shall be rounded. There shall be no less than 4 cigarette rests, evenly spaced, molded into the top edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.1 Dimensions. Dimensions of the receiver shall be as follows:

	Inches
Top outside diameter	8 + 1/4
Top inside diameter, minimum	5-7/8
Height outside	1-3/8 ± 1/8
Thickness, minimum	1/8
Width of top edge, minimum	1/2
Length of cigarette rests, minimum	1/2
Width of cigarette rests, minimum	1
Bottom, outside diameter, minimum	5-1/4

3.3.2 Weight. The receivers shall average not less than 25 ounces each, when weighed by the dozen (see 4.4.2).

3.3.3 Color. The color of the glass shall be amber, and it shall not be coated or tinted on the surface.

3.4 Type I glass, style b, square 6 inch. The following design requirements shall be at the manufacturers option:

(a) Outline of top edge-square or four pointed star with straight or curved edges.
(b) Base-any symmetric geometric shape.
(c) Shape of receptacle area-round or square with curved sides.
(d) Bottom outside-round or square with straight or curved sides.
(e) Outer sides-sloped from top to base or top joined to base with a smooth right angle

A minimum of 4 cigarette rests, spaced equidistant around the periphery shall be molded into the top. The rests shall be parallel to the outside top edge of the receiver or in each corner, aimed at the center of the receiver at the manufacturer's option. All surfaces shall be smooth.

3.4.1 Dimensions. Dimensions of the receiver shall be as follows :

	Inches
Width of top (between parallel sides)	5-7/8 ± 3/16
Height outside, maximum	1-3/4
Height outside, minimum	1-1/4
Thickness minimum	1/8
Length cigarette rests, minimum	1-3/16
Diameter cigarette rests, minimum	5/8
Base, diameter or width, minimum	2-1/2

3.4.2 Weight. The receivers shall average not less than 18-1/2 ounces each, when weighed by the dozen (see 4.4.2).

3.4.3 Color. The color of the glass shall be forest green or colorless, as specified (see 6.2) and shall not be coated or tinted on the surface.

3.5 Type I glass, style c, square, 4-1/2 inch. The following design requirements shall be at the manufacturer's option:

(a) Outline of top edge - square or four pointed star with straight or curved edges.
(b) Base - any symmetric geometric shape.
(c) Shape of receptacle area - round or square with curved sides.
(d) Bottom outside - round, or square with straight or curved sides.
(e) Outer sides - sloped from top to base, or top joined to base with a smooth right angle.

A minimum of 4 cigarette rests, spaced equidistant around the periphery shall be molded into the top. The rests shall be parallel to the outside top edge of the receiver or in each corner, aimed at the center of the receiver at the manufacturer's option. All surfaces shall be smooth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.5.1 Dimensions. Dimensions of the receiver shall be as follows:

	Inches
Width of top (between parallel sides)	4-7/16 ± 3/8
Height outside maximum	1-5/16
Height outside, minimum	1
Thickness, minimum	1/8
Length cigarette rests, minimum	7/8
Diameter cigarette rests, minimum	1/2
Base, diameter or width, minimum	2

3.5.2 Weight. The receivers shall average not less than 6 ounces each, when weighed by the dozen (see 4.4.2).

3.5.3 Color. The glass shall be colorless, and shall not be coated or tinted on the surface.

3.6 Type II, plastic, style a, one-piece construction.

3.6.1 Design. The receiver shall conform to the design shown in figure 1.

3.6.2 Dimensions. The receiver shall conform to the dimensions shown in figure 1.

3.6.3 Color. The receiver shall be dark brown in color.

3.7 Type II, plastic, style b, two-piece construction.

3.7.1 Base. The base shall be of one piece, round, molded construction with vertical sides. The surface on which the receiver rests shall be flat. The center portion of the base shall be inverted so that when the top is in place, it will effectively close off the cigarette refuse reservoir.

3.7.2 Top. The top shall be of one-piece molded construction with an inner surface inclined downward toward the raised center of the base. There shall be not less than 3 evenly spaced molded cigarette rests around the circumference of the top. The cigarette rests shall be inclined downward toward the center of the receiver and be designed to hold cigarettes firmly and act as snuffers for forgotten cigarettes. The top shall be constructed to be lifted and replaced without restriction, allowing the cigarette refuse to drop into the base reservoir (see 4.4.6).

3.7.3 Dimensions. Dimensions of the receiver shall be as follows:

	Inches
Base, outside diameter	4-1/4 ± 1/4
Base, height outside	1-3/4 ± 1/4
Base and top, thickness minimum	1/16
Length, cigarette rests minimum	5/8

3.7.4 Color. The color shall be black or brown, as specified (see 6.2).

3.7.5 Finish. The receiver shall have polished finish.

3.8 Type III, metal, style a, two-piece construction.

3.8.1 Base. The base shall be of one-piece construction and shall conform to the design and dimensions in figure 2.

3.8.2 Top. The top shall be of one-piece construction and shall conform to the design and dimensions in figure 3. The cigarette rests shall be of such size and design as to firmly hold cigarettes in place and cause automatic extinguishing of neglected burning cigarettes (see 4.4.5 and 4.4.6).

3.8.3 Identification marking. Each base shall be stamped with the manufacturer's name or trademark in the raised center of the base.

3.8.4 Finish. The base shall be finished inside and outside with a scratch, satin, or polished finish or combination of either. The exposed surface of the top shall have a polished finish. The unexposed surface shall have a satin or scratch finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.9 Shock requirements.

3.9.1 Type I, glass. Styles a, b, and c receivers shall not break into more than 35 pieces when tested in accordance with 4.4.3.

3.9.2 Type II, plastic. Styles a and b receivers shall not fracture when tested in accordance with 4.4.4.

3.9.3 Type III, metal. Style a, base and top shall have a good fit after being tested in accordance with 4.4.4.

3.10 Workmanship. The ashtrays shall be smooth, free from sharp edges, projections or sharp corners which may injure the hands or scratch polished-wood surfaces on which they rest. The receivers shall not rock when placed on a flat surface. The inside (ash container) shall be reasonably flat or rounded and smooth. The receivers shall be free from projections, depressions which cannot be easily cleaned. The tops and bases of the two piece ash receivers shall have a good fit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling.

4.2.1 Lot. Unless otherwise specified (see 6.2), a lot shall consist of all ash receivers of the same type and style, submitted for inspection at the same time.

4.2.2 Visual examination of end item. Sampling for this examination shall be according to level S-4 in MIL-STD-105.

4.2.3 Sampling for tests. Sampling for testing shall be in accordance with level S-2 in MIL-STD-105. The sample unit shall be one complete ash receiver except for weight tests (4.4.2) for which the sample unit shall be 12 ash receivers.

4.3 Inspection.

4.3.1 End item. Ash receivers shall be examined for defects listed in table I. The acceptable quality levels (AQL's) for defects listed in table I shall be 2.5 defects per hundred units for major defects and 6.5 defects per hundred units for total defects.

TABLE I. Classification of defects, end item

Defects	Major	Minor
Type and style not as specified	X	
Nicks, chips, or cracks in glass receivers	X	
Sharp corners or edges (glass, plastic, or metal receivers)	X	
Cigarette rests not sloped toward ash container	X	
Glass not specified color, or colorless, as applicable	X	
Fractures in metal receivers	X	
Any dimension not within tolerance (glass, plastic, and metal receivers)		X
Base and top of 2 piece receivers, poor fit		X
Damage or defects not affecting function or serviceability		X

4.3.2 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing, and marking requirements comply with section 5 of this specification. Defects shall be scored in accordance with table II. For examination of contents, the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers in the end item inspection lot. The inspection level shall be II and AQL shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.

4.4 Tests.

4.4.1 Acceptable quality level. The AQL shall be 4.0 defects per hundred units.

4.4.2 Weight. Glass receivers shall be weighed on a scale accurate to 0.1 ounce (see 3.3.2, 3.4.2, and 3.5.2).

4.4.3 Breakage, type I, glass. The test shall be made by placing the specimen on its base upon a solid support (1-3/4 inch maple plank), placing a steel center punch (point ground to approximately a 60° included angle) in contact with the center of the inside surface of the bottom and striking with a hammer in successive blows of increasing severity until breakage occurs. The specimen should break into a small number of irregular shaped pieces not greater in number than 35, and it must not dice. Any piece 1/4 inch or more on any three of its adjacent edges (excluding the thickness dimension) shall be included in the number counted. Smaller fragments shall not be counted (see 3.9.1).

4.4.4 Shock, type II plastic and type III metal. Plastic and metal receivers shall be dropped three times from a height of 30 inches to a concrete floor (see 3.9.2 and 3.9.3).

4.4.5 Burn, type II plastic. Place a lighted cigarette with the burning end in contact with the center inside surface of the receiver. After allowing the cigarette to burn one half of its length, extinguish by pressing the burning cigarette in an upright position against the same inner surface of the receiver (see 3.2.2).

4.4.6 Extinguishing, type II, style b plastic and type III metal. Place a lighted cigarette in the holder with the burning portion extending toward the center of the top. Permit the cigarette to burn in this position until it is extinguished by the holder (see 3.7.2 and 3.8.2).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Type II or III receivers shall be individually packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676. The box shall be closed in accordance with the appendix to the applicable box specification.

5.1.2 Level B. Unless otherwise specified (see 6.2), type II or III receivers shall be packaged as specified in 5.1.1.

5.1.3 Level C. The receivers shall be packaged to insure protection during shipment and safe delivery to destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I. Twelve type I receivers of like description in 6- or 8-inch diameters or 72 receivers in diameters less than 6 inches shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Each receiver shall be packaged in a close-fitting cell formed by fiberboard partitions. Fiberboard pads the full size of the box shall be provided to separate each layer of receivers with the fiberboard for the partitions and pads meeting the requirements of PPP-F-320. The box shall be closed in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.2.1.2 Type II or III. Seventy-two type II or III receivers of like description packaged as specified in 5.1 shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be closed in accordance with the appendix to the box specification. When the receivers are not packaged in dividual containers, partititions and pads as specified in 5.2.1.1 shall be utilized.

5.2.2 Level B.

5.2.2.1 Type I. Twelve type I receivers of like description in 6- or 8-inch diameters or 72 receivers in diameters less than 6 inches shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. Each receiver shall be packaged in a close-fitting cell formed by fiberboard partitions. Fiberboard pads the full size of the box shall be provided to separate each layer of receivers with the fiberboard for partitions and pads meeting the requirements of PPP-F-320. The box shall be closed in accordance with the appendix to the box specification.

5.2.2.2 Type II or III. Seventy-two type II or III receivers of like description packaged as specified in 5.1 shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification. When the receivers are not packaged in individual containers, partitions and pads as specified in 5.2.1.1 shall be utilized.

5.2.3 Level C. The receivers shall be packed to insure protection during shipment and safe delivery to destination in compliance with the National Motor Freight Classification rules or the Uniform Freight Classification rules, as applicable.

5.3 Marking. In addition to any special markings required by the contract or purchase order, all marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. All marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. All marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Ash receivers covered by this specification are intended to be used on desks and tables for collecting cigarette and tobacco wastes.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:


(a) Title, number, and date of this specification.
(b) Type and style (1.2).
(c) Color, of type I, style b (3.4.3) type II, style b (3.7.4).
(d) Size of lot, if different from 4.2.1.
(e) Level of packaging and packing required (5.1 and 5.2).
(f) Special packaging if required for level B (5.1.2).

6.3 Supersession data. This specification supersedes Interim Federal Specification AA-A-00710A (GSA-FSS), March 31, 1965, Interim Federal Specification AA-T-00623B (GSA-FSS), April 17, 1962, and Federal Specification AA-T-623A, July 22, 1953, in part as indicated in table III.

TABLE III.

AA-T-623A		AA-A-710B
Type I	- glass, square only	Type I, style c
Type I	- glass, all other shapes	Deleted
Type I	- plastic	Deleted
Type I	- metal	Deleted
Type II	- all shapes, all materials	Deleted
Type III	- glass, square	Type I, style b
Type III	- glass, round	Deleted
Type IV	- glass, round	Type I, style a
Type V	- plastic	Type II, style a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

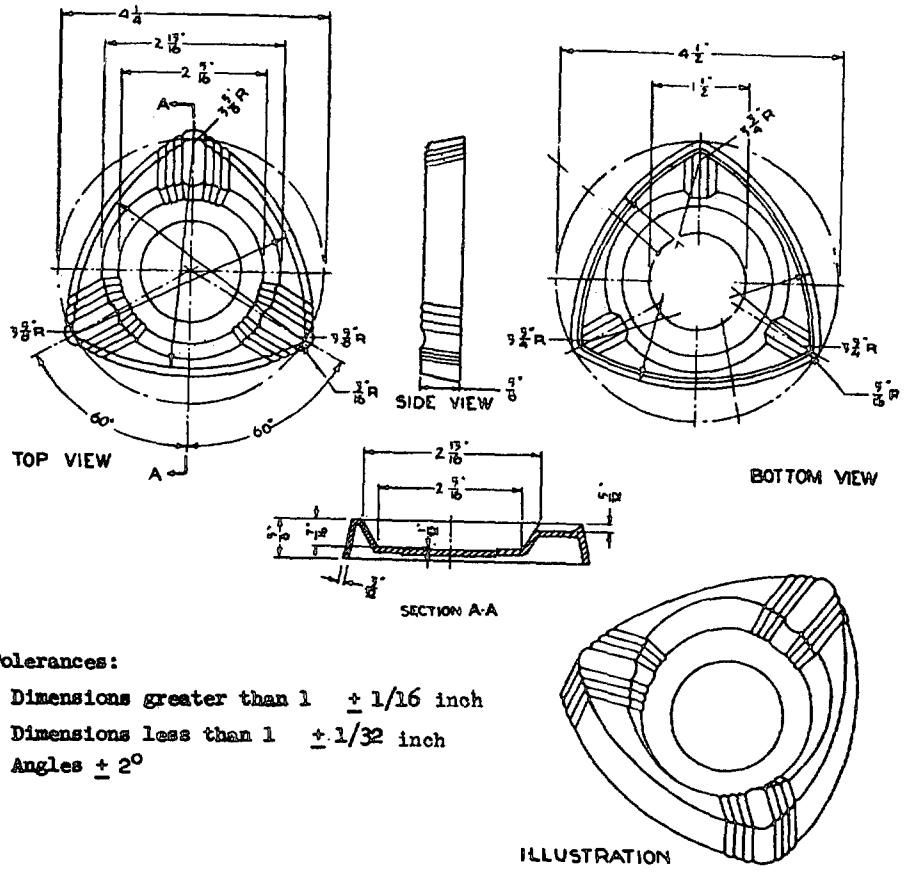

Tolerances:

Dimensions greater than 1 ± 1/16 inch

Dimensions less than 1 ± 1/32 inch

Angles ± 2°

FIGURE 1. Plastic receiver

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

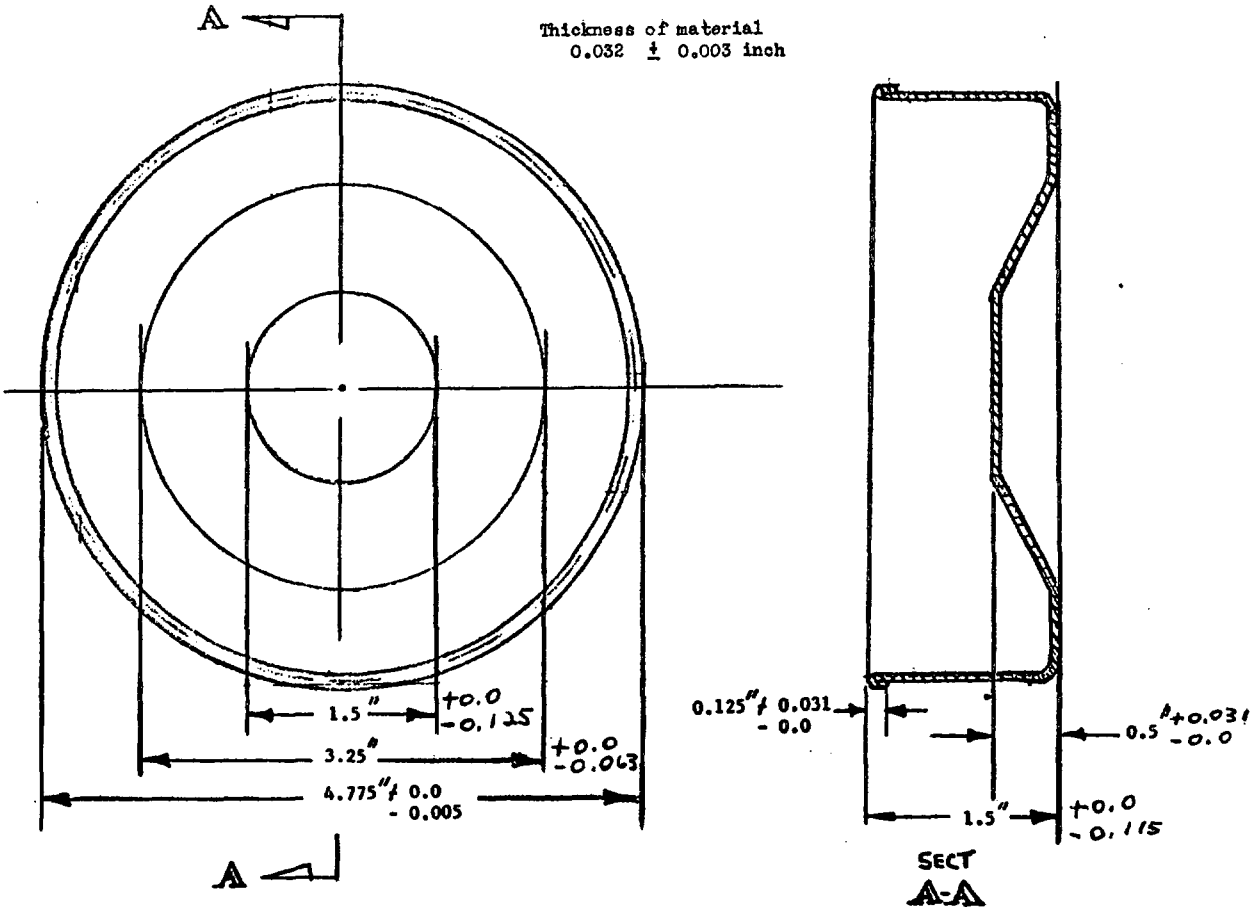


FIGURE 2. Base, metal receiver

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

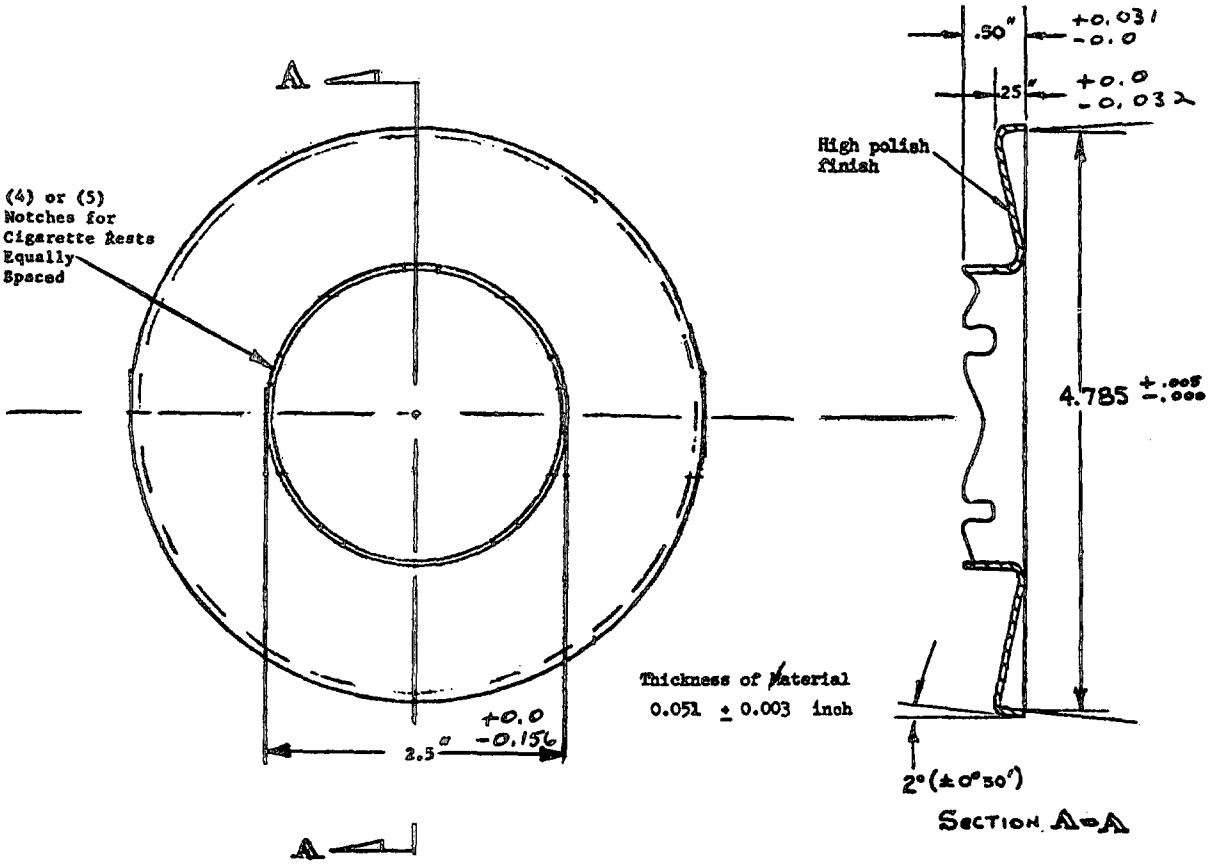


FIGURE 3. Top, metal receiver

User activity:

Army - GL

Preparing activity:

GSA-FSS

Civil Agency Coordinating Activities:

GSA-FSS
HEW-HSM
INTERIOR-BOR

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other docum ents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.