[INCH-POUNDS]
AA-A-710E
July 15, 1993
SUPERSEDING
AA-A-710D
July 26, 1990

FEDERAL SPECIFICATION

ASH RECEIVERS, TOBACCO, (DESK TYPE)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers ash receivers used for the collection of cigarette and tobacco wastes.

1.2 Classification. Ash receivers covered by this specification shall be of the following types as specified (see 6.2):

Type I - Glass - square, 4-1/2 inch (114.3 mm).
Type III - Metal - two-piece construction

2. APPLICABLE DOCUMENTS

2.1 Issues of document. The documents referenced in this Federal specification shall be the issues in effect on the date of the invitation for bids or request for proposal unless otherwise specified. These documents form a part of this Federal specification to the extent specified. In the event of a conflict between this Federal specification and a document referenced herein, this Federal specification shall take precedence.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 9920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Federal Standards:

FED-STD-123 - Marking for Shipment (Civil Agencies).
FED-STD-376 - Preferred Metric Units for General use by the Federal government.

Copies of Federal specifications and standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Copies of military standards may be obtained from the Standardization Documents Order Disk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM Standard:

B209 - Standard Specification for Aluminum and Aluminum-alloy Sheet and Plate.

Application for copies should be addressed to ASTM, 1916 Race Street Philadelphia, PA 19103.

National Motor Freight Traffic Association, Inc. Agent

National Motor Freight Classification.

Application for copies should be addressed to the American Trucking Association, Inc., 2200 Mill Rd., Alexandria, VA 22314.

Uniform Classification Committee, Agent

Uniform Freight Classification.

Application for copies should be addressed to the National Railroad Freight Committee, Suite 1120, 222 South Riverside Plaza, IL 60606.

3. REQUIREMENTS

3.1 Material.

3.1.1 Glass. Type I ash receivers shall be made of colorless glass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.1.2 Metal. Type III ash receivers shall be made of aluminum or aluminum alloy designated 1100-0 or 3003-0 in accordance with ASTM B209.

3.2 Type I, glass, square, 4-1/2 inch (114.3 mm). The following design requirements shall be at the manufacturer's option:

(a) Outline of top edge - square or four pointed star with straight or curved edges.
(b) Base - any symmetric geometric shape.
(c) Shape of receptacle area - round or square with curved sides.
(d) Bottom outside - round, or square with straight or curved sides.
(e) Outer sides - sloped from top to base, or top joined to base with a smooth right angle.

A minimum of 4 cigarette rests, spaced equidistant around the periphery and aimed at the center of the receiver, shall be molded into the top. The cigarette rests shall be sloped toward the center of the ash receiver. The rests shall be parallel to the outside top edge of the receiver or in each corner, at the manufacturer's option. All surfaces shall be smooth.

3.2.1 Dimensions. Dimensions of the Type I receiver shall be as follows:

	Inches	
Width of top (between parallel sides)	4-7/16 + 3/8	(112.7 mm + 9.5 mm)
Height, outside, maximum	1-5/16	(33.4 mm)
Height, outside, minimum	1	(25.4 mm)
Thickness, minimum	1/8	(3.2 mm)
Length, cigarette rests, minimum	7/8	(22.3 mm)
Diameter, cigarette rest, minimum	1/2	(12.7 mm)
Base, diameter or width, minimum	2	(50.8 mm)

3.2.2 Weight. The Type I ash receivers shall average not less than 6 ounces (170.1 g) each, when weighed by the dozen (see 4.5.1).

3.2.3 Color. The glass shall be colorless, and shall not be coated or tinted on the surface.

3.3 Type III, metal, two-piece construction.

3.3.1 Base. The base shall be of one-piece construction and shall conform to the design and dimensions in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.2 Top. The top shall be of one-piece construction and shall conform to the design and dimensions in figure 2. The cigarette rests shall be of such size and design as to firmly hold cigarettes in place and cause automatic extinguishing of neglected burning cigarettes (see 4.5.4).

3.3.3 Identification marking. Each base shall be indented or embossed with the manufacturer's name or trademark in the raised center of the base.

3.3.4 Finish. The base shall be finished inside and outside with a scratch, satin, or polished finish or combination of either. The exposed surface of the top shall have a polished finish. The unexposed surface shall have a satin or scratch finish.

3.4 Shock requirements.

3.4.1 Type I, glass. The ash receivers shall not break into more than 35 pieces when tested in accordance with 4.5.2.

3.4.2 Type III, metal. Base and top shall have a good fit after being tested in accordance with 4.5.3.

3.5 Workmanship. The ash receivers shall be smooth, free from sharp edges, projections or sharp corners which may injure the hands or scratch polished-wood surfaces on which they rest. The receivers shall not rock when placed on a flat surface. The inside (ash container) shall be reasonably flat or rounded and smooth. The receivers shall be free from projections, depressions which cannot be easily cleaned.

3.6 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this specification are met.

3.8 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The values stated in parentheses are for informational purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.2.1).
(b) Preparation for delivery inspection (see 4.6).

4.2.1 Quality conformance inspection. Quality conformance inspection shall be performed on the sample ash receivers selected in accordance with 4.4 and 4.5.

4.2.2 Inspection lot. All units of the same type and design, manufactured by the same manufacturer, and offered to the Government at one time, shall be considered a lot for purpose of inspection. The sample unit shall be one complete ash receiver.

4.3 Sampling. A random sample of ash receivers shall be selected from each lot in accordance with MIL-STD-105.

4.3.1 Sampling for examination. Examination of the ash receivers shall be based on inspection level I, and an Acceptable Quality Level (AQL), of 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

4.3.2 Sampling for tests. Tests shall be based on inspection level S-2 and an AQL of 2.5 percent defective.

4.4 Examination. Each sample selected in accordance with 4.3.1 shall be examined for defects listed in table I.

4.5 Tests. Each sample selected in accordance with 4.3.2 shall be tested to determine compliance with this specification. Tests shall be conducted as specified in 4.5.1 through 4.5.4.

4.5.1 Weight. Glass receivers shall be weighed on a scale accurate to 0.1 ounce (2.8 g) (see 3.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defects	Major	Minor
End item	Type not as specified	X	
	Nicks, chips, or cracks in glass receivers	X	
	Sharp corners or edges (glass or metal receivers)	X	
	Cigarette rest not sloped toward ash container.	X	
	Glass not colorless	X	
	Fractures in metal receivers	X	
	Any dimension not within tolerance		X
	Base and top of 2 piece receivers, poor fit		X
	Damage or defects not affecting function or serviceability		X

4.5.2 Breakage, type I glass. The test shall be made by placing the specimen on its base upon a solid support (1-3/4 inch (44.5 mm) maple plank), placing a steel center punch (point ground to a 60 degree included angle) in contact with the center of the inside surface of the bottom and striking with a hammer in successive blows of increasing severity until breakage occurs. The specimen should break into a small number of irregular shaped pieces not greater in number than 35, and it must not dice. Any piece 1/4 inch (6.4 mm) or more on any three of its adjacent edges (excluding the thickness dimension) shall be included in the number counted. Smaller fragments shall not be counted (se e 3.4.1).

4.5.3 Shock, type III metal. Metal receivers shall be dropped three times from a height of 30 inches (762.0 mm) to a concrete floor (see 3.4.2).

4.5.4 Extinguishing, type III metal. Place a lighted cigarette in the holder with the burning portion extending toward the center of the top. Permit the cigarette to burn in this position until it is extinguished by the holder (see 3.3.2).

4.6 Preparation for delivery inspection. A random sample of unit, intermediate and shipping containers (as applicable) shall be selected from each lot and examined for conformance with the preservation, packaging, packing, labeling and marking required in the contract or order. Samples shall be selected in accordance with Inspection level S-2, AQL 6.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking. The preservation, packaging, packing and marking shall be as specified in the contract or order.

5.2 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with FED-STD-123 or MIL-STD-129, as applicable (see 6.2).

6. NOTES

6.1 Intended use. Ash receivers covered by this specification are intended to be used on desks and tables for collecting cigarette and tobacco waste.

6.2 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Type of ash receiver required (see 1.2).
(c) Marking required (see 5.2).

MILITARY INTEREST:

NONE: DOD has waived coordination on revisions and amendments to the Federal specification until further notice.

CIVIL AGENCY INTEREST:


HHS - HSM
POSTAL - USPS
INTERIOR - BLM

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Material Thickness
0.032″ +/-0.005
(0.8 mm +/-0.1 mm)

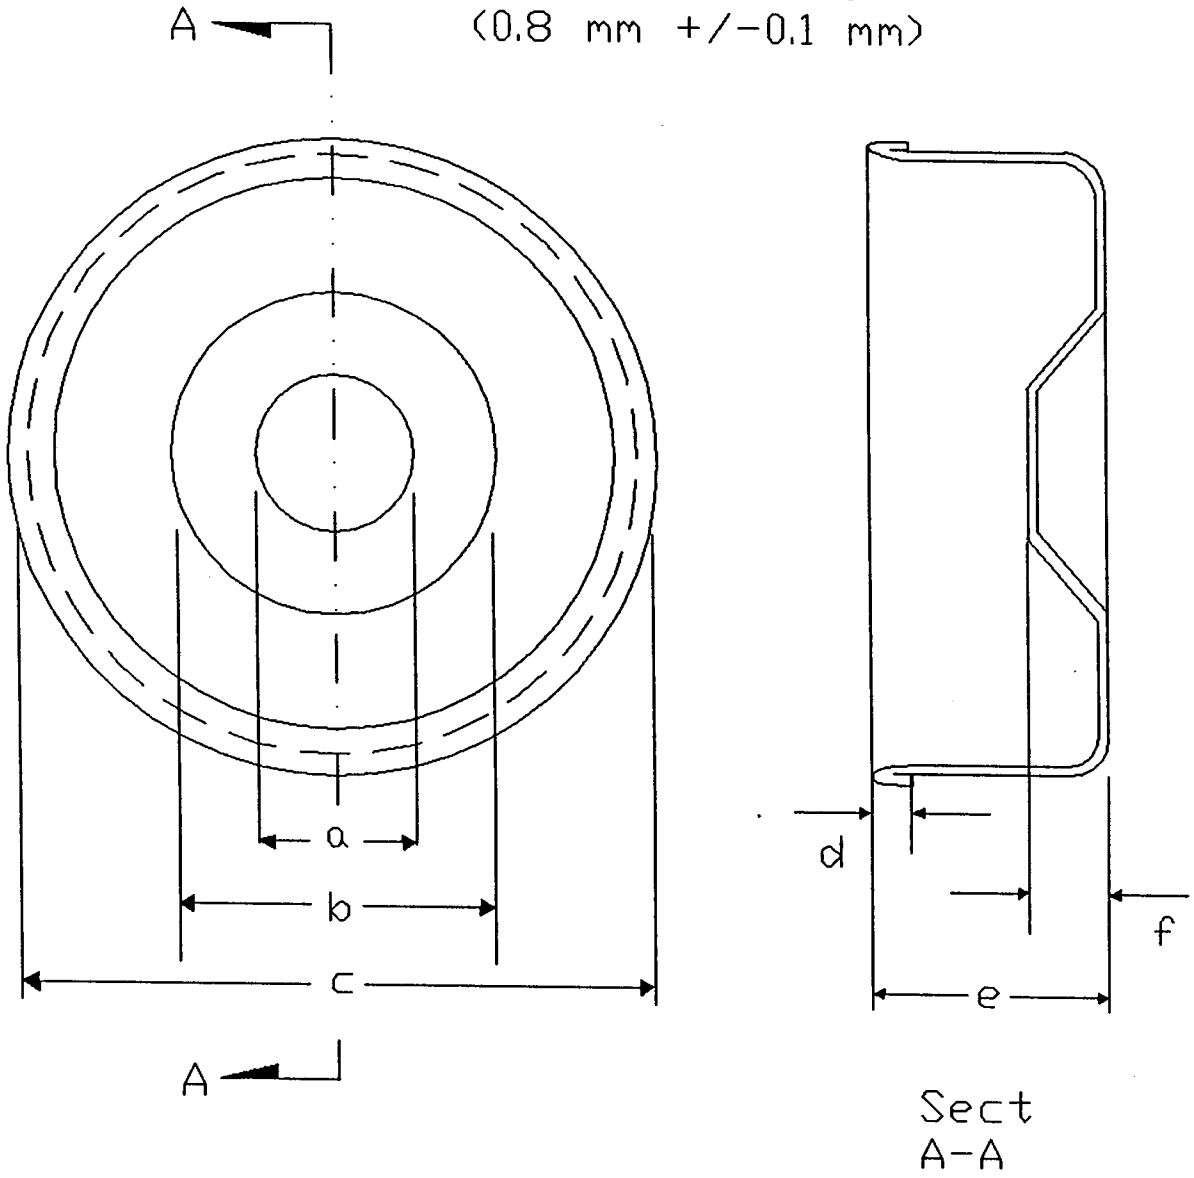

Dimensions:

a = $1.5^{+0.0}_{-0.115}$″ (38.1 $^{+0.0}_{-2.9}$ mm)

b = 3.25″ +/- 0.05″ (82.6 mm +/-1.3 mm)

c = 4.775″ Maximum (121.3 mm)


d = 0.125″ Minimum (3.2 mm)

e = $1.5^{+0.0}_{-0.115}$″ (38.1 $^{+0.0}_{-2.9}$ mm)

f = 0.5″ Minimum (12.7 mm +0.8 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Figure 1. Base, Metal Receiver

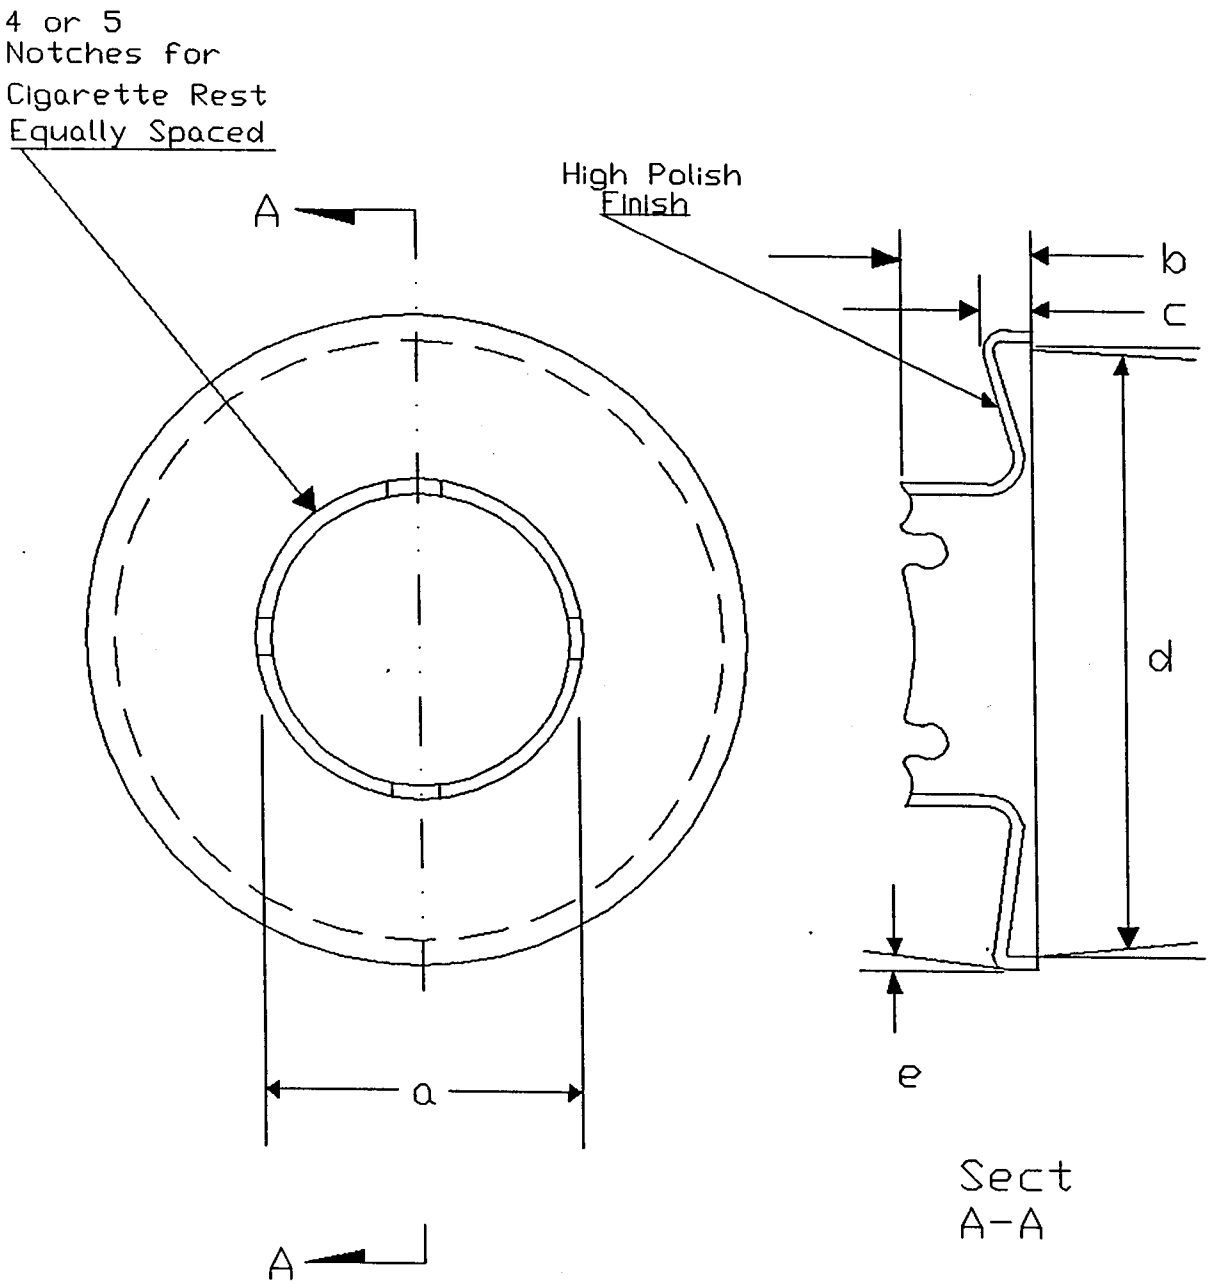

Dimensions:

a = 2.5″ Minimum
(63.5 mm)

b = .50″ Minimum
(12.7 mm)

c = .25″ Minimum
(6.4 mm)

d = 4.775″ Minimum
(121.3 mm)

e = 2° ±□° 30′

Material Thickness
0.050″ +/−0.005
(1.3 mm +/−0.1 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Figure 2. Top, Metal Receiver