INTERIM FEDERAL SPECIFICATION

COSTUMER, METAL, CONTEMPORARY STYLE

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers contemporary style costumers. They are a companion group to other contemporary style steel office furniture and are uniform in basic design, quality and appearance.

1.2 Classification. The costumer covered herein shall be of two types.

Type I - Round pole with a circular base.
Type II - Square pole with a four-leg base.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications

L-P-378	-	Plastic Sheets and Strip, Thin Gauge, Polyolefin.
QQ-A-200/9	-	Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 6063.
QQ-A-591	-	Aluminum Alloy Die Castings.
QQ-C-320	-	Chromium Plating (Electrodeposited).
QQ-N-290	-	Nickel Plating (Electrodeposited).
PPP-B-636	-	Box, Fiberboard.

Federal Standards

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of Federal Specifications and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Iron and Steel Institute:

Steel Products Manual, Carbon Steel Sheets.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017).

National Motor Freight Traffic Association, Incorporated, Agent.

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified, (see 6.2), before production is commenced, a sample of each type costumer on contract and each component part thereof shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all applicable provisions of this specification. Production units shall not vary from approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused in their present state and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel sheets used for costumers covered by this specification shall be commercial quality as defined in Steel Products Manual, cold rolled or cold rolled oiled as defined in the manual. All steel shall be smooth, free from rust, scale, pits, scratches, laps and buckles affecting strength or appearance and shall withstand the bend test specified in section 4.

3.2.2 Iron castings. All iron castings shall be free of blowholes, porosity, hard spots, shrinkage, cracks, or other defects.

3.2.3 Extruded aluminum. Extruded aluminum shapes shall be alloy 6063. The temper of the alloy shall be at the manufacturer's option. Chemical composition of the alloy shall be in accordance with QQ-A-200/9.

3.2.4 Aluminum die casting. Die castings shall be alloy 380. Chemical composition of the alloy shall be in accordance with QQ-A-591.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.5 Seamless drawn aluminum tubing. Drawn aluminum tubing, when specified, shall be seamless alloy 6063. The temper of the alloy shall be at the manufacturer's option. The alloy shall be free from defects and shall be of good commercial quality.

3.2.6 Finishing materials.

3.2.6.1 Plated finish.

3.2.6.1.1 Chrome plating. The materials used in the plating process shall be as normally used commercially to accomplish the thickness and quality specified herein.

3.2.6.2 Aluminum finish.

3.2.6.2.1 Annodized aluminum. The materials used in the annodizing process shall be as normally used commercially to accomplish type and quality of annodizing specified herein.

3.3 Design. The general appearance of the costumers covered in this specification shall be as shown in Figure 1. The illustrations depicted thereon identify the basic styling required but do not represent specific requirements unless so stated herein.

3.3.1 Detail design. Type I and Type II costumers shall have poles as specified in 3.4.4; Hooks as specified in 3.4.5; and Bases as specified in 3.4.6 and 3.4.7. In addition, the Type II costumers shall have leveling glides as specified in 3.4.8. Unless otherwise specified, all visible surfaces of the costumers shall be chrome plated steel as specified in 3.5.1 or satin annodized aluminum as specified in 3.5.2.

3.4 Construction. The construction requirements specified herein are minimum. The contractor will exceed these requirements wherever necessary to conform to the test provisions specified herein. Any detail not specified herein shall be in accordance with the manufacturer's commercial practice.

3.4.1 Tolerances. The commercial manufacturing tolerances for the items covered by this purchase description are permitted unless otherwise specified herein.

3.4.2 Height. The overall height of the costumers shall be not less than 68 inches nor more than 72 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.3 Assembly. Costumers shall be furnished ready for complete and proper assembly (shipped knocked-down - see 5.1.1). The joining of all components of the product shall result in compact units of sufficient strength to withstand heavy daily usage and to prevent distortion, breakage, or loosening of any part during rough handling. Illustrated assembly instructions, a complete bill of material listing all components, and all necessary mechanical fasteners shall be packed with each costumer. The method of field assembly shall be such that assembly can be accomplished with simple hand tools.

3.4.4 Pole. The pole shall be of not less than 18 gage (0.0478 inch) seamless steel tubing or continuously seam welded steel tubing. All exterior surfaces of these poles shall be satin chrome plated as specified in 3.5.1. Alternatively, the pole for Type I may be drawn aluminum tubing conforming to 3.2.5 and the pole for Type II may be of seamless extruded aluminum conforming to 3.2.3. The gage of aluminum used in the poles shall be compatible in strength with the gage of the steel poles and shall be finished as specified in 3.5.2. The Type I costumer shall have a round pole not less than 1-1/4 inches in diameter. Type II costumer shall have poles not less than 1 inch square and not more than 1-1/4 inches square. The top of the pole shall be capped with the same metal as the pole or with a black high impact plastic cap. Provisions shall be made for the secure attachment of the pole to the base and the attachment shall be sufficient strength to conform to all tests in section 4. Each pole shall have 4 double hooks as specified in 3.4.5, (one double hook shall be fastened to each side of the pole). The hooks shall be fastened to the pole in such a manner to insure compliance to the test requirements in section 4. The hooks shall be not less than 56 inches from the floor.

3.4.5 Hooks. When the costumers are of steel construction, the hooks shall be constructed of formed steel, zinc, brass, bronze, or not less than 5/16 inch round steel wire. These hooks shall be finished as specified in 3.5.1. When the round steel wire is used, a round steel ball shall be welded to each end of the double hooks. Costumers of aluminum construction shall have hooks of extruded aluminum as specified in 3.2.3 and shall be finished as specified in 3.5.2. The hooks shall have a smooth finish free from unevenness or burrs. When necessary, to prevent damage to clothing, plastic tips shall be installed on the end of each tip of the double hooks. The hooks shall be of contemporary styling and sufficient strength to conform to the test requirements in section 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.6 Base for Type I costumer. Type I costumers shall have a circular base of sufficient weight and diameter, (not to exceed 16 inches), to insure compliance with the stability test and all other tests in section 4. The rim of the circular base shall not vary more than 1/16 inch from contact with the entire surface of a level test plate. When the costumers are of steel construction, all visible surfaces of the base shall be chrome plated steel as specified in 3.5.1. Costumers of aluminum construction shall have all visible surfaces of the base finished as specified in 3.5.2. In order to provide sufficient weight to the base for stability of the costumer, the base may be constructed of two parts securely joined. The inner part shall be constructed of a material to provide the weight for the base. The outer part shall completely cover the inner material and shall consist of a steel or aluminum cover as required to meet the finishing and other requirements of this paragraph. The inner part of the base shall be treated to prevent corrosion.

3.4.7 Base for Type II costumer. Type II costumers shall have a base with four legs of equal length. This base shall have a combination of weight and overall width, not to exceed 21 inches, to insure compliance to the stability test and all other tests in section 4. When the costumer is of steel construction, the base shall be constructed of 1 inch (plus 1/4 inch, minus 0 inch), steel tubing finished as specified in 3.5.1. When the costumer is of aluminum construction the base shall be formed of 1 inch aluminum tubing finished as specified in 3.5.2. The ends of the tubing shall be capped with black high impact plastic. Alternatively, the Type II base may be constructed of an iron or aluminum casting with four legs. The casting shall be finished with black enamel and have a satin chrome plated steel or satin annodized aluminum facing securely attached to the top surface of each of the four legs. These facings shall cover at least 2/3 of the top of each leg. Provision shall be made for the attachment of adjustable glides to the end of each leg of the base whether it is constructed of casting or tubing (see 3.4.8). The base shall be securely attached to the pole so as to meet all test requirements in section 4.

3.4.8 Leveling glides. Each of the four legs of the Type II base shall have a corrosion resistant glide. The glide shall be adjustable over a range of 3/8 inches minimum. The glides shall be not less than 7/8 inch square or 7/8 diameter as applicable. The edge of square glides shall not extend beyond the edges of the legs, nor shall the edges of the round glides extend beyond the corners of the leg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.5 Pretreatment and finish.

3.5.1 Plated finish.

3.5.1.1 Pretreatment. The components to be plated shall be cleaned and otherwise pretreated in accordance with the standard commercial practice for the type of plating specified.

3.5.1.2 Chromium plating. All chromium plating shall be class 1 (decorative), Type II (satin finish), of QQ-C-320. The undercoat used on the base cover shall be copper plus nickel conforming to type III (KS) on steel base metal - 0.00075 inch of copper plus nickel as specified in QQ-N-290. Nickel alone may be used for the undercoat provided it is at least 0.0005 inch thick. The undercoat of the other chromium finished components shall be copper plus nickel or nickel alone of the applicable minimum thicknesses established in QQ-N-290. The exposed surfaces of the chromium shall visually match the GSA standard sample for satin chrome finish (see 6.3), and shall be tested for resistance to corrosion in accordance with ASTM Method B-117 as specified in 4.5.1.6. The chromium plating shall not peel, chip or crack and it shall be free of uneven color, pits, blisters, stains, powder film, and brush or grind marks.

3.5.2 Annodized finish. The aluminum components shall be annodized.

3.5.2.1 Pretreatment. The aluminum components to be annodized shall be pretreated in accordance with the standard commercial practice.

3.5.2.2 Annodization. The aluminum components shall have a fine grain, satin annodized, natural finish. All annodized components shall be free of nicks, burrs, scratches, uneven color, and stain. The exposed surfaces of the aluminum shall visually match the GSA standard sample, uncolored satin annodized aluminum, (see 6.3).

3.6 Identification marking. All costumers shall be clearly and permanently marked on the underside of the legs, base or base cover, (see 6.2), with the contractor's name or trademark; contract or order number, and month and year of manufacture. The manufacturer may also apply his standard decal or name plate to the costumers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. A high degree of craftsmanship shall be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges; to assure that the occurrence of defects will not exceed the acceptable quality level specified herein; and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample shall be made on a completely fabricated item for all provisions of this specification applicable to end product examination and tests, before regular production is started.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 except as otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.3.2 Inspection of end items. The lot shall be all costumers offered for inspection at one time. The lot size shall be expressed in units of costumers for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely assembled costumer.

4.3.2.1 Visual examination. The costumers shall be examined for the defects specified in table I. The inspection level and the acceptable quality level shall be as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of end item defects

Examine	Defect	Classification Major	Minor
Enamel finish	Poor adhesion, i.e. blistered, checked peeling; tacky (not dry to touch), color separation, stain, foreign matter in coating, area of thin coating or abrasion.	X	
	Wrong color.		X
	Scratch through to base metal, bare spots, rust under coating.	X	
Metallic coating	Wrong kind.	X	
	Area of thin coating or no coating, poor adhesion, i.e. blistered, peeling, flaky, stained or discolored.	X	
Construction and workmanship	Any component malformed, dented, buckled or bent affecting serviceability.	X	
	Any component malformed, dented, buckled or bent not affecting serviceability.		X
	Sharp edge or projection that may cause injury.	X	
	Not material specified.		X
	Any component missing.	X	
	Any serviceable component not attached as specified.		X
Pole	Does not have required number of hooks.	X	
	Hooks not positioned as stated.		X
	Pole not securely attached to base.	X	
	Pole not capped.		X
	Not finished as specified.	X	
Hooks	Not as specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification Major	Minor
Base	Not as specified.	X	
Identification marking	Missing, illegible, incomplete, defective, not permanent.	X	

4.3.2.2 Dimensional examination. Inspection will be made of costumers for compliance with dimensions specified, including thickness of metal and thickness of organic finish. Any dimension not within tolerance specified will be classified as a defect. The inspection level and the acceptable quality level shall be as specified in 4.4.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection levels	AQL's Major	Total
Table I	II	4.0	10.
4.3.2.2	S-2		4.0
4.3.3	S-2		4.0

4.5 Tests.

4.5.1 Tests relating to end item.

4.5.1.1 Performance testing. Completely assembled costumers shall be tested as specified in the related sub-paragraphs for the indicated performance characteristics. Inspection level S-1 shall be used for selection of the number of costumers to be tested from any lot.

4.5.1.2 Bend test for steel sheets. The steel sheets for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain over a radius not exceeding the thickness of the test sample without showing any cracks or fractures on the outside of the bend.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.5.1.3 Stability test for costumers. The manufacturer shall develop a device for suspending weight from the coat hook and hat hook. The device shall hold the weight within two inches from the end of hooks and not allow the weights to hang more than 15 inches below the hook. One of the top sets of hooks on one side of the costumer shall be loaded as follows: The hat hook shall be loaded with 20 pounds and the coat hook loaded with 50 pounds. Any tipping, instability, deformation, or loosening of pole from base of the costumer shall be reason for rejection.

4.5.1.4 Test on hook. All four hooks shall be loaded as specified in 4.5.1.3. Any permanent set or loosening of the hooks from the pole shall be reason for rejection. In addition, any distortion of the pole or loosening of the pole from the base shall be reason for rejection.

4.5.1.5 Level test. Place unit on a level surface plate. If a 1/16 inch thick feeler gauge can be easily inserted under the base at any point, the unit shall be rejected.

4.5.1.6 Chromium plating test. Test samples shall be plated as specified in 3.5.2.2 and shall be tested for corrosion in accordance with the 5 percent neutral salt spray at 95 degrees F. in accordance with ASTM Test Method B-117. Test period shall not be less than 48 hours. After the specified exposure is completed, the specimen shall be visually examined to assure that the plating shows no evidence of peel, chip, uneven color, powder film, pits or stain. Widely scattered spots of corrosion are permitted; however, none of these spots of corrosion shall exceed 1/16 inch along the greatest dimension.

4.6 Inspection of preparation for delivery. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table II. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, or distortion of container.
Contents	Gross weight exceeds requirements of the box specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each costumer shall be knocked-down to produce the practicable minimum cube. The hooks (when shipped loose), base and fastening devices shall be wrapped in plastic film a minimum of 2 mils thick conforming to L-P-378. Cushioning, blocking and bracking shall be utilized within the container to immobilize all parts and prevent damage during shipment and storage.

5.1.2 Level C. Each costumer shall be packaged in accordance with the manufacturer's standard practice providing that this will insure protection for the costumer during shipment and provides for safe delivery to its destination.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each costumer packaged as specified in 5.1.1 shall be packed in a close-fitting box conforming to PPP-B-636, class weather resistant, style optional. Close, waterproof seal and reinforce each box in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Each costumer packaged as specified in 5.1.1 shall be packed in a close-fitting box conforming to PPP-B-636, class domestic, style optional. Closure of boxes shall be in accordance with method II of the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Costumers packaged as specified in 5.1.2 shall be packed in a manner that will assure safe arrival at destination in compliance with the National Motor Freight Classification rules or the Uniform Freight Classification rules, as applicable.

5.3 Marking. In addition to any special markings required by the contract or order, all marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. All marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. All marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The metal costumers covered by this specification are intended for office use to accommodate hats and coats.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following

(a) Title, number and date of this specification.

(b) If preproduction sample requirement is waived (3.1).


(c) If special marking is required (3.6 and 5.3).

(d) Level of packaging and packing required (see 5.1 and 5.2).


(e) Whether civil or military marking of packages is required (see 5.3).


6.3 Chrome and annodized aluminum finish samples. Sample panels showing the standard satin chrome finish and satin annodized aluminum finish can be obtained from Furniture Branch (FMFF), Furniture, Packaging and Fibers Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

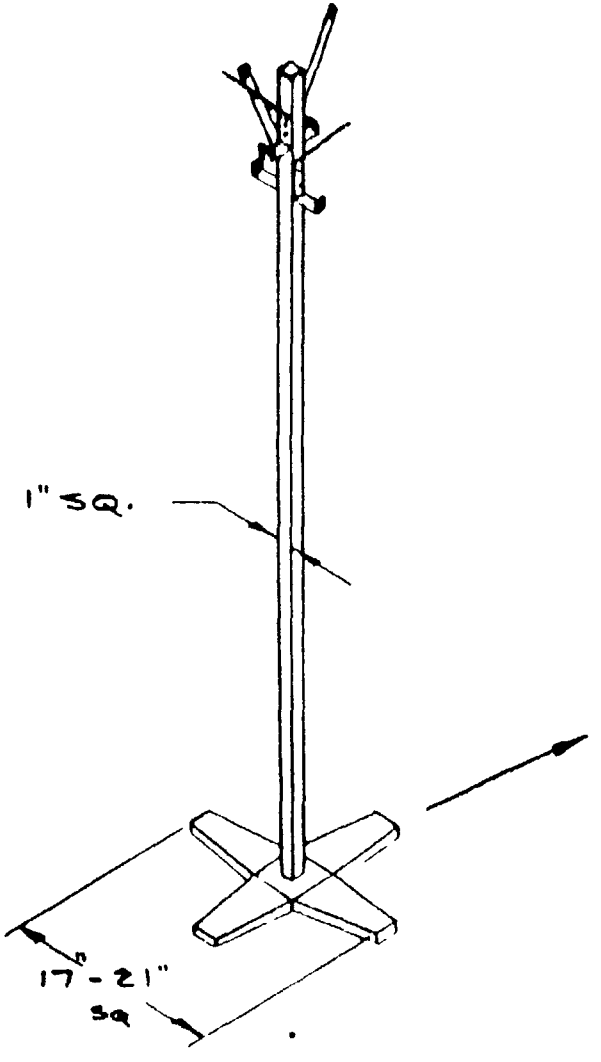

TYPE II
FOUR-LEG BASE
(THIS DESIGN CONFIGURATION IS NOT MANDITORY)

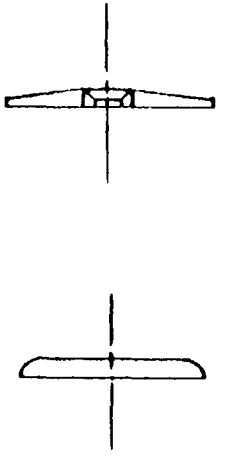

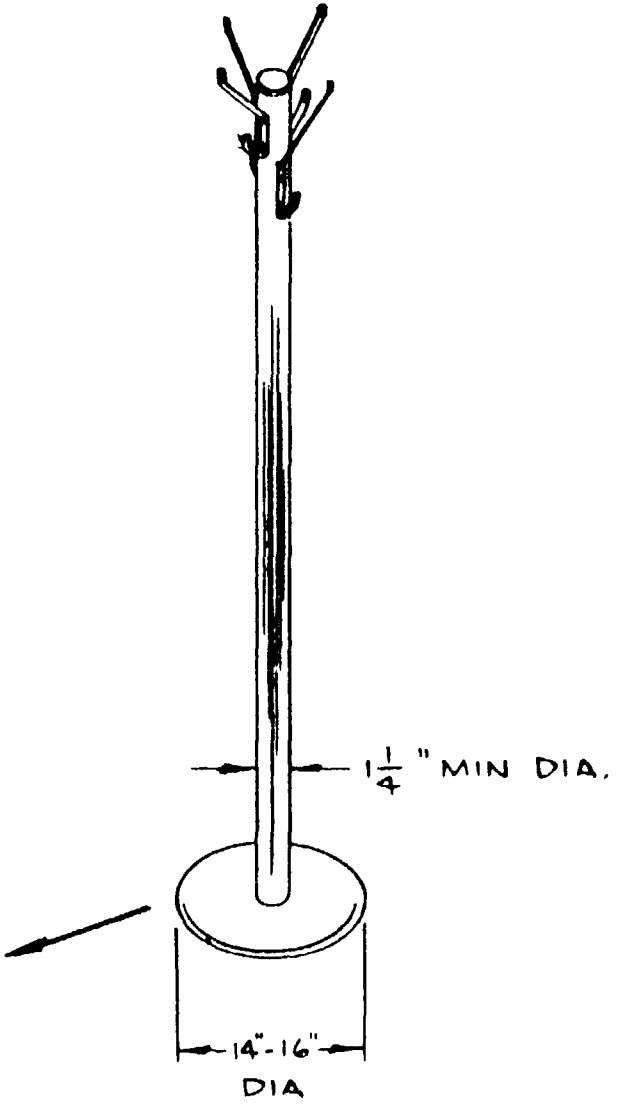

TYPE I
CIRCULAR BASE

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.