AA-D-001107(GSA-FSS)
AMENDMENT-2
September 1, 1971
SUPERSEDING
AMENDMENT-1
March 15, 1968

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

DESK, FLAT TOP, STEEL, OFFICE, 30 INCHES DEEP

This amendment was developed by the General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. The General Services Administration has authorized this amendment as a part of Interim Federal Specification AA-D-001107(GSA-FSS) dated November 1, 1967.

PAGE 1

Paragraph 1.1, add at end of paragraph "The type III desk is identified to the type I, class 1 desk except for the size of the top."

Paragraph 1.2.1. After "Type I, Class 2" add the following:

"Style a - Pedestal containing one storage and one file drawer"
"Style b - Pedestal containing three storage drawers"

After the lising for "Type II" add the following:

"Type III - Conference desk, double pedestal, 70 inches wide, 36 inches deep, 29 inches high. (Approximately 5 inch overhang on each side of desk and approximately 6 inch overhang at back of desk.)"

PAGE 3

Paragraph 3.2.3.1, line 1, delete "type 430" and substitute "type 302".

Paragraph 3.2.3.3, item b, delete in its entirety and substitute:

"b. All edges on pulls, except those edges that are in direct contact with the drawer fronts, shall be rounded to the equivalent of not less than 0.010 inch radius. Those edges in direct contact with the drawer front may or may not be so rounded.

Paragraph 3.2.3.3, item c, delete in its entirety.

Add the following new paragraph after paragraph 3.2.3.6:

"3.2.3.7 Locks. The drawer lock shall be the disc tumbler type having not less than a 3/4 inch diameter tube and shall be operated by a grooved key. The key shall be removable from the lock in both the locked and unlocked position. Duplicate keys shall be furnished with each lock. Each lock on any order of 200 desks or less shall be of a different key change in that no more than one set of duplicate keys will operate more than one of the locks. The lock cam (or bolt) shall be not less than 3/32 (0.0937 inch) thick and shall have ample length to properly secure the file drawer and storage drawer immediately above the file drawer. The face of the lock shall be finished as specified in 3.2.3.1"

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Paragraph 3.3, Line 2. Delete "figures 1 and 2." and substitute "Figure 1 - Revision 1, Figure 2 - Revision 1, Figure 3 and Figure 4."

Paragraph 3.3, delete items a, b, c, d, e, and f and substitute the following:

"a. Type I, Class 1 and Type I, Class 2, Style a and Type III desks shall have one file drawer (in bottom position), one storage drawer, and one utility drawer in the right hand pedestal.

b. Type I, Class 1, and Type III double pedestal desks shall have three storage drawers and one sliding shelf in the left hand pedestal.

c. Type I, Class 2, Style b desks shall have three storage drawers and one utility drawer in the right hand pedestal.

d. Sliding shelves and utility drawers shall be interchangeable without the need of special tools specifically designed for this purpose.

e. Type I, Class 1 and Type 1, Class 2, Style a and Type III desks shall have a lock in the file drawer.

f. Any storage drawer in the Type I, Class 1 and Type III desks shall be interchangeable to any of the top and center storage drawer positions in both pedestals in the same desk without the use of any tools.

g. The file drawer in the right hand pedestal in the Type I, Class 1 and Type III desks shall be interchangeable with the bottom and center storage drawer in the left hand pedestal of the same desk without the need of special tools specifically designed for this purpose.

h. All Type I and Type III desks shall have recessed back panels."

Paragraph 3.4.2.1, section headed "Brazing", line 2, delete "be gaxflux" and substitute "include the use of a nickel bronze rod".

Paragraph 3.4.3, delete entire paragraph and substitute the following:

"3.4.3 Assembly. The joining of all members shall result in a compact unit of sufficient strength to prevent distortion, breakage or loosening of any part of the desks during heavy duty daily usage and to withstand rough handling in shipping and moving. The legs shall not be attached to the desk, but shall be wrapped to protect the finish and shall be secured to the inside of the desk pack in such a manner as to prevent movement during shipping. The proper number of machine screws, nuts, and lockwashers or self-tapping screws and lockwashers (as applicable), shall be bagged in a cloth bag or alternatively, shall be bagged in a heat sealed polyethylene bag not less than 2.5 mils thick and packed with the legs. Leg attachment instructions also shall be packed with the legs. These instructions shall clearly outline the procedures involved in attaching the legs to the desk. They shall be a concise as possible and easy to follow. There shall be no obstruction in the leg mounting provision in the bottom of the pedestals and end panels that would prevent the easy mounting of the legs in the field with simple tools. When mounted onto the desk, no part of the leg shall extend beyond the front and rear of the pedestals and end panels. The desk top shall be removable, yet it shall be securely attached to the desk in such a manner as to prevent individual vertical and horizontal movement of any part of the top. The top overhang for the type I, classes 1 and 2 desks shall be as follows: Measured from the pedestal, the overhang of the top shall be not less than 3/16 inch nor more than 1-1/4 inches. The overhang at the front and rear shall be equal and the overhang at the sides shall be equal, but it is not required that the overhang be equal on all four sides. Measured from the pedestal, the top overhang for the type III desk shall be as follows: The top overhang at the sides shall be equal (approximately 5 inches-commensurate with top size in 1.2.1 and tolerance in 3.5.1). The overhang at the front shall be the sames as the contractor applies to the type I, classes 1 and 2 desks. The overhang at the back shall be approximately 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

inches-commensurate with the top size in 1.2.1 and tolerance in 3.5.1. When drawers and sliding shelves are in the closed position, they shall set squarely in the pedestal opening and the drawer and sliding shelf fronts shall be flush with, or shall inset the face of the pedestal not more than 1/16 inch. Welding of subassemblies shall be as specified for each part. The type II typewriter platform units shall be individually packed and shipped separate from the desk.

Paragraph 3.4.4, delete entire paragraph and substitute the following:

"3.4.4 Top. The overall height of the edge moulding plus the binding strip shall be not less than 1-1/8 inches nor more than 1-9/16 inches. The top plate for all desks shall be of not less than 16 gage (0.0598 inch) steel, and shall be rigidly reinforced to conform to the test specified in 4.6.2. Alternatively, the top plate for the type I, classes 1 and 2 desks shall be not less than 18 gage (0.0478 inch) steel provided it is reinforced lengthwise (side-to-side), by one of the following methods:

(a) At least three reinforcements, not less than 20 gage (0.0359 inch) steel, two of which shall be hat sections with not less than two rib formations or embossings extending full length of the piece on the widest surface of the section. These hat sections shall have a formed width of not less than 7 inches. The third reinforcement shall have not less than 2 bends.

(b) At least three reinforcements, not less than 18 gage (0.0478 inch) steel, one of which shall be a hat section and the other two shall each have a channel plus a flange formation. One each of the latter two reinforcements shall extend along the front and rear of the top and shall inset the edge moulding along the front and rear of the top. The formed width of each of these reinforcements shall be not less than 5-1/2 inches.

The 18 gage top plates shall be additionally reinforced, if necessary, to conform to the test specified in 4.6.2.

Included in the reinforcing of the top for the type III desks shall be one 18 gage (0.0478 inch) steel reinforcement having not less than three full length 90 degree formations. This reinforcement shall extend along the rear edge moulding. The length of it shall abut or inset the rear edge moulding and the ends of it shall abut or inset the side edge moulding. The formed width of this reinforcement shall be not less than three inches. It shall be welded to the top plate and brazed to the side and rear edge moulding at a total of not less than five places (each area of braze shall be not less than 1/2 inch long). All spotwelding of steel components to the top plate shall be on not more than 6 inch centers. All lengthwise reinforcements on all tops shall be welded to the top plate and the ends shall abut or inset the side edge moulding or side edge moulding reinforcing members (as applicable), and shall be securely brazed thereto. The top plates shall be covered with plastic laminate sheet as specified in 3.2.2. The plastic laminate shall be bonded uniformly to the top plate by an adhesive recommended by the adhesive manufacturer or the plastic laminate manufacturer for use with metal and plastic laminate. The plastic laminate shall be applied at a controlled temperature and sufficient pinch roller pressure (approximately 50 pounds) to insure permanent bond between the plastic laminate and the entire top plate surface. A back-up under the top is required as a part of the rolling process. The steel top plate shall be properly cleaned prior to application of the adhesive. The edges of the top covering shall be chamfered to provide an area for the binding strip to hold the covering against the top plate. The edge moulding shall be not less than 18 gage (0.0478 inch) steel. The inside edge of the bottom of all edge mouldings shall be formed for strength and to prevent personal contact with a potentially sharp metal edge. Alternatively, the edge moulding may be of 20 gage (0.0359 inch) steel, provided it interlocks with 18 gage (0.0478 inch) steel top reinforcements and there is no sharp edge along the bottom edges of the moulding or on the interlocking reinforcements. All edge moulding butt joints shall be reinforced with a steel member of not less than 18 gage steel, having no less than two formations, and being not less than 12 inches long. This member shall be securely welded to the inside sides and bottom of the edge moulding on both sides of the joint. The binding strip specified in 3.2.3.4 shall be securely held in place but permit removal and shall closely fit the top material along the perimeter of the top. When assembled to the top, the binding strip shall be positioned and engaged between the top plate and the edge moulding in such manner as to prevent the binding strip from moving against and damaging the top covering material upon receipt of shipping and moving impacts. (This force is

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

expected to be up to, but not including, the force which visibly damages or deforms the edge moulding). The top of the binding strip shall not project above the surface of the top covering at any point along the perimeter of the desk top. The binding strip shall be either flush with the outside of the edge moulding or may extend outside it by not more than 3/32 inch. The corners of the desk tops shall be rounded to a 1/2 inch (minimum) radius, or shall have graduated curvatures at the corners which eliminate square corners but are not true radii. The underside of the portion of the desk top that overhangs the desk shall be completely free of burrs and sharp or rough edges of metal."

PAGE 6

Paragraph 3.4.5, delete entire paragraph and substitute the following:

"3.4.5 Pedestal. The pedestal sides and back shall be formed from one piece of not less than 20 gage (0.0359 inch) steel with front edges formed channel shape. The four outside vertical edges of the pedestal shall be rounded by not less than 3/8 inch radii and bottom horizontal edges of the pedestals shall be rounded by not less than 1/4 inch radii. Alternatively, the rounding of these edges shall be accomplished by use of compound radii. The top edges of the pedestal sides and back shall have 90 degree flanges. A pedestal bottom of not less than 20 gage (0.0359 inch) steel shall be securely welded to the bottom of the pedestal sides and back. The front of the pedestal bottom shall be formed in a return flange formation with the bottom edge rounded as specified above for the outside edge of the pedestal. The face of the front of the pedestal bottom shall be flush with, or shall inset, (not more than the thickness of the pedestal shell), the face of the pedestal. These joints shall be close-fitting and shall be secured to prevent opening (or "spreading") by welding, brazing in accordance with paragraph 3.4.2.1, internal reinforcing, or a combination thereof. When an exposed formed steel rail is applied between the top storage drawer and sliding shelf, (or utility drawer, as applicable), the face of the rail shall be flush with or shall inset the face of the pedestal not more than 1/16 inch. The ends of the rail shall be securely attached to the front verticals and the joint between the rail and the face of the pedestal shall be brazed and ground smooth. When this exposed rail is not used, a compensating structural member shall be incorporated into the pedestal construction tying the upper sides of the pedestal together at the front top corners or beginning within 2-1/2 inches of these corners. Pedestal bottom reinforcing shall be in accordance with one of the following alternates:

(a) When attachment of the legs does not include the use of solid nuts, two bottom reinforcements of 14 gage (0.0747 inch) steel, with hat section formation, shall extend across the full width of the bottom. The reinforcement near the rear shall be securely welded to the bottom and welded or brazed in accordance with paragraph 3.4.2.1 to the rear verticals. The reinforcement near the front shall be securely welded to the bottom and welded or brazed in accordance with paragraph 3.4.2.1 to the front verticals.

(b) When attachment of the legs does not include the use of solid nuts, the front bottom reinforcement shall have not less than two bends, the rear bottom reinforcement shall have not less than three bends, and a hat section formed piece shall extend between the front and rear bottom reinforcements. All these reinforcement pieces shall be of not less than 14 gage (0.0747 inch) steel. The front and rear bottom reinforcements shall be welded to the pedestal as described in (a) above and the center reinforcement shall be welded to the pedestal bottom. In this construction the pedestal bottom shall be of not less than 22 gage (0.0299 inch) steel.

(c) When attachment of the legs does include the use of solid nuts the pedestal bottom reinforcing shall be as described in (a) above except the front and rear bottom reinforcements shall be of not less than 16 gage (0.0598 inch) steel.

(d) When attachment of the legs does include solid nuts, the return on the pedestal bottom front formation shall extend downward to the pedestal bottom and shall have an additional flange parallel with and welded to the pedestal bottom. The front verticals shall be welded to the bottom-front return formation using 14 gage gussets. The front bottom reinforcements shall be constructed and welded to the pedestal bottom as described in "(a)" above, except it shall be of not less than 18 gage (0.0478 inch) steel. The rear bottom reinforcement shall also be of not less than 18 gage steel, shall have not less than six lengthwise formations, shall have a formed width of not less than 5-1/2 inches, and shall be welded to the pedestal bottom and welded or brazed in accordance with paragraph 3.4.2.1 to the rear verticals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Provision shall be made in the pedestal bottom and bottom reinforcements for the application of the legs. The pedestal shall have not less than four vertical reinforcements, (two on each side), of not less than 18 gage (0.0478 inch) steel. The front verticals shall have not less than three full length 90 degree bends and the rear verticals shall have not less than two full length 90 degree bends. (An offset formation may also be used but not in lieu of any of the specified bends.) The formed front edge of the front verticals shall fit snugly against the inside of the front face of the pedestal shell and the front return flanges on the pedestal shell shall be spotwelded, brazed or tackwelded to the front vertical at not less than four well spaced locations. The inside of the pedestal shall have a felt composition sound-dampening material not less than 0.080 inch thick permanently adhered to the sides and back. At least 1/2 the area of each of the sides and back shall be covered by the sound-dampening material. The sound-dampening material may be omitted from the sides of the pedestal when six, (3 each side), verticals are used. One typewriter platform retainer shall be securely attached to each pedestal. It shall extend the full width of the pedestal opening and the location of that part of it which retains the typewriter platform, (in the relation to the top drawer and the front of the pedestal), must be held as indicated in Figure 2. This retainer shall be of not less than 14 gage (0.0747 inch) by 1/2 inch steel, or alternatively, shall be of not less than 18 gage (0.0478 inch) steel formed in such manner as to provide equivalent strength and rigidity. Also, alternatively, the retainer may be an assembly of more than one piece of formed steel provided all pieces of steel are not less than 18 gage (0.0478 inch) steel and provided that member which provides the retaining action is not less than 8-1/2 inches long and is located (in relation to the top drawer and the front of the pedestal), as shown in figure 2. All pedestals shall have a locking rail, secured at both ends to the front vertical reinforcements in such a manner as to prevent horizontal and vertical movement of the rail. It shall be located between the file drawer and the storage drawer (and in an equivalent position in the pedestals containing three storage drawers), and shall not interfere with the operation or specified interchangeability of the drawers. It shall not be visible when viewing the pedestal with the drawers in the closed position. The locking rail shall be of not less than 18 gage (0.0478 inch) steel, shall have a flat fold formation along the front edge, shall have a 90 degree flange along both sides and rear edge, and shall be not less than 1-1/2 inches wide, (front to rear). It shall be slotted to accommodate the file drawer lock bolt."

Paragraph 3.4.6, delete the entire paragraph and substitute the following:

"3.4.6 End panels. The end panels shall be constructed of two basic pieces; the outside panel and the inner panel. The outside panel shall be of not less than 20 gage (0.0359 inch) steel and the inner panel shall be of not less than 22 gage (0.0299 inch) steel. There shall be at least one formation along the entire perimeter of the bottom of the end panel. The top side edges of the end panel shall have at lease one 90 degree flange. The outside panel and the inner panel shall be securely interlocked, welded, brazed in accordance with paragraph 3.4.2.1 (or a combination thereof), together. Alternatively, the end panel may be of a basic one-piece construction of not less than 20 gage (0.0359 inch) steel and the vertical ends shall be securely interlocked, welded, brazed in accordance with paragraph 3.4.2.1 (or a combination thereof), together. All the above formation requirements for the two-piece construction apply to the one-piece construction. In either type of construction, all four outside vertical edges of the end panel shall have the same radius as the vertical edges of the pedestal. Also, in either type of construction, the interior of the end panel shall be reinforced with at least two vertical reinforcements, the width of which shall be the full inside width of the end panel. Alternatively, two horizontal stiffeners, constructed of not less than 16 gage (0.0598 inch) steel shall be spotwelded near the top and bottom of the panel. It shall be additionally reinforced as necessary to prevent "oil canning" of both outside and inner panels, to assure that it will hold its strength and shape through the abuse of shipping and moving, and to provide rigid support and mounting surface for the legs. All reinforcements that provide direct support and mounting surface for the legs shall be of not less than 16 gage (0.0598 inch) steel. All vertical seams shall be on the kneespace side of the end panel. The end panel shall be attached to the desk top by means of steel brackets of not less than 12 gage (0.1046 inch) steel. Each bracket shall be bolted to both the top and the end panel at a minimum of two places each. Alternatively, the brackets shall be securely welded to the assembled end panel and bolted, at not less than two places, to the assembled top."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Paragraph 3.4.7, delete the entire paragraph and substitute the following:

"3.4.7 Legs. The legs shall be the non-ferrous type of the general configuration shown in figure 1, may be the sloped rectangular type of the general configuration shown in figure 1A, or may be the height adjustment type. When the non-ferrous type is used, the leg shall be made of a die cast, non-ferrous metal and shall be finished in a color that matches the desk, or they shall be moulded of non-woven, fiber glass, matt-filled polyester in a color which matches the color of the desk. This type leg shall have a rubber pad or the glide specified in paragraph 3.2.3.5 on the bottom of the leg. When the sloped, rectangular type leg is used, that part of the leg facing the front and rear of the desk shall be not less than 1-1/4 inches wide, the full height of the leg, and that part facing the sides of the desk shall be not less than 2-1/4 inches wide full height or shall be not less than 2-1/4 inches wide at the top and sloped to not less than 1-3/4 inches wide at the bottom. All four vertical edges shall be rounded. This leg shall be of 16 gage (0.0598 inch) steel with a shroud not less than 0.0486 inch thick of one of the materials specified in 3.2.3.1. This leg shall also have a rubber pad or the glide specified in paragraph 3.2.3.5 on the bottom. When the height adjustment type leg is used, the legs shall be constructed in accordance with the chrome plated steel leg requirements specified in paragraph 3.3.14 of AA-O-00240/1C and the height adjustment mechanism requirements specified in paragraph 3.3.15 of AA-O-00240/1C. When the rubber pad is used on the non-ferrous type leg or the sloped rectangular type leg, the composition of the rubber material, the amount of rubber than extends beyond the leg, and the support provided for the rubber base pad shall be such as to prevent the weight of the desk from compressing the rubber or deforming the support so that any part of the leg touches the floor. The pad shall be secured to the leg so that it will have no movement independent of the leg except compression."

PAGES 6 and 7

Paragraph 3.4.8, delete the entire paragraph and substitute the following:

"3.4.8 Rear Kneespace panel. The kneespace back panel shall be fabricated from 20 gage (0.0359 inch) steel and shall be formed for strength on all four sides. The formation along the bottom edge shall be a roll, bead, closed return flange or other formation that will prevent damage to wearing apparel and injury to the user. All desk kneespace panels shall be recessed to not less than 4-3/4 inches from the back of the pedestals except when the top part is formed toward the rear of the desk such as to clear a kneespace drawer and suspension (generally "Z" shape in cross section), in which case the top part of the kneespace panel shall be behind the tangent line of the radius on the vertical edge of the pedestal or end panel. The bottom of the panel shall be not more than 1-1/2 inches above the bottom of the pedestals and end panels, and not below the bottom edge of the pedestals and end panels. The kneespace panel shall be secured to the desk through the pedestal and end panel sides by use of screws or at the top and bottom of the pedestal and end panel by use of 18 gage (0.0478 inch) minimum steel tie pieces. When the kneespace panels are secured to the sides of the pedestals and end panel by screws, there shall be not less than four screws on each side of the kneespace panel. The top and bottom screws shall be as close to the top and bottom of the kneespace panel as practical. When tie pieces are used to secure the kneespace panel, the top tie pieces shall be secured to the top of the kneespace panel and the top of the pedestals and end panels. The bottom tie pieces shall be secured to the bottom of the kneespace panel and the bottom of the pedestals and end panels. The bottom tie pieces shall be formed and secured so as to conform to, and fit against, the bottom horizontal radius on the pedestals and end panels. The combining of some of the provisions from each of the above two methods of securing the kneespace panel to the desk, thus establishing a different method, is not acceptable. When the panel is secured to the desk at the top and bottom as specified above and a "Z" style panel is used, the bottom corners of the top section shall be reinforced with not less than 18 gage (0.0478 inch) gussets."

PAGE 7

Paragraph 3.4.9, line 2, delete "Figure 1" and substitute "Figure 1, Revision 1 and Figure 2, Revision 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Paragraph 3.4.9, line 11, after the word "compressor" insert the following:

"The lock specified in paragraph 3.2.3.7 shall be applied to all file drawers. The lock shall be located on the horizontal center of the outside drawer front, and shall be positioned between the top of the pull and the top of the drawer front so that the lock cam (bolt) will make proper engagement with the divider pan and the storage drawer lock strike."

Paragraph 3.4.9.1, line 8, after the word "seam" insert "Provision shall be made in the outside drawer front when applicable for application of the lock. (see 3.2.3.7 and 3.4.9)."

Paragraph 3.4.9.1, line 10, after the sentence ending with the word "front" insert "Alternatively, the side flanges may be omitted from the inside drawer front, provided the latter has a channel formation not less than 1-1/4 inches wide extending the full width of the inside drawer front and centered on the attaching points and provided the outer front covers the inner front so that the ommission of the flanges is not evident by external observation of the drawer. When properly assembled to the file drawer, the inner front shall cover that part of the drawer lock extending inside the outer front. Provisions shall be made in the inner front so that the lock cam (bolt) can properly engage the locking rail and storage drawer lock strike."

Paragraph 3.4.9.2, add the following to the end of the paragraph:

"These provisions for partition adjustment do not need to extend the full length of the drawer body, but they shall terminate not more than three inches from the front of the drawer body and not more than 2-1/2 inches from the rear of the drawer body. A lock strike of not less than 16 gage (0.0598 inch) steel shall be welded to the outside bottom of all storage drawer bodies. The lock strike shall be of such size and so positioned on the storage drawer bodies to assure that the file drawer lock bolt will properly engage the strike."

Paragraph 3.4.9.3, line 7, delete "3-1/32" and substitute "31/32".

PAGE 8

Paragraph 3.4.10.1, first line, delete entire first sentence and substitute the following:

"The case track shall be formed of not less than 16 gage (0.0598 inch) steel and shall be secured to the pedestal inside vertical reinforcements as specified for the progressive suspension case track in paragraph 3.4.10.4. There shall be six case tracks (3 each side), secured inside all pedestals of all desks. Alternatively, it is permissible to omit the case track from the bottom position in the right hand pedestals only, thus leaving four case tracks (2 each side) in the top and center storage drawer positions in the right hand pedestals."

Paragraph 3.4.10.1, line 7, delete sentence following the word "bottom" and substitute the following:

"The flange and flanges, (as applicable), of the drawer track shall be secured to the drawer body by two rows of spotwelds on not more than 4 inch centers, or alternatively, by one row of staggered spot welds on not more than 3 inch centers measured diagonally."

Paragraph 3.4.10.1, last line, after word "loosening" delete balance of sentence and substitute the following:

"to the point of being hand removable and against falling out."

PAGE 9

Paragraph 3.4.11, delete the entire paragraph and substitute the following:

"3.4.11 Sliding shelves and utility drawers. The face of the sliding shelf and utility drawer shall be equal but shall not be less than 1-3/16 inches in height. The sliding shelf and the utility drawer shall operate smoothly and easily. Both the sliding shelf and the utility drawer shall extend horizontally, not less than 14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

inches from the front of the top of the desk and both shall be removable, but they shall not be capable of unintentional removal when fully extended. Both items shall strike stops of rubber, felt, coil spring, leaf spring, or other noise reducing material in both the inward and outward operation. The sliding shelf and utility drawer runners shall be formed of not less than 16 gage (0.0598 inch) steel. Alternatively, the sliding shelf and utility drawer shall be of not less than 18 gage (0.0478 inch) steel provided runners and connecting ties are of one-piece construction. The runners shall be securely welded, bolted, riveted, or hooked-on (or a combination thereof); in such a manner as to prevent horizontal and vertical movement; and in such a manner as to prevent unintentional dislodging of runners. The sliding shelf shall be of not less than 20 gage (0.0359 inch) steel with all four sides formed and reinforced for strength and rigidity. The parts comprising the utility drawer shall be of not less than 22 gage (0.0299 inch) steel. The parts comprising the utility drawer shall consist of drawer front, drawer body and drawer back. The overall outside depth (front to rear) of the utility drawer shall be not less than 22 inches. The utility drawer front shall have not less than a channel formation along top and side edges and not less than a flange formation along the bottom. The utility drawer body shall be formed of one piece of steel. The top edge of the sides of the body shall be beaded, channeled, or rolled for safety and reinforcement. The drawer front shall be welded to the bottom of the drawer body and shall be welded or hooked-on (or a combination thereof) to the sides of the drawer body. The utility drawer back shall be securely welded to the drawer body. The top of the drawer back shall have a flange facing inward (hood) not less than 1/2 inch wide and the front edge of this flange shall have a flat fold formation. The utility drawer shall be equipped with convenience tray type compartments made of not less than 22 gage (0.0299 inch) steel. Alternatively, when the drawer body is of not less than 18 gage steel, the convenience tray parts may be not less than 24 gage (0.0239 inch) steel. The convenience tray shall have three sections not less than 3-3/4 inches wide and one pencil section immediately behind the three small sections extending the full width of the tray. The front of the convenience tray shall also serve as the utility drawer inner head. The convenience tray shall be welded, riveted, or hooked-on (or a combination thereof) to the utility drawer body. Both the sliding shelf and utility drawer shall be equipped with knobs or pulls of the material specified in 3.2.3.1 or shall be spring activated."

Paragraph 3.4.12, line 6, after the word "bag" insert "or in a heat sealed polyethylene bag not less than 2.5 mils thick."

Paragraph 3.4.12, line 7, after the word "tools" insert "specifically designed for this purpose".

PAGE 10

Paragraph 3.4.12.1, delete last sentence in the paragraph and substitute the following:

"The top having the double wall construction shall have self-edge laminated plastic (see paragraph 3.2.2) on the top and three sides. The top having the single wall construction shall be finished as specified in paragraph 3.6".

Paragraph 3.4.12.3, at the end of the paragraph add the following:

"All edges of steel shall be free of burrs and sharpness. All formed corners shall be close fitting and free of burrs and sharpness. All single thicknesses of steel corners shall be rounded to the equivalent of not less than 1/8 inch radius."

Paragraph 3.5, line 1, delete "Figure 1" and substitute "Figure 1, Revision 1 and Figure 2, Revision 1".

Paragraph 3.6.3, line 6, after the word "with" insert "type I or type II of".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

PAGE 13

Add the following to the end of Table I:

Examine	Defect	Classification Major	Minor
Locks	Not the specified finish.		X
	Lock attachment to drawer front loose.		X
	Not type of lock specified.		X
	Key changes not as specified.	X	

PAGE 15

Paragraph 4.6.12, delete entire paragraph and substitute the following:

"4.6.12 Drawer interchangeability test. The storage and file drawers shall be interchanged as specified in paragraph 3.3. With each change of drawers, the tests specified in 4.6.6, 4.6.7, and 4.6.8 shall be performed. The drawers shall interchange with ease, with or without tools, as specified in 3.3, and file drawers along with storage drawers immediately above the file drawer shall lock and unlock properly in the specified positions."

PAGES 15, 16, AND 17

Section 5 (preparation for delivery), delete entire section and substitute the following:

"5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or B as specified (see 6.2).

5.1.1 Level A. The Level A packaging shall be in accordance with MIL-STD-1186.

5.1.2 Level B.

5.1.2.1 Finished Surfaces. The desk top surface and edges shall be protected by full length cover or shroud fabricated from polyethylene film not less than one mil thick, conforming to L-P-378.

5.1.2.2 Sliding shelves and utility drawers. The exposed finished edge surfaces of sliding shelves and top edges of drawers shall be covered with a minimum of .120 inch thick cushioning material conforming to PPP-C-843, Type I, Class A. The shelves and drawers shall be secured in a closed position utilizing one inch wide tape conforming to PPP-B-60, Type III, Class 1, or metal clips of the type normally used for the product. (See Figures A, C, or J, as applicable.) The keys, for the lock, shall be placed in a heavy kraft envelope or bag, or a cloth bag or a polyethylene bag (the polyethylene bag, when used, shall not be less than 1.5 mils thick). The envelope or bag shall be secured to the bottom of a drawer with tape conforming to PPP-T-42.

5.1.2.3 Desk tops. In addition to the polyethylene shroud the desk top and edges shall be protected with cushioning material 1/4 inch thick, fabricated in the form of pads or blankets. The pad shall fold down over the edge on all four sides a minimum distance of 1.5 inches. The four corners of the pad shall be secured with 3/4 inch pressure sensitive tape to prevent the pad from sliding out of place.

5.1.2.4 Skid base. The desk shall be mounted on a wooden skid base constructed as shown in Figures A, C, or J, as applicable. The skid lumber shall comply with MIL-STD-731, Group I, II, or III. The skid shall be assembled as follows: Cement coated 10 penny nails conforming to FF-N-105, Type II, Style 7 shall be used to attach the one inch (nominal) boards to the nominal 2 x 4 blocks. Where one inch (nominal) boards are joined to like thickness boards, cement coated staples, 16 gauge, 7/16 inch crown, step point design and of adequate length to permit clinching shall be used. The desk shall be secured to the skid with flat-head screws or self-tapping screws inserted through the upper skid frame (as shown in Figures A, C, or J, as applicable) into the holes provided for that purpose in the bottom of the desk pedestals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.1.2.5 Desk Cover. The desk, prepared for shipment as described above, shall be fitted with a close-fitting corrugated fiberboard cover. The corrugated material shall conform to PPP-F-320, Type CF, class-domestic, variety DW, grade 275 and the construction shall be as shown in Figure S. See Figure B, D, or K, as applicable, for assembly.

5.1.2.6 Desk legs. The desk legs shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. Closure and sealing of box shall be in accordance with appendix to PPP-B-636. The leg package shall then be placed inside a desk drawer and secured in place with 1/2 inch wide reinforced pressure sensitive tape conforming to PPP-T-97. The machine screws, nuts, and lockwashers, or self-tapping screws (for mounting desk legs) shall be bagged in a cloth or polyethylene bag (the polyethylene bag, when used, shall be not less than 2.5 mils thick) and packed with the legs.

5.1.2.7 Drawer partitions. The drawer partitions shall be wrapped in a manner that will prevent damage to the finished surfaces, and secured to the bottom of any drawer with 3 inch wide tape conforming to PPP-T-42. The tape shall extend a minimum of 3 inches at each end onto the drawer bottom.

5.2 Packing. Packing shall be Level A or B, as specified (see 6.2).

5.2.1 Level A. The Level A packing shall be in accordance with 5.2.2 except that cover shall be constructed from material conforming to PPP-F-320, Type CF, class weather-resistant, variety DW, grade VIIC. Strap closed packs two places (over pedestals) using 3/4 by .020 steel strapping conforming to QQ-S-781, Type I, Class B.

5.2.2 Level B.

5.2.2.1 Desks. The packaged desk shall be secured for shipment as follows:

The desk cover shall be secured to the skid with staples placed along every 6 ± 1 inches of surface where the desk cover contacts the skid base. (See Figures B, D, or K, as applicable.) Staples shall conform to FF-N-105, Type II, Style 3, crown width one inch, 16 gauge, with a minimum leg length of 7/8 inch. Reinforced tape, conforming to PPP-T-76, 3 inches wide and approximately 8 inches long, shall be used on each corner to secure the end flaps to the carton body. See Figures B, D, or K, as applicable, for location of tape.

5.3 Typewriter platforms. The typewriter platforms shall be packed Level A, or B, as specified (see 6.2).

5.3.1 Level A. The typewriter platforms shall be packed knocked-down. The components shall be wrapped in a cushioning material conforming to PPP-C-843, type and class optional. Secure the cushioning material in place with pressure-sensitive adhesive tape conforming to PPP-T-60, Type III, Class 1. The complete platform shall be packed in a close-fitting box conforming to PPP-B-636, Type CF, class weather-resistant, variety DW. Close and seal and strap boxes in accordance with Method II of the appendix to PPP-B-636.

5.3.2 Level B. The typewriter platforms shall be packed in accordance with 5.3.1, except that the box shall conform to PPP-B-636, class domestic.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2 as specified (see 6.2).

5.4.1 Civil agencies. In addition to the special markings required in 5.4.3, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military agencies. In addition to the special markings required in 5.4.3, the shipping containers shall be marked in accordance with MIL-STD-129.

5.4.3 Special marking. In addition to the markings required by 5.4.1 or 5.4.2, the front, back and end panels of each shipping container shall be marked in each upper corner with the word "UP" and an arrow pointing to the top of the container (see Figure B, D, or K, as applicable). The end panels of the shipping container shall also be marked with the word "FRONT" and an arrow pointing to the front of the container. "FRONT" and "UP" shall be printed in letters not less than 2 inches high. In addition, the top panel of the container shall be marked in letters not less than 2 inches high with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TOP
THIS SIDE UP
FRAGILE-HANDLE WITH CARE

Additionally, at least one side and one end shall be marked as follows, in characters not less than 2 inches high:

FURNITURE
FRAGILE-HANDLE WITH CARE

Add the following in characters a minimum of 1 inch high:

CAUTION
REMOVE SHIPPING SCREWS
FROM UNDERSIDE OF SKID BEFORE
UNPACKING

The fork truck areas shall be printed on each container end and side, as shown in Figures B, D, or K, as applicable. The end panels of the shipping container shall be marked to indicate the front of the desk and guidelines shall be marked on the ends to assist in alignment of units in warehouse stocking. These guidelines shall be as shown in Figures B, D, or K, as applicable, and shall consist of a solid vertical line on one end on center and either two solid or one dashed vertical line on the opposite end, on center. The single pedestal desk containers shall be clearly marked on the front and applicable end "PEDESTAL END" in one inch minimum characters (see Figure K).

PAGE 17

Paragraph 6.1, delete entire paragraph and substitute the following:

"6.1 Intended use. The type I, classes 1 and 2 desks covered by this specification are intended for use in all general office areas. The type III desk is intended for use at supervisory levels to provide informal conference facility."

Add the following new paragraph:

"6.3 Color, pattern, and finish of laminated plastic. The following products are known to comply with the required laminated plastic color, pattern, and finish as exemplified by the GSA Standard Sample.

1. Enjay Fiber and Laminates Co., (NEVAMAR), product number LH-7-1, White Leather - LSO Finish.
2. Formica Corporation, (FORMICA), product number 77-249-33.
3. General Electric Corp., (TEXTOLITE), product number S-759, Unbrushed Textured.
4. Pioneer Plastics Corp., (PIONITE), product number 8-LEA-7 Albino Leathertone - Matte Finish.
5. Westinghouse Corp., (MICARTA), product number 81-M-60 White Cowhide - Oil Rub.
6. Reiss Associates, Inc., (RAILITE), product number NW-861-0, Oiled Texture Finish.
7. Den-Gre Plastic Co., Inc., (LAMILITE), product number 525, White Leather, Matt Finish.
8. Ralph Wilson Plastic Co., (WILSON ART), product number 2970, Velvet Finish."

FIGURES

Figure 1 - Delete Figure 1 and substitute "Figure 1, Revision 1".

Add new figure "Figure 2, Revision 1".

Figure 2 - Type II, Typewriter platform. Delete "Figure 2" and renumber to "Figure 3".


Figure 3 - Delete "Figure 3" and renumber to "Figure 4".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Desk contains:

	Minimum inside clear dimensions
4 storage drawers	12-1/8" W x 5-1/2" H x 23-1/2" D
1 file drawer	12-1/8" W x 10-1/4" H x 23-1/2" D

Drawer pulls not shown

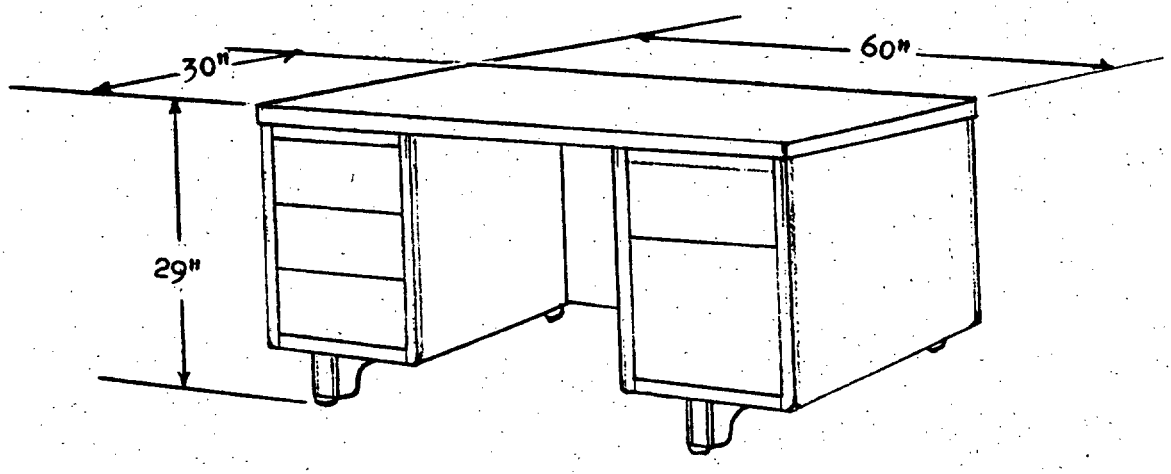


Type I, Class 1, double pedestal clerical desk

Desk contains:

	Minimum inside clear dimensions
1 storage drawer	12-1/8" W x 5-1/2" H x 23-1/2" D
1 file drawer	12-1/8" W x 10-1/4" H x 23-1/2" D

Drawer pulls not shown

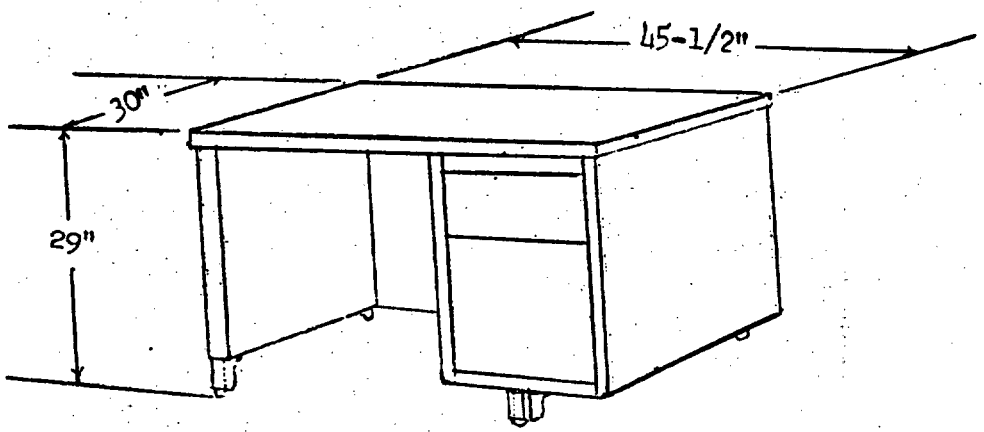

Type I, Class 2, Style a, single pedestal desk


FIGURE 1, REVISION 1. Clerical desks

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Desk contains:

	Minimum inside clear dimensions
3 storage drawers	12-1/8" W x 5-1/8" H x 23-1/2" D

Drawer pulls not shown

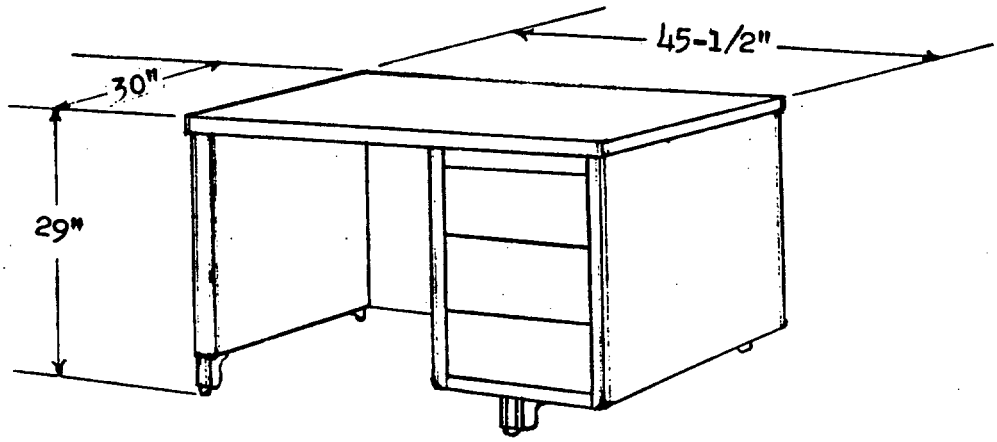


Type I, Class 2, Style b, single pedestal desk

Desk contains:

	Minimum inside clear dimensions
4 storage drawers	12-1/8" W x 5-1/2" H x 23-1/2" D
1 file drawer	12-1/8" W x 10-1/4" H x 23-1/2" D

Drawer pulls not shown

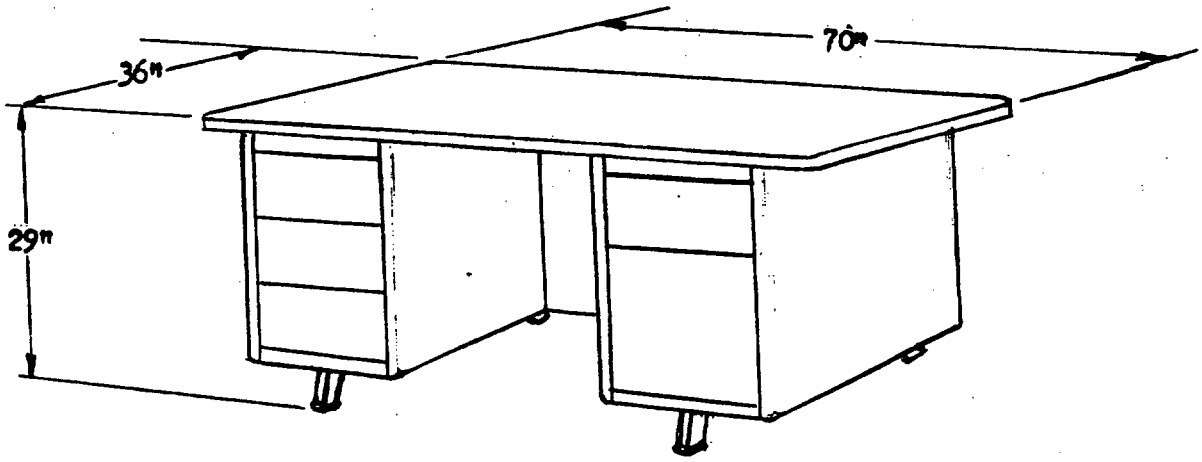

Type III, Conference desk, double pedestal

FIGURE 2, REVISION 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

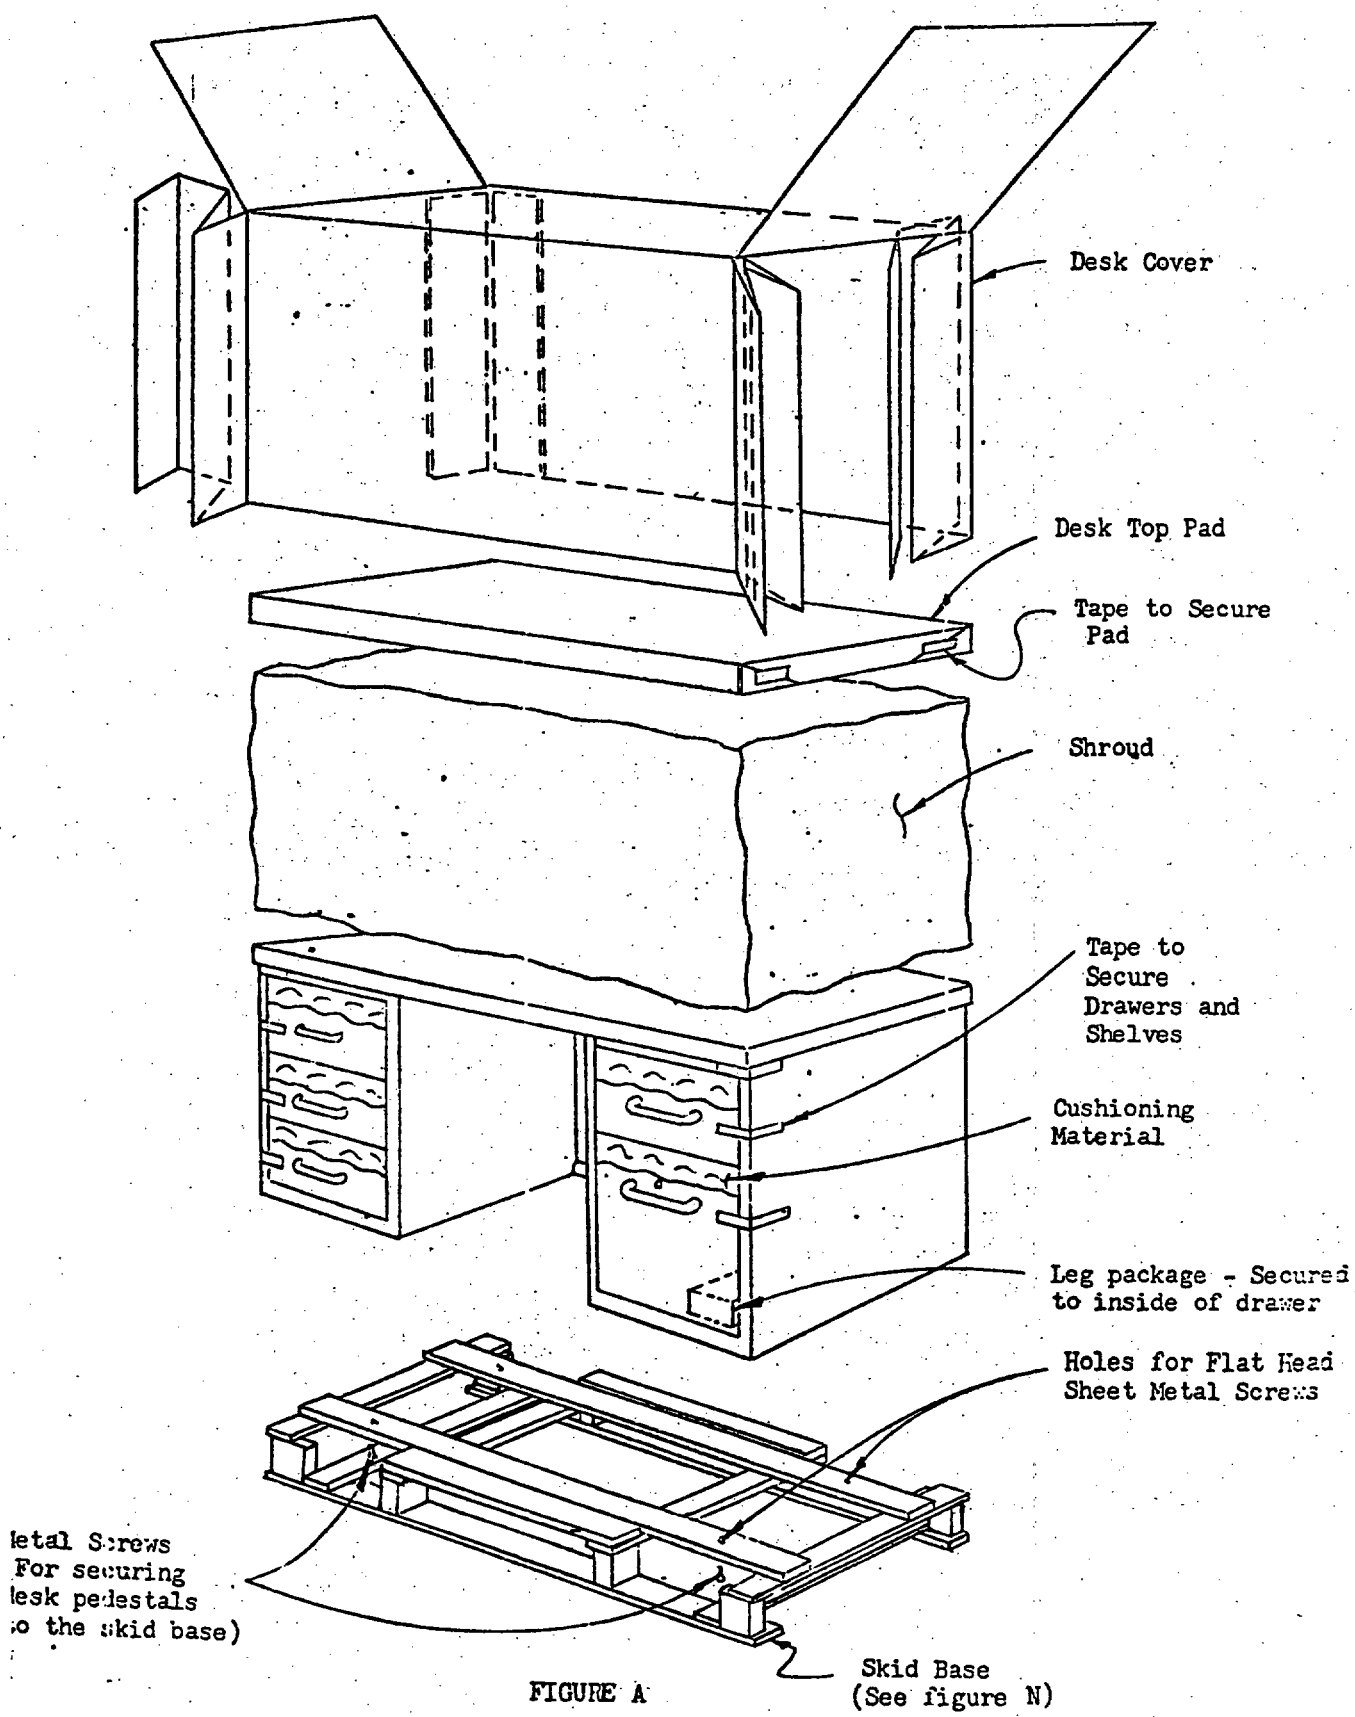


FIGURE A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

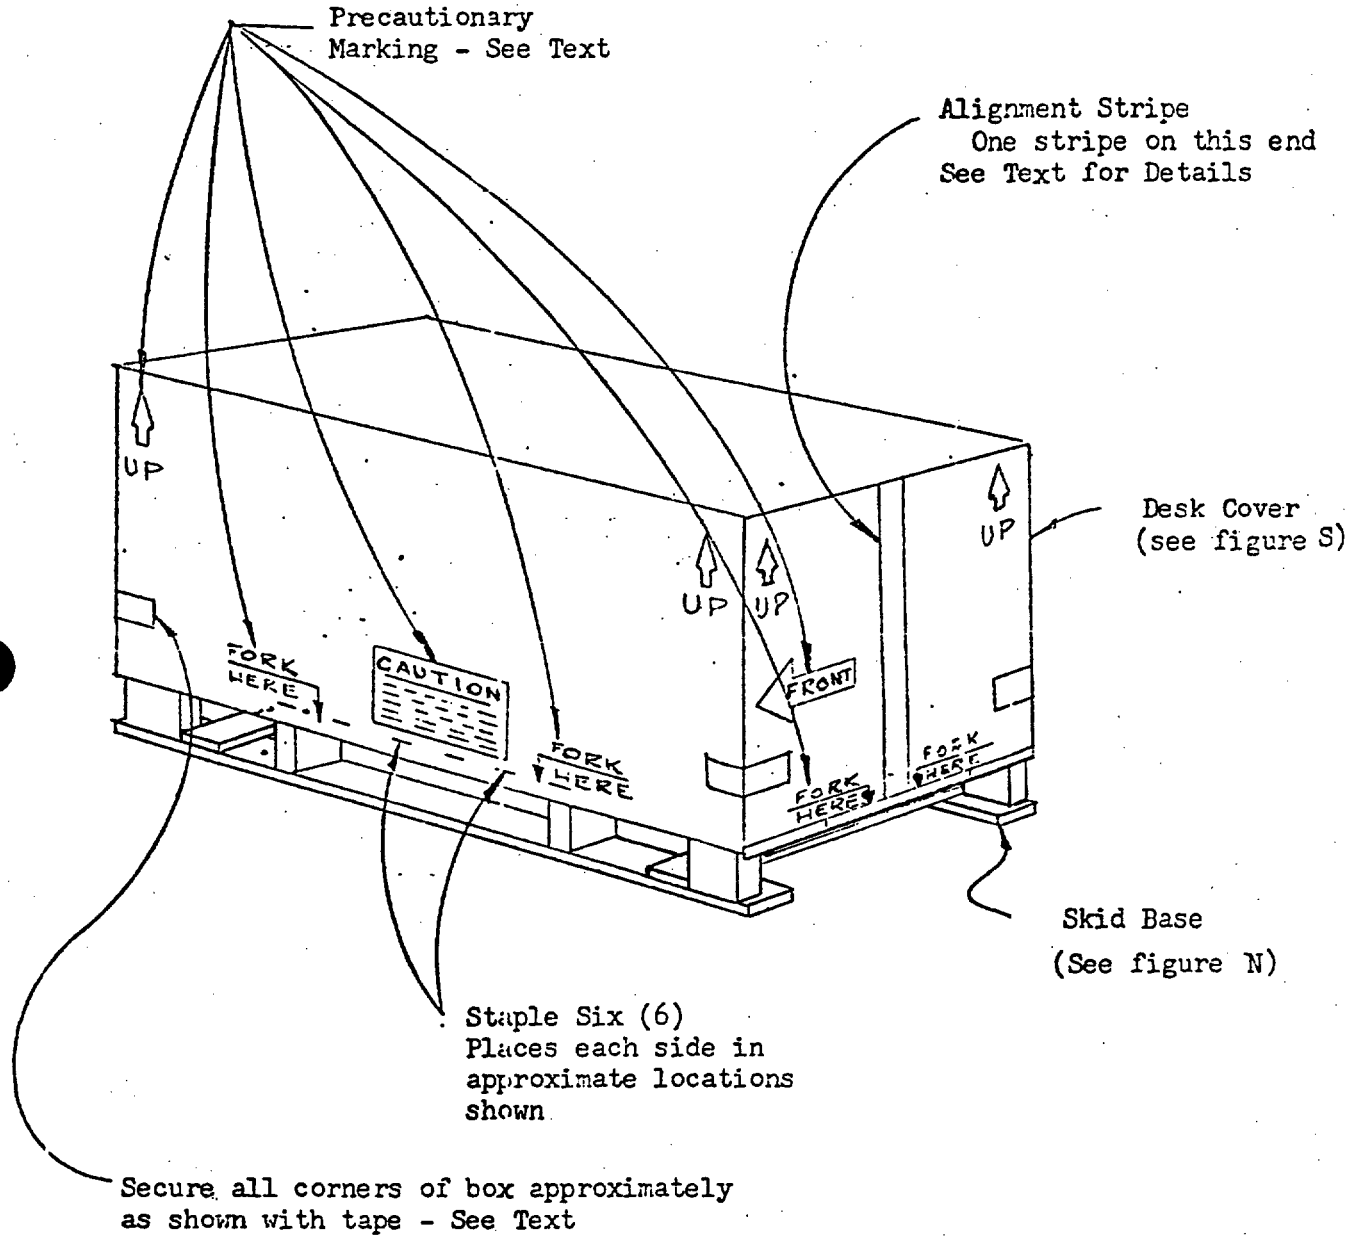


FIGURE B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

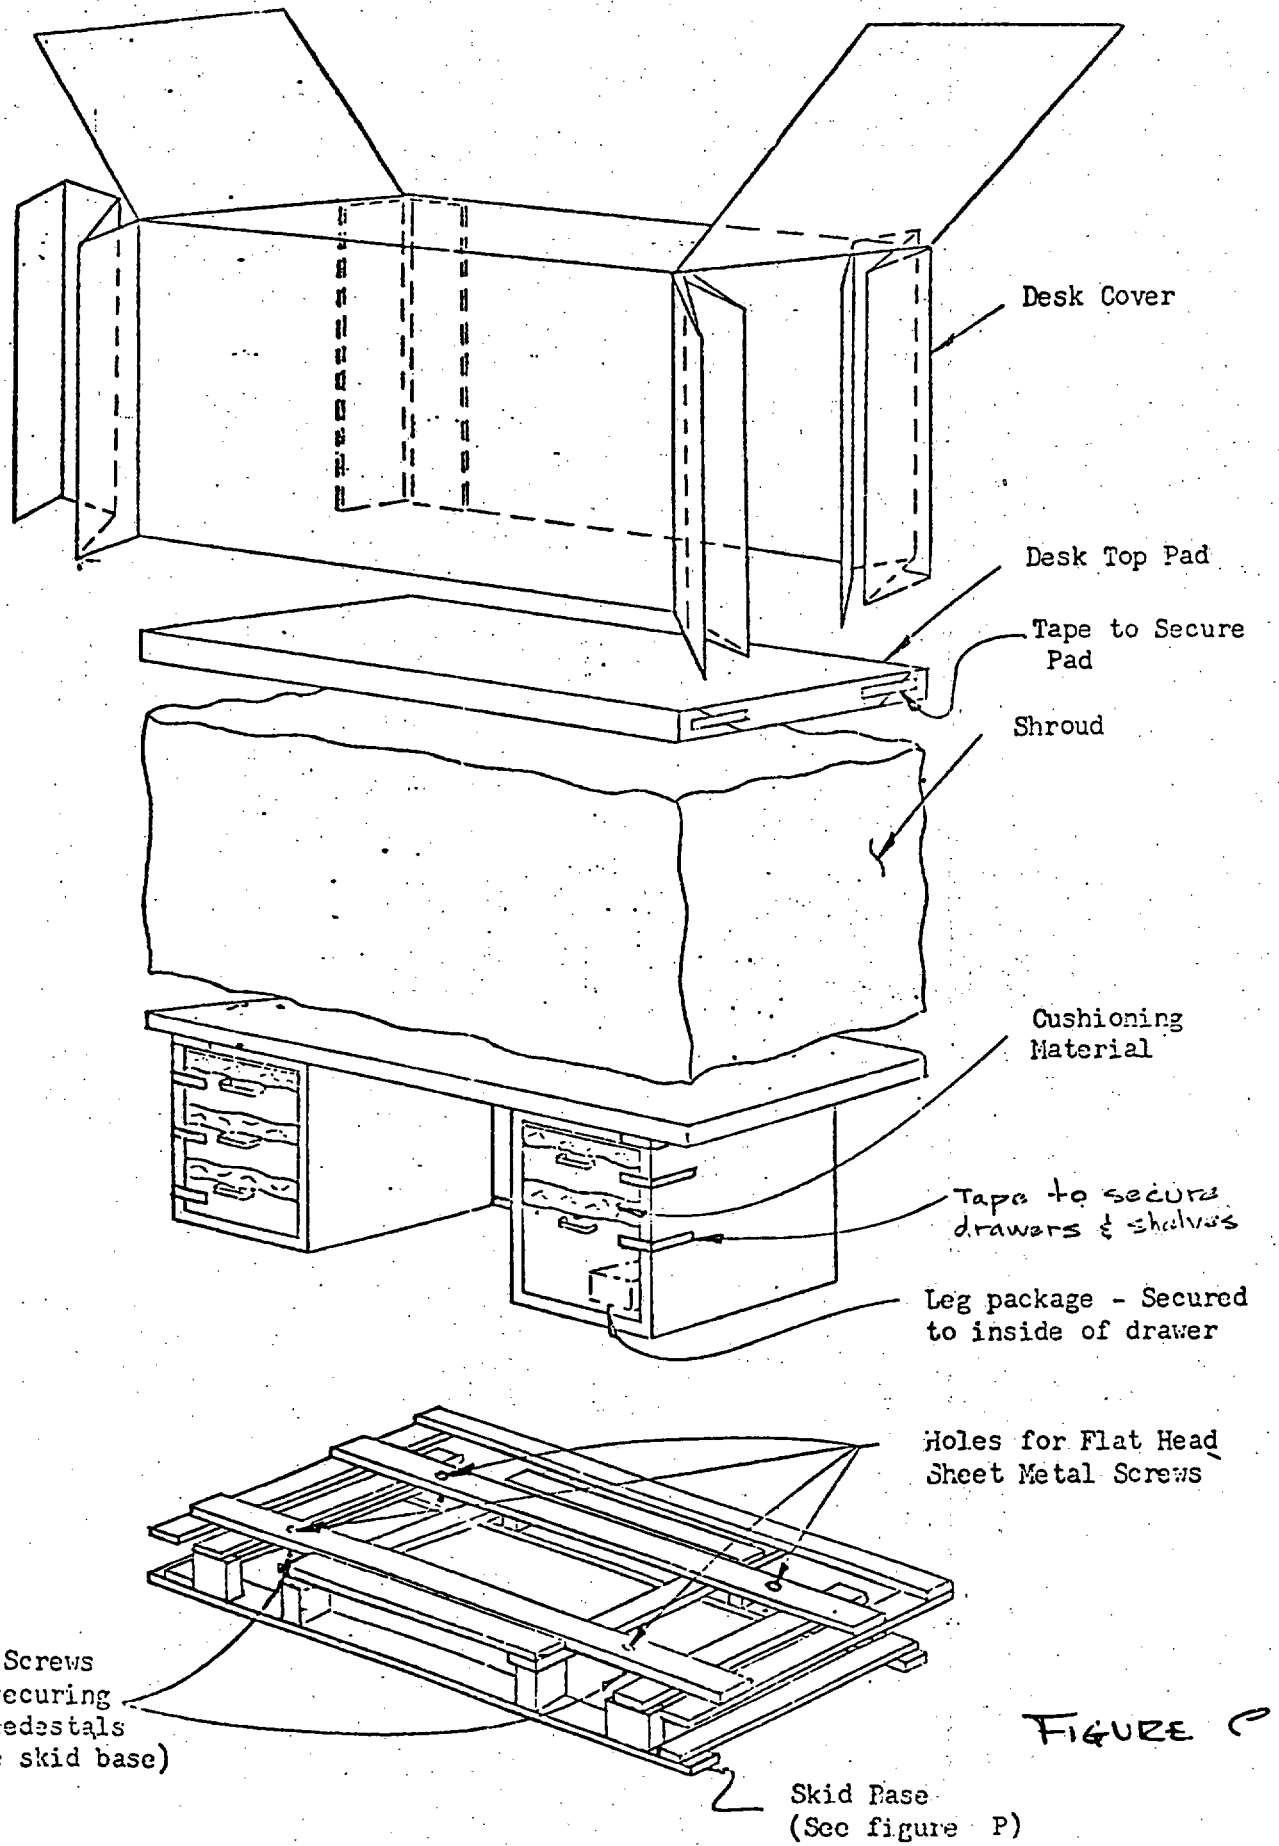


FIGURE P

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

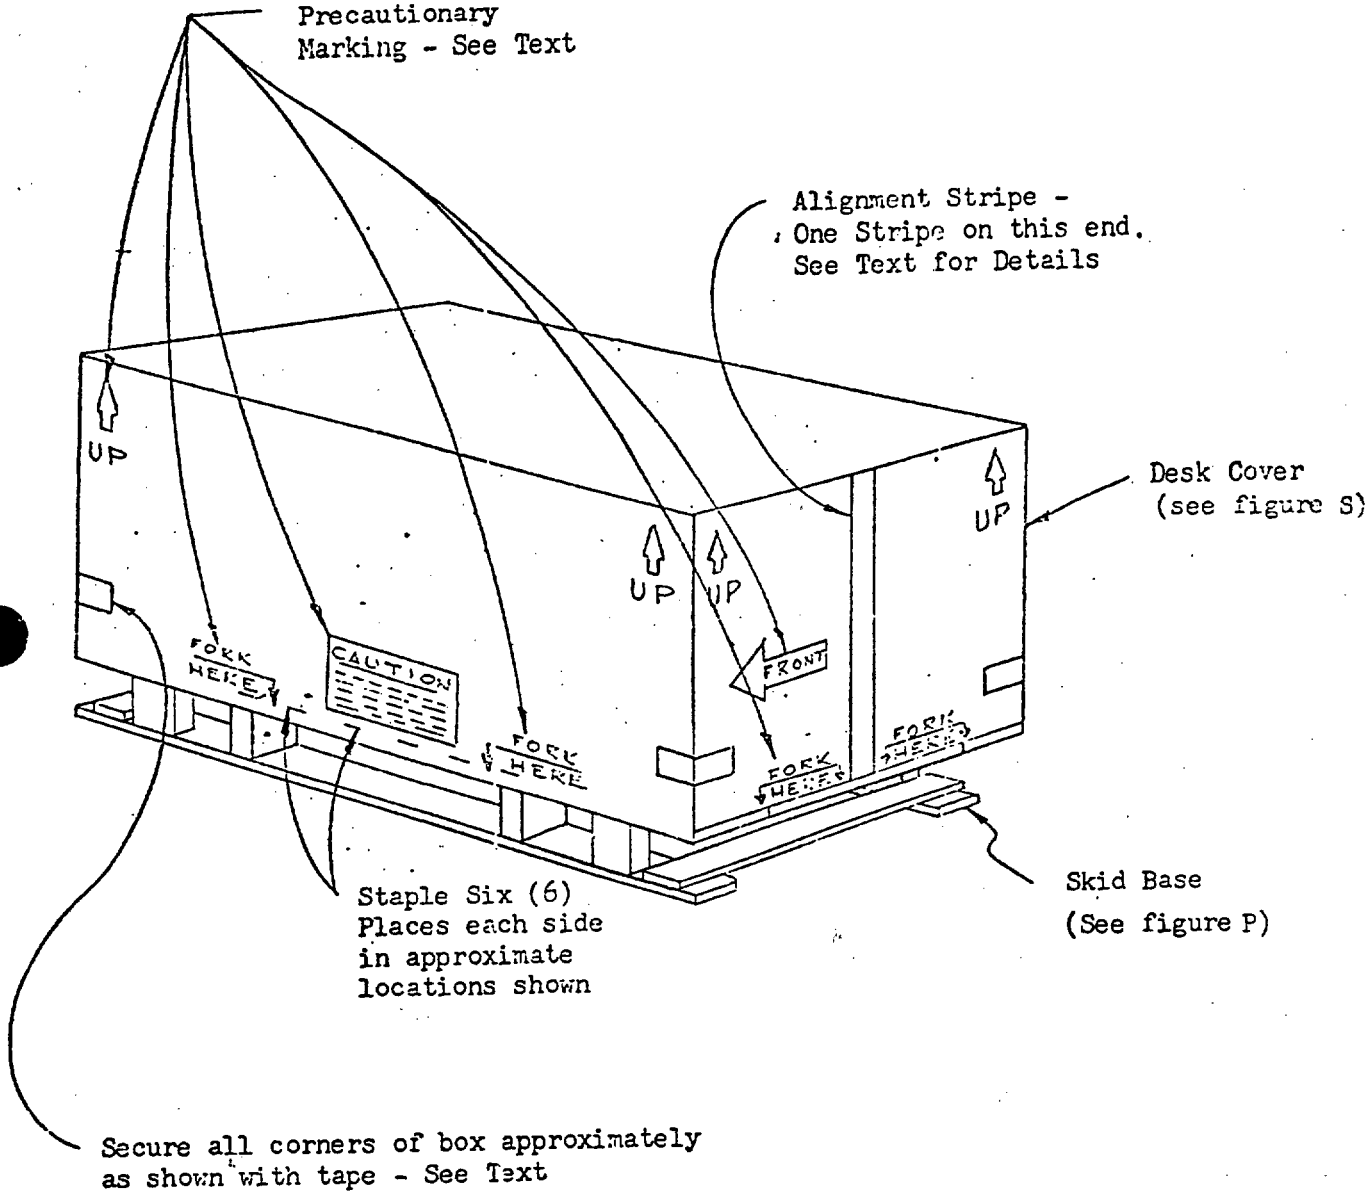


FIGURE D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

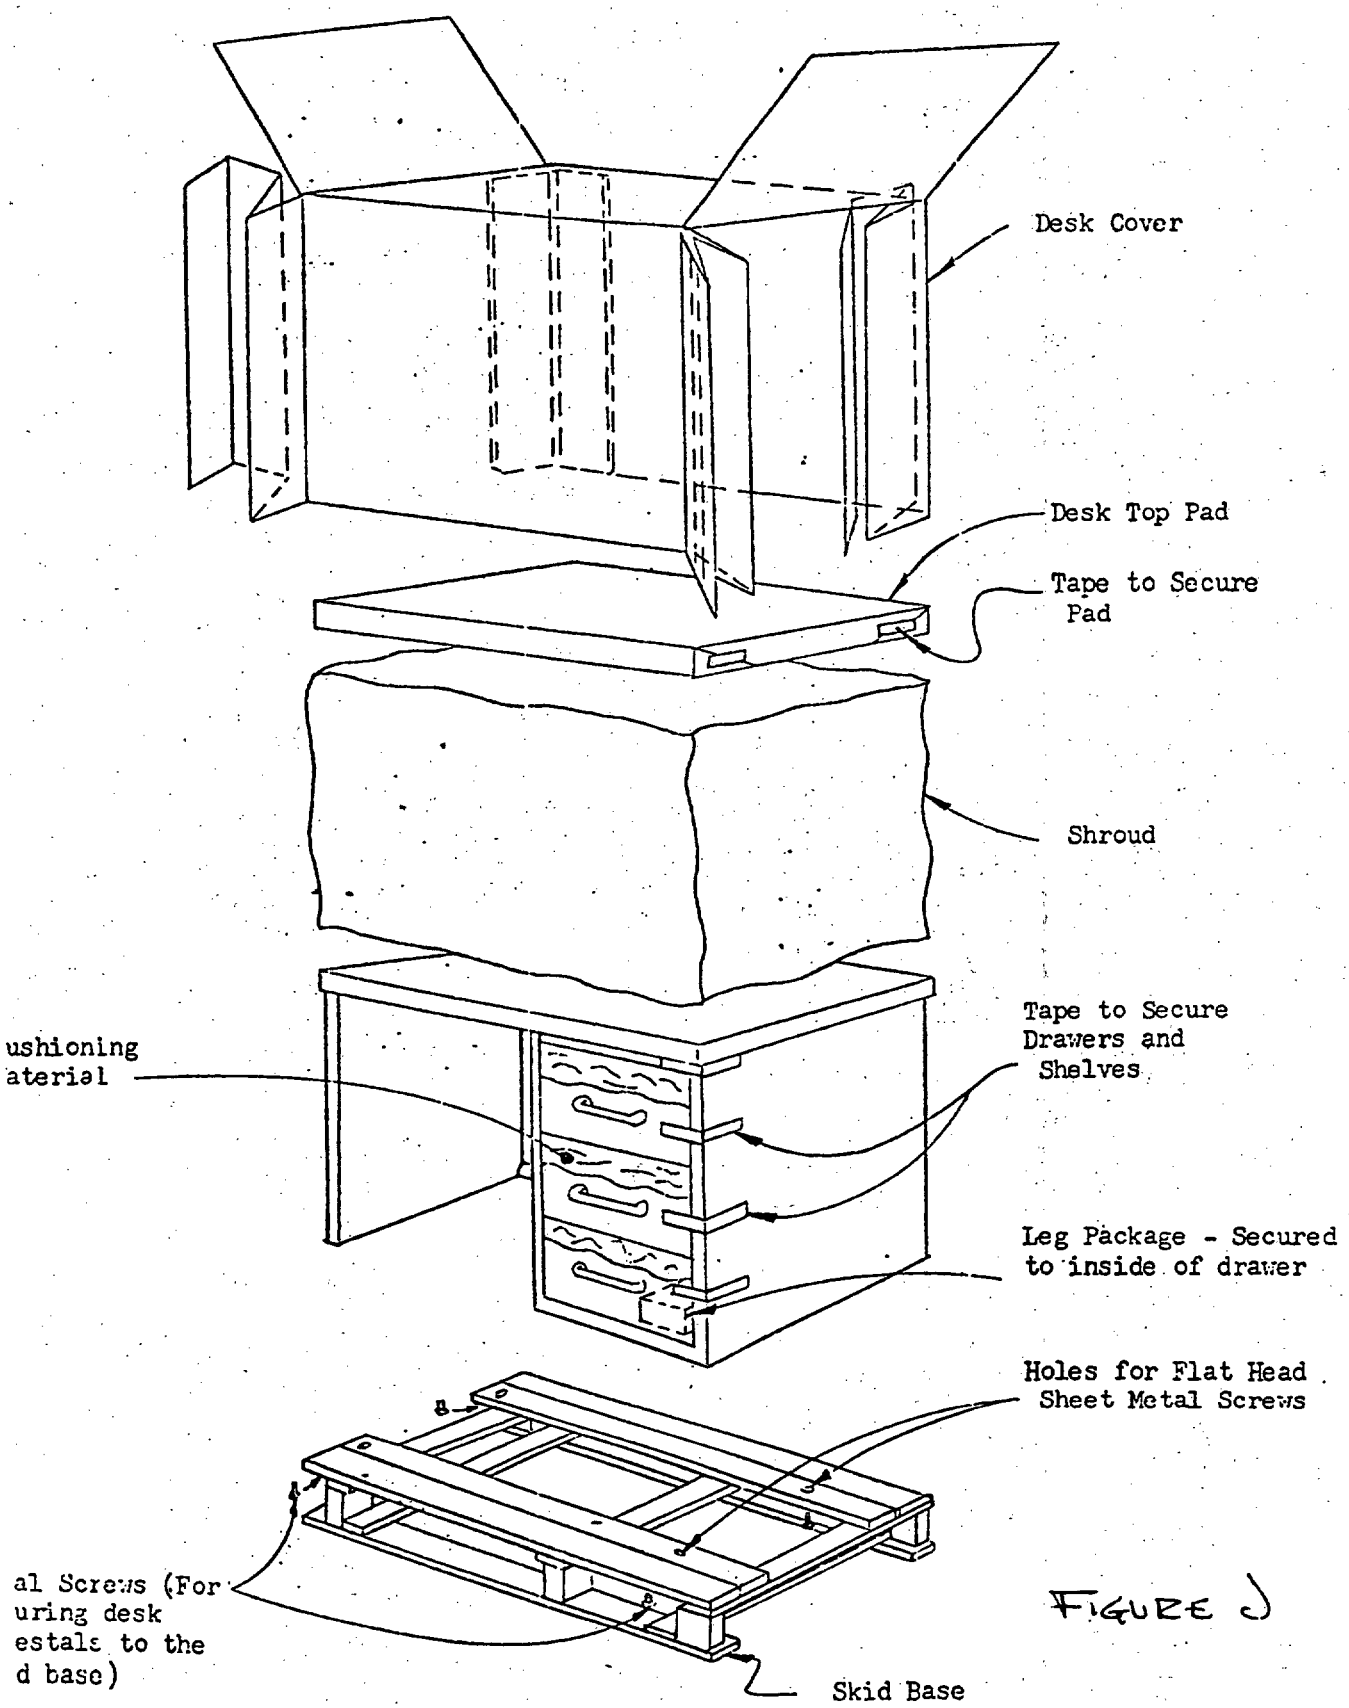


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

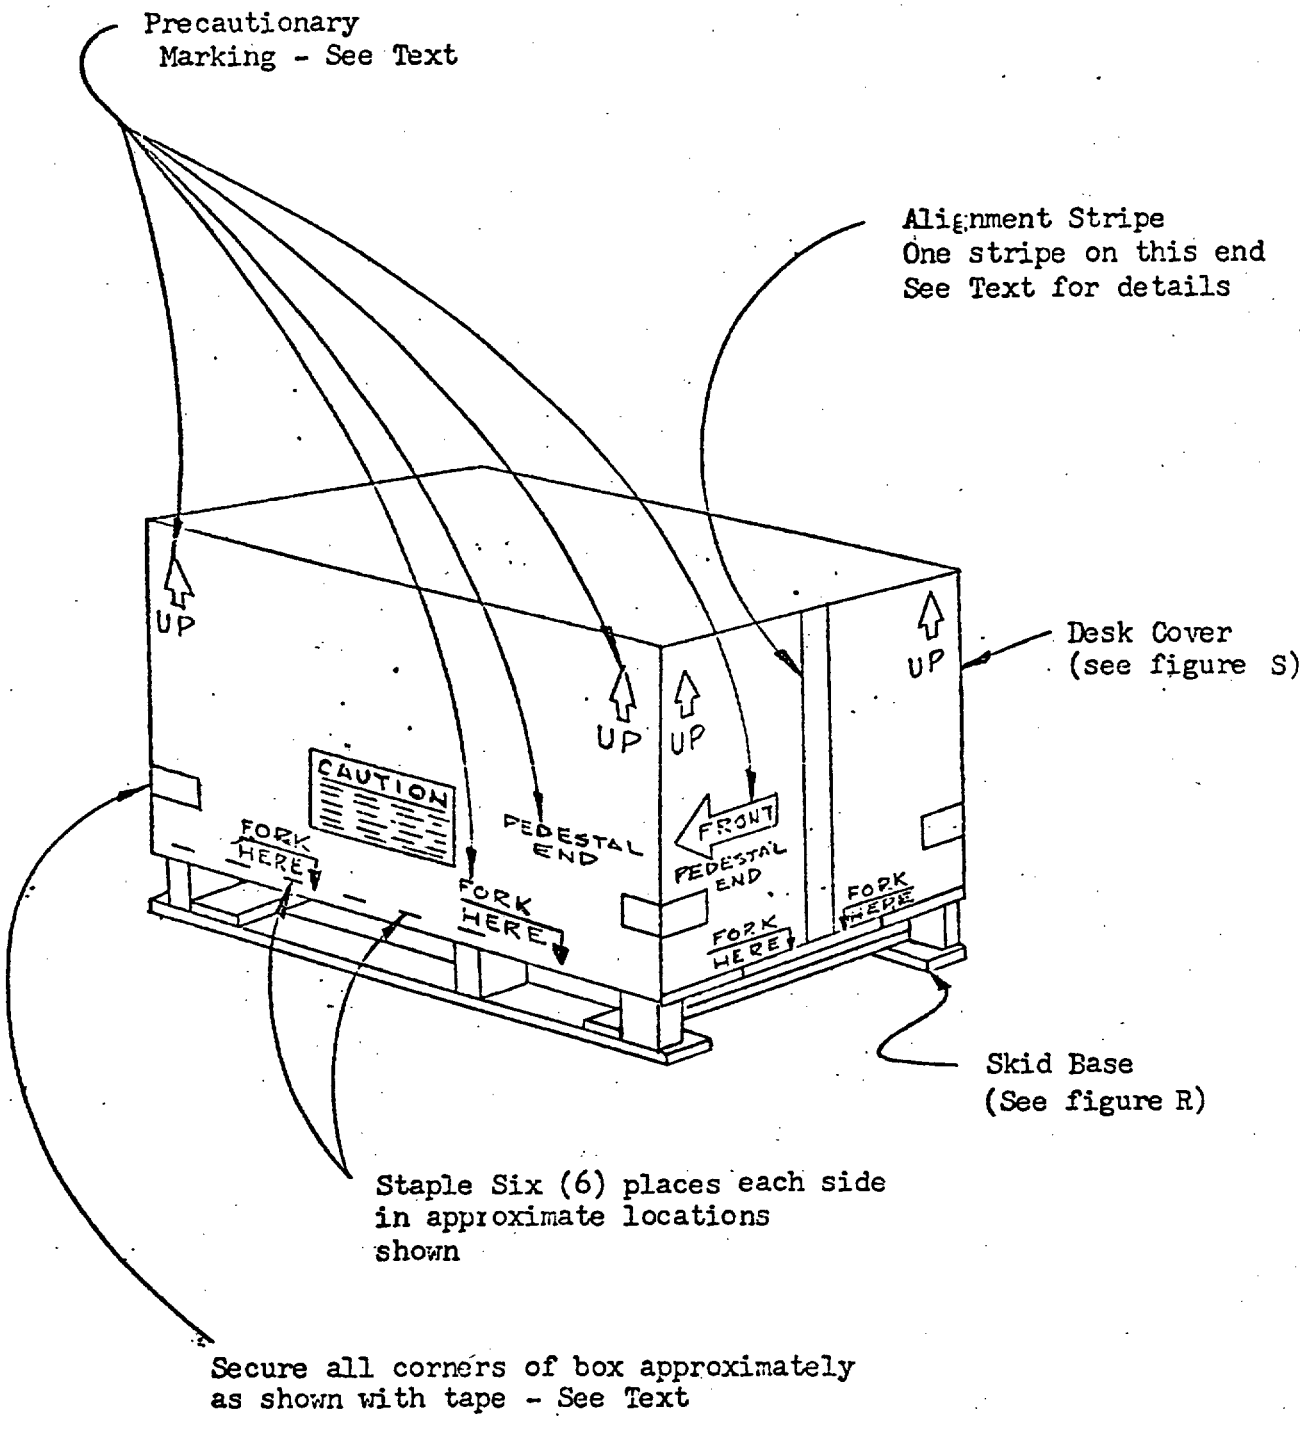


FIGURE K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

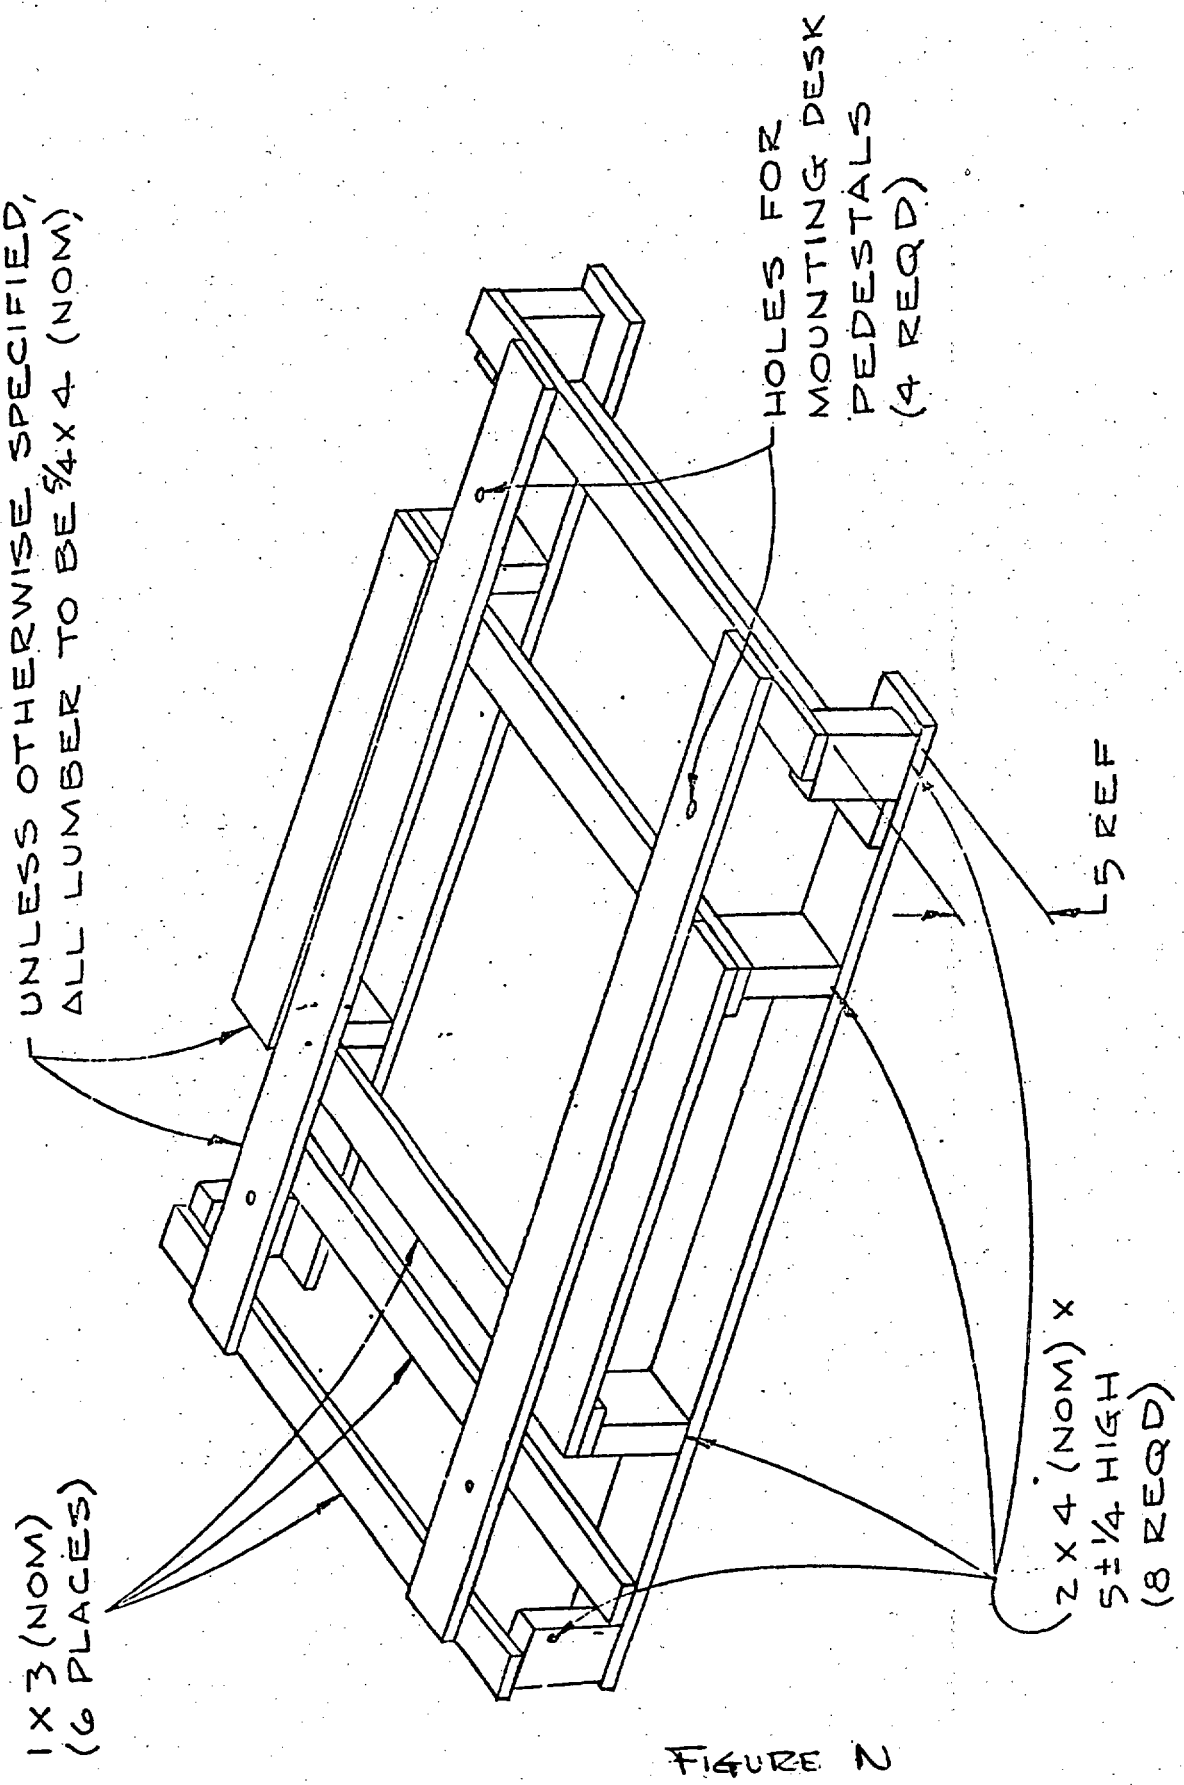


FIGURE N

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

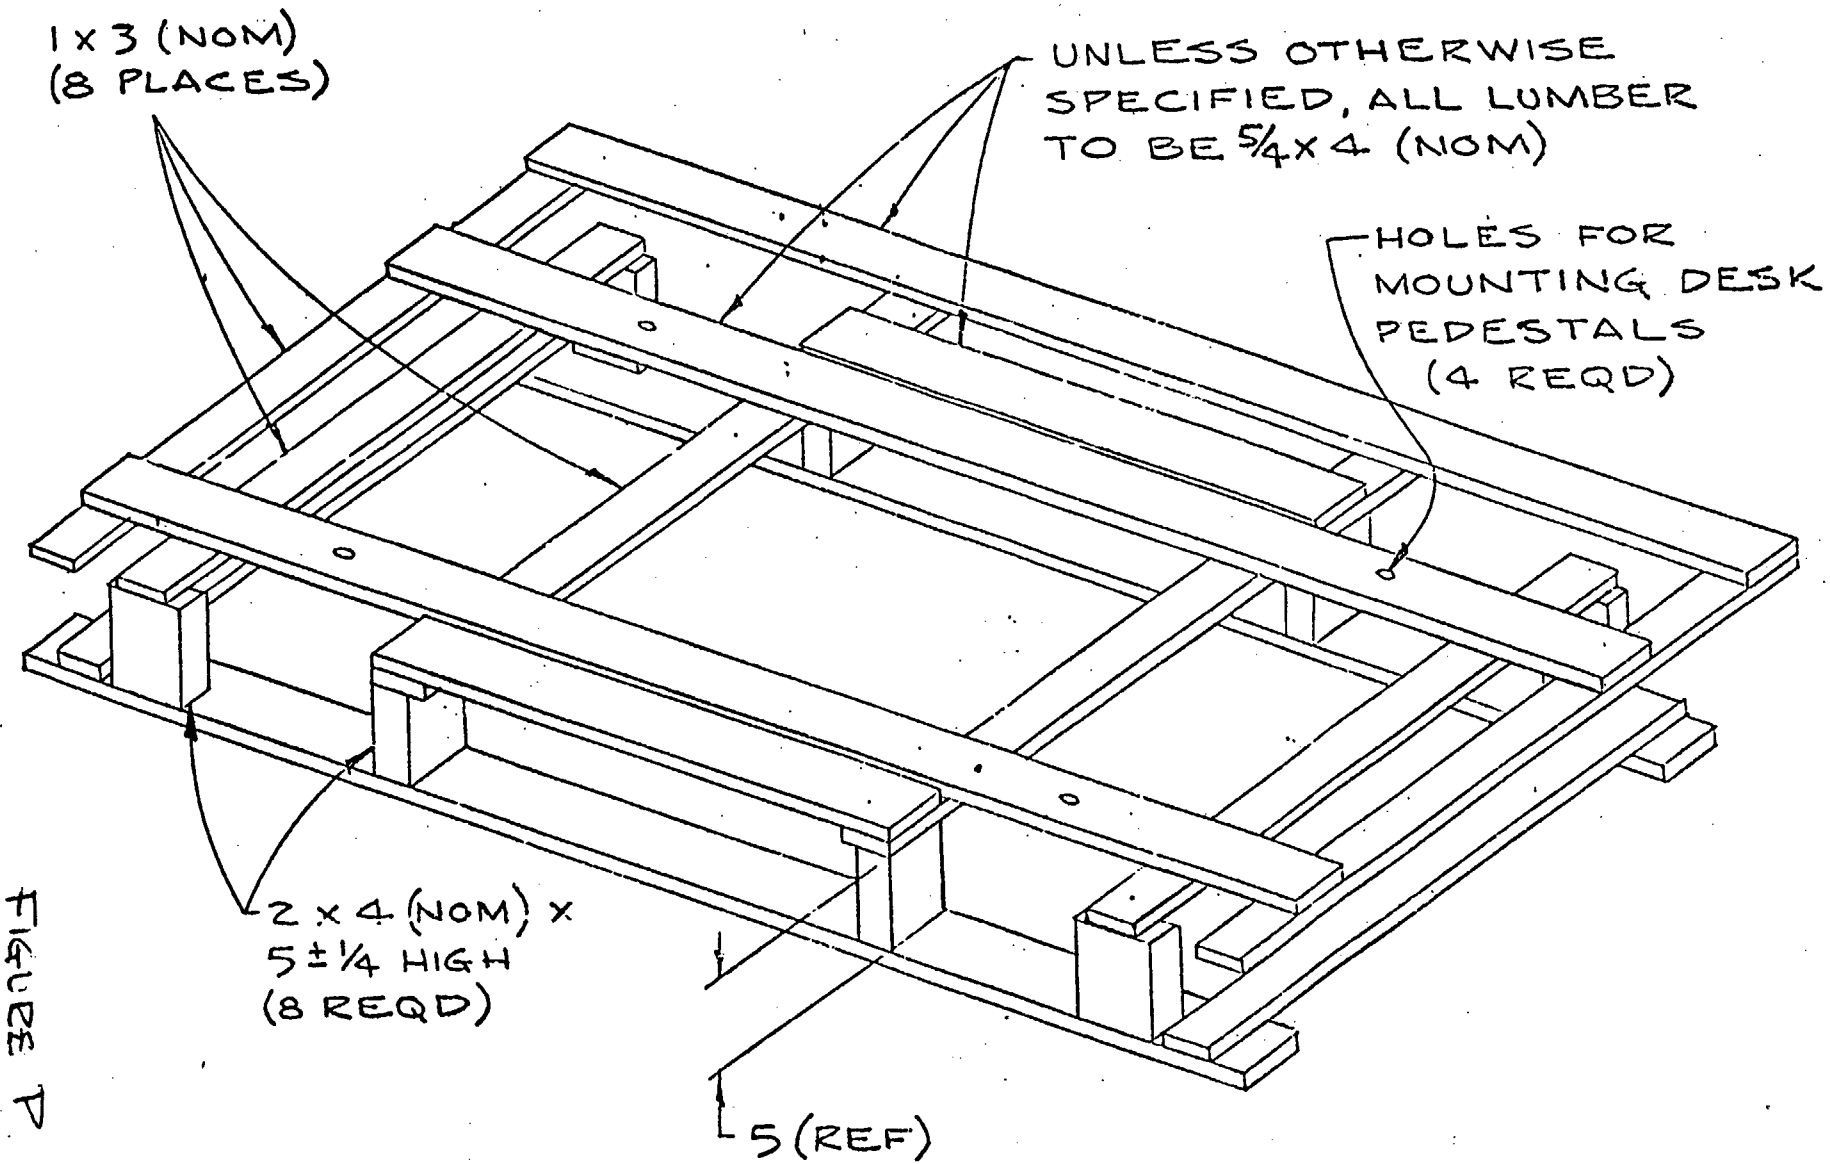


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.



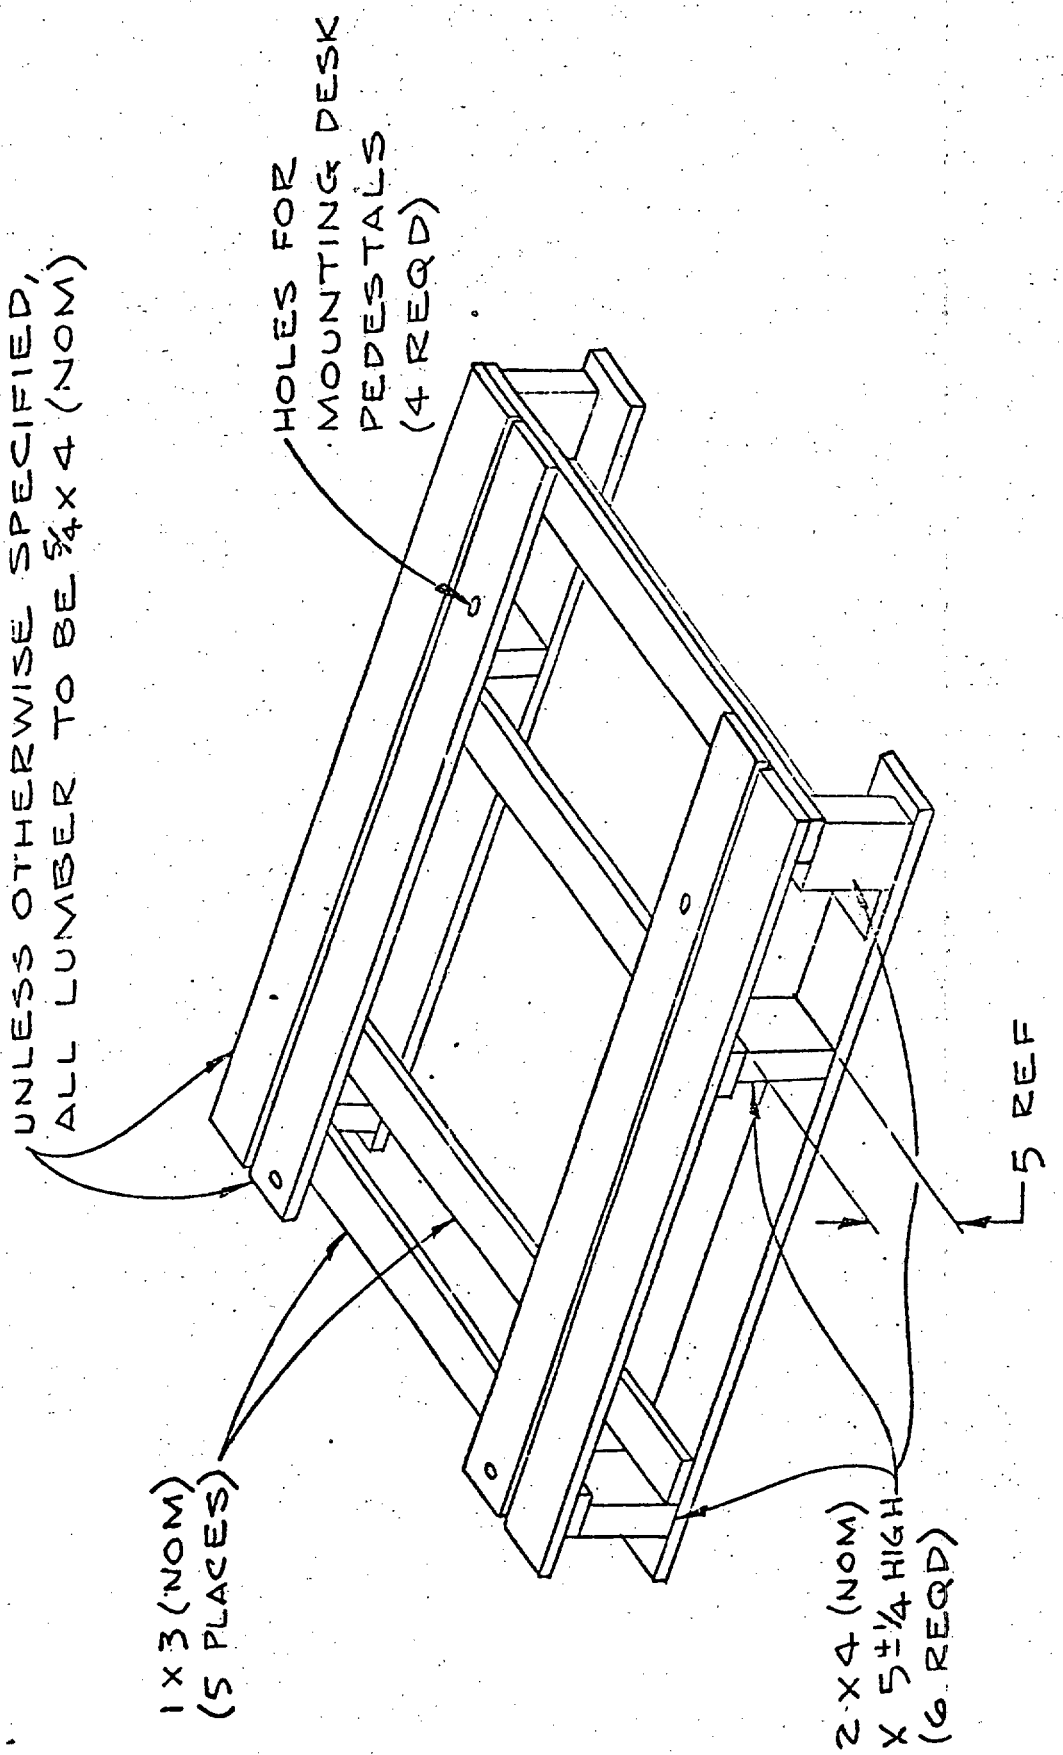


FIGURE R.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

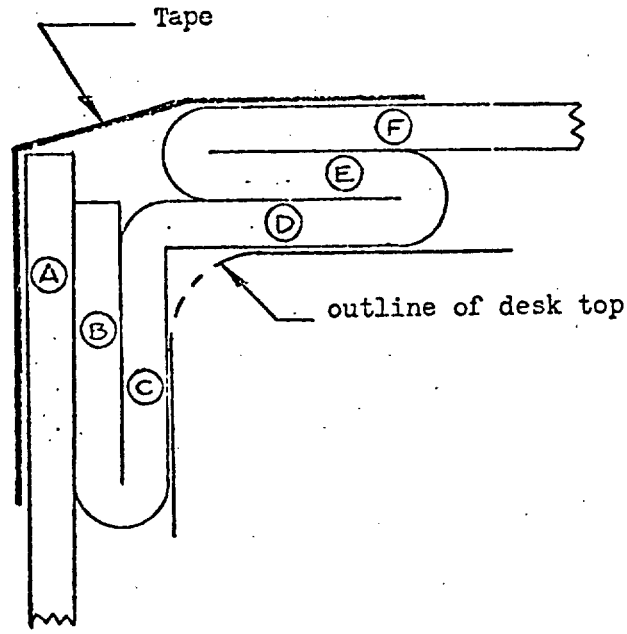

Typical Assembled Corner
of type I desk cover

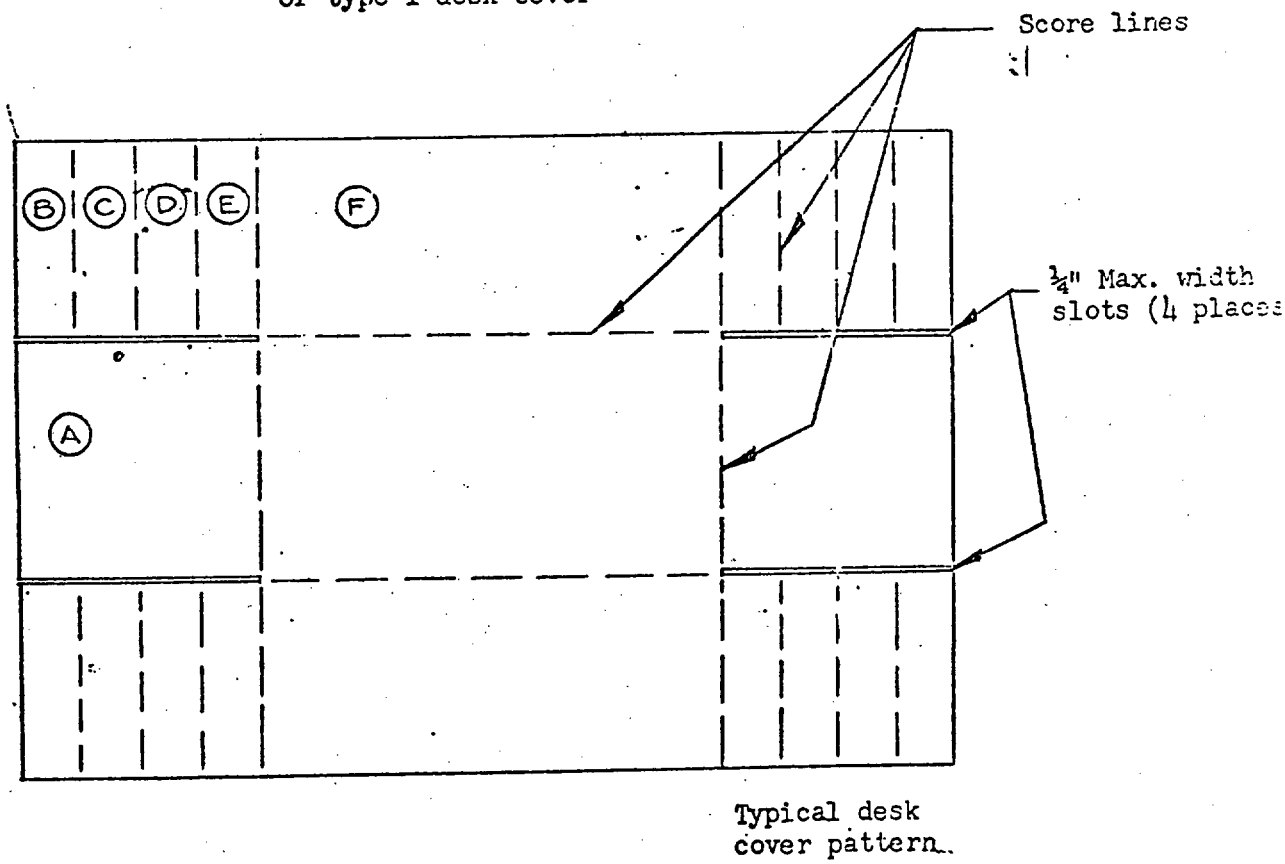

Typical desk
cover pattern

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.