AA-F-001165B
June 1, 1989
Superseding
AA-F-001165A
February 13, 1975

Interim Federal Specification

Furniture, Metal Frame, Laminated Plastic Surfaced Panels, Case Goods and Tables

This Interim Federal specification was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers furntiure units fabricated of rounded corner extrusions, rounded corner brackets, plywood, and particleboard.

1.2 Classification. The units shall consist of the following types, classes, and sizes:

Type I Chest of Drawers

Size 1 - 3 Drawer - width 30 inches, depth 20 inches, height 29 inches.

Size 2 - 5 Drawer - width 36 inches, depth 18 inches, height 45 3/4 inches.

Size 3 - 6 Drawer - width 36 inches, depth 18 inches, height 54 inches.

Type II Overchest

Style 1 - With Shelves - width 30 inches, depth 15 inches, height 44 inches.

Style 2 - With Drop Lid - width 30 inches, depth 15 inches, height 44 inches.

Style 3 - Console Overchest

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Size 1 - width 40 inches, depth 15 inches, height 41-1/2 inches.

Size 2 - width 59 inches, depth 15 inches, height 41-1/2 inches.

Type III - Dresser Desk - 4 Drawer - width 42 inches, depth 20 inches, height 29 inches.

Type IV - Table Desk - 2 Drawer - width 42 inches, depth 20 inches, height 29 inches.

Type V - Night Stand - 1 Drawer - width 18 inches, depth 18 inches, height 24 inches.

Type VI - Valanced Bookshelf (used with Type IV Table Desk) - width 42 inches, depth 10 inches, height 22 inches.

Type VII - Mirror - width 20 inches, height 40 inches.

Type VIII - Bed, Panel Headboard with Metal Frame

Size 1 - width 39 inches, height 31 inches.

Size 2 - width 54 inches, height 31 inches.

Size 3 - width 60 inches, height 31 inches.

Type IX - Bed, Bunk

Size 1 - width 36 1/2 inches, depth 80 inches, height 58 inches.

Size 2 - width 36 1/2 inches, depth 82 inches, height 58 inches.

Type X - Console Base

Size 1 - Two door

Size 2 - Three door

Type XI - Magazine Rack - width 36 inches, depth 13 inches, height 28 inches.

2. APPLICABLE DOCUMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2.1 The following documents of the issues in effect on date of invitation for bids on request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-A-200/9 - Aluminum Alloy Bar, Rod, Shapes and Tube Extruded, 6063

Federal Standards:

Fed. Test Method Std. No. 101 - Preservation, Packaging, and Packing Materials: Test Procedures

Fed Std. No. 123 - Marking for shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Franscisco, Los Angles, and Seattle, WA.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Die Casting Institute, Inc.

Product Standards for Die Castings.

(Applications for copies should be addressed to the American Die Casting Institute, Inc., 366 Madison Avenue, New York, NY 10017.)

Aluminum Association Inc.

Drafting Standards for Aluminum Extrusions and Tubular Products.

(Applications for copies should be addressed to the Aluminum Association, Inc., 750 3rd Avenue, New York, NY 10017.)

American Society for Testing and Materials (ASTM) Standard:

ASTM D905 - Standard Method Test for Strength Properties of Adhesives in Shear by Compression Loading.
D-2247 - Standard Method for Testing Coated Metal Specimens at 100% Relative Humidity.
B-117 - Standard Method of Salt Spray (Fog Test.)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

American National Standard Institute (ANSI) Standards:

ANSI A208.1-1989-Mat Formed Wood Particleboard.

(Copies may be obtained from the American National Standards Institute, 1430 Boradway, New York 10018.)

National Electrical Manufactures Association Standards Publication:

No. LD 3-1985 - High Pressure Decorative Laminate

(Copies may be obtained from the National Electrical Manufactures Association, 2101 L Street, N.W. Suite 300, Washington, DC 20037.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Regulatory requirement. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.1.2 Metal.

3.1.2.1 Aluminum. Aluminum used in corner extrusions shall be alloy temper 6063-T6 of Fed. Spec. QQ-A-200/9.

3.1.2.2 Metal Finish Procedures. External metal surfaces shall be cleaned and prepared according to the maufacturers commecial practice. A coat of baking enamel shall be applied. The finish shall be baked per manufacturers instructions and shall have a minimum dry film thickness of 1.0 mils. The finish shall be free from runs, wrinkles, sags, grit, etc., detrimental to appearance and shall be uniform in thickness over the entire surface with no visual indication of separation of color. Color shall be as specified in 3.1.1.4 Metal finish. The applied finish shall pass the following test for hardness and adhesion:

Hardness - the film shall withstand the firm stroke of a pointed 2H pencil held at a 45 degree angle and pushed across the surface. There shall be no evidence of scratching or marring when viewed at an oblique angle with a strong light source.

Adhesion - the dried film shall remain adherent. Sample panel shall be scored with a razor through the film to the base metal, in a test grid consisting of at least 36 1/8 inch squares. The grid and adjacent surfaces shall be covered with a one inch wide piece of cellophane tape (Scotch brand 600 or equal) firmly pressed to the surface. The grid and adjacent painted surface shall remain intact and completely adherent when the tape is quickly pulled from the surface.

3.1.2.3 Aluminum Finish. The finish of the aluminum frame shall be as specified in 3.1.1.2. Additionally the finish shall not blister when subjected to the humidity test specified in 4.4.3 and the immersion test specified in 4.4.4. When subject to the 200 hour salt spray test specified in 4.4.5 the finish shall show no evidence of corrosion, peeling, or exposure of the undercoating at points other than within 1/8 inch distance of the scribe marks.

3.1.2.4 Metal Finish. The aluminum extrusions and corner brackets shall be finished to match Federal Standard 595a #20122.

3.1.3 Plastic Laminate. Decorative face sheets shall conform to grade GP 28 with satin finish in NEMA LD-3 except for postformed tops which shall be PF 42 for desk tops and PF 30 for the others. The backing sheet shall be BK 20 in LD-3 or 0.020 inch Gatorply. Finish and color shall conform to FSS-L-01002 Walnut, FSS-L-01008 English Oak, or FSS-L-01009 Champagne.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.1.3.1 Application of Plastic Laminate. Surface of the particleboard and plywood shall be suitable for application of the plastic laminate. The laminate shall be securely applied, providing a tight, uniform bond. Adhesive used shall conform to that specified in 3.1.4.

3.1.4 Adhesives. Adhesives except on postformed tops and edgebanding shall develop an average block shear strength of 2800 lb/in^2 when tested as specified in 4.4.1. Contract adhesive required on post formed edges.

3.1.5 Particleboard. The particleboard shall be in accordance with any of the following types, grades, and classes in ANSI A208.1-1989.

1-H-1
1-M-3 except that panels shall have a minimum average screw holding capacity of 235 pounds on the edges and 285 pounds on the faces.

2-H-2

The thickness of the particleboard shall be as specified. The moisture content of the particleboard shall not exceed 9 percent at time of laminating.

3.1.6 PVC Edgeband. PVC edgeband may be used in lieu of plastic laminate on all shelf edges. It shall be of the type to be applied with hot melt glue.

Thickness: 0.030" ± inch.
Color and Grain: Match plastic laminate.
Base Color of PVC: Compatible with overall surface color. Contrasting base color which would produce a visible line when PVC us trimmed is not acceptable.
U.V. Topcoat: Required
Specular Gloss: Same gloss as plastic laminate.
Acetone Resistance: Any change in gloss, color, or grain after testing (4.4.2) is not acceptable.

3.2 Hardware.

3.2.1 Cast Corner Brackets. Corner brackets cast in zinc, and as shown in Figure 1 shall be used to join the corner extrusions.

3.2.2 Drawer Suspensions. Drawer suspensions shall be of the side mount type with positive out stops and meets test requirements in 4.4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.3 Adjustable Glides. Adjustable glides shall have a minimum 1 inch long 5/8-16 steel stem.

3.2.3.1 Glides for Bunk Beds. Glides shall consist of an internal metal platform fitted with a spring clip insert. The platform shall fit the inside of the aluminum posts dependent on the manufacture's choice of material. The exposed portion of glide (in contact with floor) shall be of corrision resistant steel or chrome plated.

3.2.4 Drawer Pulls. Unless otherwise specified herein, each drawer shall receive a surface mounted oak pull Hettich #45-011-783 or equivalent mounted with two screws through the drawer front. Pulls shall be finished to match with the plastic laminate on the drawer front.

3.3 Construction.

3.3.1 Design. The design and style of the items shall be as shown in the attached figures and illustrations.

3.3.2 Assembly. All welding, gluing, and joinery shall provide secure and rigid joints in proper alignment.

3.3.3 Tolerances. Where tolerances are not specified for components, the following tolerances will be permitted:

Dimension of any solid wood part - plus or minum 1/16 inch.
Dimension of plywood parts - plus 1/16 inch minus 1/32 inch on plywood 3/16 inch thick or more.
Dimension of particleboard thickness - plus or minus 1/64 inch.
Dimensions - overall - plus 1/4 inch or minus 1/4 inch.

3.3.4 Component Requirements.

3.3.4.1 Case Drawers. Case drawers, with the exception of the Console Base and knee space drawers on the type III dresser desk and Type IV table desk, shall have a minimum depth of 14 inches. Drawer sides and back shall be a minimum 7/16" thickness hardwood. The sides shall be joined to the front and the back by driven dovetail joinery and glue. The drawer bottom shall be a minimum 3/16 inch plywood and be reinforced with a minimum of six glue blocks.

3.3.4.2 Tops. Unless otherwise specified herein, tops shall be constructed of 3/4 inch particleboard with decorative laminate on the top surface and non-decorative on the bottom. The front edge shall be built-up to a minimum 1 inch thickness and postformed 90° with a 3/4 inch radius. The left and right edges of the top shall have slots to accept a "T" support (Figure 2) which engages the side horizontal corner extrusion. The rear edge of the top shall be rabbeted where it joins the rear panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.4.3 Side Panels. Side panels shall be constructed of 3/4 inch particleboard with decorative laminate and backer unless otherwise specified. Corner extrusions shall be attached to the front and top edges with a corner bracket joining the extrusions.

3.3.4.4 Back Panels. Back panels shall be constructed of 3/8 inch particleboard with backer on both sides except where the interior face is visible, in which case, the interior face shall match the interior finish.

3.3.4.5 Bottom Panel. Bottom panels shall be constructed of 3/4 inch particleboard with backer on both sides except where the top face is visible, in which case, the top face shall match the interior finish.

3.3.5 Unit Requirements.

3.3.5.1 Chest of Drawers. The three, five, and six drawer chests are similar in construction except for overall size, and shall be constructed as shown in Figure 6 and as specified herein. An aluminum extrusion (Figure 3) shall be attached to the front edge of the top, and run the full width of the case opening. Another aluminum extrusion (Figure 4) shall be attached to the front edge of the bottom panel, and run the full width of the case opening to serve as a toe kick. Drawer suspensions shall be attached to the case sides and drawer sides, and allow smooth operation of the drawers. The back panel shall be firmly attached to the sides and top. There shall be two adjustable glides at the front and two tack glides at the rear.

3.3.5.2 Overchest - Style 1. The overchest shall have one fixed and one adjustable shelf. The adjustable shelf shall have at least three positions and between 4 and 6 inches adjustment. Construction shall be as shown in Figure 14.

3.3.5.3 Overchest - Style 2. The Type 2 overchest shall have a bottom panel connected to a drop lid with a full length continuous hinge. It shall also have a magnetic catch on the bottom of the fixed shelf to keep the drop lid closed and two drop lid stays to slow the swing of the drop lid. The drop lid shall protrude approximately 1/8 inch above the fixed shelf when closed to provide for a pull. Construction shall be as shown in Figure 7.

3.3.5.4 Dresser Desk. The dresser desk shall be constructed as shown in Figure 8 and as herein specified. It shall have 3 drawers in the pedestal and 1 drawer in the kneespace. An aluminum extrusion (Figure 3) shall run the full length of the front edge of the top except that the lower leg of the extrusion shall be eliminated over the knee space. Another aluminum extrusion (Figure 4) shall be attached to the bottom panel and

Source: https://assist.dla.mil -- Downloaded: 20260410-26T11:41Z
Check the source to verify that this is the current version before use.

run the full width of the opening in the pedestal. There shall be three adjustable glides under the pedestal and two tack glides under the end panel.

3.3.5.5 Table Desk. The table desk shall be constructed as shown in to Figure 9 and as specified herein. It shall have two drawers in the kneespace. An aluminum extrusion (Figure 3) shall run the full length of the front edge of the top. There shall be two tack glides on the bottom of both end panels. A modesty panel, 11-3/4 inches high, shall run full length between the end panels. The modesty panel shall be secured to the end panels using metal angles or wooden blocks screwed to each panel.

3.3.5.6 Night Stand. The night stand shall be constructed as shown in Figure 10 and as specified herein. It shall have one drawer with a minimum of 2 inch inside clear height and one open compartment. The top of the bottom panel, the front of the back panel and both sides of the end panels shall have decorative laminate. An aluminum extrusion (Figure 3) shall run the full width of the front edge of the top. Another aluminum extrusion (Figure 4) shall be attached to the full width of the bottom panel to serve as a toe kick. There shall be two tack glides on the bottom of both end panels.

3.3.5.7 Valanced Bookshelf. The bookshelf shall be constructed as shown in Figure 11 and as specified herein. It shall consist of a shelf, valance, and two end support panels. Both sides of the end panels, and the front of the valance shall be decorative laminate. The front face of the back panel shall have a full width cork tackboard. A single tube 20 watt 24 inch long flourescent light fixture shall be provided and mounted under the bookshelf. Rounded corner extrusions shall cover the top, front, and bottom edges of the end panels. A grommeted hole shall be provided in the back panel to allow passage of the electrical cord for the light fixture. An aluminum extrusion (Figure 3) shall run full width of the front edge of the top and provide for attachment to the valance.

3.3.5.8 Mirror. The mirror shall be constructed as shown in Figure 12 and as specified herein. The frame shall be an assembly of rounded corner extrusions (Figure 5) and corner brackets. The mirror glass shall be 1/4 inch thick, and shall be backed with a sheet of single wall corrugated fiberboard and then a sheet of 1/16 inch thick high pressure laminate backer.

3.3.5.9 Bed, Panel Headboard with Metal Frame. The headboard shall be constructed as shown in Figure 13 and as specified herein. The headboard shall be a 3/4 inch particleboard panel with decorative laminate and backer framed on the top and sides with aluminum extrusions (Figure 5) and corner brackets. There shall be four 5/16 inch through holes as shown in Figure 13 to provide for mounting of the bed frame. The dolly shall

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

consist of a frame or base, four legs or risers each equipped with not less than a 2-3/4 inch diameter all-plastic glide of high impact material. Glides shall have a metal collar at top end to prevent splitting when top end is fitted over or into the legs or risers. Glides shall have a flat center surface for proper seating with floor surface. Brackets for securing headboards to dolly shall be no less than 11 gauge (0.1196 inch nominal) and slots in same to receive headboard mounting bolts shall be a minimum of two (2) in number which shall be spaced a minimum of 2-1/2 inches center to center.

The frame shall be constructed of not less than 1-1/2 inches by 1-1/2 inches by 11 gauge (0.11196 inch nominal) formed steel angles or 1-1/2 inches by 1-1/2 inches by 7/64 (0.0109) inch high carbon steel angles and be braced and welded or riveted to give firm support and to accommodate standard sized bed springs. Should the steel angles be inverted they should be equipped with suitable, outward extending, fixed positioned, steel flanges to retain the box springs and have plastic covers to elminate wearing or tearing of box spring ticking. These dollies may be furnished, and shall be easily adjustable to fit either single, double, or queen size bedding. When used queen size, frame shall be equipped with an easily installed cross center support. Cross center support to have two legs which are recessed inward from side rails. These legs "to float" off of floor.

Alternatively, a frame otherwise meeting all requirements listed above may be constructed of channels, the cross rails of which shall be not less than 16 gauge (0.0598 inch) steel with a vertical web no less than 1-1/8 inches and flanges no less than 1 inch, and the side rails of which shall be no less than 14 gauge (0.0747 inch) steel with a vertical web no less than 1-1/2 inches and flanges no less than 1 inch; each side rail shall be equipped with at least three (3) suitable, outwardly extending, fixed positioned, steel flanges or angles to retain the box springs. Retaining flanges to be equipped with plastic covers to eliminate wearing or tearing of box spring ticking. The lateral members of either construction shall not interfere with proper seating of bed spring construction having drop cross-slats. Attaching brackets and hardware shall be furnished. The frame shall be painted and baked with a baking type enamel that covers all exposed areas when it is in an assembled position. All rough edges and surface shall be eliminated.

3.3.5.10 Bed, Bunk. The bunk bed (Figure 15) shall consist of an upper and lower headboard and footboard assembly, and upper and lower bed frame. The upper headboard and footboard assemblies shall be identical in design and dimension, each unit fabricated of two 1-1/4 inch square tubular aluminum corner posts having a 1/8 inch wall thickness, and a 1-1/4 inch square tubular

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

top rail with a 1-1/4 inch radius formed at the top of the corner post. The upper assembly section shall have a lower cross rail, 1 inch square by 1/8 wall thickness shall be welded between the posts to house the particleboard panels 28 inch, by 5-3/4 inch, 3/4 inch thick. Three metal dowels projecting from the underside of the top rail into the particleboard panels and three screws inserted into the lower edge of the particleboard to secure the panel. The lower assembly shall have two cross rails welded between the posts to the house the particleboard panels 28 inches, by 15-3/4 inches, 3/4 thick, and secured to the cross rails same as the upper assembly. The particleboard panels are faced with decorative plastic laminate specified in 3.2.1 on both faces and self-edged on the two ends with the upper and lower edges finished with lacquer or enamel.

The upper headboard and footboard assembly shall be connected with a 1 inch by 1 inch by 1/8 inch tube, 8 inches long. The tube shall be inserted into post of the lower assemblies, and secured with a No. 8 pan head screw from the inside of the bed post. The bed frame shall consist of 1-1/2 by 2 inch, 5/32 inch thick steel angle side and end rails (commercial tolerance). Two-inch flanges shall be vertical, shall be welded at all four corners and to brackets, 6 inch by 3 inch by 3/16 inch, bored to receive two 3/8 inch bolts fitted with chrome plated capnuts for mounting to the posts. Two stretcher braces shall span the frame width, placed to furnish maximum support to the frame and no-sag springs. Stretcher braces shall be located approximately one-third of frame length toward center from each end. The braces shall be of 1 by 1 inch, nominal 0.1196 wall thickness, formed and offset for clearance of spring compression under load.

The bed frame shall consist of 18 sinuous springs formed from nominal 0.1483 inch diameter high carbon-no-sag furniture spring wire having a tensil strength of 220,000/250,000 p.s.i. Diameter shall be subject to standard manufacturing tolerance. Each strand shall be one piece, terminating with z hook ends. Each strand shall be equally spaced and shall be connected to adjacent strands with at least four rows of wire connecting links, clinched over the springs. Strand ends shall be inserted in holes in horizontal flanges of side rails in a manner to provide secure retention free from scratching and tearing hazards. Each end strand shall be attached to the end angles with no less than five helical springs. Post caps, when required, shall be of formed metal or suitable plastic material.

3.3.5.11 Console Base, Size 1. The width of the console base shall be 40-1/8 inches ± 1/8 inch. It shall have one adjustable shelf, two drawers, and two doors. It shall be 34 inches high and 22 inches deep. The base shall be 2-1/2 inches high. The adjustable shelf shall be 17 inches deep. Body panels, shelves, and partition wall shall be 3/4 inch minimum and covered with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

plastic laminate. All edges not covered or abutting another panel shall be covered with PVC edge banding or shall be self-edged. The top shall be one inch minimum covered with plastic laminate and postformed 180 degees on the front edge. The back panels shall be 3/8 inch minimum covered with plastic laminate on the front surface and Gatorply or backer on the rear. The door hinges shall be concealed type and allow the doors to open 90 degrees minimum. The top shall have four threaded inserts installed to accommodate the posts for C-fix cam bolts that provide for attachment of an optional console overchest. The threaded inserts shall be provided with plugs to cover the holes when the overchest is not attached.

All drawers shall be guided by side glides which provide smooth, quiet operation. Drawers shall be easily removable without tools, and shall have in-stops and out-stops and self pulls along the bottom edge. Side to side play shall not exceed 3/8 inch when drawers are pulled 2/3 out when tested as specified in 4.4.9. Space between drawer back and case back shall be maximum 2 inches. The base shall be 2-1/2 inches recessed from the front edge of the doors to provide for toe space. The lower edges of the base shall be provided with four adjustable glides. The doors shall be flush - 1/16 with the side and transverse panels and shall swing to the side. The door clearance shall be even and approximately 1/8 inch. The top edges of the doors shall be formed or positioned for self pulls. The laminate colors shall be as specified in Table 1. The unit, assembled with the console overchest, shall pass the tests specified in 4.4.6, 4.4.7, and 4.4.8 at time of first article inspection. The tests shall be repeated if any changes are made in the materials, or design.

TABLE 1

LOWER SECTION

End Panels	(Outside)	Walnut or Oak	(Inside)	Champagne
Doors	(Front side)	Walnut or Oak	(Backside)	Champagne
Back Panel	(Back Side)	N/D	(Front Side)	Champagne
Drawer Fronts		Walnut or Oak		
Shelves, partiton	(Both Sides)	Champagne		
Countertop	(Top Side)	Walnut or Oak	(Underside)	N/D
Bottom Panel	(Top Side)	Champagne	(Underside)	N/D

A standard reference panel shall be used to determine the acceptability of the color/appearance of the plastic laminate:

English Oak: FSS-L-01008
Walnut: FSS-L-01002
Champagne: FSS-L-01009

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.5.12 Console Base, Size 2. The Size 2 console base shall be constructed as in 3.3.5.11 except that the overall width shall be 58-7/8 inches ± 1/8 inch. It shall have one adjustable shelf, one partition located approximately 19 inches from the left side, three drawers, and three doors. (Fig. 16). The laminate colors shall be as specified in Table I.

3.3.5.13 Magazine Rack. The magazine rack shall be constructed as shown in Figure 17 and as specified herein. It shall consist of two end panels, a full width shelf mounted 30 degrees from horizontal near the top, a full width bottom shelf about 3 inches from the bottom, and a toe kick. The end panels shall be 3/4 inch particleboard with decorative laminate on both sides. Aluminum extrusions (Figure 5) shall run full length along the front, rear, and top edges of the end panels, and join with cast corner brackets (Figure 1) at the top. There shall be two tack glides at the bottom of both end panels. The top shelf shall be 3/4 inch particleboard with decorative laminate on both sides. A retaining lip shall be attached to the lower edge of the top shelf near the bottom. The exposed edges of the top shelf shall be self edge. The bottom shelf shall be 3/4 inch particleboard with decorative laminate on the top surface and non-decorative on the bottom. The exposed edge of the bottom shelf shall be self edged. The shelves shall be attached to the end panels with a total of eight (8) C-fix cambolts. The toe kick shall be 3/4 inch particleboard with decorative laminate on the front face and non-decorative on the back.

3.3.5.14 Console Overchest, Size 1. The width of the console overchest shall be 40-1/8 inches ± 1/8 inch. It shall have one adjustable middle shelf, one fixed botton shelf, and two doors. It shall be 41 inches high and 15 inches deep. The lower edge of the door shall be 18 inches from the bottom of the unit and shall extend 1/4 inch below the bottom shelf to act as a door pull. The doors shall be flush - 1/16 with the side and transverse panels and shall swing to the side. The clearance around the doors shall be even and approximately 1/8 inch. The shelves shall be 11 inches deep. Body panels, shelves, and partition walls shall be 3/4 inch minimum and covered with plastic laminate. All edges not covered or abutting another panel shall be covered with PVC edge banding or self-edged. The back panel shall be 3/8 inch mimimum covered with plastic laminate on the front surface and Gatorply or backer on the rear. The lower edge of the back panel shall be sealed to protect from moisture degradation, and shall be secured to the end panels and top with adhesive and staples.

The door hinges shall be the concealed type and allow the doors to open 90 degrees minimum. The lower edges of the side panels shall accommodate the cams and caps of the C-fix cam bolts for attachment to the console base. The top panel shall be 3/4 inch minimum covered with plastic laminate and have a postformed front edge with a 3/4 inch radius. The lower edge of the back panel shall have a 1-5/8 inch diameter minimum opening one inch from

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

each corner. The openings shall be sealed or finished or alternatively, they may have grommets. The unit, assembled with the console base, shall pass the tests specified in 4.4.6, 4.4.7, and 4.4.8 at time of first article inspection. The tests shall be repeated if any changes are made in materials, methods, or design.

3.3.5.15 Console Overchest, Size 2. The Size 2 console overchest shall be constructed as in 3.3.5.14 except that the overall width shall be 58-7/8 inches. It shall have one adjustable middle shelf, one fixed shelf, one partition located approximately 19 inches from the left side, and three doors. See Figure 18.

3.4 Identification Marking. Each item shall be permanently, neatly, and legibly marked with the following information: National Stock Number, Date of Manufacture, Name of Manufacturer, Contract Number, Specification Number.

3.5 Workmanship. Method of construction, joinery, glueing, assembly, and drawer/door fit and action shall conform to best commercial practice for furniture of this style. All surfaces exposed to view in normal use (including drawer parts, and drawer partitions) shall be smoothly machined and sanded. Dovetails shall be tight and well fitted. Units shall be free of splinters, sharp corners, and sharp edges to prevent injury to personnel or damage to their clothing. The application of materials, drying time, cleaning, and rubbing shall be controlled to produce items of quality appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified the contract or order, the supplier may use their own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure the supplies and services conform to prescribed requirements.

4.2. First Article Sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with the purchase description. Approval of the 1st article sample authorizes the commencement of production, but does not relieve the contractor of the responsibility of complying with all other applicable provisions of this purchase description. Production units shall not vary from the approved 1st article sample in

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

design of construction without written approval of the contracting officer. First article sample shall be maintained as a production standard. Retain first article sample unitl the last order is shipped, delivered and accepted by the ordering activity.

4.3 Sampling for Inspection and Acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 as applicable.

4.3.1 Component and Material Inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards, or if none, in accordance with this specification.

4.3.2 Inspection or End Item. The lot shall be all units of the same type offered for inspection at one time. The samples shall be completely assembled units or units ready for assembly as applicable.

4.3.3 Inspection Levels and Acceptable Quality Levels (AQL's). Inspection and accetpable quality levels expressed defects per hundred units shall be as shown in Table II.

TABLE II Accetable Quality Level in accordance with MIL-STD-105

For Examination In	Inspection Level	AQL's Major	Total
Table III	I	4	6.5
4.3.5	I	-	6.5
4.3.6	I	-	6.5

4.3.4 Visual Examination, Assembled Units. The assembled units snall be examined for defects as specified in Table III.

TABLE III Classification of Defects

Examine	Defects	AQL's Major	Minor
Materials	Metal components not of material or gage specified.		X
	Particleboard not of material or size specified.		X
Laminiated Plastic	Not material specified, incorrect thickness.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

TABLE III Classification of Defects (Continued)

Examine	Defects	AQL's Major	AQL's Minor
	Face sheet missing.		X
	Poor adhesion, i.e. blistered, peeled, wrinkled, broken, cut, scratched, or marred.	X	
	Face sheet damaged, dented, cracked, marred, or discolored.		X
	Scratch or nicks in face sheet affecting appearance.		X
	Substrate board defects such as foreign material, shives or surface imperfections that affect surface quality.		X
	Wrong color or grain.		X
Enamel Finish	Poor adhesion, i.e. blistered, cracked, peeling, tacky (not dry to touch), color separation, stain, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Color not as required.		X
	Scratch through to base material, bare, spots, rust under coating.		X
Workmanship and Construction (General)	Any part missing except screws.	X	
	Malformed or mislocated parts affecting serviceability.		X
	Broken, punctured, or cracked parts. Sharp edges or projection that may cause injury.	X	
	Malformed, mislocated, damaged, buckled, or wraped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE III Classification of Defects (Continued)

Examine	Defects	AQL's Major	AQL's Minor
	Incorrect formation or design or component preventing it from adequately performing it specified function.		X
	Edges not "eased off" where required.		X
Screws	Spacing of screws not as specified.	X	
	Screw point visibly bulging surfaces.	X	
	Screws and lock washers not plated; threads stripped on more than one screw, more than one screw missing.		X
Edging	Not securely and neatly applied.		X
Miscellaneous Hardware	Wrong type, wrong location, not securely attached.		X
Identification Marking	Missing, not pernament, illegible, incomplete or incorrect.		X
Top & Bottom	Wrong dimensions, not perpendicular to end panels.	X	
Back	Wrong color.		X
	Wrong type, wrong dimensions, not attached properly.		X
Welding	Missing, not sound (broken, cracked, burnt, poor adhesion).		X

4.3.5 Dimensional Examination Any dimension not within tolerance specified shall be classified as a defect (see 4.3.3).

4.3.6 Examination of preparation for delivery. Any examination shall be made to determine the packaging, packing, and marking as required by Section 5 of this specification are complied with. Defects shall be scored as specified in Table V. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V Preparation for Delivery Defects

Examine	Defect
Marking	Incorrect illegible; of improper size, location, sequence or method of application.
Material	Any nonconforming components, components missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, panels, and doors or contents and padding of perimeter edges.
Contents	Not as specified.

4.4 Tests, General. All products or containers damaged in marking these test shall be at the expense of the manufacturer.

4.4.1 Test for Adhesives. Test for adhesives shall be as shown below.

Test for Adhesives

Component	Characteristic	Requirement References	Test Method	Sample Unit
Adhesive	Block Shear Test	3.3.1	ASTM D 905 1/ 2/	1/2 pint

1/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The test joints, upon removal from pressure, shall be conditioned at a relative humidity of 40 ± 4 percent.

2/ A test specimen that fails at less than 2,800 p.s.i. and displays 50 percent or more wood failure, shall be diregarded when computing the average shear strength. When the average shear strength, (a) is less than the required 2,800 p.s.i., (b) has a 10 percent or greater difference between the high and low test specimen values, and (c) one or more sample fails at 2,800 p.s.i. or more, the test shall be rerun.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

4.4.2 Tests for P.V.C. Edgeband. Acetone resistence: Apply ten double rubs (20 total) with normal hand pressure using a fabric cleaning towel, well saturated with acetone. ("Normal hand pressure" is force necessary to remove excess hot melt glue from surface.)

4.4.3 Humidity Test. The metal finish shall be subjected to 100 percent relative humidity at 100 degrees fahrenheit for a period of 48 hours in accordance with ASTM D 2247.

4.4.4 Water Immersion Test. The metal finish of test specimen shall be immersed in water for a period of 24 hours.

4.4.5 Salt Spray Test. The finished surfaced of the test piece of panel shall be scribed through the coatings to base metal along two diagonals for a distance of 5 inches. The panel shall be exposed to a 200 hour salt spray test given in accordance with the applicable requirements of ASTM B 117.

4.4.6 ANSI Recommended Construction and Performance Standards for Kitchens and Vanity Cabinet A161.1-1980. Failure to comply with these requirements will be cause for rejection. Applicable tests:

5.1 Static Loading on shelves and bottom of cabinets.
5.3 Base front joint loading.
5.4 Impact on shelves, cabinet bottoms and drawer bottoms.
5.5 Impact on base cabinet front and door.
6.1 Door racking and hinge set.
6.2 Door, door holding devices, and hinge operation.
7.0 Drawer Operation tests (modified as follows)

Test drawers in complete piece of furniture.

Drawer Closing Impact. Lay case on back. Pull one drawer out 2/3 of suspension travel and release. Allow drawer to free-fall to closed position, impacting drawer in-stops. Repeat this procedure a total of five time. Set cases upright and check drawer operation.

Drawer Operation. Perform drawer cycle test on same drawer and suspension that closing impact test was performed on. Use evenly distributed 50 lb. load in all drawer cycle tests. On each inward stroke during cycling test, drawer must contact drawer in-stops. After cycling test is completed, fully extend tested drawer and apply an additionall 50 lb. load (100 lb. total), evenly distributed inside the drawer. Cycle drawer in and out one time. Remove all load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Minimum Performance. Add: Drawer shall continue to operate smoothly and quietly after all tests with no permanent deflection of any drawer suspension parts. Before and after each test, check to ensure drawer does not stop on drawer front. Test must be performed at furniture manufacturer's plant or at any independent test laboratory. Test certification from suspension supplier will not be acceptable.

4.4.7 Rack Test. Cabinet shall be placed on level surface with glides removed. The upper section shall be loaded with 150 lbs. evenly distributed and the lower section with 250 lbs. evenly distributed. A 3-1/2 inch square by 1-1/2 inch thick block shall be placed under two diagonally opposite corners. A 100 lb. load shall be placed on the unsupported corner of the counter top in an area not to exceed 6 inches square. A 100 lb. load shall be placed on the unsupported diagonally opposite corner of the upper section top in an area not to exceed 6 inches square. The cabinet shall remain in this position for 24 hours minimum.

Minimum Performance: After removing blocks and loads, all doors and drawers shall function properly. Joints shall remain tight without breakage. Cabinet shall not have any cracks or shifts which shall affect its appearance or serviceablity.

4.4.8 Drop Test. Cabinet shall be placed on a hard level surface with glides fully retracted. Tilt the cabinet until the bottom of one end is (12 inches for Size 1 and 8 inches for Size 2) from the floor. Allow the cabinet to free-fall to the floor. Repeat this action on the opposite side.

Minimum Performance. All doors and drawers shall fucntion properly. Joints shall remain tight without breakage. Cabinet shall not have any cracks or splits which shall affect its appearance or serviceability. Distortion of glides is acceptable provided glides function properly.

4.4.9 Drawer side play test. Failure to comply with this test will be cause for rejection. Perform test on a complete piece of furniture, in furniture manufacturer's plant.

Test each drawer in the items required for first article inspection. On two year contracts, retest units from current production after the first year.

Test procedure: Pull unloaded drawer 2/3 out of case. With moderate hand pressure, push drawer front to the right. Establish a reference point on the position of the right edge of the drawer front. Now push drawer front with moderate hand pressure, as far as it will go, to the left. Measurement between reference point and new drawer front position shall be 3/8 inch maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5 PREPARATION FOR DELIVERY. Preparation for delivery shall be specified in the solicıation.

6. NOTES

6.1 Intended Use. These units are intended for use in overseas households with repeated assembly, dıassembly, ıssue and reıssue.

6.2 Orderıng Data. Purchasers should select the preferred optıons permitted herein, and include the following information ın procurement documents.

(a) Title, number, and date of this document.
(b) Type, style and size of unit required (see 1.2.1).
(c) Level of packaging and packing required (see 5).
(d) Color/graın of decoratıve laminate if requirements dıffer from those specifıed in 3.1.3 or Table I.
(e) When first artıcle samples are not requıred (see 4.2)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currenversion before use.

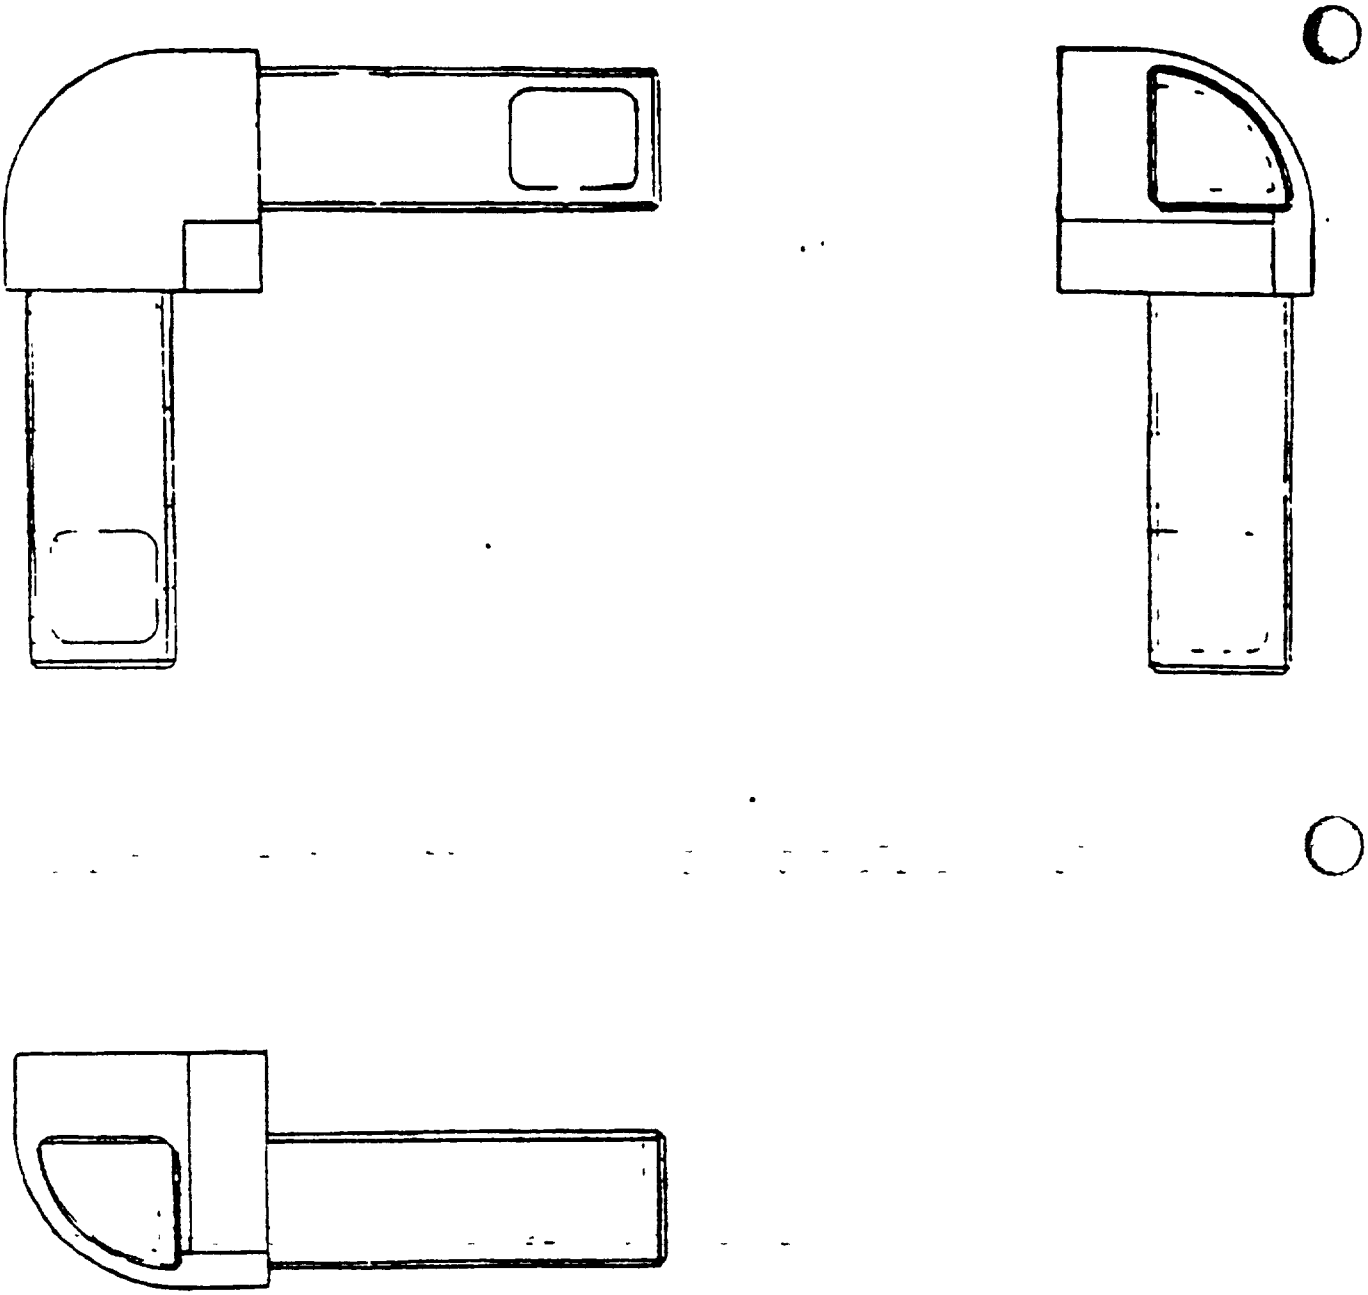


FIG. 1
CORNER BRACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

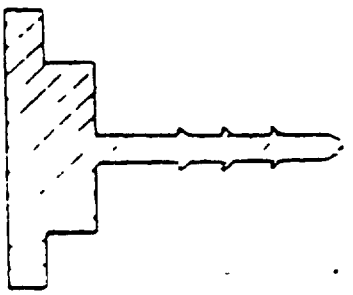


FIG. 2 "T" SUPPORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.




FIG. 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

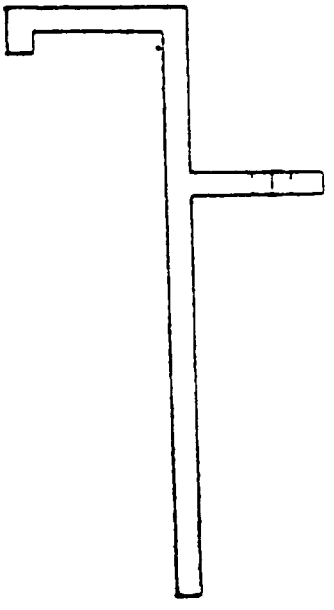
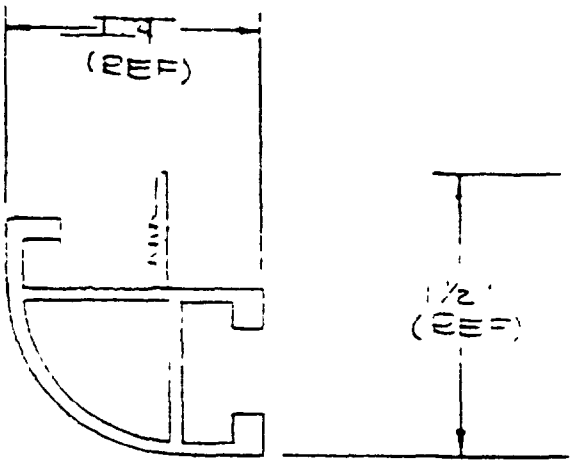


FIG 4
TOE KICK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.



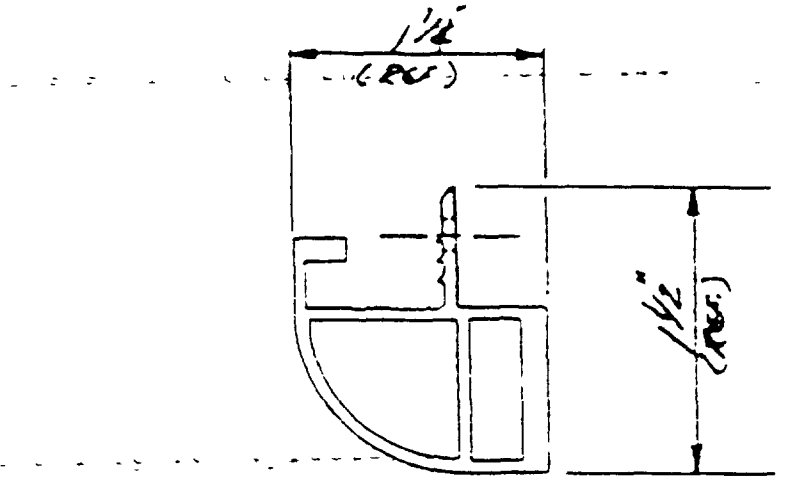


FIG. 5
CORNER EXTRUSIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

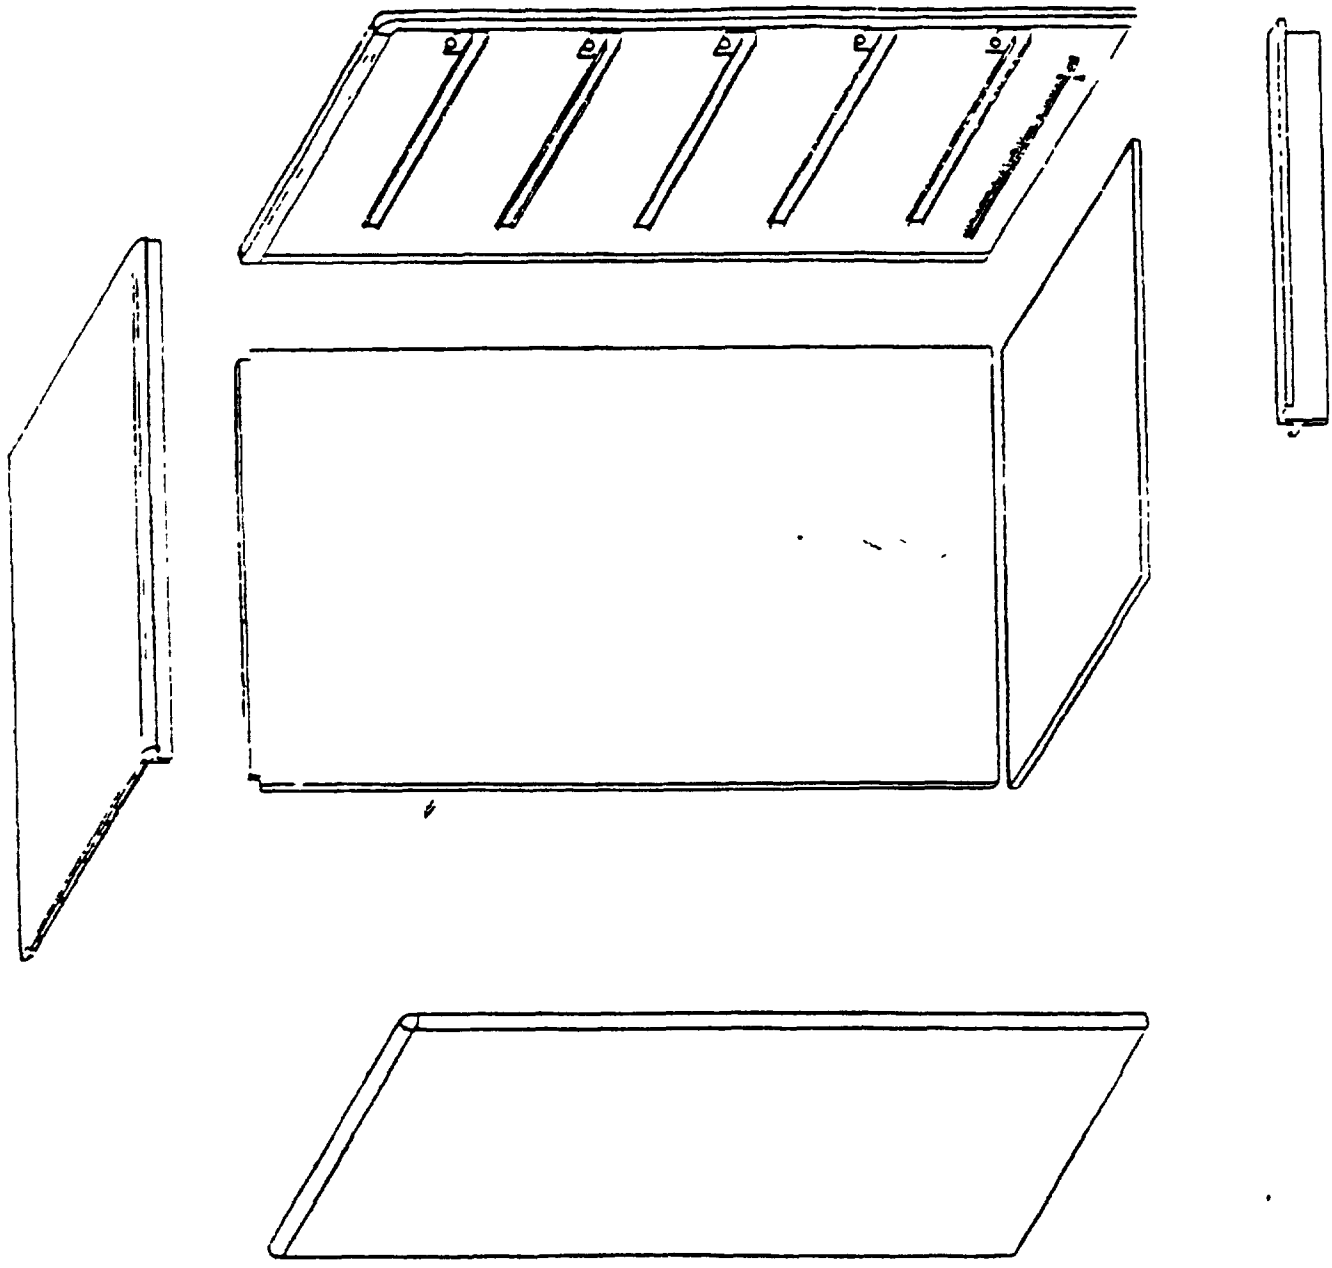


FIG 6 CHEST OF DRAWERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

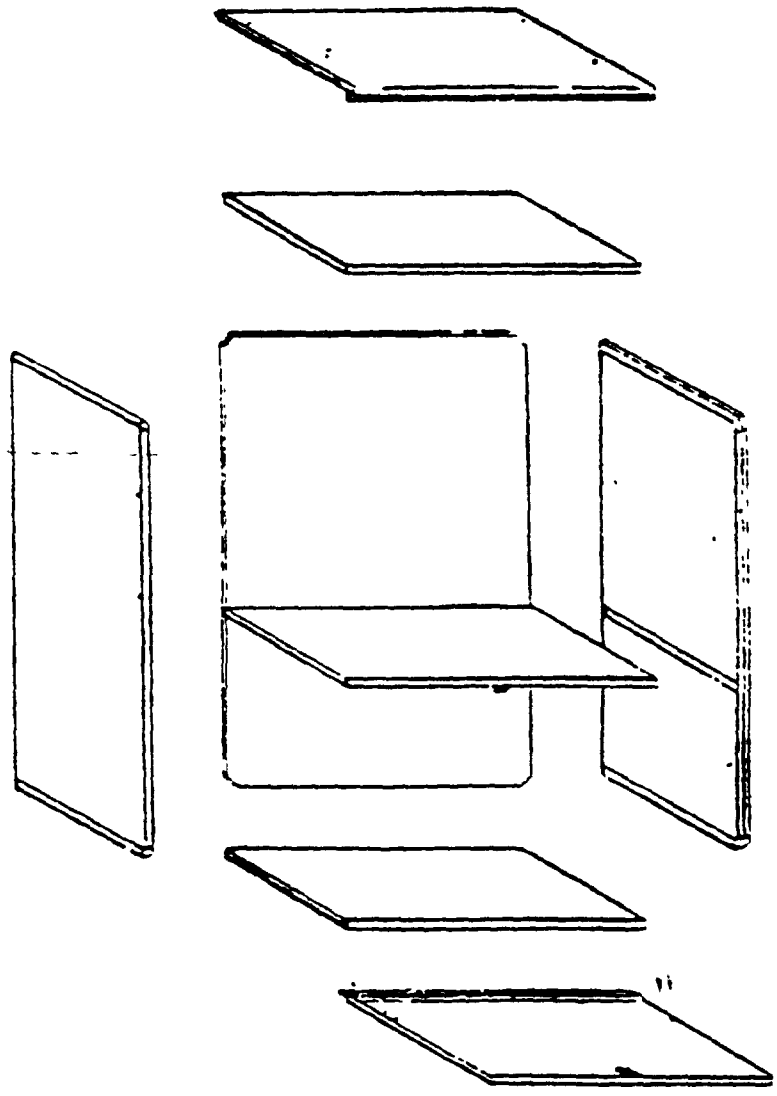


FIG. 7
OVERCHEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

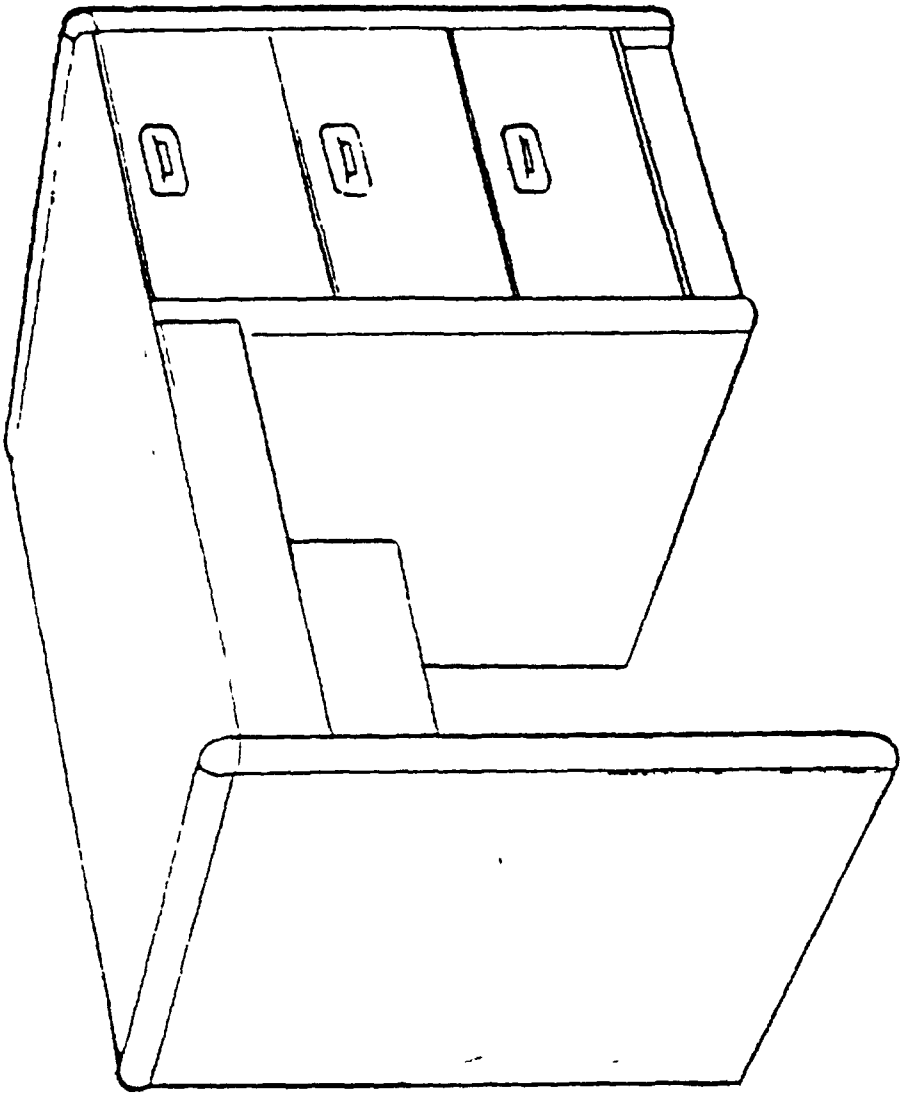


FIG. 8
DRESSER DESK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

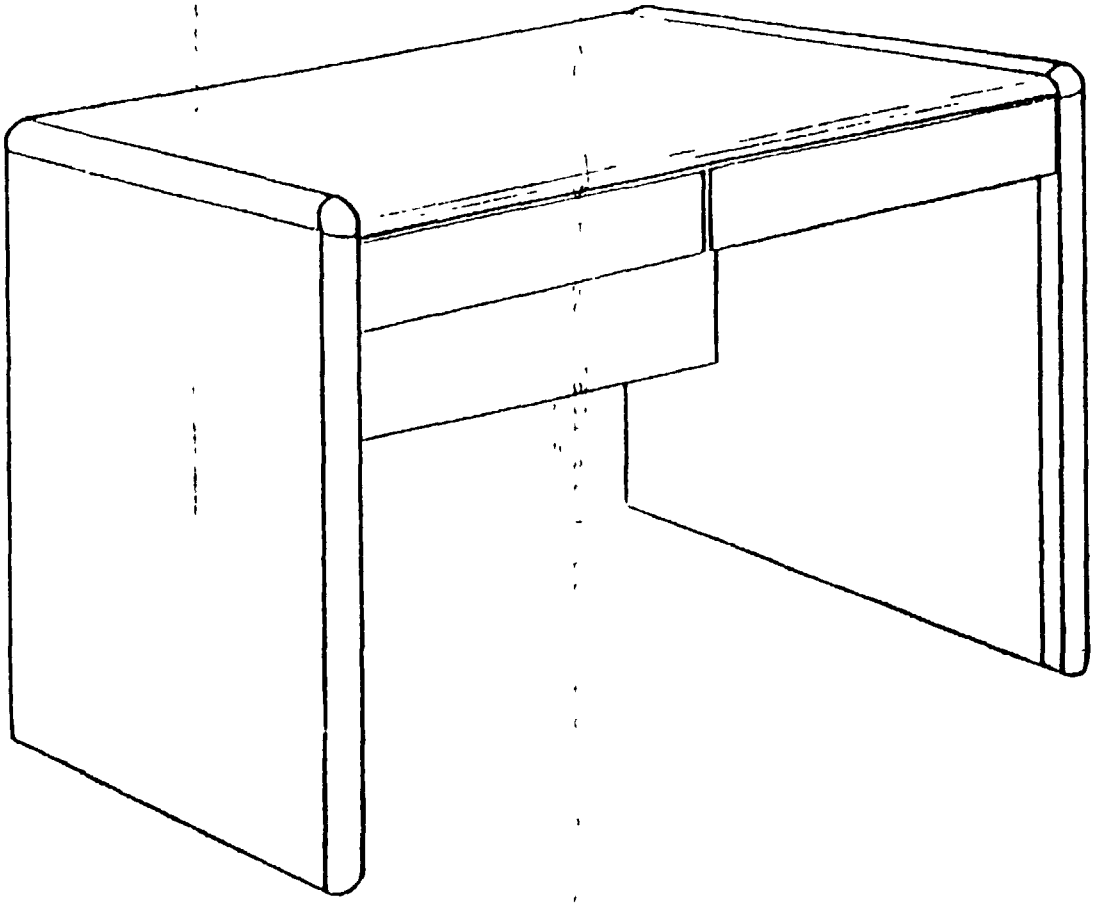


FIG. 9
TABLE DESK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

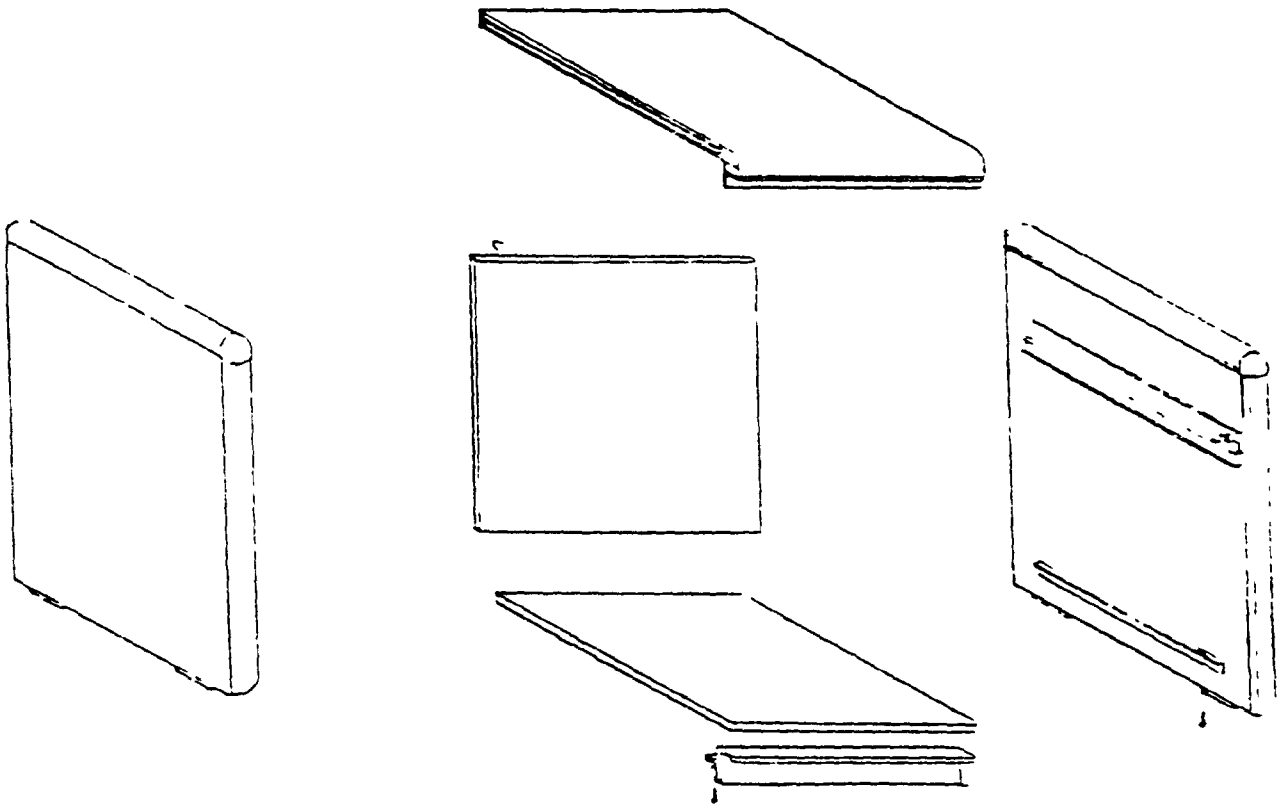


FIG 10
NIGHT STAND

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

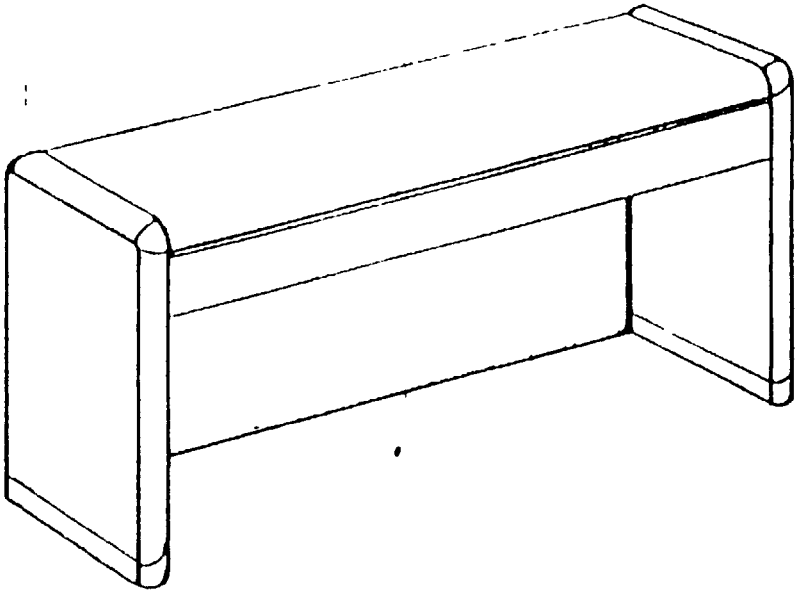


FIG. 11
VALANCED BOOKSHELF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

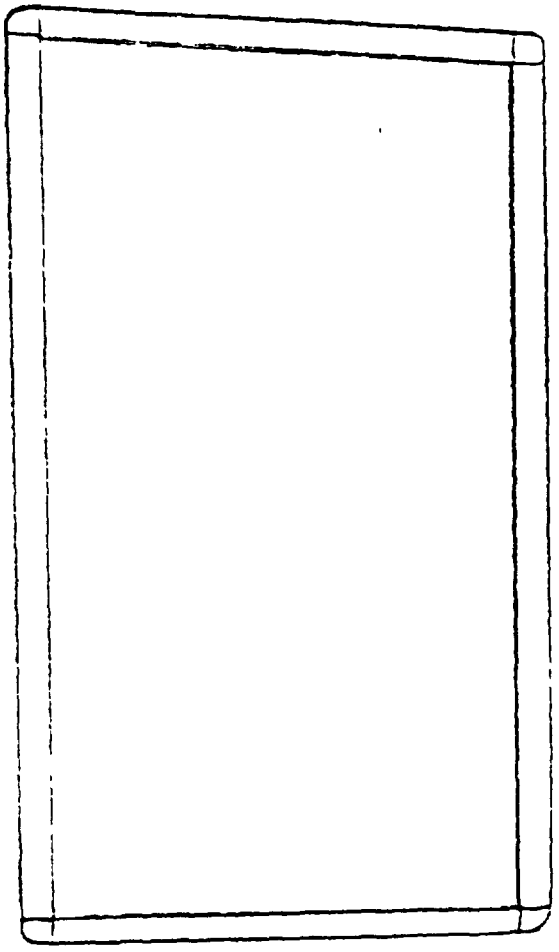


FIG. 12
MIRROR

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

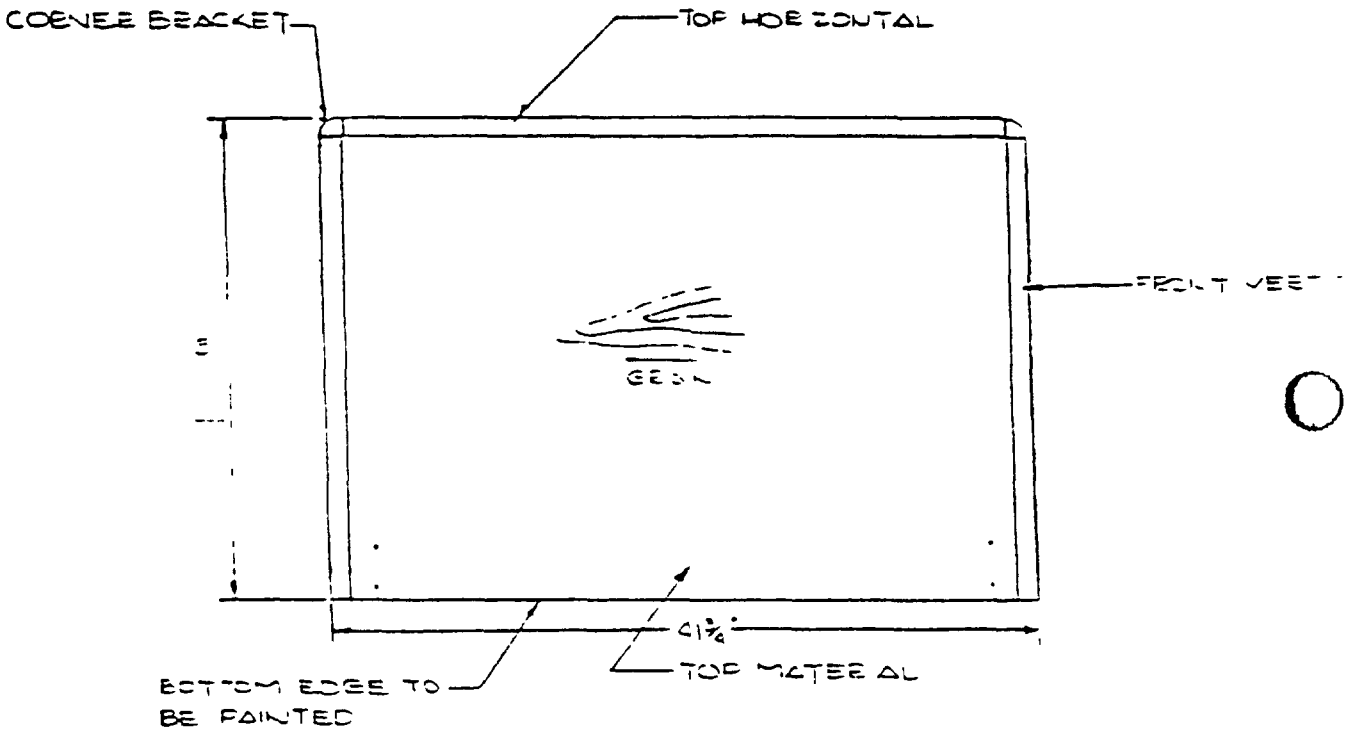


FIG. 13
HEADBOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

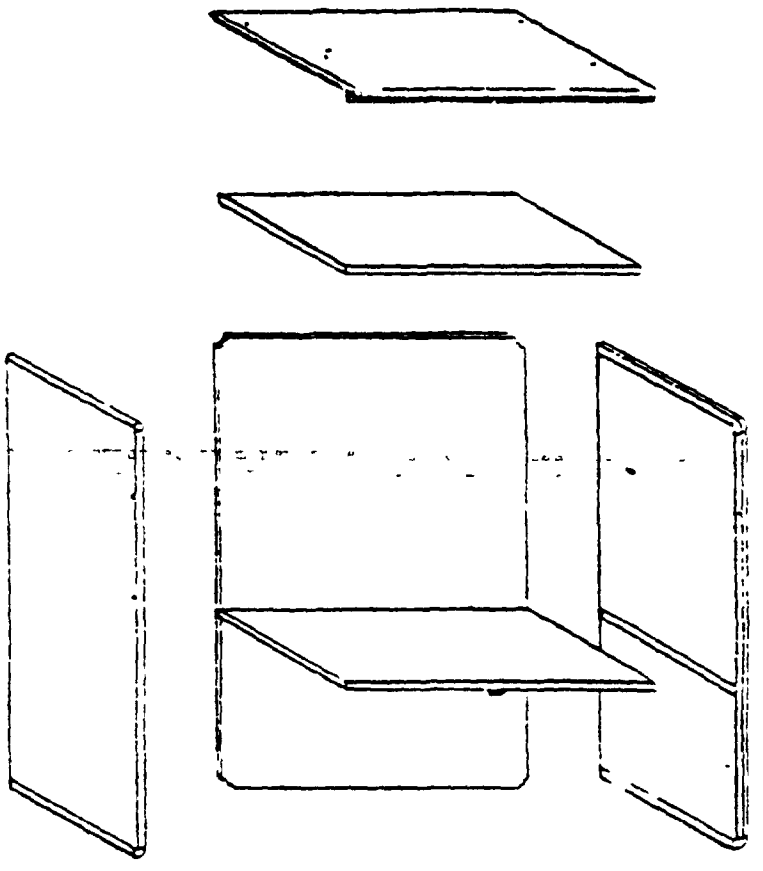


FIG. 14
OVERCHEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

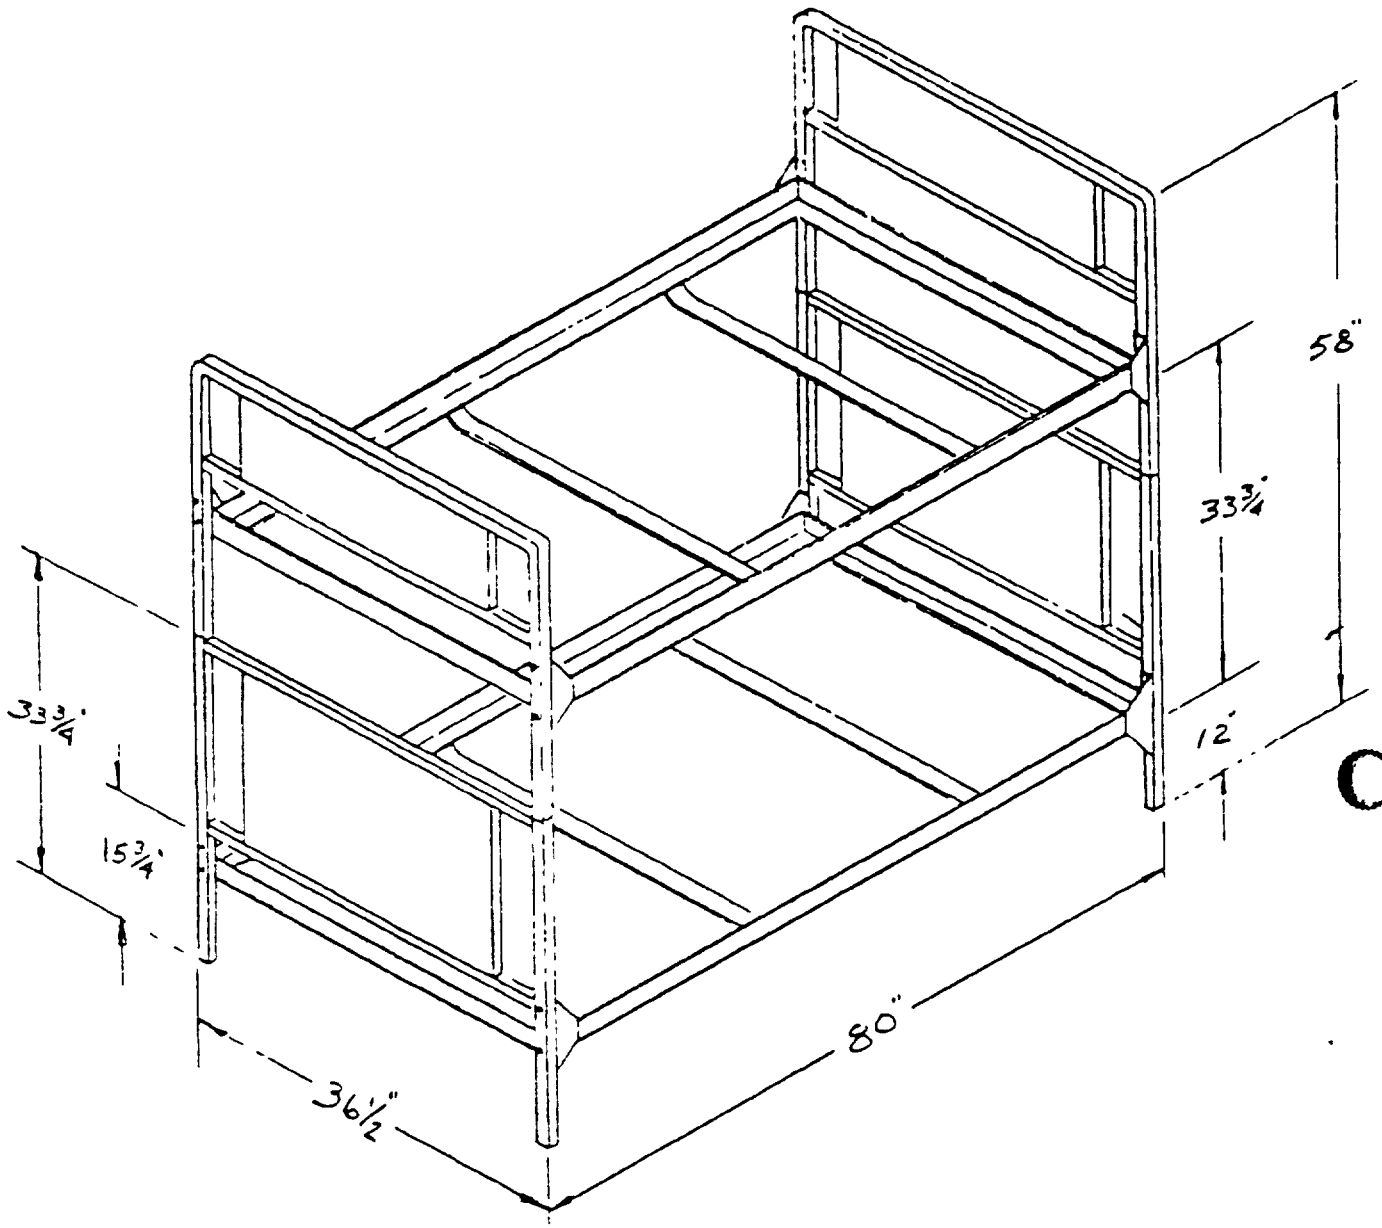


FIG. 15
BUNK BED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

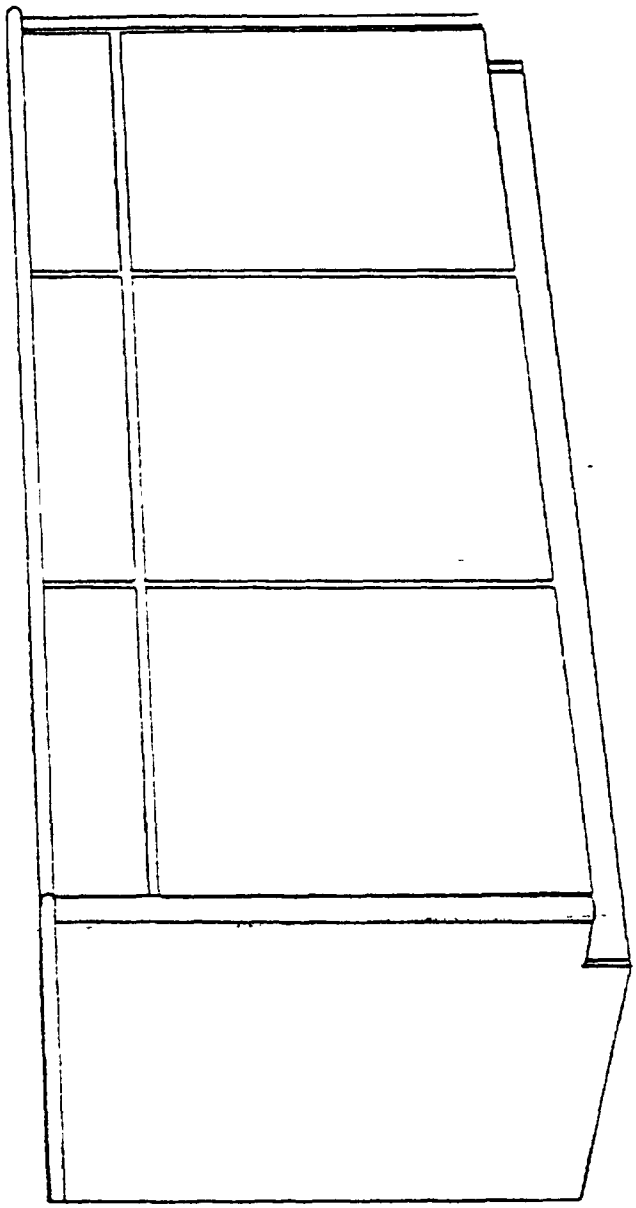


FIG. 16
CONSOLE BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

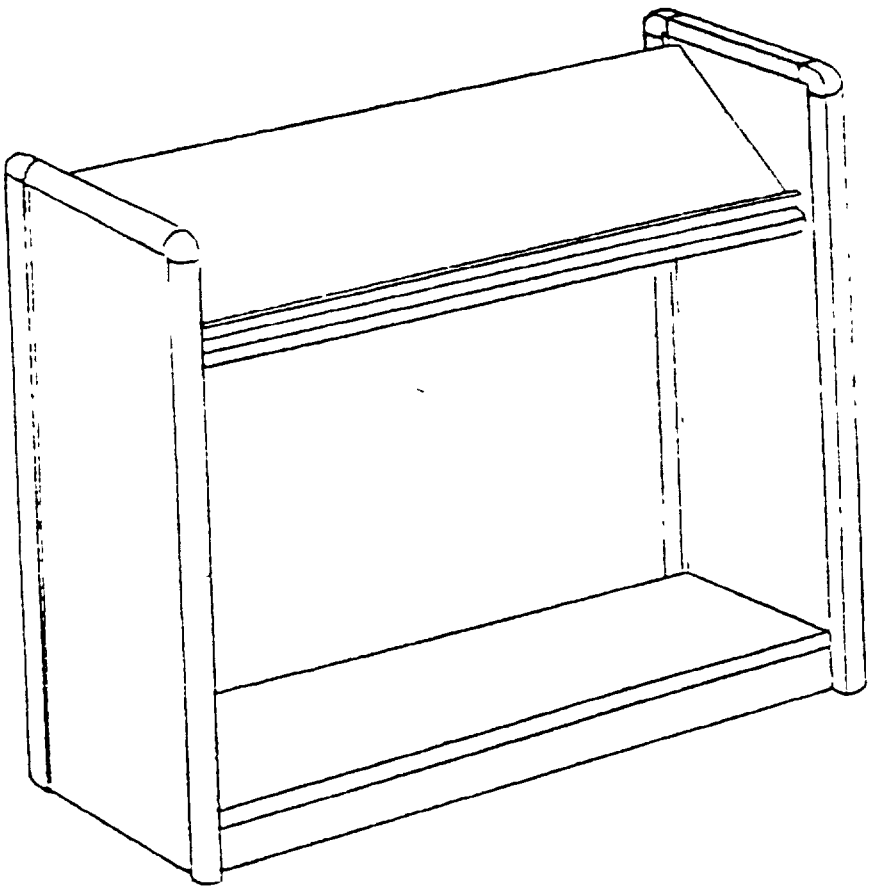


FIG. 17
MAGAZINE RACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

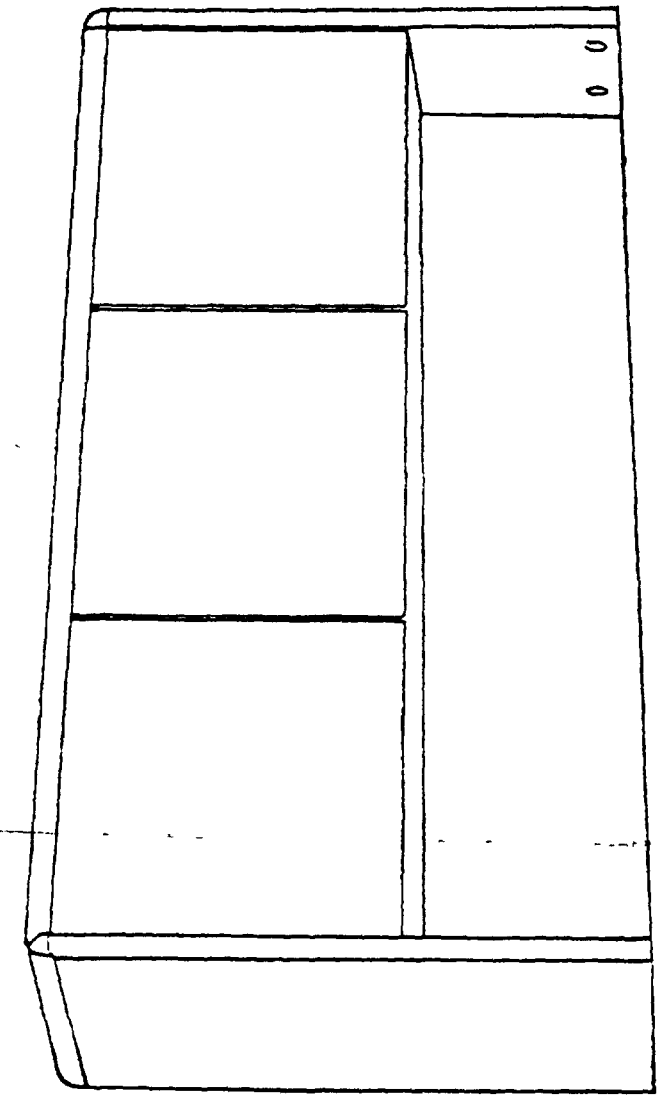


FIG. 18
CONSOLE OVEN CHEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.