AA-F-001873A/GEN(GSA-FSS)
August 23, 1977
SUPERSEDING
AA-F-001873(GSA-FSS)
November 20, 1973

INTERIM FEDERAL SPECIFICATION

FURNITURE, CONTEMPORARY, OAK

(GENERAL SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the general requirements for contemporary oak furniture intended for use in military quarters, dayrooms and lounge areas Specific requirements, figures and drawings and other information pertaining to any individual piece of furniture in this group will be found in the applicable detailed specification Index of applicable paragraphs and sub-paragraphs will be found in the back of this document

1.2 Classification

1.2 1 Types and sizes. The types and sizes of furniture covered by this specification shall be as specified in the applicable detailed specifications, which are as follows

AA-F-001873/1 - Furniture, Contemporary, Oak. Seating Pieces
AA-F-001873/2 - Furniture, Contemporary, Oak: Tables, Occasional
AA-F-001873/3 - Furniture, Contemporary, Oak Bed
AA-F-001873/4 - Furniture, Contemporary, Oak Case Pieces

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of Invitation For Bids or request for proposal, form a part of this specification to the extent specified herein

Federal Specifications

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin
L-P-508 - Plastic Sheet, Laminated, Decorative and Non-decorative
L-T-41 - Table Top and Furniture Assemblies
DD-M-411 - Mirror, Glass.
TT-L-57 - Lacquer, Rubbing, Clear (for Wood Furniture)
TT-S-180 - Sealer and Lubricant for Wood Furniture
CCC-A-680- Artificial Leather (Cloth Coated), Vinyl Resin, Expanded Layer, Upholstery
CCC-C-540- Cloth, Upholstery

Federal Standards

Fed Std. No 123 - Marking for Shipment (Civil Agencies)
Fed Test Method Std No 191 - Textile Test Methods

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402).

(Single copies of Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA).

GSA DC 78-110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2 2 Other publications The following documents form a part of this specification to the extent specified herein Unless a specific issue is identified, the issue in effect on date of Invitation For Bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) publications.

D-905 - Test for Strength Properties of Adhesive Bonds in Shear by Compression Loading.
D-1175 - Abrasion Resistance of Textile Fabrics.
D-1564-71- Testing Slab Flexible Urethane Foam

(Copies of ASTM Specifications may be obtained from American Society for Testing Materials, 1916 Race Street, Philadelphia, PA 19120)

Product and Commercial Standards

CS-236 - Mat-Formed Wood Particleboard
PS-1 - Construction and Industrial Plywood
PS-13 - Uncored Slab Urethane Foam for Bedding and Furniture Cushioning
PS-51 - Hardwood Plywood.
PS-58 - Basic Hardboard

(Copies of the Product and Commercial Standards referenced above, which are Department of Commerce publications, may be obtained upon application, accompanied by money order, coupon, or cash to the Superintendent of Documents, Government Printing Office, Washington, DC 20302 Prices may be obtained from the Superintendent of Documents.)

National Motor Freight Traffic Association Incorporated, Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc , Traffic Department, 1616 P Street, NW, Washington, DC 20036)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606)

3 REQUIREMENTS

3 1 Preproduction sample Unless otherwise specified, before production is commenced, a sample of the finished item and each component part thereof conforming to the requirement of this specification shall be offered for approval of the contracting officer or authorized representative Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all other applicable provisions of this specification (see 6 1 herein)

3.2 Material The materials specified herein shall conform to the applicable specification, as hereinafter specified. Materials not definitely specified shall be of commercial quality, suitable in every respect for the purpose intended. All materials shall be free from defects which may affect serviceability or appearance of the finished product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2 1 Adhesives. The adhesives to be used and the permitted application shall be as shown i[illegible]

TABLE I - Adhesives

Application	Kind of Adhesives
All glue blocks, assembly joints, glued laminated stock, and edge joining or lumber-core panels	Any adhesive that will develop and average block shear strength of not less than 2800 pounds per square inch when tested as specified in 4 4.11 herein

3.2 2 Plastic laminate Plastic laminate shall conform to L-P-508, style D, type I, grade HP, Class . All horizontal surfaces shall be one piece and have a thickness of 0.050" ± 0 005" All vertical surfaces shall be one piece and have a thickness of 0.028" ± 0.004" The grain of the wood grain plastic shall run in the direction of the longest dimension The backing sheet shall be one piece and in accordance with L-P-508, style ND, type \, grade HP It shall be 0 050" ± .005" for horizontal surfaces and 0.020" ± 005' for vertical surfaces Alternatively in lieu of standard HP backing sheet the following substitute backing sheet may be used Wood fiber mat impregnated with resin, such as urea formaldehyde, modified with cross-linking resins such as acrylic or vinyl acetate Percent dry resin to dry fiber shall be 32 6% ± 5% Low pressure product manufactured by a continuous process Thickness of the backer on vertical surfaces shall be .030' ± 003" Thickness of the backer on horizontal surfaces shall be .041" ± 004' Grain direction of the backer shall run in the same direction as the HP plastic laminate face (see 6 3 herein The color and appearance of the plastic laminate shall be English Oak (FSS-1-01008) unless otherwise specified in the invitation to bid A standard reference panel shall be used to determine the acceptability of the color/grain of the plastic laminate (see 6.2 herein)

3 2 3 Particleboard The particleboard shall be in accordance with any of the following types grades and classes in Commercial Standard CS 236

Type I, grade A (high density), class 1,

Type I, grade B (medium density), class 2, except that panels less than one inch thick shall have a minimum average screw holding capacity of 235 pounds on the edges and 285 pounds on the faces

Type II, grade A (high density), class 2,

The thickness of the particleboard shall be as hereafter specified The moisture content of the particleboard shall not exceed 9 percent at time of laminating

3 2 4 Laminate plastic surfaced panels All laminated plastic surfaced panels shall be constructed in accordance with Type IV of L-T-41 All edges of tops and shelves shall be self-edged Only the top and side edges of drawer fronts shall be self-edged

3 2 5 Plywood and Laminated parts

3.2 5 1 Softwood plywood The softwood plywood shall comply with group 1 or 2 grade A-D-INT of PS-1

3 2 5 2 Hardwood plywood The hardwood plywood shall be constructed according to the requirements of PS-51 and as specified herein Bondage shall be type II or better, face and back veneers shall be not less than 1/28 inch thick before sanding and when face and back veneers are not of the same species, the two veneers shall be of the same density and thickness Face veneers shall be o the wood specified in table III and shall be grade 1 (good) flat cut All face veneers in one panel shall be matched for color and grain to present uniform appearance The above requirements shall apply to all paneled surfaces viewed in normal use position and in addition, the back of the desk and vanity and the interior of the bookcase, night table and vanity compartment Cross-bands shall be not less than 1/2- inch thick and shall be grade 1 or better under grade 1 veneers and grade 3 or better crossbands shall be used under grade 2 veneers Veneer cores shall be grade 3 or better and any voids at panel edges shall be filled

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Particleboard core shall be as specified in 3.2.3 herein. The entire exposed edge of the core shall be banded with same kind of wood as other exposed parts. Lumber core panels shall be regular grade except the no butt joints or knots in excess of 1/2 inch diameter, will be permitted Crossbands, veneer cores and lumber cores shall be of medium or low density wood as defined in PS-51 At time of assembly, the moisture content shall be from 5 to 9 percent.

3.2 6 Edge Banding. Lumber core panels shall be edge banded a minimum of one inch finished. The width of the banding shall exceed the minimum when notching is required. The band shall exceed the depth of the notch

3 2 7 Hardboard Hardboard shall be Class 2 (Standard) S1S and 1/8 inch thick as specified in PS-58.

3.2.8 Dowels. Dowels shall be of ash, hickory, maple, birch, beech, or oak Dowels shall be dried to a moisture content not exceeding 5 percent at the time of assembly. They shall be longitudinally or spirally grooved, have beveled ends and be of sufficient length to form a rigid joint. Dowel diameter shall be as specified below.

Dowel diameter	Application
7/16" or 1/2"	7/8" thick tops or shelves Drawer support panels in the Type I, Class 1 bed
3/8" or 1/2"	three used to secure the back panel to the two back leg posts on the Type V chair Also used in the end in the ends of 3/4" thick component parts
5/8" chuck dowel	Used at each end of each stretcher on the Type V chair Chuck dowels shall be pinned into position to prevent twisting of the stretcher
1/2"	Use everywhere except as noted above

3 2 9 Tacks and staples Tacks and staples used to secure upholstery shall be of the commercial type and size as required to adequately and securely retain the upholstery material in place. Staples used to secure wood parts shall be size .050 X 030, of 1010 to 1012 steel, cold drawn, work hardened and copper lacquer coated.

3.2 10 Fastening devices All bolts, nuts, screws, washers, and other fastening devices shall be made corrosion resistant in accordance with the manufacturer's standard commercial practice, except the use of paint or lacquer as sole corrosion resistant agent is prohibited

3.2 11 Hinge The vanity drop lid hinge shall be solid brass, brass plated, chromium plated or nickel plated steel All finishes shall be corrosion resistant The hinge shall be continuous type with equal wings The screw holes shall not be over 2 inches apart, the material thickness not less that 0.072 inch and the length 21-1/2 inches.

3.2 12 Shelf Support The shelves shall be supported by shelf support pins of plated corrosion resistant steel with a stem not less than 1/4 inch in diameter by 3/8 inch long The support area of the pins shall be a minimum of 1/4 inch wide by 3/4 inch long and shall be inserted into positioned hole in the sides and partition panels The holes shall be drilled to enable each shelf to be used in five different vertical positions, spaced one inch apart The bottom shelf shall be sixteen inches from the top and the top shelf seven inches from the top

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2 13 Drawer guides Unless otherwise specified drawer guides shall consist of the following:

Part	Material	Attachment
1 Track holder a. drawer guide channel	(1) Wood	glue and blocks and screwed or nailed to drawer back and front
	(2) 20 gage steel	screwed or stapled to drawer back and front
b drawer guide	high impact plastic	screwed with min. of 3 screws to drawer back
2 Slide (min 1-5/8" wide x 5/8" thick)	wood	screwed to parting rails in front and back of case
3 "L" shaped side saddles (glides)	high impact plastic	securely fastened in the corner on the top face of each front parting rail.

Drawers shall operate quietly and smoothly and shall not drop more than 3/8 inch when three quarters opened

3.2 14 Glides Glides shall be strip type, a minimum 11/16 inch diameter by 3/16 inch thick, of non-marking, non-migrating, high impact plastic, attached with a nail Nails shall be annular ringed or helically threaded, a minimum .075 inch by 1 inch long with a head diameter minimum 184 inch Nails shall be centered and driven fully to prevent them from touching the floor surface

3 2 15 Polyurethane foam Polyurethane foam shall be as defined in PS-13, Uncored Slab Urethane and shall conform to the requirements of Table II when tested as specified in the applicable sections of ASTM D-1564 The physical properties are based upon the use of a 4 inch thick test slab.

TABLE II Physical properties of polyurethane foam

Property	Grade A	B	C	D
25 percent Indentation load deflection, lbs.	27 ± 3	34 ± 3	34 ± 3	44 ± 4
Indentation load ratio (65 percent/25 percent), min.	1.9	1.9	1 9	1 9
Compression set 22 hours/158 degrees F , 90 percent deflection, percent max	15%	15%	15%	15%
Steam autoclave test (condition B) Percent change in 25 percent comp load deflect, percent max	20%	20%	20%	20%
Comp set 2. hour/158 degrees F., 90 percent deflect, percent max	20%	20%	20%	20%
Fatigue test 25 percent indentation load ratio loss, percent max	25%	25%	25%	25%
Thickness loss percent max	5%	5%	5%	5%
Rebound Resilience	40%	45%	45%	45%
Density, pounds/cu. ft. (min)	1.2	1.4	1.4	2.6

3.2 16 Wood varieties and parts Wood parts including solid wood and veneers shall be of the kind of wood listed in Table III and of the quality hereinafter specified. It is to be noted that only one species of wood may be selected from the species allowed under exposed face veneers and exposed solid parts. Exposed parts include all parts and surfaces of each item of furniture which are visible when the item is placed in the normal use position Vanity, desk, night table backs, the exterior of bed drawers and drawer bearing rails shall also be considered exposed areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE III. Varieties of Wood

Exposed Face Veneer 1/	Exposed Solid Parts 1/	Unexposed Solid, Plywood and Laminated Parts 2/	
Red Oak	Red Oak	Red Alder	Beech
White Oak	White Oak	Poplar	Birch
Ash	Ash	Gum	Cherry
Elm	Elm	Maple	Hackberry
Hackberry	Hackberry	Mahogany	Magnolia
		Walnut	Sycamore
		Sycamore	Pecan
		Red Lauan (plywood only)	Oak
			Ash
			Elm

1/ Only one species used throughout a single piece of furniture
2/ Only one species used in laying any one laminate item, except exposed face

3.2.16.1 Seasoning All wood shall be uniformly kiln-dried to a moisture content of from 5 to 8 percent and after kiln-drying shall be held in properly controlled warm dry storage for sufficient period of time to insure a uniform distribution of moisture among the individual pieces After gluing, built-up stock, lumber cores, and laminated rails shall be permitted to cure out or condition to insure a uniform distribution of glue joint moisture and the elimination of sunken joints, spring back, and stresses that impair serviceability of finished appearance before planing and sanding for crossbanding.

3 2 16.2 Solid exterior parts All solid exposed parts shall be free of defects which impair appearance or which might impair serviceability except as follows

a Sound, tight knots of not over 1/8 inch in average diameter are acceptable provided they are not in clusters.

b Figured grain or discoloration is acceptable provided the wood is such that it will permit a uniform color when finished

3.2 16.3 Solid interior parts Wood shall be free from defects which might impair serviceability or appearance except as follows

a Sound, tight knots of not over 1/2 inch in average diameter are permitted provided they are not in clusters, except not over 1/4 inch for drawer sides

b. Holes not over 1/16 inch in diameter are permitted, except drawer sides and backs

c Surface checks with barely perceptible opening not over 4 inches long

d Bark, gum or pitch pockets not over 1/8 inch wide and 2 inches long, except drawer parts exposed when open

3 2.17 Upholstery material

3.2.17.1 Artificial leather Artificial leather (expanded) shall conform to CCC-A-680, class 2 with treatments (a) (1) regular fire resistance, (b) Mildew resistance, and (c) Oil Resistance

3.2 17 1 1 Color of artificial leather Color of artificial leather is chosen from following list and is specified in the invitation to bid A standard reference sample shall be used to determine the acceptability of the color of the artificial leather (see 6 2 herein)

Red	FSS-V-07001	Brown	FSS-V-07006
Green	FSS-V-07002	Chestnut	FSS-V-07007
Ultramarine blue	FSS-V-07003	Gold	FSS-V-07008
Bittersweet	FSS-V-07004	Sand	FSS-V-07009
Zinnia	FSS-V-07005	Black	FSS-V-07010

3.2.17.2 Upholstery fabric. Unless otherwise specified in 6.1 herein, the upholstery fabric shall conform to type VIII of CCC-C-540, except that it shall be 100 percent flat nylon plain weave and for the characteristics listed below the requirements shall be as specified:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Characteristic		Requirement	Test Method 1/
Tearing strength, lbs., minimum			
Warp	-	40	5136
Filling	-	40	5136
Breaking strength, lbs., minimum			
Warp	-	250	5100
Filling	-	250	5100
Abrasion resistance, cycles, minimum - (Taber Abrader, CS #10 wheels, 500 gram load)	-	8,000 2/	ASTM D-1175
Seam efficiency	-	3/	5110

1/ Methods 5100, 5110 and 5136 are included in Federal Test Method Standard No 191.
2/ There shall be no yarn break. A break means the complete breaking of a yarn
3/ Nylon thread of a size comparable to that specified in CCC-C-540 may be used to test for the seam efficiency requirements of CCC-C-540

3.2.17.2.1 Color/texture of upholstery fabric. The color of the upholstery fabric is choosen from the following list and is specified in the invitation to bid. A standard reference sample shall be use to determine the acceptability of the color/texture of the fabric (see 6.2 herein).

Red	-	FSS F 01001	Black Brown	-	FSS F 01012
Blue	-	FSS F 01002	Yellow Gold	-	FSS F 01018
Bittersweet	-	FSS F 01003	Orange	-	FSS F 01019
Kelly Green	-	FSS F 01004	Brown	-	FSS F 01022
Sand	-	FSS F 01010			

3 2 17.3 Cambric The cambric shall be a plain weave cotton fabric and shall weigh not less than 3.2 ounces per linear yard on a 30 inch width basis when tested as specified in Method 5041 of Fed Test Method Std No 191 It shall have a breaking strength of not less than 38 pounds in the warp direction and 33 pounds in the filling direction when tested as specified in Method 5100 of Fed Test Method Std. No. 191 The color shall be black and one side of the fabric shall be glazed.

3.2 17 4 Polyethylene fabric A black spunbonded polyethylene sheet fabric weighing not less than 1 15 ounce per square yard, a spunbonded polypropylene sheet fabric weighing not less than 2 ounces per square yard or a black needlebonded and thermally bonded polypropylene sheet fabric weighing not less 1 7 ounces per square yard may be used as alternate for cambric

3.2.18 Mirrors

3.2 18.1 Glass Mirror glass shall conform to grade 1 of DD-M-411

3.2.18.2 Plastic Mirror p astic shall be non-breakable acrylic (see 6.3 herein)

3 3 Construction The general construction shall be in accordance with the requirements specified herein Any detail not specified herein shall be in accordance with the manufacturer's regular commercial practices of the quality represented by the construction details provided herein The construction requirements specified herein are minimum The contractor will exceed these requirements wherever necessary to conform to the test provisions.

3.3.1 Design The items offered by the bidder shall strictly adhere to the design and style specified in the invitation for bids and as illustr ed in the figures of the applicable detailed specifications

3.3.2 Assembly. All mechanical attachments, gluing and joinery shall provide secure and rigid joints in proper alignment. Joints shall have sufficient strength to withstand the applicable tests specified in 4 4 herein without the loosening of any part or causing any other defect which might affect the appearance or serviceability of the items.

3 3.3 Tolerances The following tolerances will be permitted except where otherwise indicated in the detailed specification. Measurements shall be made without glides attached to items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.3.1 Overall tolerances.

(a) Height - plus or minus 1/4 inch.
(b) Width - plus or minus 1/4 inch.
(c) Length - plus or minus 1/4 inch.
(d) Depth - plus or minus 1/4 inch

3 3.3.2 Component part tolerances

(a)	Dimension of any solid wood part (thickness only)	- plus 1/16 inch minus 1/32 inch.
(b)	Dimension of any plywood part (thickness only)	- plus or minus 1/32 inch
(c)	Dimensions of any laminated part (thickness only)	- plus 1/16 inch minus 1/16 inch
(d)	Any dimension, not otherwise specified	- plus or minus 1/8 inch.

3.3.4 Joinery Unless otherwise specified, all joints shall be splined, mortised and tenoned, tongued and grooved, dovetailed, or double doweled with a sufficient application of glue, specified in 3.2.1 and Table I herein, applied to the joint and held under pressure until the glue has properly set Unless otherwise specified nails or brads shall not be used for holding the joints while glue is setting Starved or insufficiently glued joints will not be acceptable.

3.3 5 Edging Edges and corners of case pieces shall be eased approximately 1/16 inch Edges of exterior frames of seating pieces, tables, beds, mirrors, desk and vanity legs and top edges of drawer bodies shall have a 1/4 inch radius profile

3 4 Method of finishing All surfaces normally exposed to view including underside of stretchers and aprons shall be sanded smooth, filled and finished The finish of the wood shall be satin and shall match plastic laminate English Oak (FSS-L-01008) for color unless otherwise specified in the invitation to bid A standard reference panel shall be used to determine the acceptability of the finish (see 6.2 herein)

3 4 1 Procedure for clear wood finish on open pore wood.

1. Sap stain to equalize wood color.
2. Apply selected colorant to wood to produce color specified.
3 Wash coat with adhesive sealer
4 Scuff sand, using fineness of sandpaper grit needed to produce proper surface
5 Fill to degree necessary to match sample
6 Seal with adhesive type sealer
7 Sand, using fineness of sandpaper grit needed to give proper surface
8 Shade to tie in color variation, if necessary
9 Top coat with lacquer
10 The lacquer and finish shall be of a quality to meet the requirements specified in 4 4 10 and subparagraphs herein
11 Rub, steel wool, wax or polish, as required to match sample panel

NOTE Operation number 8 may be performed where shown or after operation number 5 Some of the above steps may be combined according to the manufacturer's commercial practice provided the finish meets the requirement specified in 4.4.10 herein

The natural grain of the wood shall not be clouded by the finishing materials Bleaching agents or materials shall not be used The application of materials, drying time, sanding, cleaning and rubbing shall be controlled to produce items of smooth, uniform exposed surfaces without blisters, pits, wrinkles runs, tackiness or orange peel.

3.4.2 Unexposed parts and surfaces. All unexposed interior parts and surfaces including the case backs and bottoms, inside of bed rails, drawer interior and exterior surfaces, drawer bearer sections, and drawer guides shall be machined smooth and cleaned. After the furniture has been finished as specified in 3 4, herein the above parts shall be treated by either method 1 or method 2 as specified below

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Method 1, chemical treatment. The entire surface shall be given a moisture-retarding and lubricating treatment. The liquid used shall conform to the requirements of composition B as specified in TT-S-00180(GSA-FSS) The entire surfaces of the unexposed parts of the drawers shall be submerged in the moisture retarding solution for not less than 3 minutes. The drawers shall be allowed to drain before insertion into the furniture cases and all surplus of the solution shall be throughly wiped from finished surfaces to insure a clean smooth finish, and free sliding drawer operation.

Alternatively, the solution may be applied by spraying a heavy wet coat, then oven dried for not less than 30 minutes at a temperature of not less than 120°.

Method 2, sealer and lacquer The above parts shall receive one coat of lacquer sealer and one coat of clear lacquer The outside of drawer guides shall be rubbed with paraffin.

3.5 Labels. Each upholstered item shall have a label attached which conforms to the legal requirements of the state in which the items are manufactured.

3.6 Identification marking Each item shall be permanently and legibly marked in an inconspicuous place with the National Stock Number, contract number, date of manufacture, the manufacturer's name or trade mark and the specification number, so that the source of supply may be readily determined.

3.7 Workmanship The details of construction including design, joining, assembly and marking shall be in accordance with cited requirements and tolerances provided. All joints shall be tight and the method of construction and assembly of the items shall be such that they are free of all defects that detract from appearance or serviceability.

4 QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements

4.2 Preproduction inspection Examination and testing shall be made on the completely fabricated item for all provisions of this specification.

4.3 Sampling for inspection and acceptance Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated

4.3.1 Component and material inspection In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.3.2 Inspection of end item The lot shall be all units of the same type offered for inspection at one time The samples shall be completely assembled units

4.3.3 Inspection levels and acceptable quality levels (AQL'S) Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in table IV below

TABLE IV Acceptable quality levels in accordance with MIL-STD-105

For examination in	Inspection level	AQL's	
		Major	Total
4.3.4	I	4	10.0
4.3.5	I	-	6.5
4.3.6	I	-	6.5

4.3.4 Visual examination, assembled units. The assembled units shall be examined for defects as specified in Table V

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects

Examine	Defect	Classification Major	Classification Minor
Finish and appearance of exposed wood parts visible in normal use position.	Does not match standard reference panel with respect to color.		X
	Discoloration (Bleeding) over 1 square inch		X
	Spotted, affecting appearance.		X
	Light or dark colored areas, affecting appearance		X
	Area of no lacquer film over 1 square inch in area.	X	
	Glue stain or glue line clearly showing stain of glue line appearance		X
	Excess glue not removed.		X
	Finish peeling, flaking, blistered, Cracked, checked or wrinkled	X	
	Finish cut or rubbed through to wood		X
	Open grain Finishing material not filling pores		X
	Orange peel, affecting appearance		X
	Damage or scratch, less than 1 inch long, or 1 inch square		X
	Damage or scratch over 1 inch square or 1 inch long	X	
	Finish tacky, i e , not completely dry.		X
	Rough or gritty surface or foreign matter imbedded in finish		X
	Light colored edge not touched up		X
	Burn-in or repairs not neatly accomplished		X
	Unstained (white) wood visible when item is in normal use position		X
Finish of exterior wood parts not visible in normal use position.	Finish not applied where required		X
	Stain or sealer coat omitted where required		X
Finish of interior and concealed wood surfaces	Top edge of drawer front scratched, bruised, or not finished same as exterior wood surfaces		X
	Stain or sealer coat omitted from bottom of drawer.		X
	Opening or top edge of drawer scratched or bruised, or not finished on the exterior wood surfaces		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects (con.)

Examine	Defect	Classification Major	Classification Minor
Finish of interior and concealed wood surfaces	Interior surfaces of drawers not finished as specified.		X
	Drawer interior dirty or roughly finished.		X
	Excess glue not removed from drawer interior.		X
	Drawer tray not finished.		X
	Any surface of drawer tray rough.		X
	Rough surface on handhold on step stool.		X
Finish of hardware	Component tarnished or stained, affecting appearance.		X
	Rusted or corroded.		X
	Not coated with protective finish.		X
Quality of plywood and laminated wood on exposed surfaces	Not harmonious grain match between panels on any one item.		X
	Species of wood not as specified	X	
	Number of plies not as specified.	X	
	Open joint in face veneer	X	
	Face veneer butt-matched.		X
	Uneven core surface telegraphing.		X
	Any cross break in veneer	X	
	Sanded through face ply.	X	
	Waves of uneven sanding, affecting appearance.		X
	Machine mark, affecting appearance.		X
	Veneer blister.		X
	Veneer chipped or splintered.		X
	Any loose or unsound knot		X
	Conspicuous patch		X
	Decay, affecting appearance		X
	Unfilled void at exposed edge.		X
	Species of wood not as specified.	X	
	Components not fabricated of one piece solid wood where required.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects (con.)

Examine	Defect	Classification Major	Minor
Quality of plywood and laminated wood on exposed surfaces (con)	More than 1 species of wood used for exposed wood components of any one item.		X
	Direction of grain not as specified		X
	Check or split over 1 inch in length	X	
	Wood warped, affecting appearance or serviceability	X	
	Loosened grain or shake on unexposed surface		X
	Loosened grain or shake on exposed surface.		X
	Honeycomb		X
	Loose or unsound knot		X
	Hole on exterior surface, affecting appearance		X
	Glued up pieces uneven in built-up stock.		X
	Wave of uneven sanding		X
	Machine mark on exposed surface, affecting appearance		X
	Any mineral streak on exposed surface over 1/16 inch by 4 inches or 1/8 inch by 2 inches		X
	Wood chipped or splintered on exposed surface of drawer interior		X
	Any manufacturing defect or defect native to the wood filled in with plastic wood or other filler material		X
Quality of plywood or unexposed surfaces	Any manufacturer's defect or defect native to the wood filled with plastic wood or other filler material		X
	Species of wood not as specified	X	
	Number of plies not as specified		X
	Veneer delaminated	X	
	Any knot holes	X	
Quality of Particleboard	Not material specified	X	
Quality of laminated plastic	Not material specified	X	
	Color or grain character of face sheet does not match reference panel.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects (con.)

Examine	Defect	Classification Major	Classification Minor
Quality of laminated plastic (con.)	Face or backing sheet missing.	X	
	Top surface not proper finish.		X
	Sheet containing area of no adhesion		X
	Face sheet damaged, dented, cracked, marred, or discolored		X
	Scratch or nick in face sheet, affecting appearance		X
	Evidence of telegraphing lumber-core grain.		X
Construction, assembly and attachment of unexposed and exposed parts	Component missing.	X	
	Component in wrong location, except attaching implements		X
	Component loose or insecurely fastened where rigidity is required	X	
	Component out of alignment or out of square affecting serviceability	X	
	Poor fit of component part on mating part		X
	Defective hinge or other mechanism that does not function properly	X	
	Wood component not glued as specified	X	
	Solid wood used in place of veneer or vice versa.		X
	Wood component damaged or not properly machined.		X
	Routing not uniform or uneven		X
	Components not chamfered where required		X
	Edges not eased where required		X
	Any loose or unsound glued joint.	X	
	Wood joint not as specified		X
	Glue joint open.		X
	Top panels warped ¼ inch or more width or length	X	
	Overhang of top panel uneven or not as specified.		X
	Drawer clearance not as specified.		X
	Drawer does not close completely.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects (con.)

Examine	Defect	Classification Major	Minor
Construction, assembly and attachment of unexposed and exposed parts (con)	Drawer binds when opening or closing.	X	
	Glides improperly positioned.		X
	Legs or base uneven		X
	Legs not as specified or not as shown on drawings or figures	X	
	Component not size or shape specified		X
	Component not type or design specified		X
	Component not assembled as specified		X
Workmanship and attachment of screws, bolts, and nuts	Any attachment device not type or size as specified	X	
	Material not as specified		X
	Spacing of screws not as specified	X	
	Screw point visibly bulging wood		X
	Wood at insertion point not countersunk when specified		X
	Screws or bolts broken off		X
	Screws or bolt in wrong location		X
	More than 1 screw, bolt, or nut missing	X	
	More than 1 bolt, screw, or nut not drawn up tightly.		X
	Threads on nuts or bolts stripped		X
Indentification marking	Text incomplete		X
	Missing, incorrect or illegible		X
	Marking in wrong location		X
Upholstery	Not material specified	X	
	Color not as specified		X
	Stained, streaked, spotted, faded, affecting appearance		X
Upholstery workmanship	Not securely attached.	X	
	Stitching not as specified		X
	Lines of seams and welts not true and even.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of End Item Defects (con.)

Examine	Defect	Classification Major	Minor
Glides	Not type specified.	X	
	Missing when specified.	X	
Arms	Not constructed as specified.	X	
Seat, back pan and frames	No bumper or cushion filler on edges	X	
	Sharp edges contacting upholstery material.	X	
	Legs of side chair not braced.	X	
Labels	Missing.		X
Bed Springs	Any dimension not as specified in the bed spring.	X	
	Any thickness of metal not as specified in bed spring	X	
	Any construction requirement omitted on bed spring.	X	
	Baked enamel flaking or peeling on bed spring		X
	Sharp edges on any corner or edge of steel components of bed		X
	Any helical coils missing	X	
	Springs painted wrong color on bed	X	

4.3.5 Dimensional examination Any dimension not within tolerance specified shall be classified as a defect (see 4.3.3 herein)

4.3.6 Examination of preparation for delivery An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in Table VI The sample unit shall be one shipping container fully prepared for delivery The lot size shall be the number of containers in the inspection lot (see 4.3.3 herein)

TABLE VI. Preparation for delivery defects

Examine	Defect
Marking	Incorrect, illegible, of improper size, location, sequence, or method of application
Material	Any non-conforming components, component missing, damaged, or otherwise defective affecting serviceability
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, panels, and doors of contents and padding of perimeter edges
Contents	Not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4 4 Performance tests. The following tests shall be conducted on one sample item of each type as specified The order of testing is at the discretion of the contractor and will not necessarily be performed in the order in which they are listed in the specification In general, they should progress from the least severe structurally to the most severe. Tests shall be conducted as specified herein and illustrated in Figures 1 through 9 herein, which are examples of test fixtures and equipment to be used for applying specific loads to the items but do not preclude the use of other test fixtures and set-ups provided the effect of the load systems are duplicated. Points of reference lines shall be provided on various parts of the items so that accurate measurement may be taken to determine if any permanent distortion has taken place under test

4 4 1 Drop test for seats Test all types of seating pieces except Types V and VI Glides shall be secured to prevent movement during the test A bag of sand not more than 16 inches in diameter, weighing 275 pounds, shall be dropped one time onto the center of the seats from a height of 6 inches Dimensions established by the points and reference lines shall be taken Permanent distortion in excess of 1/4 inch, and failure of wood or joints or any other damage to any parts of the items that would affect their serviceability shall be cause for rejection (see Figure 1 herein).

4 4 2 Back test Test type V of seating pieces. The chair shall be secured to the floor or platform in an upright position to prevent movement during the test A spring dynamometer, or an equally effective device, shall be attached to both ends of a yoke which shall be fastened to the top of the chair back frame A back pull of 200 pounds shall be maintained for 5 minutes The pull shall be applied at a 90 degree angle to the slope of the back Dimensions established by the reference lines shall be taken Permanent distortion of 1/4 inch, any failure of wood or joints or any other damage to any parts of the chair that would affect their serviceability shall be cause for rejection (see Figure 2 herein)

4 4 3 Leg test A Test all Types of occasional tables and all Types of seating pieces except Type VI The items shall be placed on their sides and the lower front legs shall be supported their entire length These legs shall be restrained from movement. Reference lines shall be established to determine if any distortion has taken place during the test A perpendicular test load of 175 pounds shall be applied 1 inch from the bottom of the top front legs through a 1/2 inch diameter rod Permanent distortion in excess of 1/4 inch, any failure of wood or joints or any other damage to any parts of the items that would affect their serviceability shall be cause for rejection (see Figure 3 herein)

4 4 4 Leg test B Test same items tested in Leg Test A The items shall be placed on their backs or ends The lower legs shall be restrained from movement. Reference lines shall be established to determine if any distortion has taken place during the test A perpendicular test load of 300 pounds shall be applied through a 1/2 inch diameter rod placed perpendicular to the long axis of the front legs and 1 inch from the bottom of the legs Each front leg of each item shall be subjected to this test Permanent distortion in excess of 1/8 inch, any failure of wood or joints or any other damage to any parts of the items that would affect their serviceability shall be cause for rejection (see Figure 4 herein).

4 4 5 Racking test Test only Type V of seating pieces The chair shall be tilted on its rear legs and the legs restrained from movement Reference lines shall be established to determine if any distortion has taken place during the test A beam shall be placed across the front edge of the seat and the top edge of the back A downward test load of 300 pounds shall be applied at a point vertically above the intersection of the rear legs and the floor Permanent distortion in excess of 1/8 inch, any failure of wood or joints or any other damage to any parts of the chair that would affect its seviceability shall be cause for rejection (see Figure 5 herein)

4.4 6 Arm test Test all Types of seating pieces except Type IV, V and VI A stationary support, to which a shaped block rest has been securely bolted, shall be provided The block rest shall be shaped to fit the contour and extend the full length of the seat rail but notched so as not to provide support for the chair and settee arm The chair and settee shall be placed against the shaped block rest in an upright position and clamped to the floor by a bar braced from the front to the rear on the seat frame Reference lines shall be established to determine if any distortion has taken place during the test A spring dynamometer or any effective device shall be attached to the outer front end of the arm A horizontal pull of 200 pounds shall be applied in an outward direction perpendicular to the plane of the arm The permanent distortion shall be measured as a horizontal movement of a line on the top of the arm frame before and after the application of the test load. Permanent distortion in excess of 1/8 inch, any failure of the wood or joints or any other damage to any part of the chair that would affect its serviceability shall be cause for rejection (see Figure 6 herein).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.4.7 Leg impact test. Test all Types and Sizes of seating pieces, occasional tables, bed and case pieces. A 2 by 4 wood block shall be securely positioned so that it will come in contact with one leg or corner at the lowest point. The items shall be pushed along the floor at a normal walking speed of between 2.5 and 3.0 miles per hour for a distance of 20 feet. The block or items shall be positioned so that only one leg or base corner strikes the obstacle Pressure shall be released at the time of impact. Each leg or base corner shall be subjected to the test. Any permanent deformation, set, loosening of parts, cracked or fractured joints or any other damage to any part of the items that would affect their serviceability shall be cause for rejection.

4.4.8 Bed drop-in spring tests.

4 4.8.1 Roller deflection test A cylinder of 18 inches diameter by 24 inches long, filled with water to a total weight of 200 pounds, is placed across the springs and rolled across the length of the bed spring, less the mattress pad The bed spring shall be elevated from the floor and supported at the four corners. The rolling motion starts 16 inches from the end of the bed and moves across the bed to 16 inches from other end. The up and back motion is repeated to a total of 25,000 cycles. Upon removal of the test cylinder, the crown in the arc of the spring strands shall not have changed by plus or minus 1/2 inch. The connecting links may be replaced as necessary during test. (Figure 7 herein). Failure of the test shall be cause for rejection.

4.4.8.2 Rapid pressure impact test The bed springs, less the mattress pad, is mounted and secured to an accelerated pressure deflection machine. The machine operates at approximately 2,200 strokes per hour The stroke of the shaft is adjusted to exert a downward pressure of 2 inches measured from the top of the spring strand After 100,000 deflections (strokes) the set shall not exceed plus or minus 1/4 inch in the spring The connecting links may be replaced as necessary during test. (Figure 8 herein) Failure of the test shall be cause for rejection

4.4.8.3 Static load test A 600 pound load shall be placed across the side angles of the spring unit of an assembled bed, midway between the bed ends. The test load used is 18 inches wide (bottom) by 31 inches high by 42 inches long At the center of the spring unit, the deflection of the spring unit side angle shall not be more than 9/16 inches with the 600 pounds in place Upon removal of the test load, the spring unit angle shall not have set more than 1/16 inch and shall show no visible distortion in the spring unit frame. (Figure 9 herein) Failure of the test shall be cause for rejection

4 4 9 Static loading Test all Types of occasional tables and case pieces The height of the items shall be measured accurately A static load of 700 pounds shall be applied vertically to a 12 inch diameter area in the center of the tops and allowed to remain in place for 30 minutes. Upon removal of the load, the height shall be measured Any permanent distortion of more than 1/8 inch or any failure which affects the serviceability of the items shall be cause for rejection.

4 4.10 Test of finish system The following tests shall be made of panels produced in accordance with the procedures used in producing the furniture.

4 4.10 1 Resistance tests (spot test) Perform tests as specified in paragraphs 4.3.7, 4.3 7 1, 4.3.7.2, 4.3 7 3 and 4 3 7.4 of Federal Specification TT-L-57,

4 4.10 2 Print resistance tests Perform tests as specified in paragraphs 4.3.8, 4.3.8.1 and 4 3 8 2 of Federal Specification TT-L-57

4 4.10 3 Ultra-violet light resistance Ultra-violet light resistance shall be as specified in 4 3 9 of Federal Specification TT-L-57 except that panel preparation as specified shall be disregarded, and tests shall be made on complete finished wood panels of the same wood as used in production The finish shall be produced in accordance with procedures used in producing the furniture

4.4.10.4 Toughness and adhesion Test for toughness and adhesion shall be made using a Bell Laboratories adhesion tester The panel shall be marred both parallel and perpendicular to the grain The resulting indentation shall show no whitening which is evidence of film separation. The film shall conform to the contour of the indentation and shall not crack in a brittle manner in or along the indentation The test shall be made on completely finished wood panels of the same wood as used in production. The finish panel shall be produced in accordance with procedures used in producing the furniture.

4.4.11 Test for adhesives Test for adhesives shall be as shown in Table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE VII. Test for adhesives

Component	Characteristic	Requirement Reference	Test Method	Sample Unit
Adhesive	Block shear test	3.2.1 herein	ASTM D-905 1/ 2/ 3/	1/2 pint

1/ The following modifications apply when testing casein-type adhesive the test block shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ Whenever a specimen fails at a load of less than 2,800 pounds per square inch and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 pounds per square inch or higher, the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 pounds per square inch

4 4 12 Test for upholstery fabric. The upholstery fabric shall be tested in accordance with the requirement of 3 2 17.2 herein and any failure to comply shall be reason for rejection

5 PREPARATION FOR DELIVERY

5.1 Packaging Unless otherwise specified in the invitation for bids each unit shall be packaged in accordance with the manufacturer's standard commercial practice.

5 2 Packing Unless otherwise specified in the invitation for bids each unit, packaged as specified in 5 1 above, shall be packed in close fitting containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification

5.3 Marking Marking shall be as specified in section 5.3 of the applicable detailed specification

6 NOTES

6.1 Ordering data shall be as specified in section 6 of the applicable detailed specification.

6.2 Samples Laminated plastic, vinyl, fabric samples and a list of products which exemplify the color, grain or texture desired, may be obtained from

Technical Support Branch - FEBS
National Furniture Center
GSA-FSS
Washington, D C 20406

6.3 Sources of supply The following manufacturers/distributers are known sources of supply for the item indicated

3 2 2 Plastic laminate (alternate backing sheet)

Gator - Ply
International Paper Company
Statesville, NC 28677

3 2.18.2 Mirror, plastic.

PLXI-VUE Decoralate, or equal
Ram Products
Wayne, MI

Colonial Kolomite Co., or equal
Chicago, IL 60647

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

INDEX OF PARAGRAPH NUMBERS AND TITLES
(General Specification - AA-F-001873A)

1. SCOPE AND CLASSIFICATION

1.1 Scope.
1.2 Classification.

2. APPLICABLE DOCUMENTS

2.2 Other publications

ASTM Designations
Product and Commercial Standards
National Motor Freight Traffic Association
Uniform Classification Committee

3. REQUIREMENTS

3.1 Preproduction sample.
3.2 Materials.
3.3 Construction.
3.4 Method of finishing.
3.5 Labels
3 7 Workmanship.

4 QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.
4.2 Preproduction inspection
4.3 Sampling for inspection and Acceptance.
4 4 Performance tests.

5. PREPARATION FOR DELIVERY

6. NOTES

6.1 Ordering data
6.2 Samples
6.3 Sources of supply

INDEX OF PARAGRAPH NUMBER AND TITLES
(General Specification - AA-F-001873/1A)

1 SCOPE AND CLASSIFICATION

1.1 Scope
1.2 Classification.

2 APPLICABLE DOCUMENTS

2.1 Specifications and Standards
2.2 Other publications

3 REQUIREMENTS

3.1 Preproduction sample.
3.2 Materials. (TABLE I.)
3.3 Construction (TABLE II.)
3.4 Type I, Chair
3.5 Type II, Sofa.
3.6 Type III, Sofa.
3.7 Type IV, Ottoman.
3.8 Cushions.
3.9 Type V, Chair.
3.10 Type VI, bench cushion.
3.11 Labels.
3.12 Identification marking
3.13 Workmanship.

4. QUALITY ASSURANCE PROVISIONS

5. PREPARATION FOR DELIVERY

5.1 Packaging.
5.2 Packing.
5.3 Marking.

6. NOTES

6.1 Ordering data.

INDEX TO PARAGRAPH NUMBERS AND TITLES
(General Specification AA-F-001873/2A)

1. SCOPE AND CLASSIFICATION

1.1 Scope.
1.2 Classification.

2. APPLICABLE DOCUMENTS

2.1 Specifications and Standards
2.2 Other publications.

3. REQUIREMENTS

3.1 Preproduction sample.
3.2 Materials (TABLE I)
3.3 Construction. (TABLE II)
3.4 Type I, size 1, square coffee table
3.5 Type I, size 2, rectangular coffee table.
3.6 Type II, lamp table
3.7 Type III, end table.
3.8 Type IV, night table.
3.9 Identification marking.
3.10 Workmanship.

4. QUALITY ASSURANCE PROVISIONS

5. PREPARATION FOR DELIVERY

5.1 Packaging.
5.2 Packing.
5.3 Marking

6 NOTES

6.1 Ordering data.

INDEX TO PARAGRAPH NUMBERS AND TITLES
(General Specification AA-F-001873/3A)

1. SCOPE AND CLASSIFICATION

1.1 Scope.
1.2 Classification.

2. APPLICABLE DOCUMENTS

2.1 Specifications and Standards.
2.2 Other publications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

INDEX TO PARAGRAPH NUMBERS AND TITLES
(General Specification AA-F-001873/3A (con.)

3 REQUIREMENTS

3.1 Preproduction sample
3 2 Materials (TABLE I.)
3.3 Construction (TABLE II.)
3.4 Type I, Class 1, bed.
3 5 Type I, Class 2, bed
3.6 Drop-in spring unit
3 7 Identification marking.
3 8 Workmanship.

4. QUALITY ASSURANCE PROVISIONS

5. PREPARATION FOR DELIVERY

5.1 Packaging.
5.2 Packing
5 3 Marking

6 NOTES

6.1 Ordering data.

INDEX TO PARAGRAPH NUMBERS AND TITLES
(General Specification AA-F-001873/4A)

1 SCOPE AND CLASSIFICATION

1.1 Scope.
1.2 Classification.

2 APPLICABLE DOCUMENTS

2 1 Specifications and Standards
2.2 Other publications.

3 REQUIREMENTS

3 1 Preproduction sample
3.2 Materials (TABLE I.)
3 3 Construction (TABLE II.)
3 4 Type I, Dresser
3 5 Type II, Mirror and support
3.6 Type III, Table
3 7 Type IV, Desk
3.8 Type V, Vanity
3 9 Type VI, Bookcase
3.10 Finish
3 11 Identification marking
3 12 Workmanship

4. QUALITY ASSURANCE PROVISIONS

5 PREPARATION FOR DELIVERY

5.1 Packaging.
5.2 Packing
5.3 Marking.

6. NOTES

6.1 Ordering data.

GSA DC 78-110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

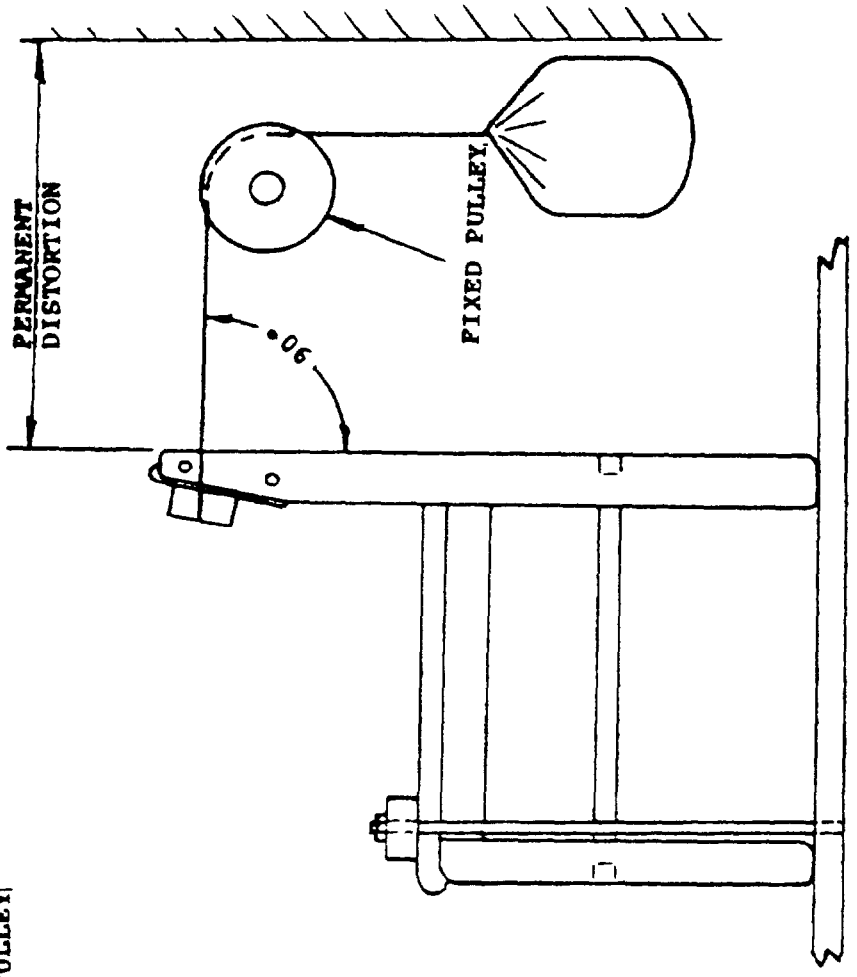


FIGURE 2 - BACK TEST

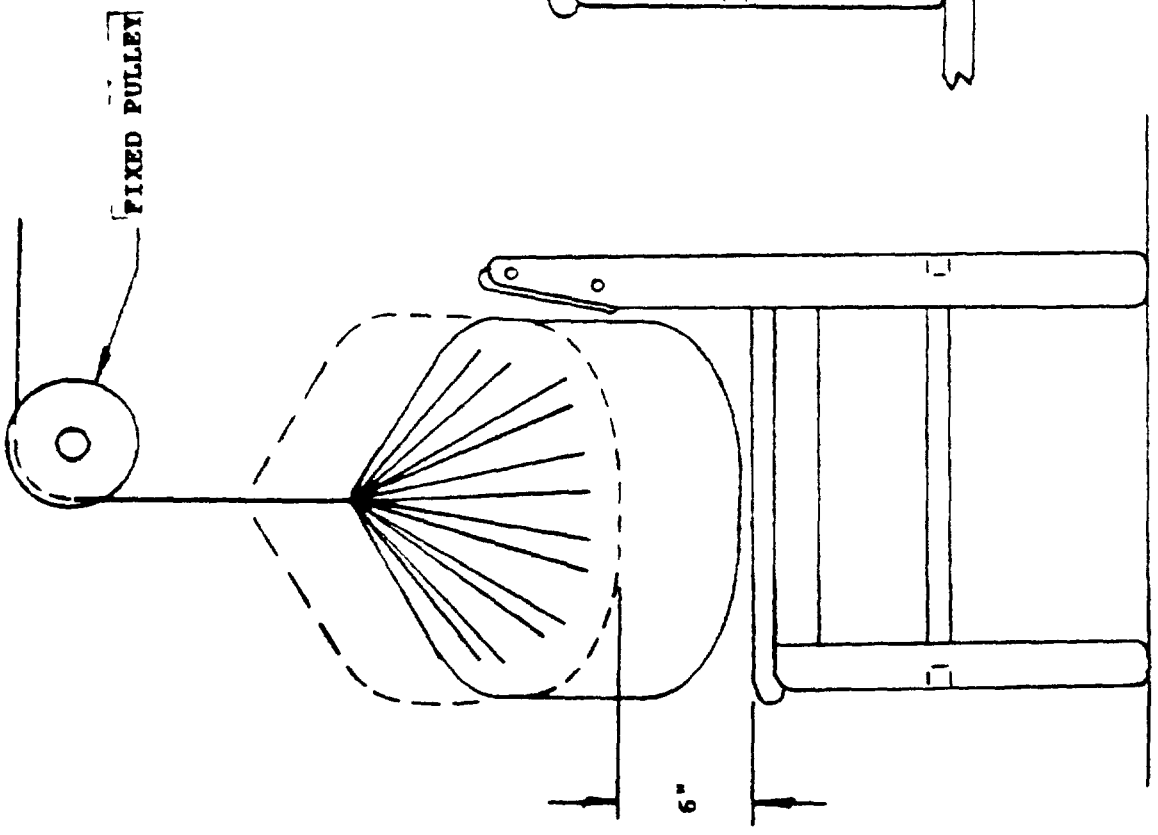


FIGURE 1 - DROP TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

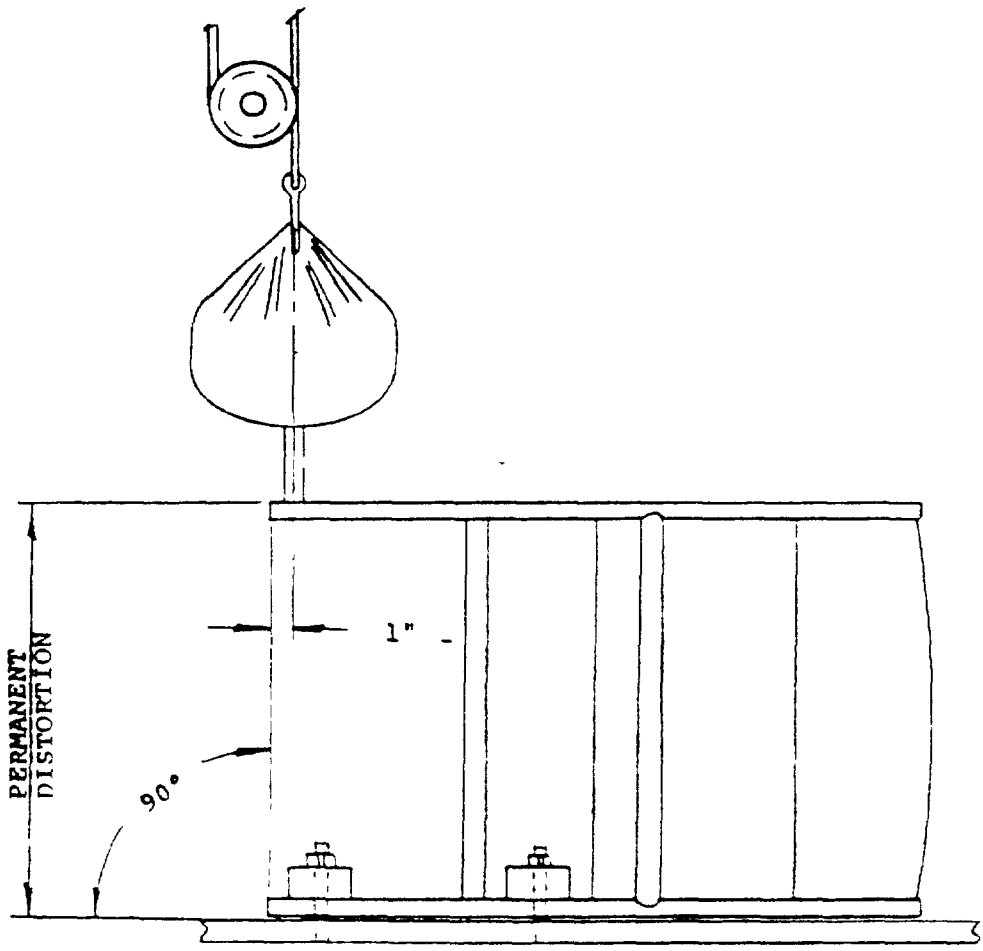


FIGURE 3 - LEG TEST A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

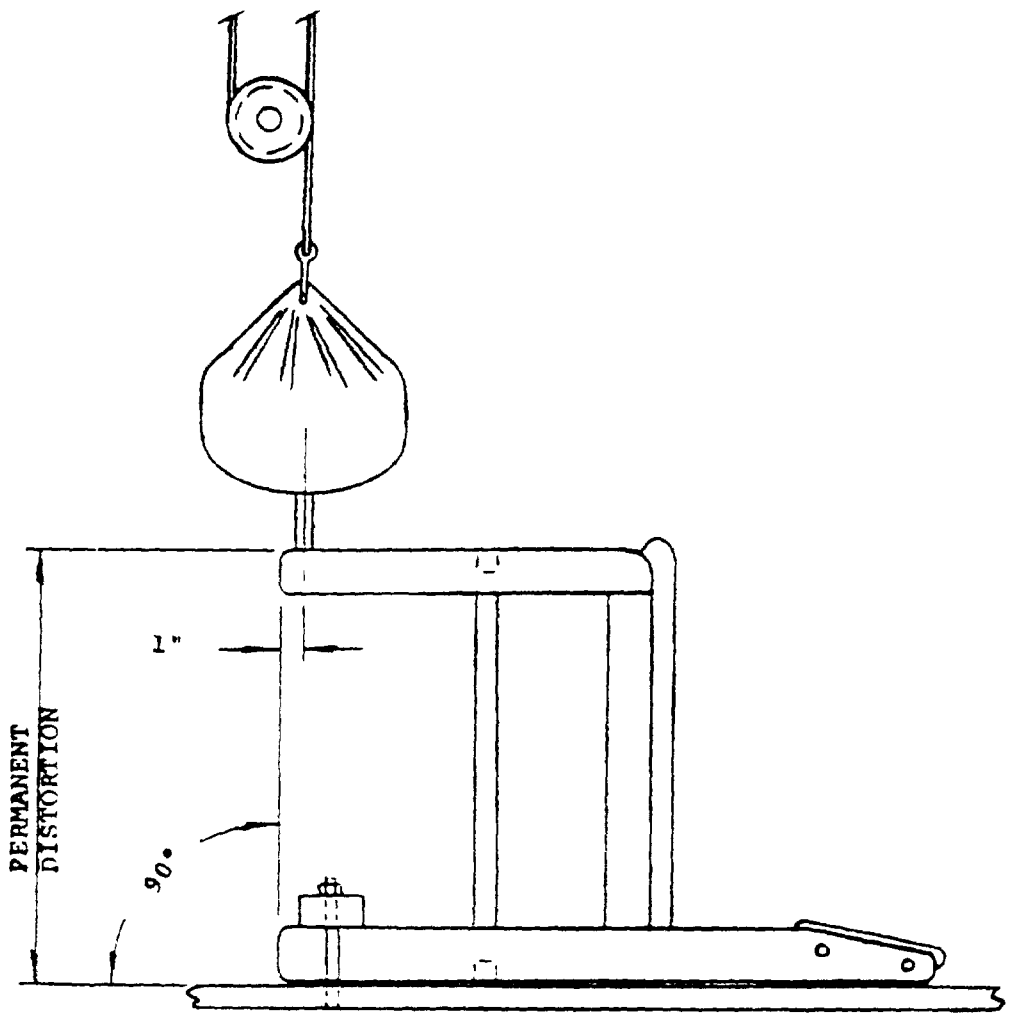


FIGURE 4 - LEG TEST B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

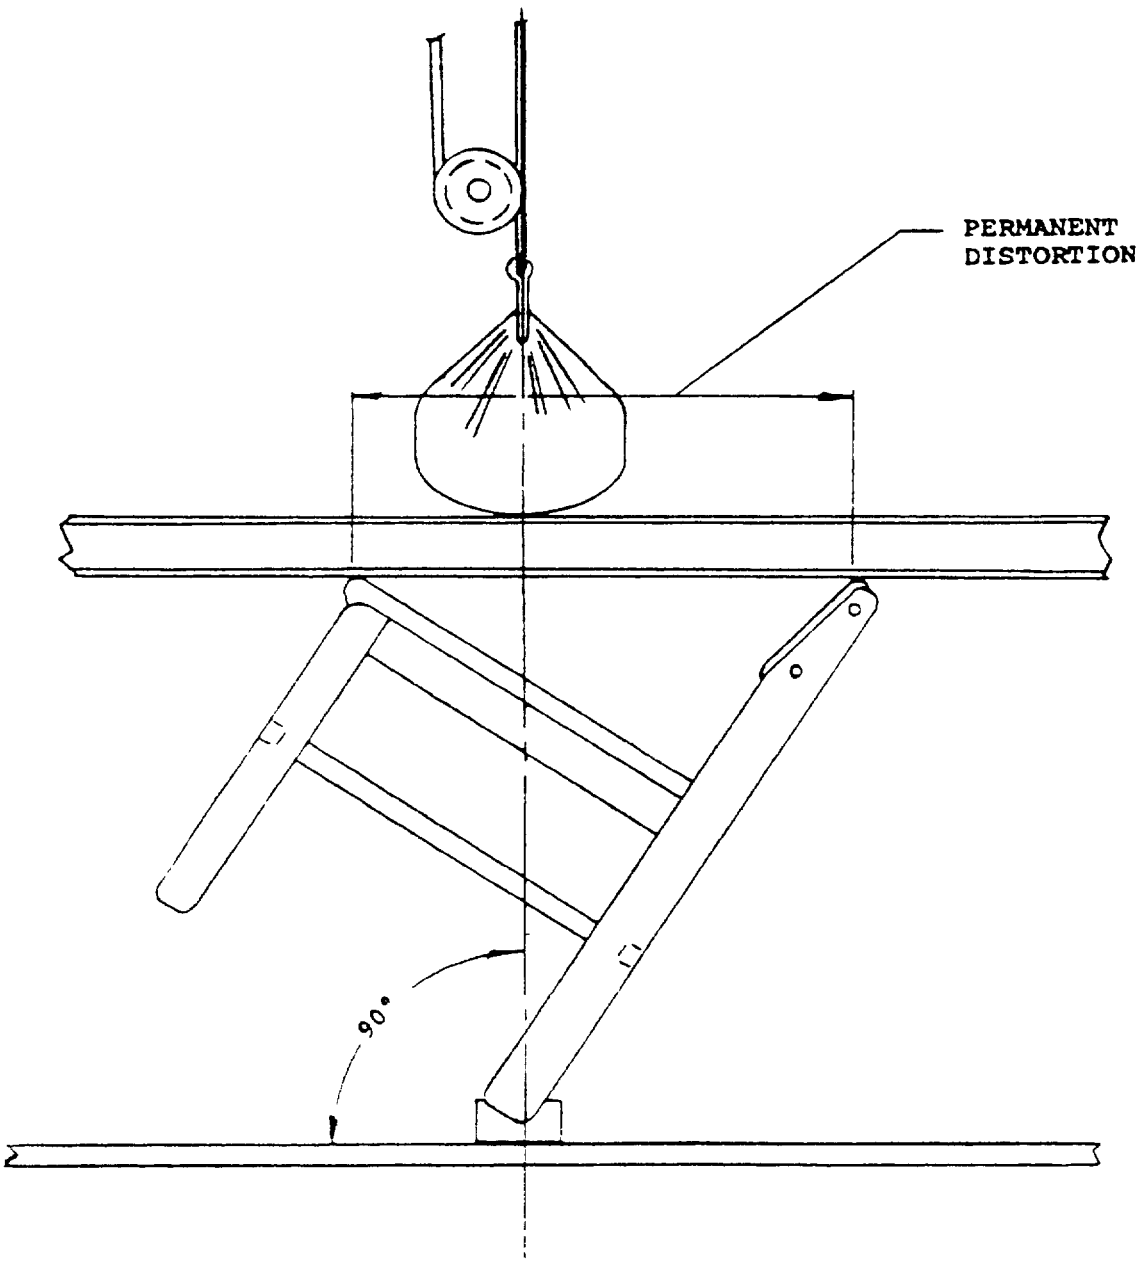


FIGURE 5 - RACKING TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.



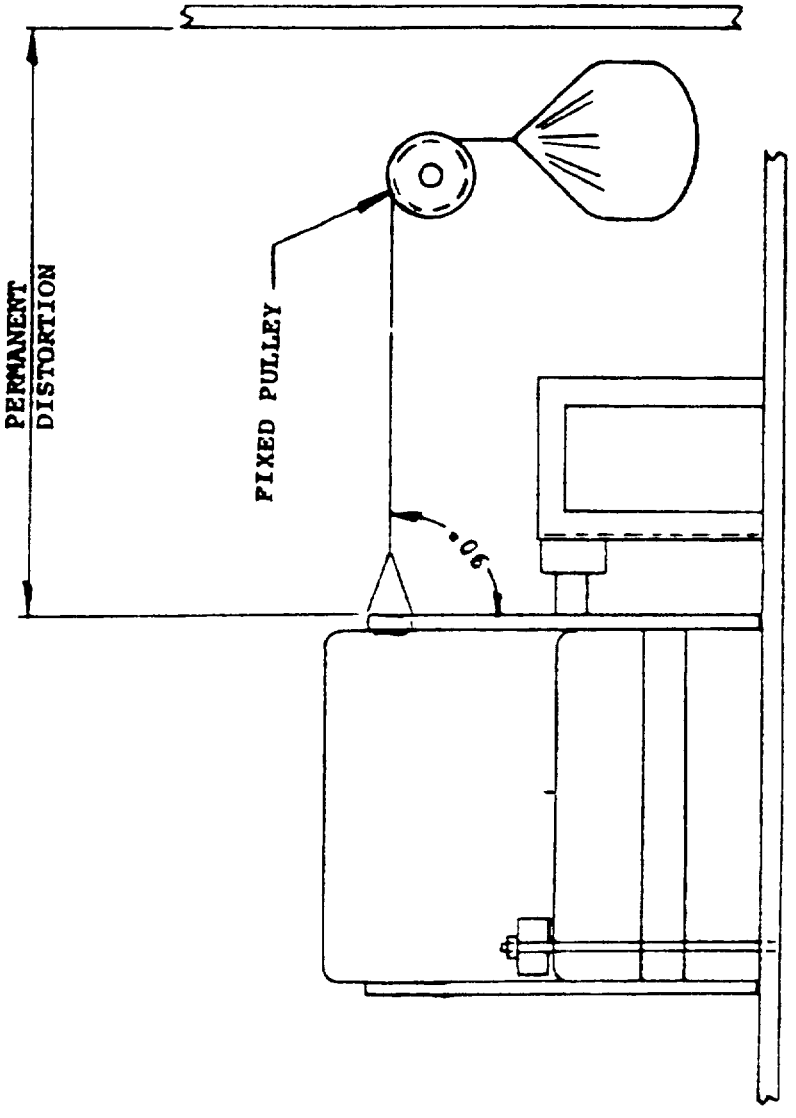


FIGURE 6 - ARM TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

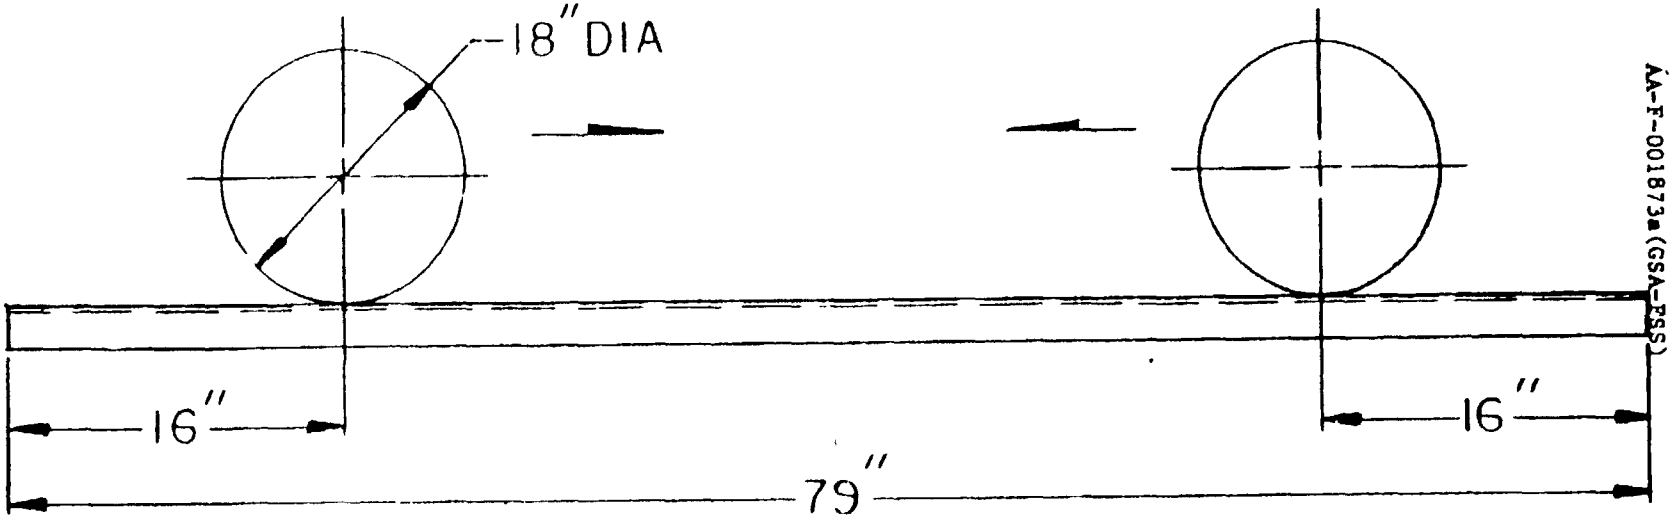

SIDE ELEVATION

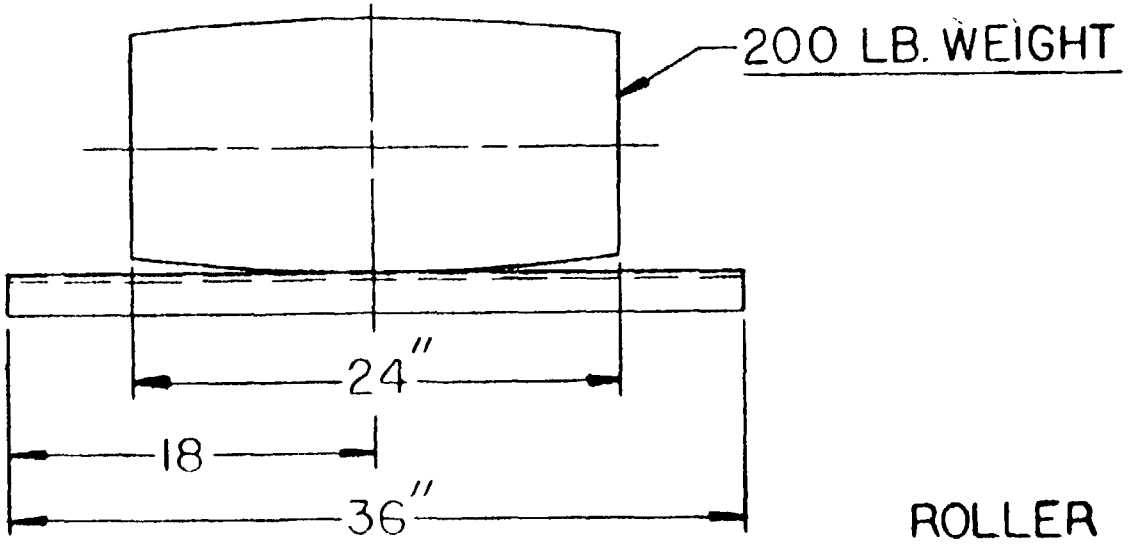


ROLLER DEFLECTION

END VIEW

FIG 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


RAPID PRESSURE IMPACT DEFLECTION

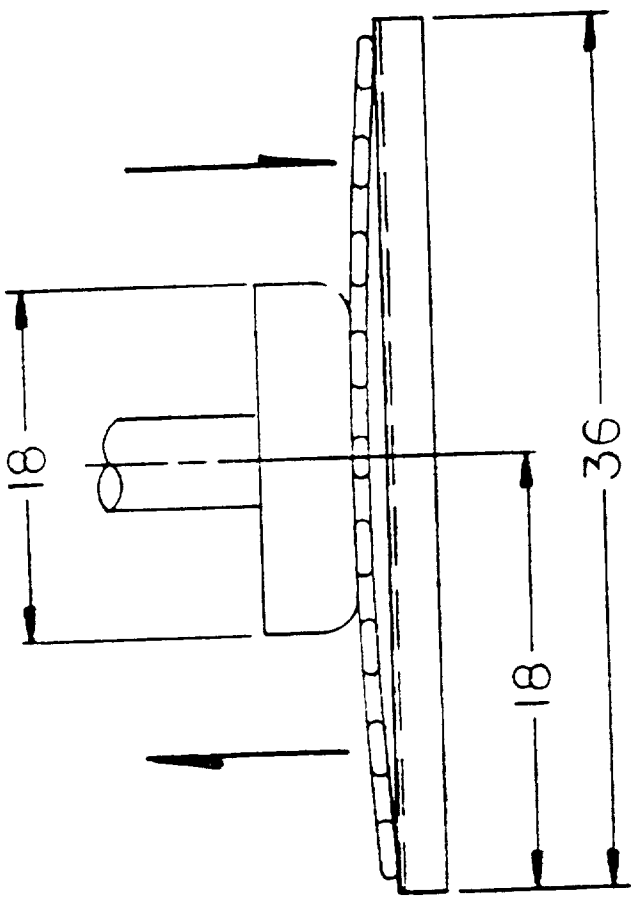

SIDE VIEW
FIG. 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

STATIC LOAD

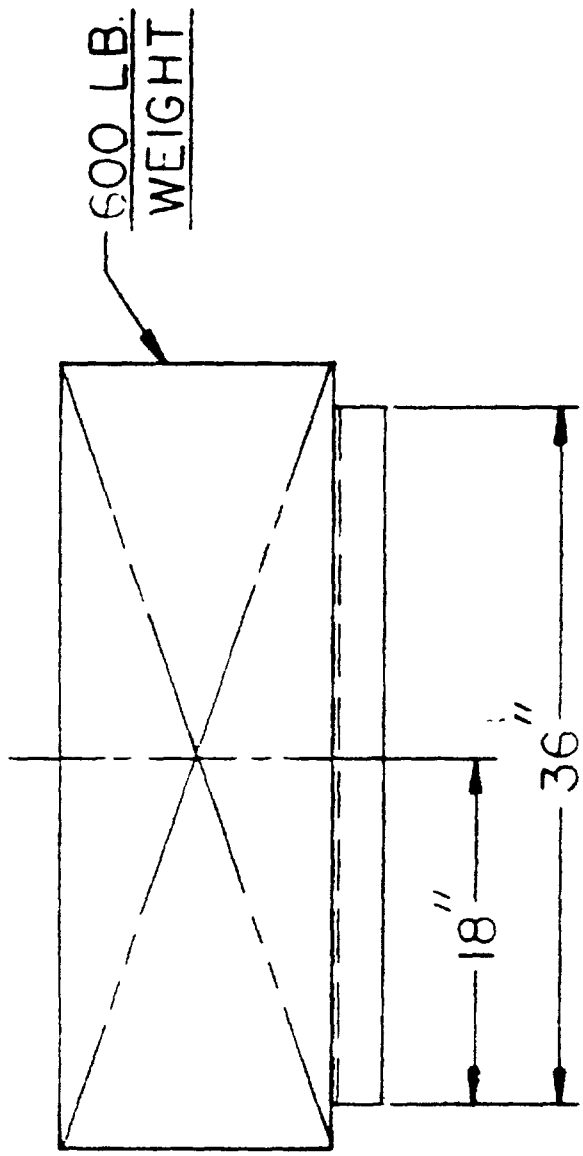

SIDE ELEVATION

FIG 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.