AA-F-001873/3A(GSA-FSS)
August 23, 1977
SUPERSEDING
AA-F-001873/3(GSA-FSS)
November 20, 1973

INTERIM FEDERAL SPECIFICATION

FURNITURE, CONTEMPORARY OAK BED

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. This specification forms a part of the latest issue of Interim Federal Specification AA-F-001873/GEN

1 SCOPE AND CLASSIFICATION

1 1 Scope This specification covers the detailed requirements for contemporary oak beds. General requirements and other information pertaining to this item including the paragraphs listed in the cross reference tables, will be found in AA-F-001873/GEN(GSA-FSS), Furniture, Contemporary Oak (General Specification)

1.1 Classification The bed shall be of one type.

Type I - Bed

Class 1 - with two drawers, stacking capability
Class 2 - with drawers, stacking capability

2 APPLICABLE DOCUMENTS

2 1 Specifications and standards The specification and standards of the issue in effect on the date of the Invitation For Bids which form a part of the specification are listed in 2 1 of AA-F-001873/GEN, hereinafter called the General Specification.

2.2 Other publications The documents which form a part of this specification are listed in 2 2 of the General Specification

3 REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be as given in 3.1 of the General Specification

3 2 Materials Materials used in construction of the bed shall be of the kind and quality specified in 3.2 of the General Specification and the applicable paragraph numbers of the latter for component materials and herein as given in Table I

TABLE I Materials cross-reference

Component	AA-F-001873/GEN Para No
Adhesives	3 2 1 - General Specification
Plastic laminate	3 2 2 - General Specification
Particleboard	3.2 3 - General Specification
Laminate plastic surfaced panels	3 2 4 - General Specification
Plywood and Laminated Parts	3 2.5 - General Specification
Edge banding	3.2 6 - General Specification
Dowels	3.2.8 - General Specification
Tacks and staples	3.2.9 - General Specification
Fastening devices	3.2.10- General Specification
Wood varieties and parts	3.2.16- General Specification

3.3 Construction. The general requirements for construction of the bed shall be as specified in 3.3 of the General Specification and the applicable paragraph numbers of the latter for components used herein are given in Table II below.

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Construction requirements cross-reference

Component	AA-F-001873/GEN Par. No.
Design	3.3.1 - General Specification
Assembly	3 3 2 - General Specification
Tolerances	3.3.3 - General Specification
Joinery	3.3.4 - General Specification
Edging	3 3 5 - General Specification
Workmanship	3.7 - General Specification

3 4 Type I, class 1 bed, with two drawers Bed frame shall be constructed as described and illustrated in Figures 1,3-8 herein. All parts and surfaces shall be finished as specified in 3 4 of General Specification

3 4 1 Bed rail unit. The bed rail unit shall consist of two bed rails, four separate cleats, four drawer support rails The bed rails shall be constructed of solid oak, 5 ply lumber core with oak veneer, or 7 ply oak with all plys of oak as referenced in Table I Use of oak bed rails will not preclude use of other allowable wood species listed in Table III Varieties of Wood of the General Specification under Exposed Face Veneer and Exposed Solid Parts, in the balance of the Item. The rails shall be 80-1/2 inches long ± 1/8 inch by 5 inches wide by 3/4 inch thick minimum The three exposed edges of the rails shall have a metal bed hook fastened in each end by two (2) 1 inch by 5/16 inch carriage bolts with a combination nut and conical washer, the nut having a self locking feature. As alternate methods, a washer approximately the same diameter as the carriage bolt head and a self-locking nut or a self-locking flange nut of the approximate diameter as the carriage bolt head may be used. The bottom edge of the rails shall be 12 inches above the bottom of the leg post The rails shall be inset equally on each side from the outside of the leg when set-up There shall be two spring support cleats glued and counter screwed to the inside of each rail 2-1/2 inches below the top edge Each cleat shall fit between the drawer support panels and be 1-1/4 inches wide by 3/4 inches thick. There shall be four drawer support panels extending between the bed rails, parallel to each other The panel shall be 39-3/8 inches long by 5-3/4 inches wide by 3/4 inches thick The lower back corner of each panel shall be cut on a 45° angle, and the lower front corner notched so that drawer front is flush with face of bed rail. Panels shall be dowelled to the bed rails with a minimum of two dowels in each end The four drawer support panels shall be constructed of 3/4 inch thick, 5 ply lumber core or 7 ply hardwood plywood Three spacer blocks shall be a minimum of 4 inches by 4 inches and attached to each panel by glue and screws, running screws through each panel into block Each drawer frame shall be reinforced with a corner block in each of the four corners Corner blocks are to run from each drawer support panel to each bed rail All corner blocks shall be a minimum of 4-3/4 inches by 2-1/2 inches by 1 inch thick and attached with glue and screws, a minimum of one screw into each mounting surface (see note B Figure 7) Two (2) spacer panels (see note C Figure 8) shall serve to stabilize the drawer support panels.

3 4 2 Drawers for Type I, Class 1 bed The drawers shall consist of a drawer body and a separate drawer front attached to the drawer body The drawer body shall have a front and back panel, two side panels, and a bottom panel The front, back, and side panels shall be constructed of 7/16 inch thick solid wood or minimum 5 ply hardwood plywood (3.2.5 of the General Specification) of the varieties and parts referenced in Table I herein and shall be grooved to receive the drawer bottom panel The bottom panel shall be constructed of 1/4 inch hardboard (3.2.6 of the General Specification, The bottom panel shall be secured by a minimum of 12 evenly positioned glue blocks The drawer sides shall be multi-finger dovetailed and glued to the front and back panels The dovetails shall be milled true and even, and any open, poorly milled or poorly glued, or unevenly assembled dovetails will be considered as not meeting the requirements of this specification The drawer body measurements inside shall be 31"W X 22"D X 7"H and the front panel shall have six counterbored holes for attachment of the drawer front The drawer front shall have a 3/4" particleboard core and shall be covered with plastic laminate as specified in 3.2.4 of the General Specification Drawer front shall be shaped and have dimensions as shown in Figure 6 herein The drawer front shall be attached to the drawer body front with six screws so that the top edges are flush and the overlap is even on both sides The edges of the drawer front shall be self-edged The face of the drawer front shall be flush to minus 1/16" and parallel to the face of the bed rail The space between the outside edge of the drawer front and the head and the head and foot posts shall be equal The drawers shall be mounted to the drawer bearing rails of the bed rail unit by heavy drawer suspension units, Knapp and Vogt No 1520, Grant 336SC, or equal The suspensions shall be mounted in accordance with the manufacturer's recommendations to provide smooth, easy operation, without excessive play using a minimum of 5 screws in each member. Drawer stops shall be provided so that the drawer front do not receive the impact on closing. The drawer backs shall be bored to receive a 1/4-20 teenut The spacer panels shall have a matching hole bored for a 1/4-20 x 2 inch long minimum, slotted head stove bolt. A spacer block 2 inches by 2 inches by 1/2 inch thick minimum shall be placed between the drawer backs and the spacer panel during shipment. An instruction sheet shall be attached to rear of spacer panel, with instruction for removal of fastenings after bed is setup. (see Figure 9 herein)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3 5 Type I, Class 2 bed, without drawers Bed frame shall be constructed as described and illustrated in Figures 2-7 herein. All parts and surfaces shall be finished as specified in 3.4 and sub-paragraphs of the General Specification.

3.5 1 Bed rail unit The bed rail unit for the Class 2 bed shall be constructed exactly the same as the Class 1 bed rail unit except that it shall not have drawers or drawer support panels and that there shall be two spring restraining cleats for each rail Each cleat shall be of 3/8 inch plywood, 6 inches long, 1-3/4 inches wide and shall be glued and screwed (2 places) to the inside edge of the spring support cleat The cleats shall be positioned flush with the bottom edge of the spring support cleats and inset 6 inches from each end of the bed rail The cleats shall protrude 1/2 inch above the upper edge of the spring support cleat to restrain the drop in spring unit.

3 6 Drop in spring unit The frame shall be constructed of steel angle with a 2 inch vertical flange and a 1-1/2 inch horizontal flange The steel shall be a minimum of 3/16 inch thick and the edges of the flanges shall be eased The corners of the frame shall have a minimum 2 inches radius profile A bowed steel tubing stretcher brace shall extend perpendicular between the frame sides and the flattened ends shall be continuous-welded to the center of each side Alternatively the ends of the steel tube stretcher brace shall be cut on an angle and continuous-welded to the vertical flange of the side members The steel tubing shall be one inch O.D with a nominal 0.065 inch wall thickness The spring fabric shall consist of 16, minimum 9-1/2 gauge sinuous springs attached to each side of the frame Each end spring shall be attached to the frame ends by five minimum .120 diameter gauge helical springs The sinuous springs shall be laterally stabilized by a minimum of five connecting links evenly spaced between each spring The drop-in spring shall be 39 inches wide by 80 ± 1/8 inches long All surfaces shall have a baked enamel finish with a baking period recommended by the paint manufacturer The drop-in spring shall pass the tests specified in 4.4 8 of the General Specification

An alternate drop-in spring unit may be used which shall be constructed as follows

The frame shall be constructed of angle iron with a 2 inch vertical flange and a 1-3/8 inch horizontal flange The steel shall be a minimum of 5/32 inch thick and the edges of the flanges shall be eased Horizontal flanges of the side rails shall overlay horizontal flanges of the ends at corners and be riveted or continuous-welded together Each corner shall be braced by a diagonal cross strap at least one inch wide and 1/8 inch thick or a 1/8 inch nominal thickness gusset plate, riveted or continuous-welded to each angle A bowed steel tubing stretcher brace shall extend perpendicular between the frame sides and the flattened ends shall be riveted or continuous-welded to the center of each side Alternatively the ends of the steel tube stretcher brace shall be cut on an angle and continuous-welded to the vertical flange of the side members The steel tubing shall be one inch O.D with nominal 0.065 inch wall thickness The spring fabric shall consist of 18 minimum 9 gauge sinuous springs attached to each side of the frame Each end spring shall be attached to the frame ends by five minimum 1098 diameter gauge helical springs The sinuous spring shall be laterally stabilized by a minimum of four connecting links evenly spaced between each spring. The drop-in spring shall be 39 inches wide by 80 ± 1/8 inches long Surfaces after having been cleaned and prepared shall have a baked enamel finish with a baking period recommended by the paint manufacturer The frames shall accommodate the carriage bolt nut and washer The drop-in spring shall pass the tests specified in 4 4 8 of the General Specification

3 7 Identification marking (see 3 7 of the General Specification)

3 8 Workmanship (see 3 7 of the General Specification)

4 QUALITY ASSURANCE PROVISIONS

4 1 The quality assurance provisions shall be as specified in Section 4 of the General Specification

5 PREPARATION FOR DELIVERY

5 Packaging Packaging shall be as specified in Section 5 1 of the General Specification (see 6 1 herein)

5 2 Packing Packing shall be as specified in Section 5 2 of the General Specification (see 6 1 herein)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civil agencies In addition to any special marking required by the contract or order all marking shall be in accordance with Fed. Std. No. 123.

5.3 2 Military activities. In addition to any special marking required by the contract or order, all marking shall be accordance with MIL-STD-129.

5 3 3 Special Marking In addition to the markings required by 5 3.1 or 5 3 2 above, the front and back panels of each shipping container shall be marked in each upper corner with the work "UP" and an arrow pointing to the direction in which the container should be placed for shipping and storage "UP" shall be in minimum 2 inch high characters In addition, the top panel of the container shall be marked with the following in minimum 2 inch high characters

TOP

THIS SIDE UP

FURNITURE

FRAGILE-HANDLE WITH CARE

The front side and back side of each shipping container shall be marked with the following in minimum 2 inch high characters

FURNITURE

FRAGILE-HANDLE WITH CARE

6 NOTES

6 1 Ordering data Purchasers should exercise any desired options offered in this specification and procurement documents should specify the following

(a) Number, title and date of this specification

(b) Number, title and date of the General Specification

(c) Type required (see 1.2 herein)

(d) Color of wood finish and plastic laminate If other than English Oak (see 3 4 of the General Specification)

(e) When preproduction sample requirement is waived (see 3 1 herein)

(f) Level of packaging and packing required (see 5 1 and 5 2 of the General Specification)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

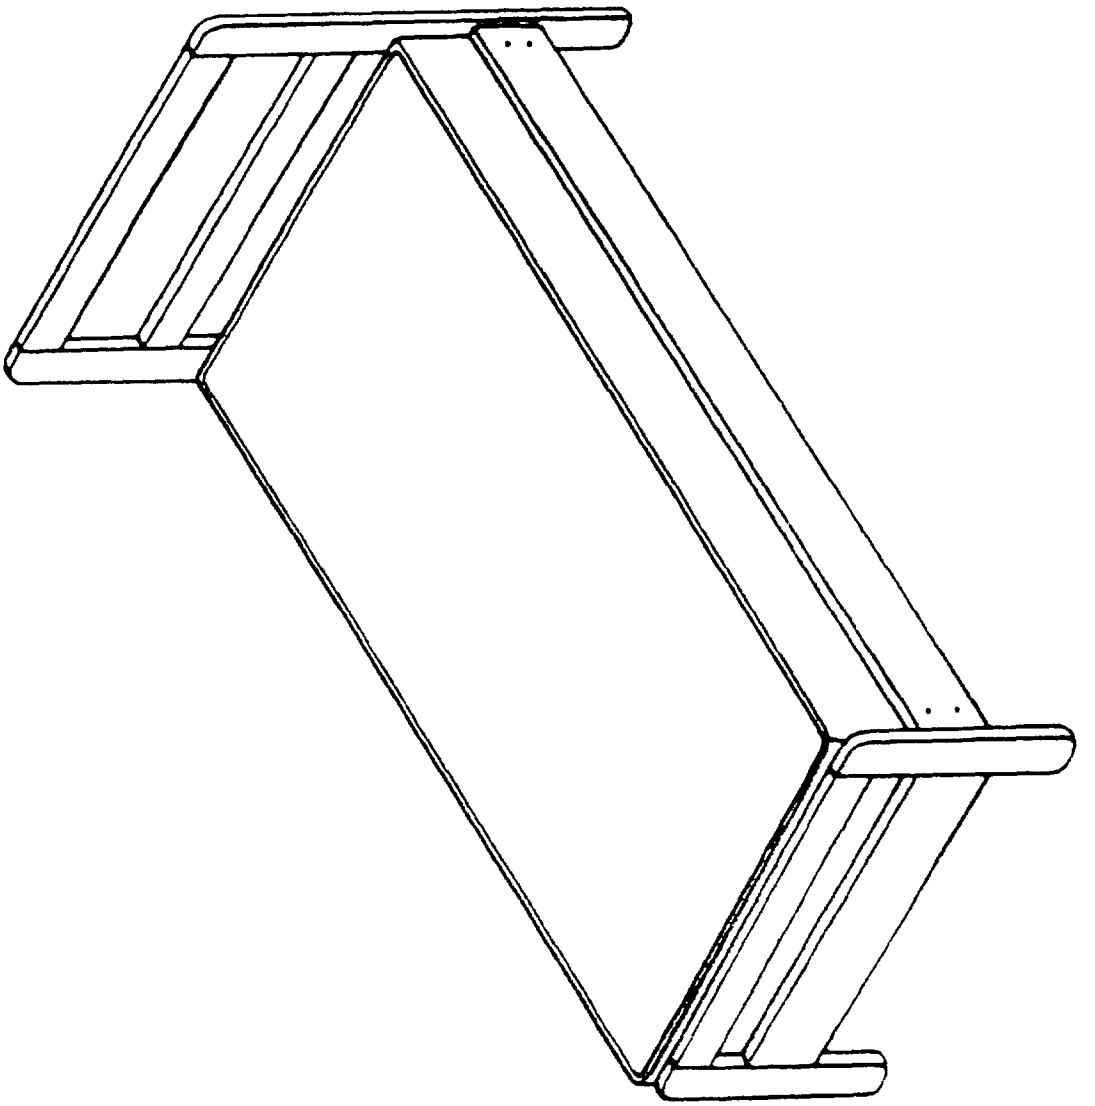


FIGURE 2 - TYPE I, CLASS 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

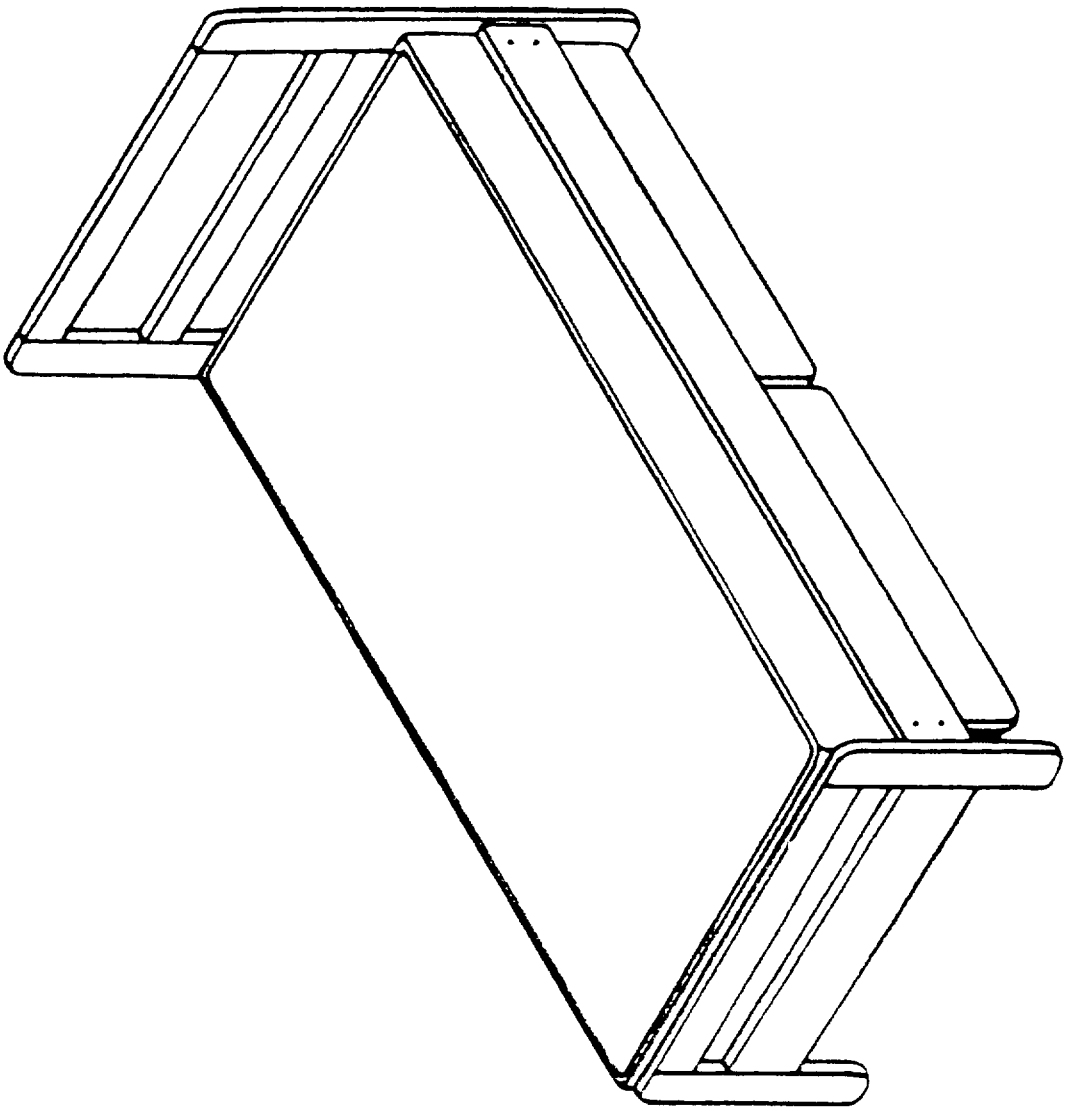


FIGURE 1 - TYPE I, CLASS 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


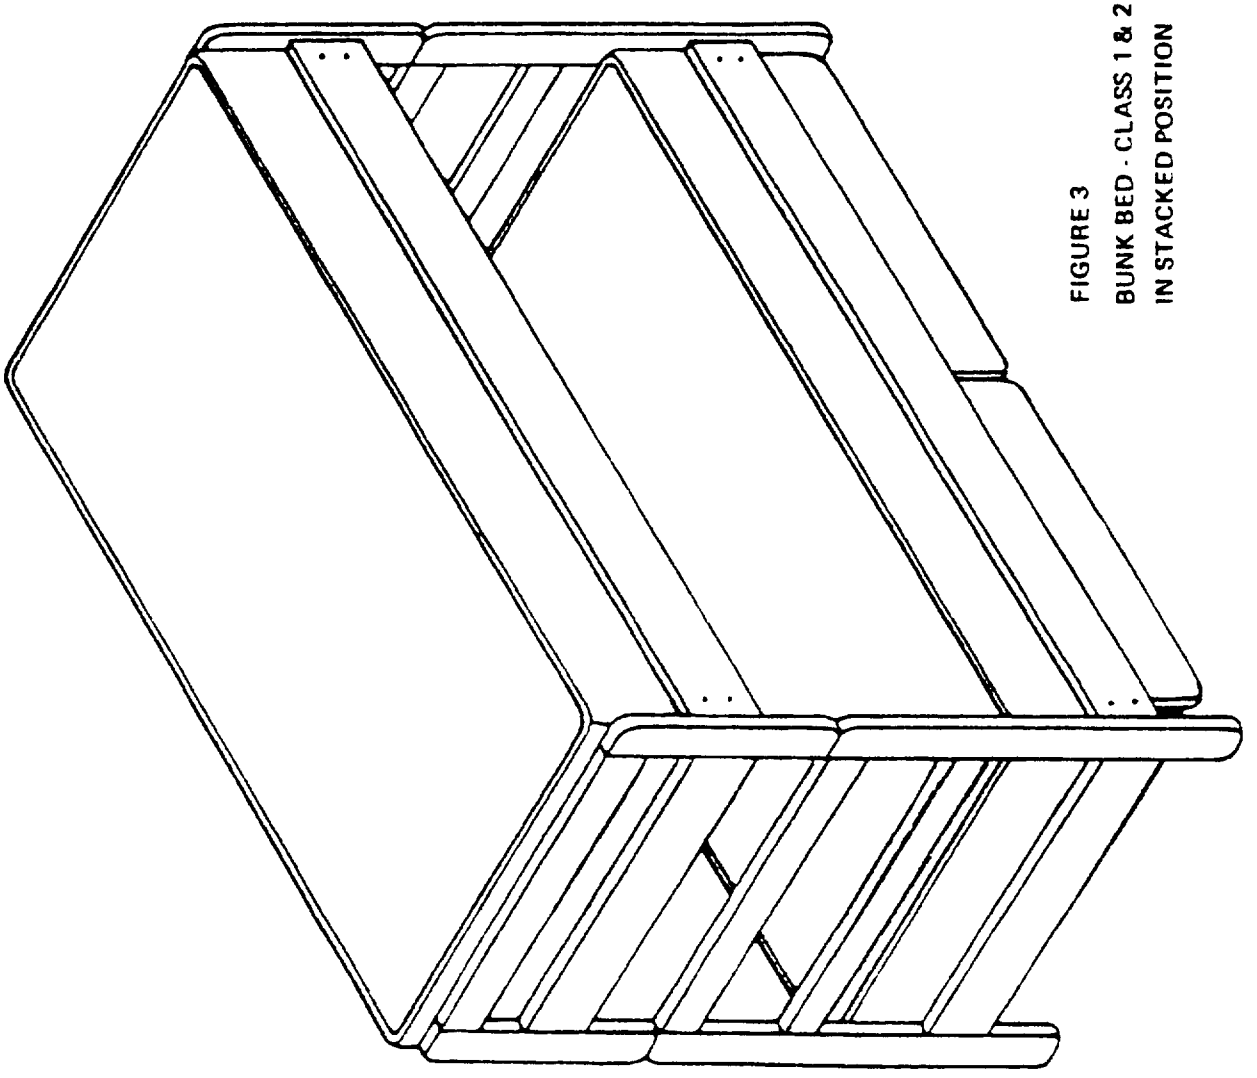



FIGURE 3
BUNK BED - CLASS 1 & 2 BEDS
IN STACKED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

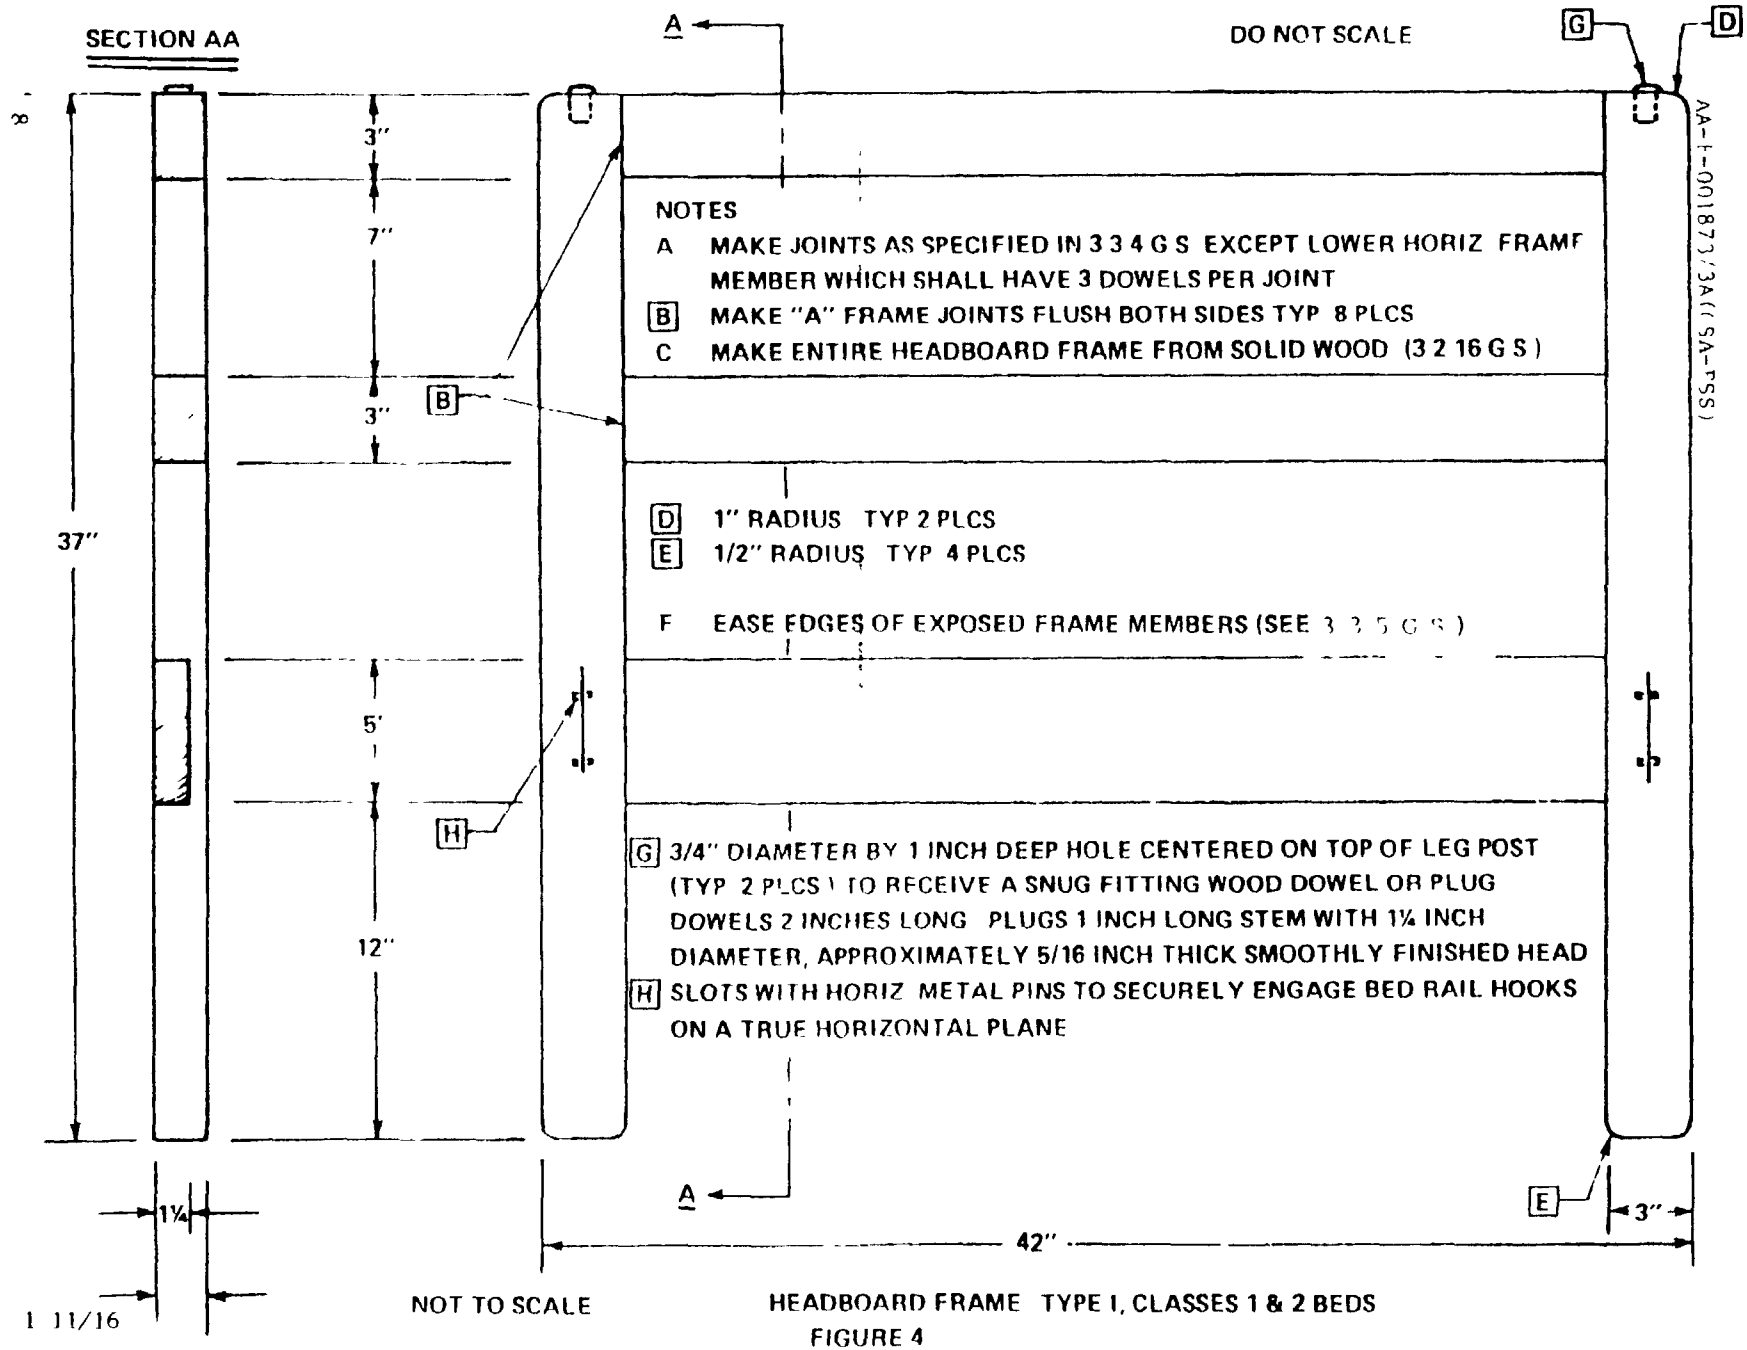

HEADBOARD FRAME TYPE I, CLASSES 1 & 2 BEDS
FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

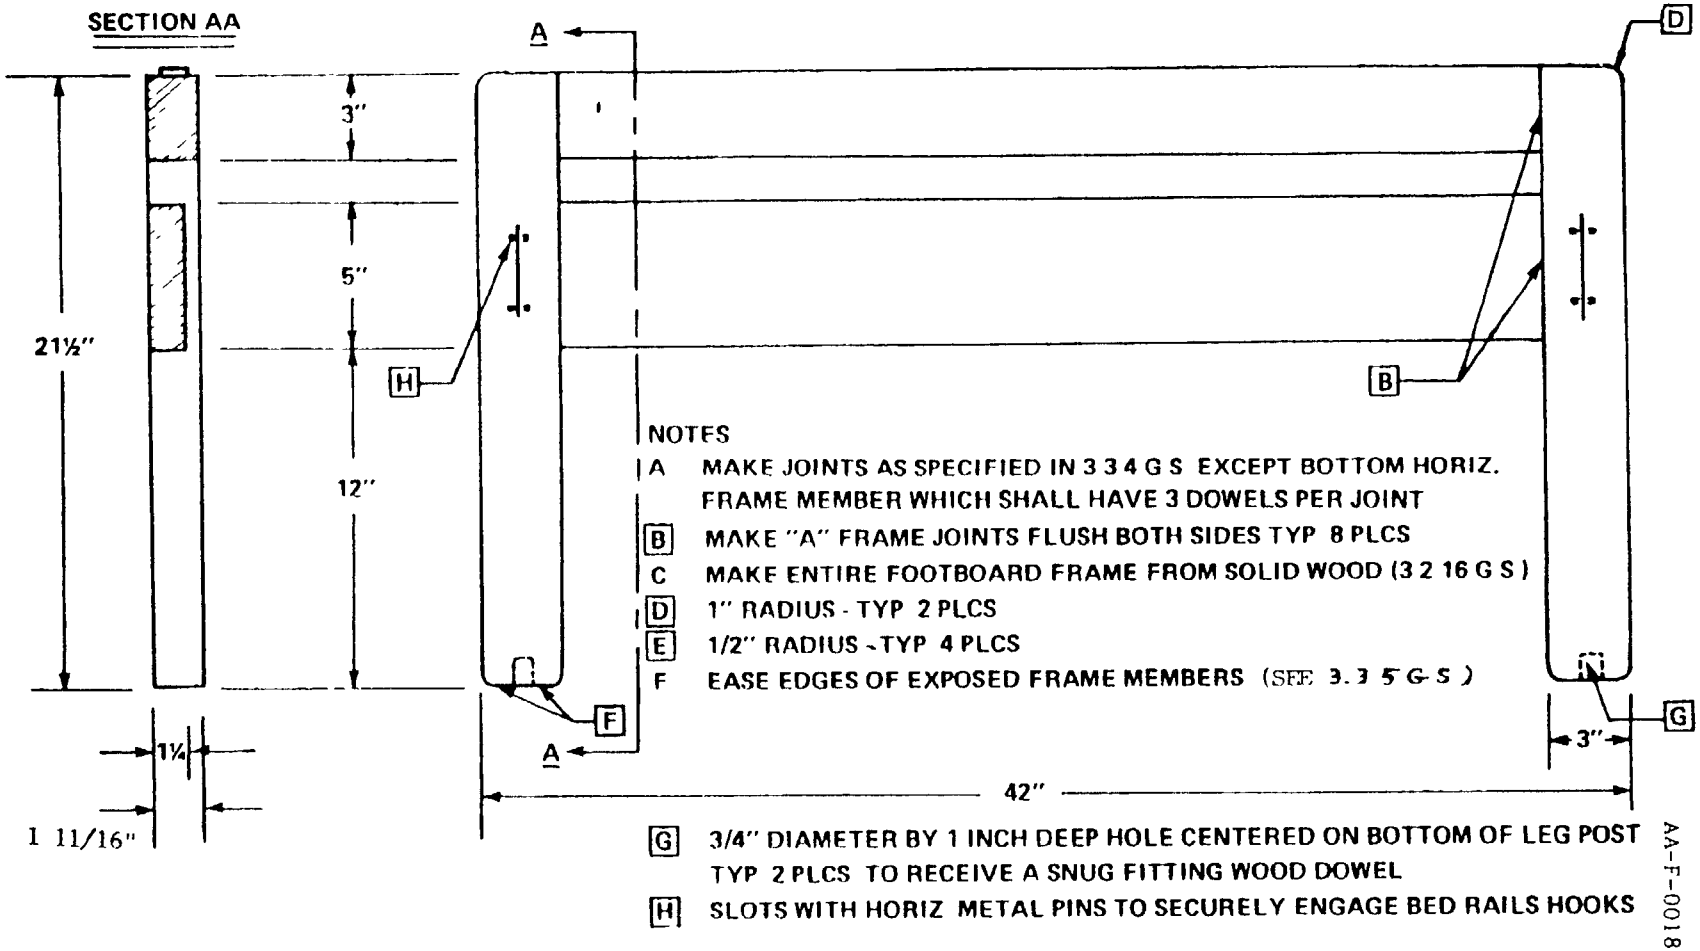

NOTES

A MAKE JOINTS AS SPECIFIED IN 3 3 4 G S EXCEPT BOTTOM HORIZ. FRAME MEMBER WHICH SHALL HAVE 3 DOWELS PER JOINT

[B] MAKE "A" FRAME JOINTS FLUSH BOTH SIDES TYP 8 PLCS

C MAKE ENTIRE FOOTBOARD FRAME FROM SOLID WOOD (3 2 16 G S)

[D] 1" RADIUS - TYP 2 PLCS

[E] 1/2" RADIUS - TYP 4 PLCS

F EASE EDGES OF EXPOSED FRAME MEMBERS (SEE 3.3 5 G-S)

[G] 3/4" DIAMETER BY 1 INCH DEEP HOLE CENTERED ON BOTTOM OF LEG POST TYP 2 PLCS TO RECEIVE A SNUG FITTING WOOD DOWEL

[H] SLOTS WITH HORIZ METAL PINS TO SECURELY ENGAGE BED RAILS HOOKS

AA-F-001873A(GSA-FSS)

NOT TO SCALE

FOOTBOARD FRAME

TYPE I, CLASSES 1 & 2 BEDS

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


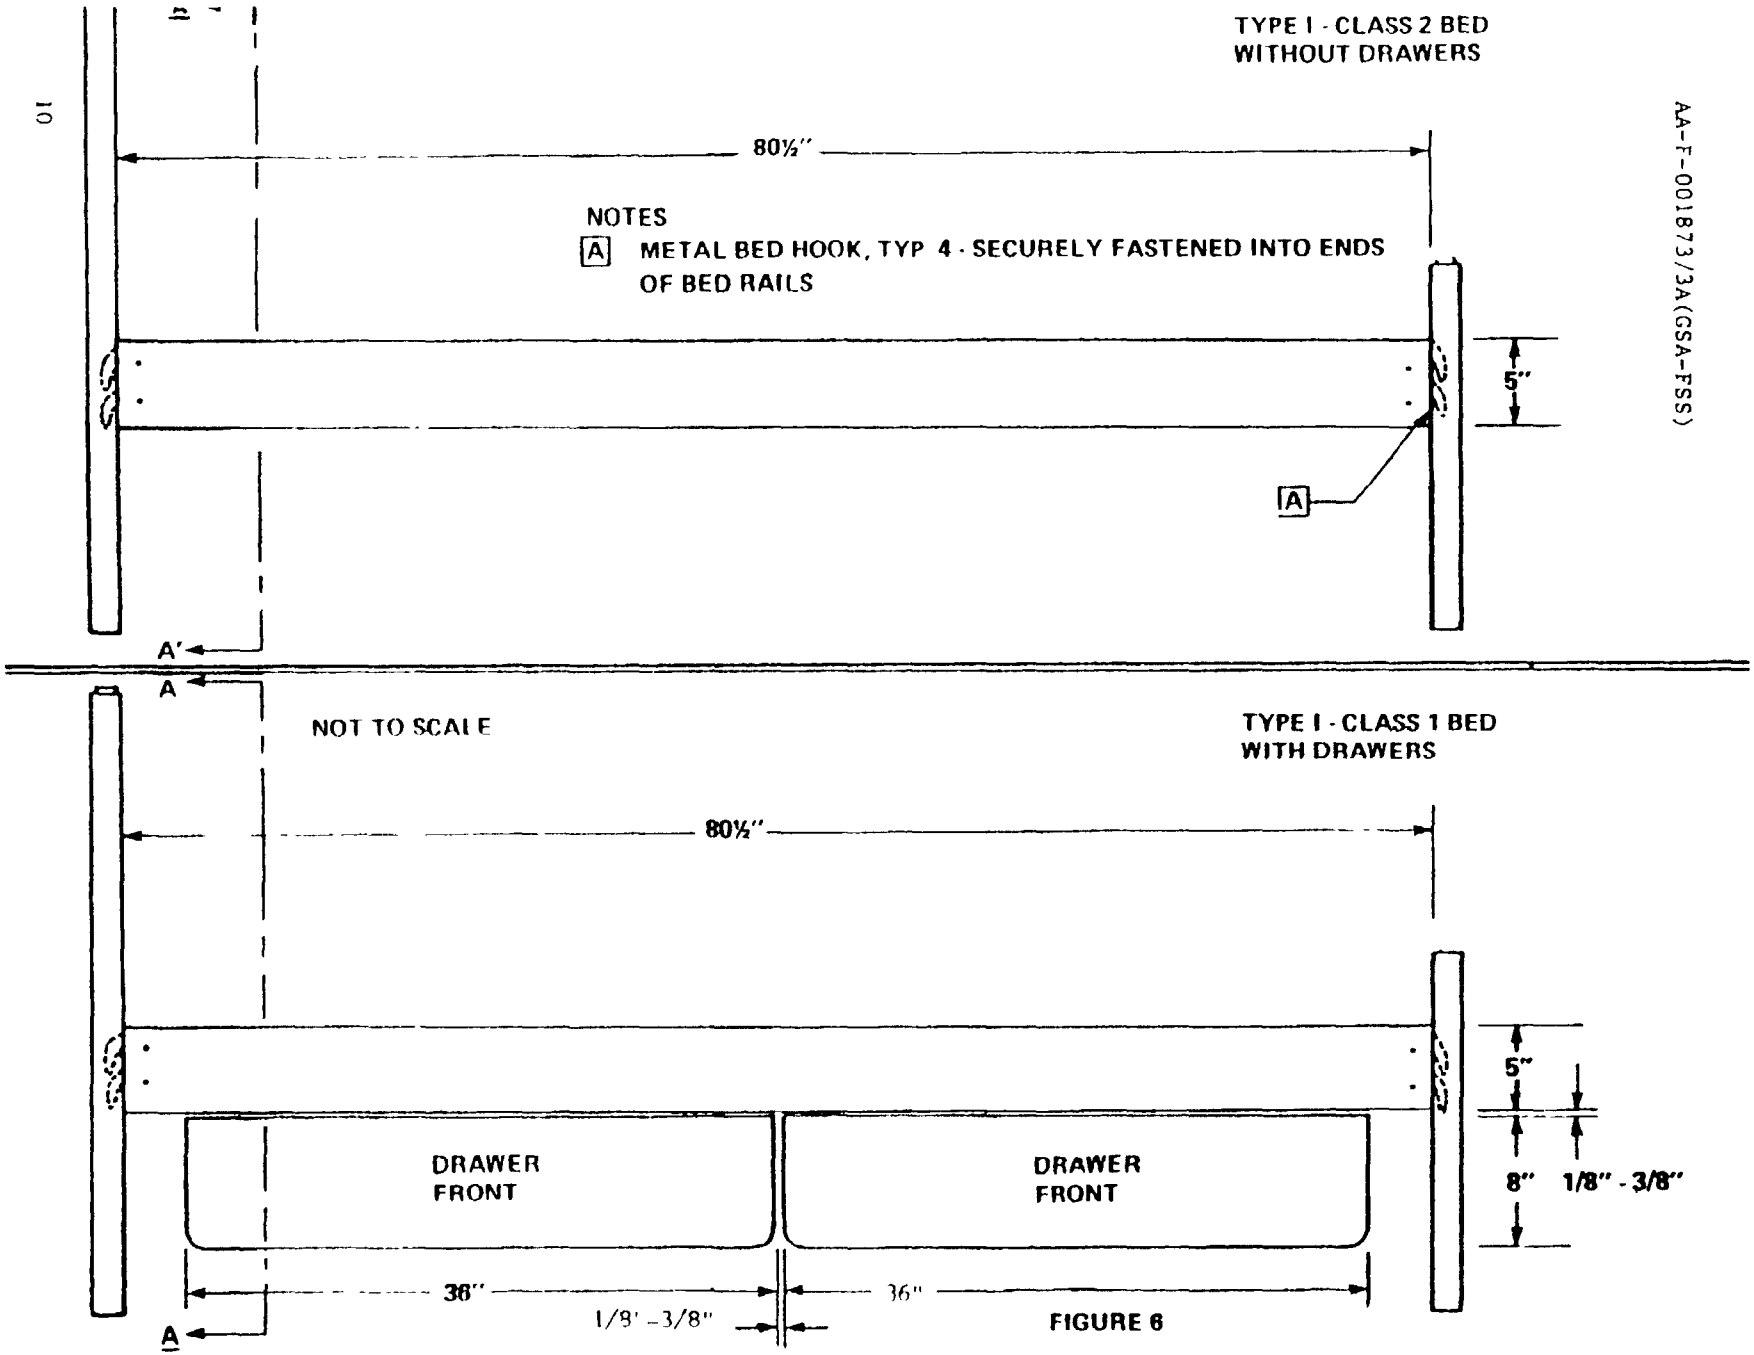


FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

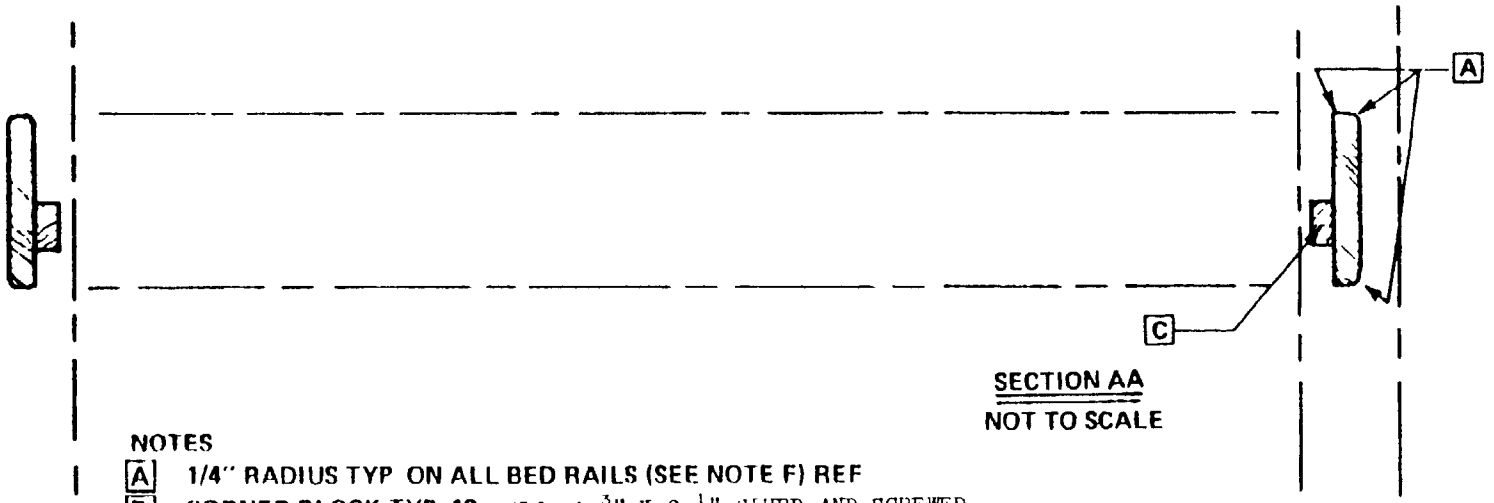

NOTES

A 1/4" RADIUS TYP ON ALL BED RAILS (SEE NOTE F) REF

B CORNER BLOCK TYP 12 - MIN. 4 $\frac{3}{4}$" X 2 $\frac{1}{2}$" GLUED AND SCREWED


C SPRING SUPPORT CLEAT FOR CLASS 2 UNIT MAY BE EITHER ONE PIECE 70 INCHES LONG OR TWO PIECES EACH 35 INCHES LONG

D SPRING SUPPORT CLEAT FOR CLASS 1 UNIT

E SPACER PANEL REF

F BED RAIL CENTERED ON LEGS (SEE NOTE A) REF


G DRAWER SUPPORT PANEL NOTCHED TO RECEIVE DRAWER FRONT

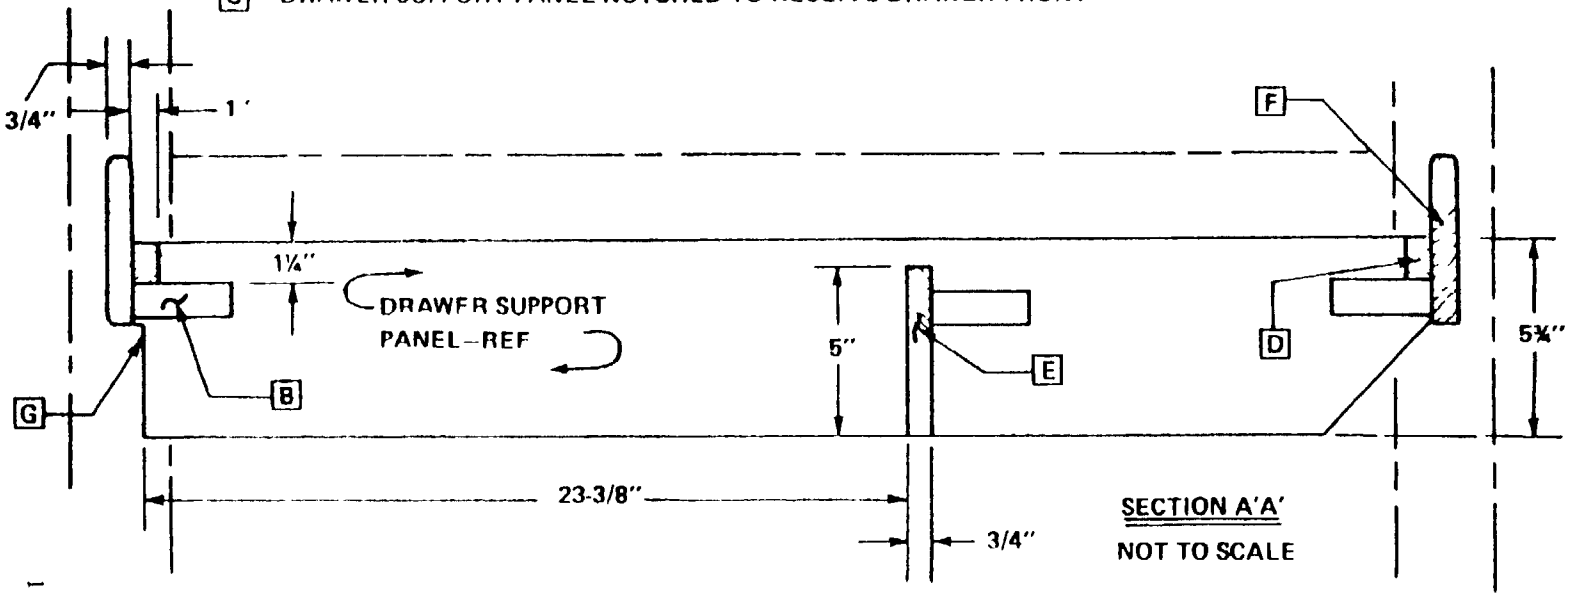

AA-F-001873/3A(GSA-FSS)

TYPE I, CLASSES 1 & 2 BEDS (DRAWERS REMOVED)
FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

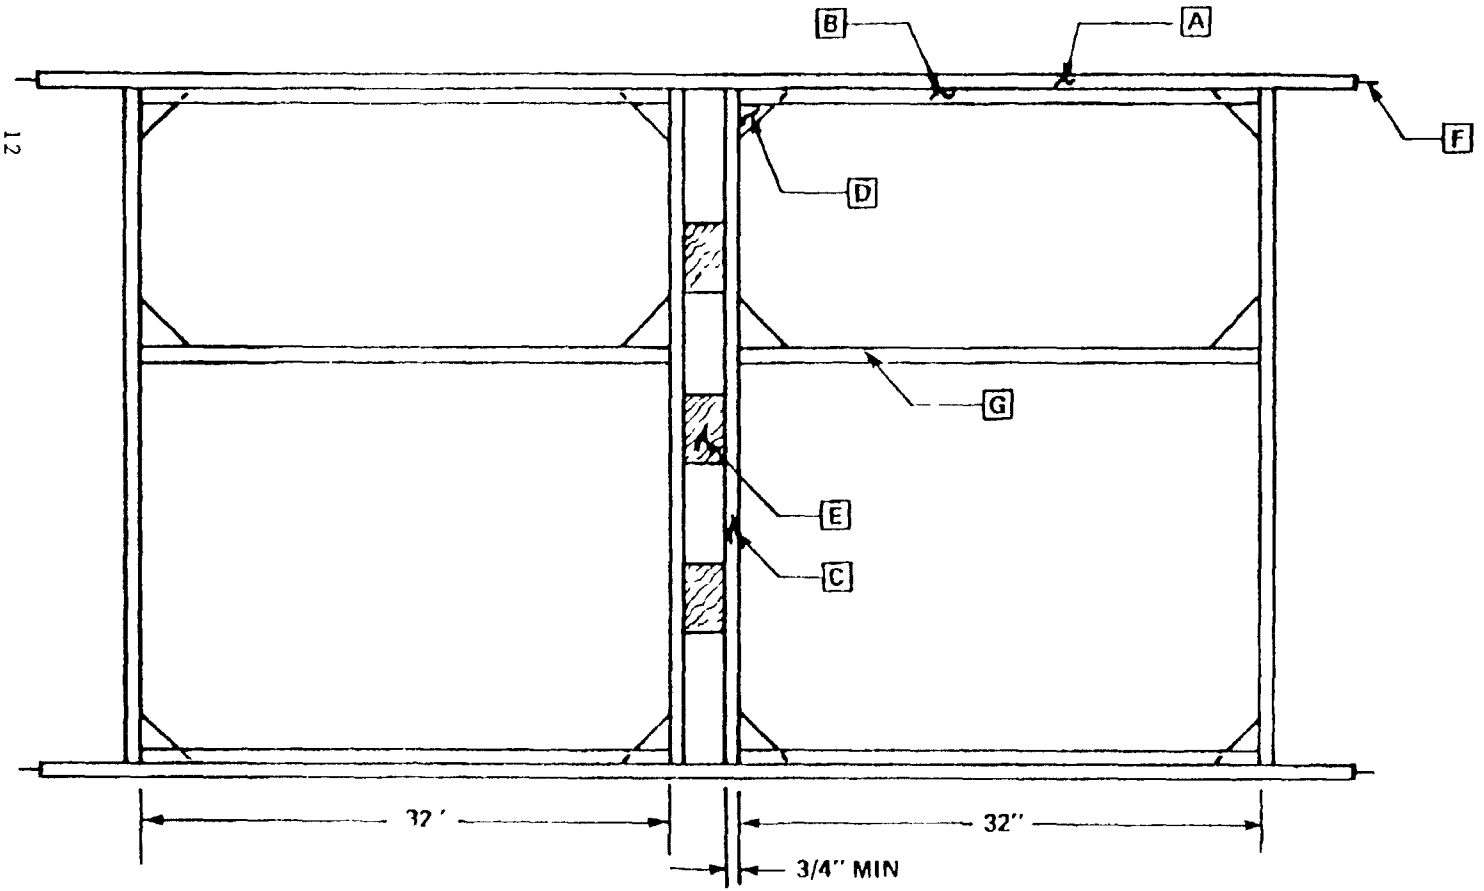

NOTES

A BED RAIL (EXPOSED) SEE NOTES A & F IN FIGURE 4 TYP 2 SOLID WOOD, 5 PLY LUMBER CORE OR 7 PLY VENEER CORE PLYWOOD (3.2.5.G S) THE PLYWOOD SHALL BE OAK THROUGHOUT REF

B SPRING SUPPORT CLEATS (UNEXPOSED) TYP 4 GLUED AND COUNTER SCREWED TO BED RAILS

C DRAWER SUPPORT PANELS (UNEXPOSED) TYP 4 5 PLY LUMBER CORE OR 7 PLY VENEER CORE PLYWOOD (3 2 5 G S) DOWEL PANELS INTO BED RAILS WITH A MINIMUM OF 2 DOWELS PER JOINT

D CORNER BLOCKS - REF

E SPACER BLOCKS TYP 3 4" x 4", GLUED AND SCREWED, POSITION FLUSH WITH BOTTOM EDGE OF DRAWER SUPPORT PANEL.

F METAL BED HOOK, TYP 4 SECURELY FASTENED INTO ENDS OF BED RAILS (SEE 3 4 1 AA-F-001873/3A)

G SPACER PANEL (UNEXPOSED) TYP 2 SOLID WOOD, 5 PLY LUMBER CORE OR 7 PLY VENEER CORE PLYWOOD (3 2 5 G S) DOWEL PANELS INTO DRAWER SUPPORT PANELS WITH A MINIMUM OF 3 DOWELS PER JOINT

TOP VIEW

NOT TO SCALE

TYPE I, CLASS 1 BED (WITH DRAWERS REMOVED)
FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

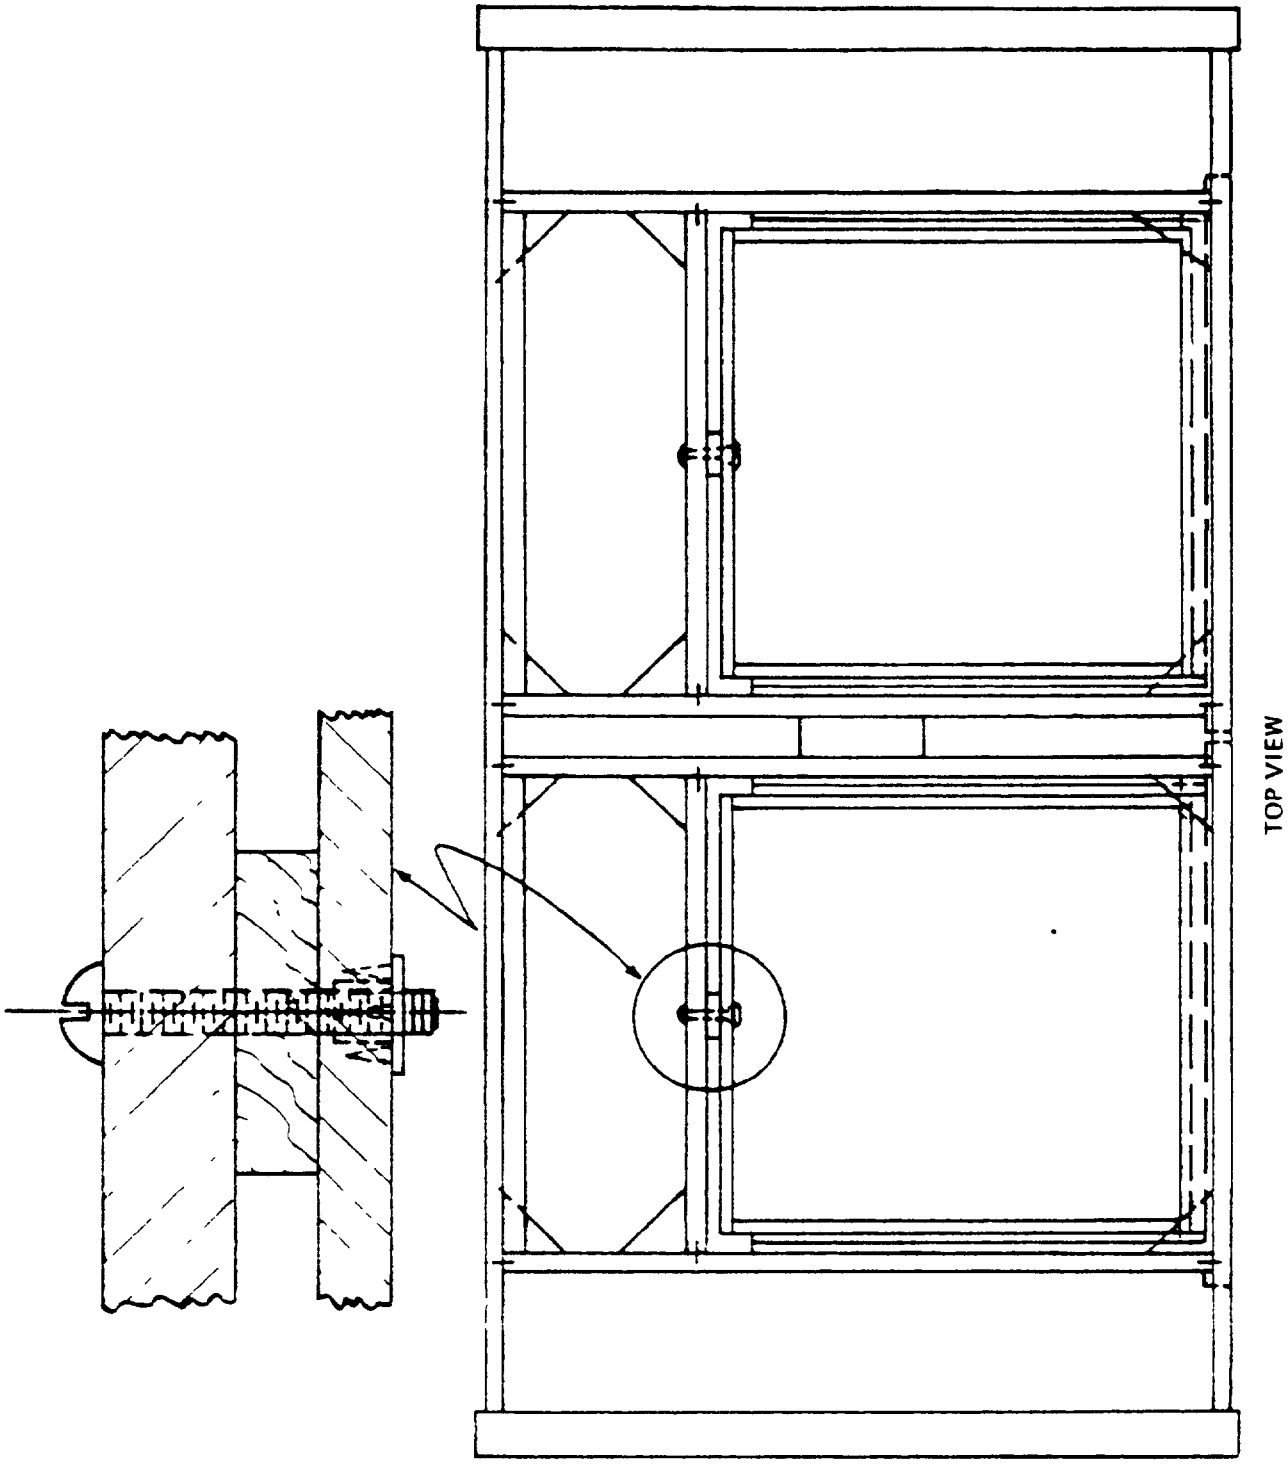


FIGURE 9 TYPE I, CLASS I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.