AA-F-001873/4A(GSA-FSS)
August 23, 1977
SUPERSEDING
AA-F-001873/4(GSA-FSS)
November 20, 1973

INTERIM FEDERAL SPECIFICATION

FURNITURE, CONTEMPORARY OAK. CASE PIECES

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. This specification forms a part of the latest issue of Interim Federal Specification AA-F-001873/GEN

1. SCOPE AND CLASSIFICATION

1 1 Scope This specification covers the detailed requirements for contemporary oak case pieces. General requirements and other information pertaining to these items including the paragraphs listed in the cross-reference tables, will be found in AA-F-001873/GEN(GSA-FSS), Furniture, Contemporary Oak (General Specification)

1 2 Classification The items shall be of the following types (see 6 1 herein).

Type I - Dresser, six drawers
Type II - Mirror, wood frame, swing support
Type III - Table, center drawer
Type IV - Desk, left pedestal
Type V - Vanity, left pedestal, lift lid
Type VI - Bookcase, adjustable shelves

2 APPLICABLE DOCUMENTS

2 1 Specifications and standards The specifications and standards of the issue in effect on the date of the invitation for bids which form a part of the specification are listed in 2 1 of AA-F-001873/GEN, hereinafter called the General Specification

2.2 Other publications The documents which form a part of this specification are listed in 2.2 of the General Specification

3 REQUIREMENTS

3 1 Preproduction sample Preproduction sample requirements shall be as given in 3.1 of General Specification

3 2 Materials Materials used in construction of the case piece shall be of the kind and quality specified in 3 2 of the General Specification and the applicable paragraph numbers of the latter for component material used herein as given in Table I below

TABLE I Materials cross-reference

Component	AA-F-001873/GEN Par No
Adhesives	3 2 1 - General Specification
Plastic laminate	3.2 2 - General Specification
Particleboard	3 2.3 - General Specification
Laminate plastic surfaced panels	3 2 4 - General Specification
Plywood and Laminated Parts	3.2 5 - General Specification
Edge Banding	3.2.6 - General Specification
Hardboard	3.2 7 - General Specification
Dowels	3.2.8 - General Specification
Tacks and staples	3.2.9 - General Specification
Fastening devices	3.2.10 - General Specification
Hinge	3.2.11 - General Specification
Shelf support	3.2.12 - General Specification
Drawer guides	3.2 13 - General Specification
Glides	3.2.14 - General Specification
Wood varieties and parts	3.2.16 - General Specification
Mirrors	3.2 18 - General Specification

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3 3 Construction The general requirements for construction of the case pieces shall be as specified in 3 3 of the General Specification and the applicable paragraph numbers of the latter for components used herein are given in Table II below

TABLE II. Construction requirements cross-reference

Component	AA-F-001873/GEN Par. No.
Design	3 3 1 - General Specification
Assembly	3 3.2 - General Specification
Tolerances	3.3.3 - General Specification
Joinery	3 3 4 - General Specification
Edging	3.3 5 - General Specification
Finish	3 4 - General Specification
Workmanship	3.7 - General Specification

3 4 Type I, Dresser The dresser shall be constructed as described and illustrated in Figures 1-4 herein All parts and surfaces not covered with plastic laminate shall be finished as specified in paragraph 3 4 of the General Specification.

3 4 1 Drawers for dresser Either of the following drawer constructions may be used at the option of the manufacturer

3 4 1 1 Drawers with removable fronts The drawers shall consist of a drawer body and a separate drawer front attached to the drawer body The drawer body shall have a front and back panel, two side panels and a bottom panel The front, back and side panels shall be constructed of minimum 3/8 inch solid wood (3.2 16 of the General Specification), 5-9 ply hardwood plywood (3.2.5.2 of the General Specification) or 5-9 ply laminated construction A mixture of solid, plywood and laminated drawer parts is not permitted in any one drawer The drawer sides, front and back shall be grooved to receive a 1/8 inch hardboard bottom (3 2 6 of the General Specification) secured by a minimum of 8 rubbed in place glue blocks, evenly spaced or adequately secured with pneumatically driven staples Sides, back and front shall be put together with multiple finger type dovetails The dovetails shall be true and even and any open, poorly milled, poorly glued or unevenly assembled dovetails will not be acceptable Drawer body dimensions shall be such as to preclude excessive drop or lateral play when drawer is opened The back of the drawers shall extend to within 2 inches of the inside back of the case The overall height of the drawer back may be 1/8 inch less than the sides to allow adjusting the drawers in the case A drawer guide channel (3 2 13 of the General Specification) shall be securely attached to the center of the drawer bottom A center drawer guide shall be securely attached to the front and back drawer frame parting rails Plastic glides shall be secured to the top, rear edges of both drawer sides and to each end of the front drawer bearing rail(s) in the case to ensure smooth drawer operation Drawer stops shall be securely glued and screwed inside the case The front panels shall be counterbored for screws for attaching the drawer front The drawer fronts shall be plastic laminate surfaced panels (3 2 4 of the General Specification) The core shall be 3/4 inch particleboard The drawer front dimensions shall be as shown in applicable figures The bottom edges of the drawer fronts shall have smoothly shaped self-pulls 1/2 inch wide by 1/4 inch deep extending to within 3 inches of each side The bottom edge including self-pull shall be smooth and filled if necessary The bottom edge shall then be sealed The left drawer fronts shall be attached to the drawer bodies by six screws, evenly spaced and the right drawer fronts shall be attached by four screws evenly spaced The drawer fronts shall be parallel to each other and the top They shall be flush with each other and the outside and bottom edges shall be flush with outside and bottom edges of the end panels Drawers shall operate smoothly and quietly without excessive drop

3 4 1 2 Drawers with fixed fronts The drawer back and sides shall be constructed of minimum 3/8 inch solid wood (3 2 16 of the General Specification) 5-9 ply hardwood plywood (3.2 5 2 of the General Specification or laminated construction A mixture of solid, plywood and laminated drawer parts is not permitted in any one drawer The drawer sides front and back shall be grooved to receive a 1/8 inch hardboard bottom (3 2 6 of the General Specification) secured by a minimum of 8 rubbed in place glue blocks, evenly spaced or secured with 12 evenly spaced pneumatically driven staples The drawer sides shall be attached to drawer back with multiple finger type dovetails. The drawer sides shall be attached to the drawer front by driven (french) dovetail on the drawer side front edge The dovetails shall be true and even and any open, poorly milled, poorly glued or unevenly assembled dovetails will not be acceptable Drawer dimensions shall be such as to preclude excessive drop or lateral play when drawer is opened The back of the drawers shall extend to within 2 inches of the inside back of the case The overall height of the drawer back may be 1/8 inch less than the sides to allow adjusting the drawers in the case A drawer guide channel (3.2.13 of the General Specification) shall be securely attached to the center of the drawer bottom A center drawer guide shall be securely attached to the front and back drawer frame parting rails

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

The drawer fronts shall be plastic laminate surfaced panals (3.2.4 of the General Specification). The core shall be 3/4 inch, 5 ply-lumber core, hardwood plywood. Drawer front dimensions shall be as shown in applicable figures. The bottom edges of the drawer fronts shall have smoothly shaped self-pulls 1/2 inch wide by 1/4 inch deep extending to within 3 inches of each side. The bottom edge including self-pull shall be smooth and filled if necessary. The bottom edge shall then be sealed. The drawer fronts shall be parallel to each other and the top They shall be flush with each other and the outside and bottom edges shall be flush with outside and bottom edges of the end panels Drawers shall operate smoothly and quietly without excessive drop.

3 5 Type II, mirror and support Mirror shall be constructed as described and illustrated in figure 5 Mirror support shall be wood or metal of type commercially produced All screw holes shall be predrilled to enable the placement of the mirror 1/2 inch in from the left edge and a minimum of 1/8 inch from top of dresser The screws shall be packaged and attached to inside front of the top left drawer The mirror support shall be shipped disassembled from the mirror

3.6 Type III, table Table shall be constructed as described and illustrated in figures 6-10 herein.

3 6 1 Drawer for table. Drawer for table shall be constructed as specified in either paragraph 3 4.1.1 or 3 4.1.2 herein as applicable

3 7 Type IV, desk Desk shall be constructed as described and illustrated in figures 11-16 herein.

3 7.1 Drawers for desk Drawers for desk shall be constructed as specified in either paragraph 3.4 1 or 3 4 1.2 herein as applicable

3 8 Type V, Vanity Vanity shall be constructed as described and illustrated in figures 17-22 herein

3 8 1 Drawers for vanity. Drawers for vanity shall be constructed as specified in either paragraph 3 4 1 1 or 3.4 1 2 herein as applicable.

3 9 Bookcase Bookcase shall be constructed as described and illustrated in figures 23-26 herein

3 10 Finish All parts and surfaces not covered with plastic laminate, shall be finished as specified in 3 4 of the General Specification

3 11 Identification marking (see 3 6 of the General Specification)

3 12 Workmanship (see 3 7 of the General Specification)

4 QUALITY ASSURANCE PROVISIONS

4 1 The quality assurance provisions shall be as specified in Section 4 of the General Specification

5 PREPARATION FOR DELIVERY

5 1 Packaging shall be as specified in Section 5 1 of the General Specification (see 6 1 herein)

5 2 Packing Packing shall be as specified in Section 5 2 of the General Specification (see 6 1 herein)

5.3 Marking

5 3 1 Civil agencies In addition to any special marking required by the contract or order, all marking shall be in accordance with Fed Std. 123

5 3 2 Military activities In addition to any special marking required by the contract or order, all marking shall be in accordance with MIL-STD-129

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5 3.3 Special Marking In addition to the markings required by 5.3 1 or 5.3.2 above, the front and back panels of each shipping container shall be marked in each upper corner with the word "UP" and an arrow pointing to the direction in which the container should be placed for shipping and storage "UP" shall be in minimum 2 inch high characters In addition, the top panel of the container shall be marked with the following in minimum 2 inch high characters·

TOP

THIS SIDE UP

FURNITURE

FRAGILE-HANDLE WITH CARE

The front side and back side of each shipping container shall be marked with the following in minimum 2 inch high characters

FURNITURE

FRAGILE-HANDLE WITH CARE

In lieu of the marking specified above, the front and back panels of the unit containers and shipping containers for the Type II mirrors shall be marked with the following in minimum two inch high characters

FURNITURE-INCLUDING GLASS

FRAGILE

HANDLE WITH CARE

6 NOTES

6 1 Ordering data Purchasers should exercise any desired options offered in this specification and procurement documents should specify the following

(a) Number, title and date of this specification

(b) Number, title and date of the General Specification

(c) Type required (see 1 2 herein)


(d) Color or wood finish and plastic laminate (see 3 2 2 and 3 4 1 of the General Specification)

(e) When preproduction sample requirement is waived (see 3 1 herein)

(f) Level of packaging and packing required (see 5 1 and 5 2 of the General Specification)

GSA DC 78-434

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

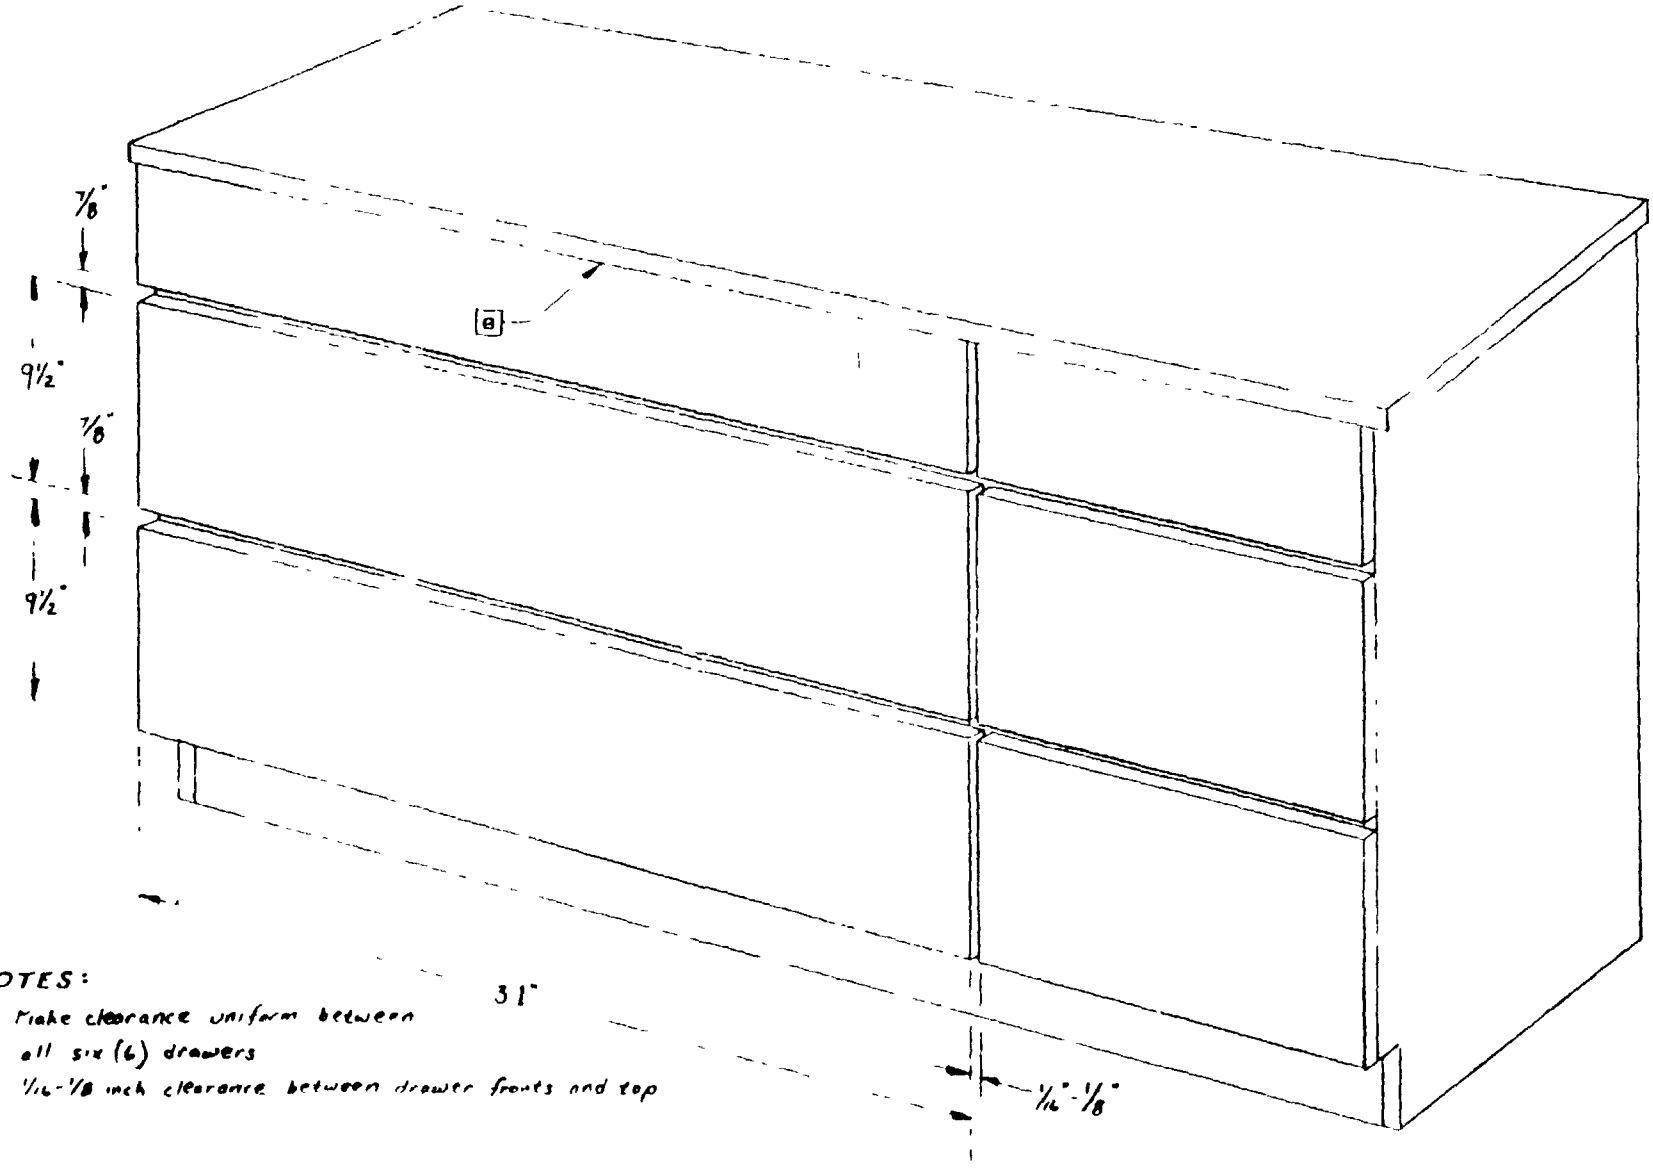

NOTES:


A Make clearance uniform between all six (6) drawers

[a] 1/16-1/8 inch clearance between drawer fronts and top

DRESSER
TYPE I

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

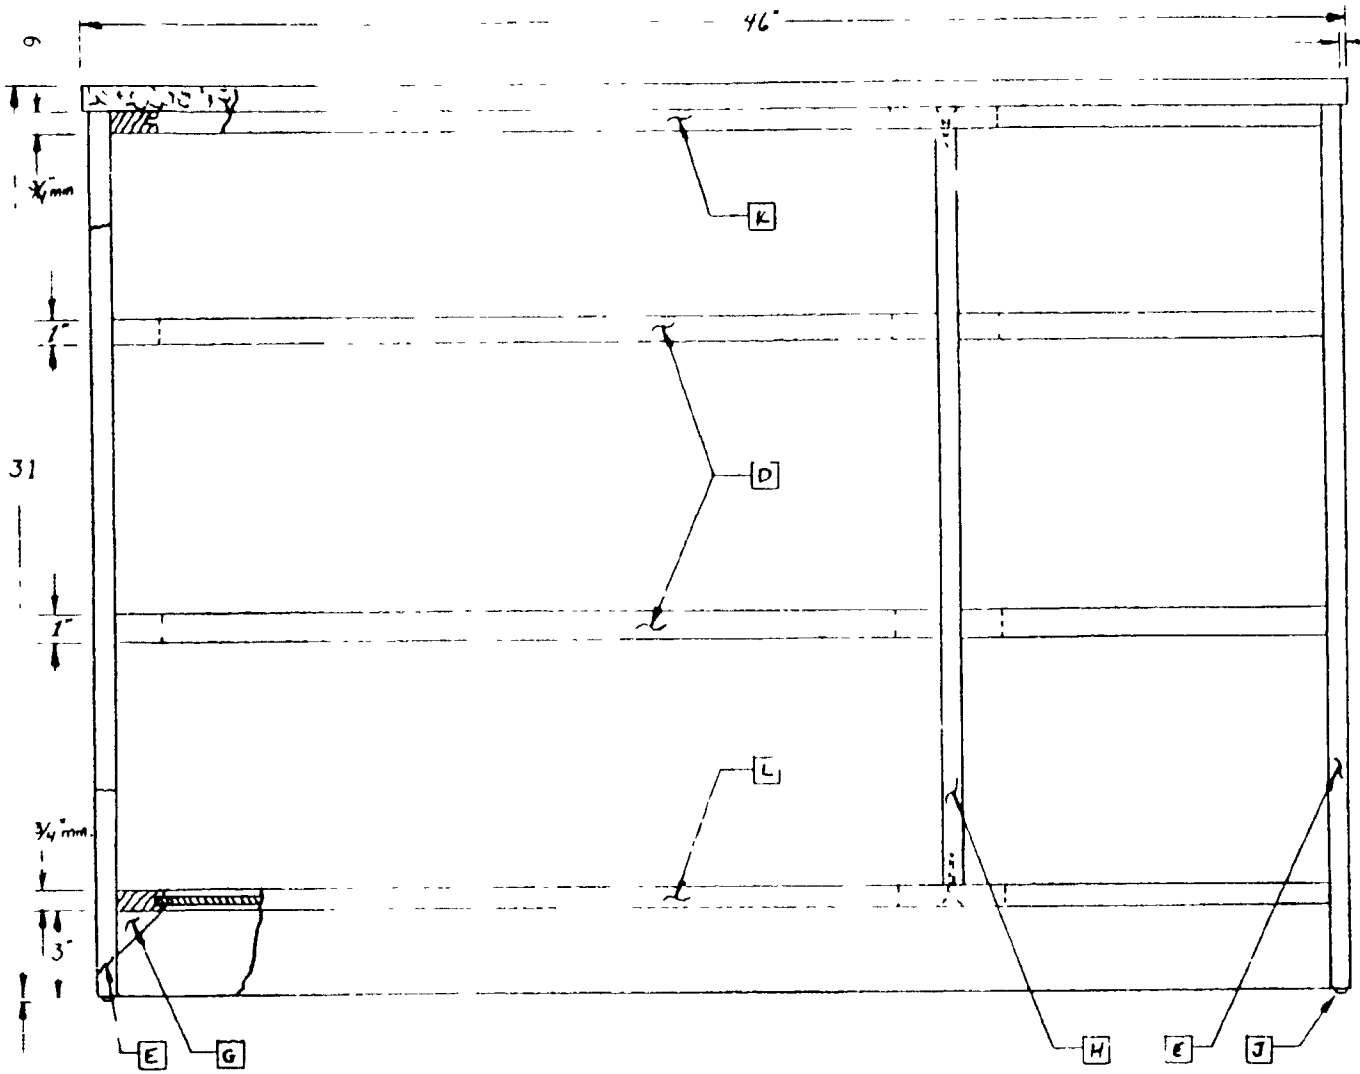

NOTES

A Make all interior frame members solid wood, 1¼" wide except as noted Make thickness as indicated in the figure.

B Make all joints as specified in 3 3 4 G S

C Reinforce joints as specified in 3 3 4 G S

D Drawer parting rails (exposed)

E Side panels ¼" min 5 ply hardwood plywood (3 2.5 2-G S)

F Dust panel 1/8" hardboard (3 2 7 - G S)

G Gusset 2 req d, 1 each side glued and screwed.

H Pilaster - ref

J ¼ inch diameter glide (3 2 14-G S) 4 req d.

K Top frame

L Bottom frame


M Tile rails (two per drawer) may be used in the top of the middle drawer openings so that the same size drawer bodies may be used in the middle and bottom drawers.

AA-F-001873/4A(GSA-FSS)

DRESSER FRONT VIEW (DRAWERS REMOVED) NOT TO SCALE

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

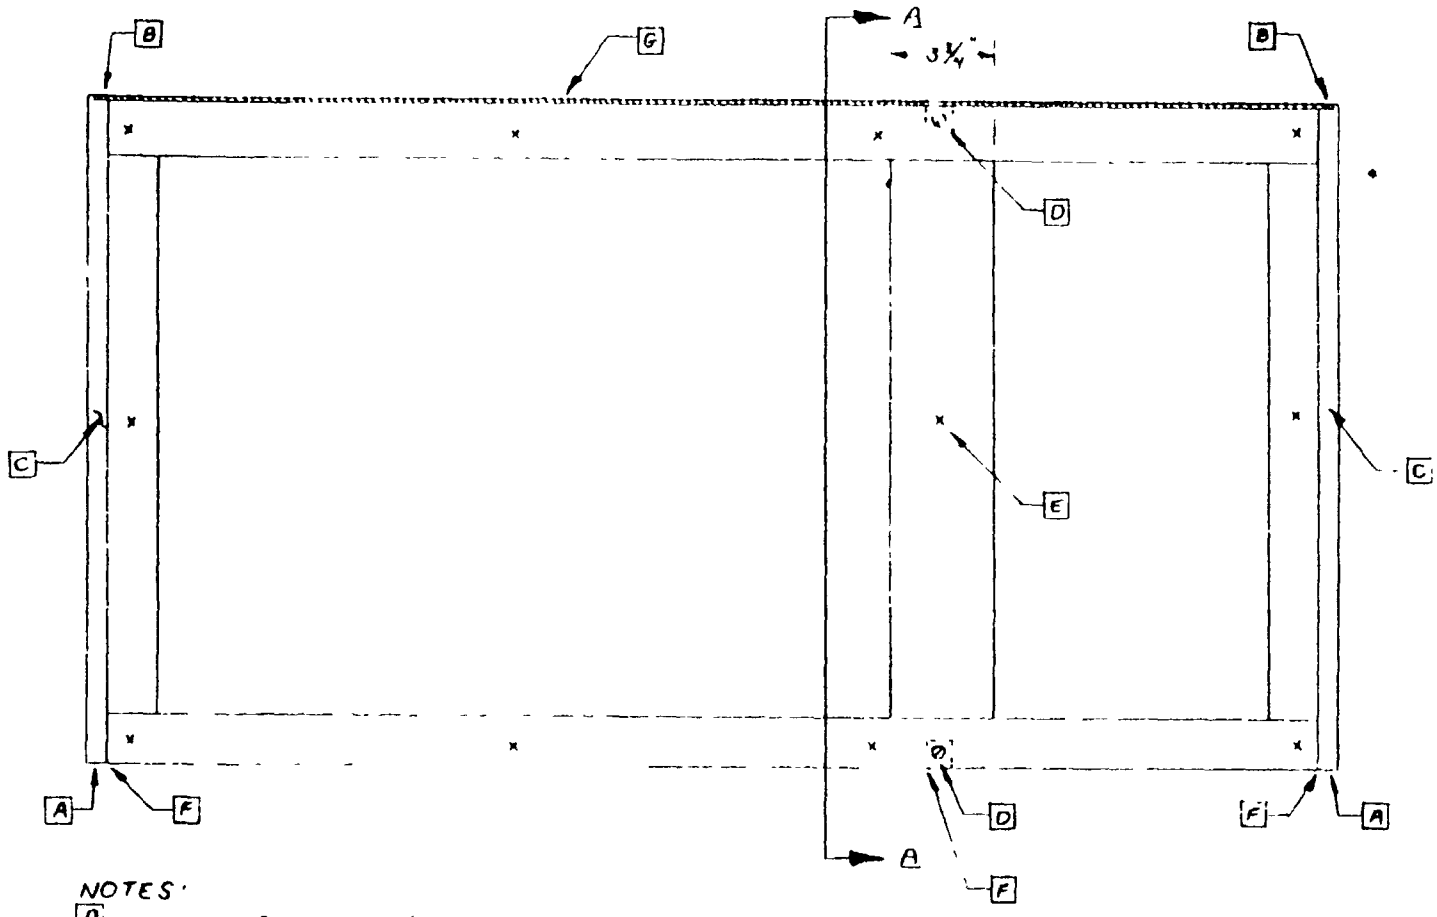

NOTES:

A Veneer band front edges of side panels typ 2 plcs

B Back edges of side panels rabbeted for back panel typ 4 plcs

C Side panels (2) ref

D Pilasters (2) ref

E Top screw attachment typ 11 plcs

F Make rails flush with front edge of side panels & pilasters typ 12 plcs


G Back panel ref

DRESSER TOP VIEW
(DRAWERS AND TOP REMOVED)

NOT TO SCALE

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

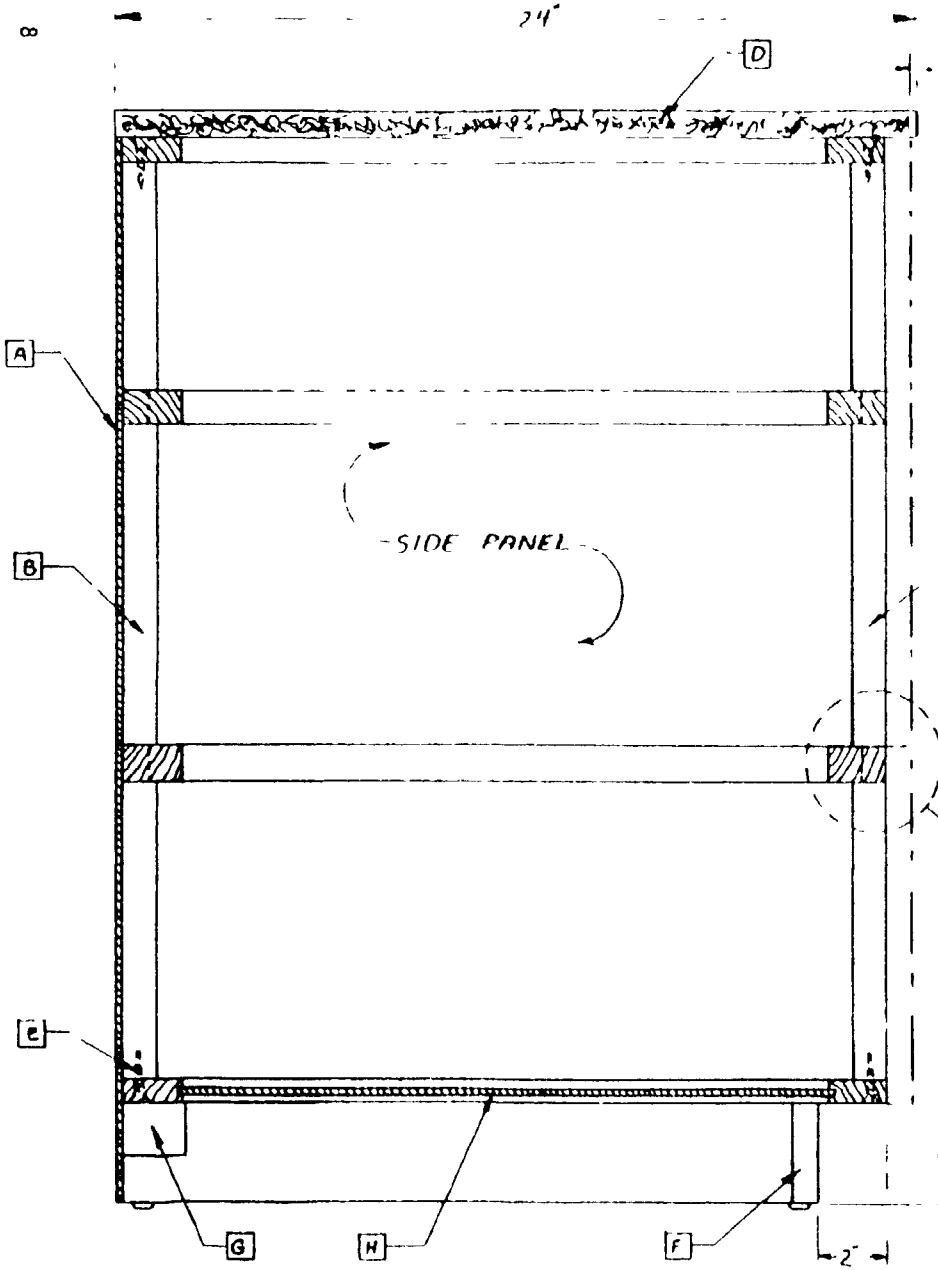


NOTES

[A] Back panel 1/8 hardboard (3 2 6-G S)
[B] Rear pilaster 1 x 1 notched into rear frame rail (see detail A)
[C] Front pilaster 1 x 1" notched into drawer parting rail (see detail A)
[D] Top 3/4 Particleboard core plastic laminated and self-edged on front and sides, rear is sealed (see 3 2 2 6.5, 3 2 3-1 5, 3 2 4-6 S)
[E] Screw through frame into pilaster, Typ 4 pls (top and bottom)
[F] Toeboard 3/4" minimum, 5ply hardwood plywood (see 3 2 5 2-6 S.)
Reinforce toeboard with glue/screws cuts as req'd
[G] Gusset ref
[H] Dust panel ref

1/8" Overhang Typ front edge and both sides

NOT TO SCALE

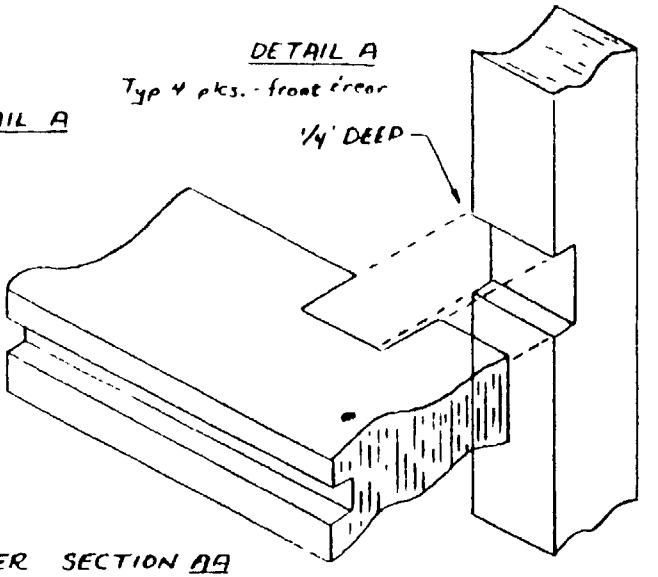



NOT TO SCALE

DRESSER SECTION AA
(DRAWERS REMOVED)

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

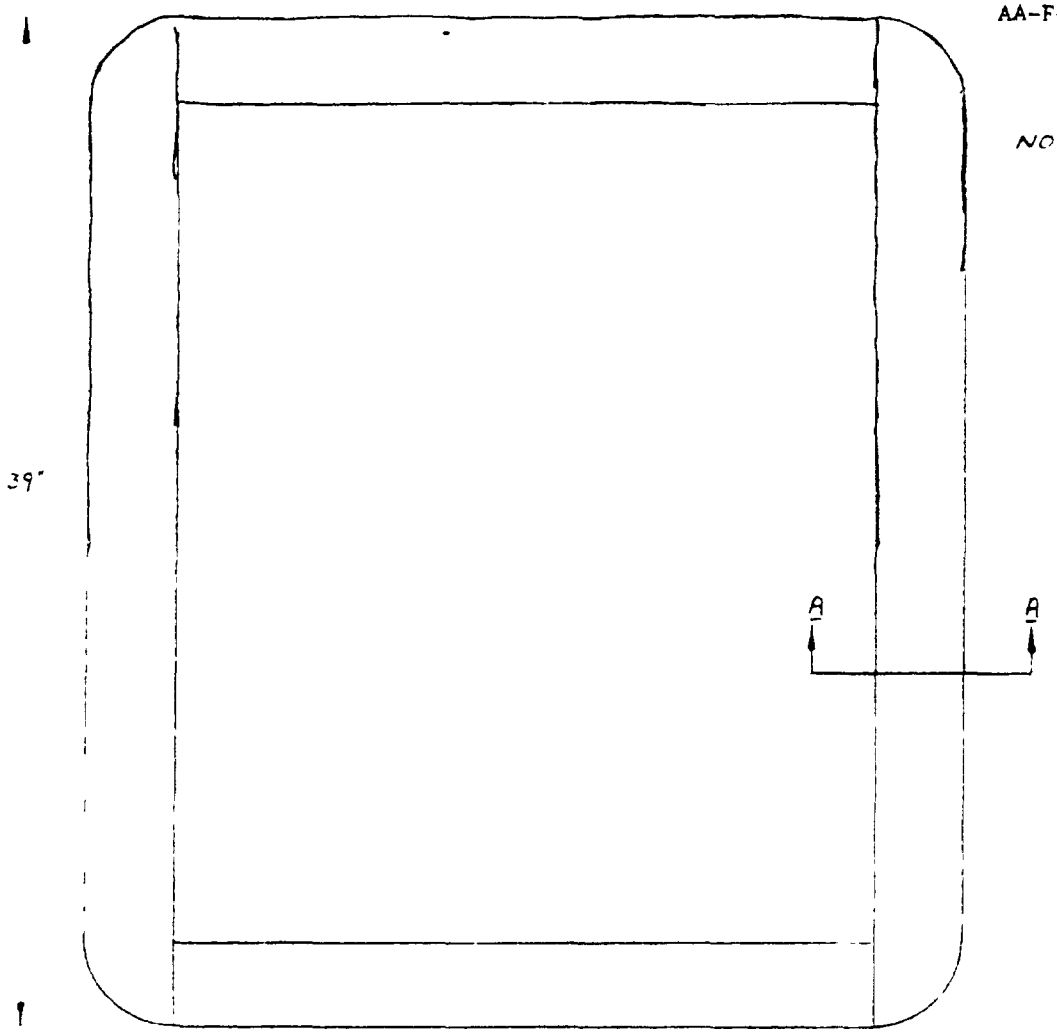

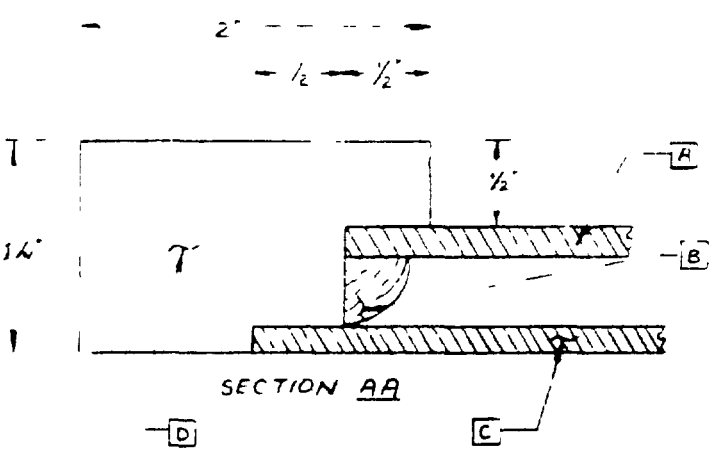

NOTES

A Mirror glass

B Full length ¼ round wooden molding or extruded mirror retainer (Kentron # K 102 681 or equal) Either molding shall be secured with staples spaced not over 4 inches apart

C ⅛ hardboard (32 6-65) back, stapled

D Solid wood frame (32 16-65)

E Make all joints as specified (32 4 65)

NOT TO SCALE MIRROR AND FRAME

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

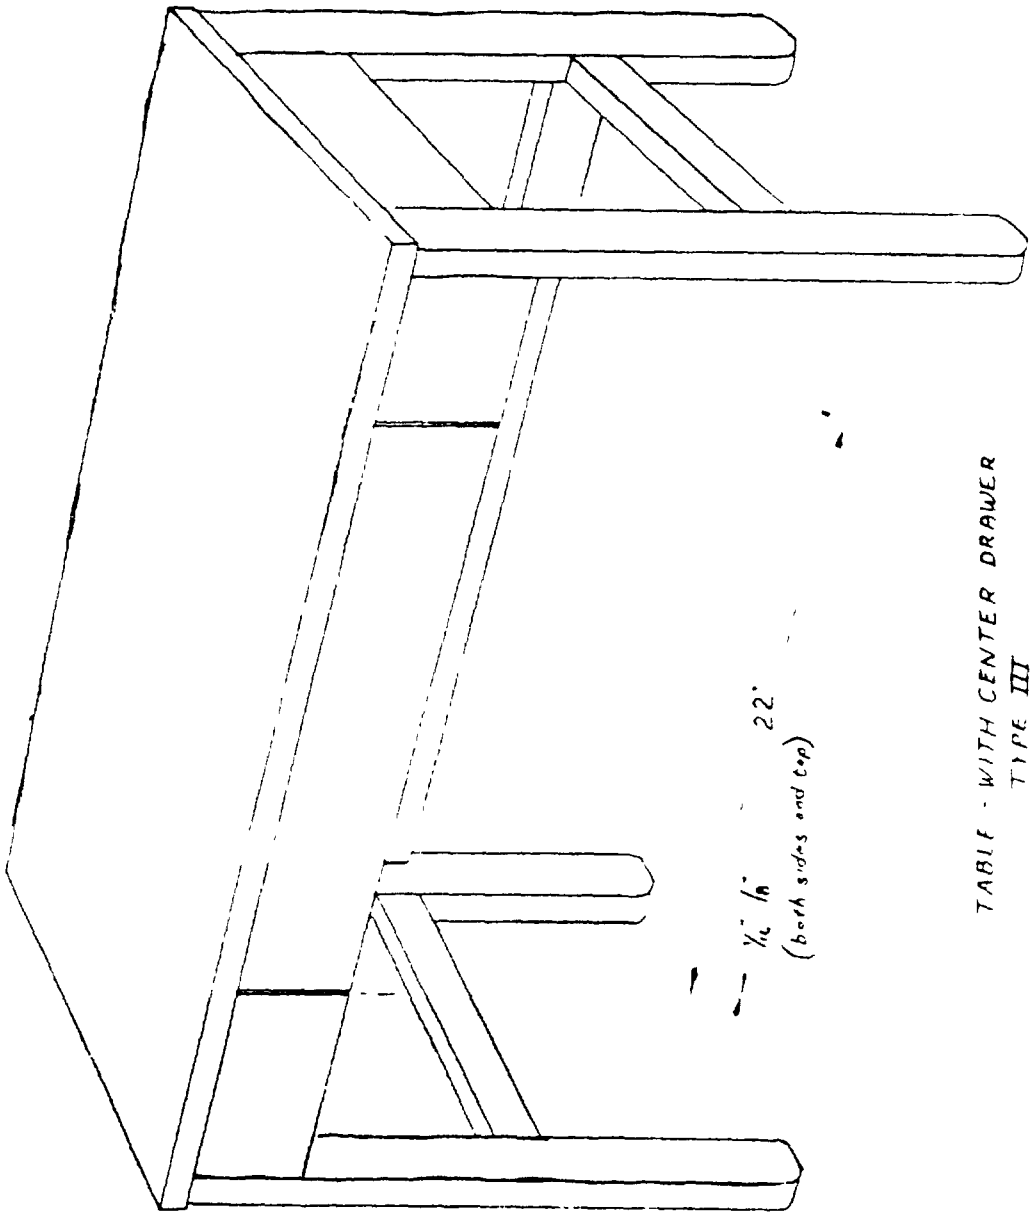


TABLE - WITH CENTER DRAWER
TYPE III

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

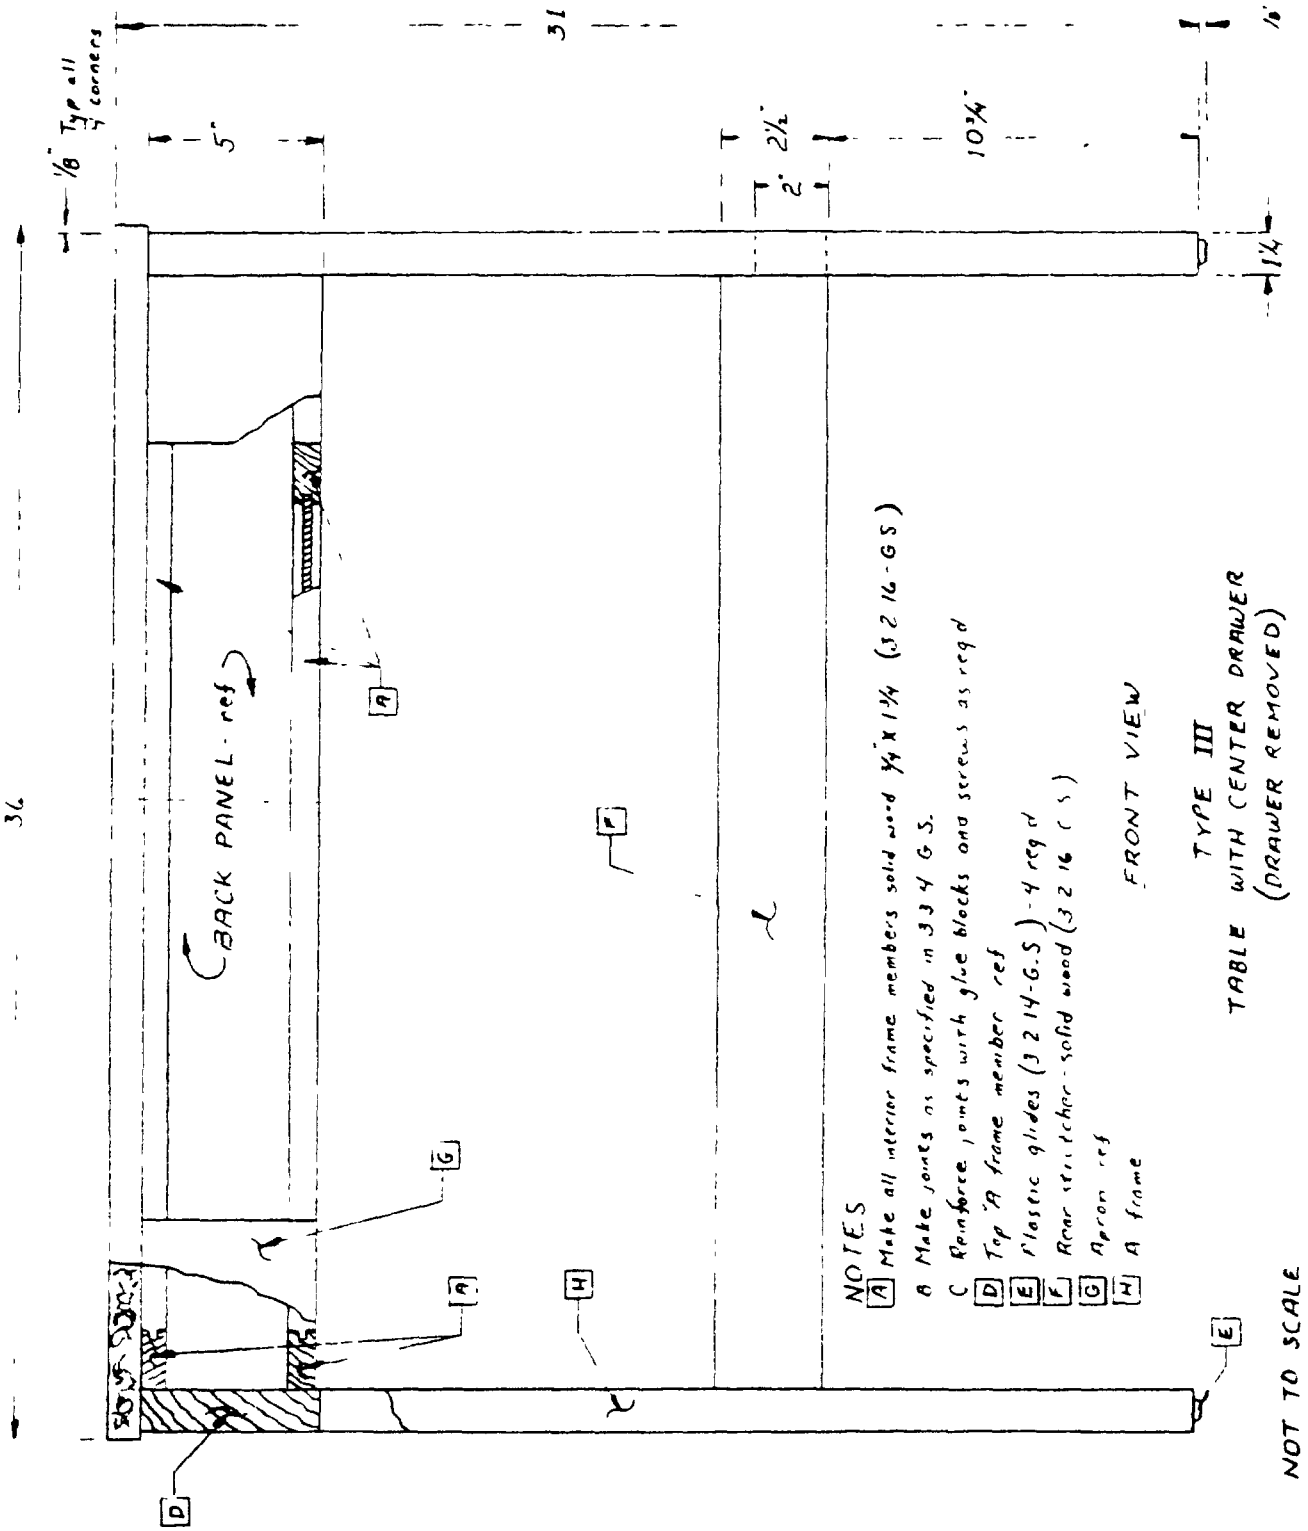


FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTES

A Make all joints as specified in 3.7.4 C.S.
B Make frame joints flush
C At frame, make from solid wood (3.2.1.4 C.)
D Near stretcher, ref
E ½ radius typ 4 places


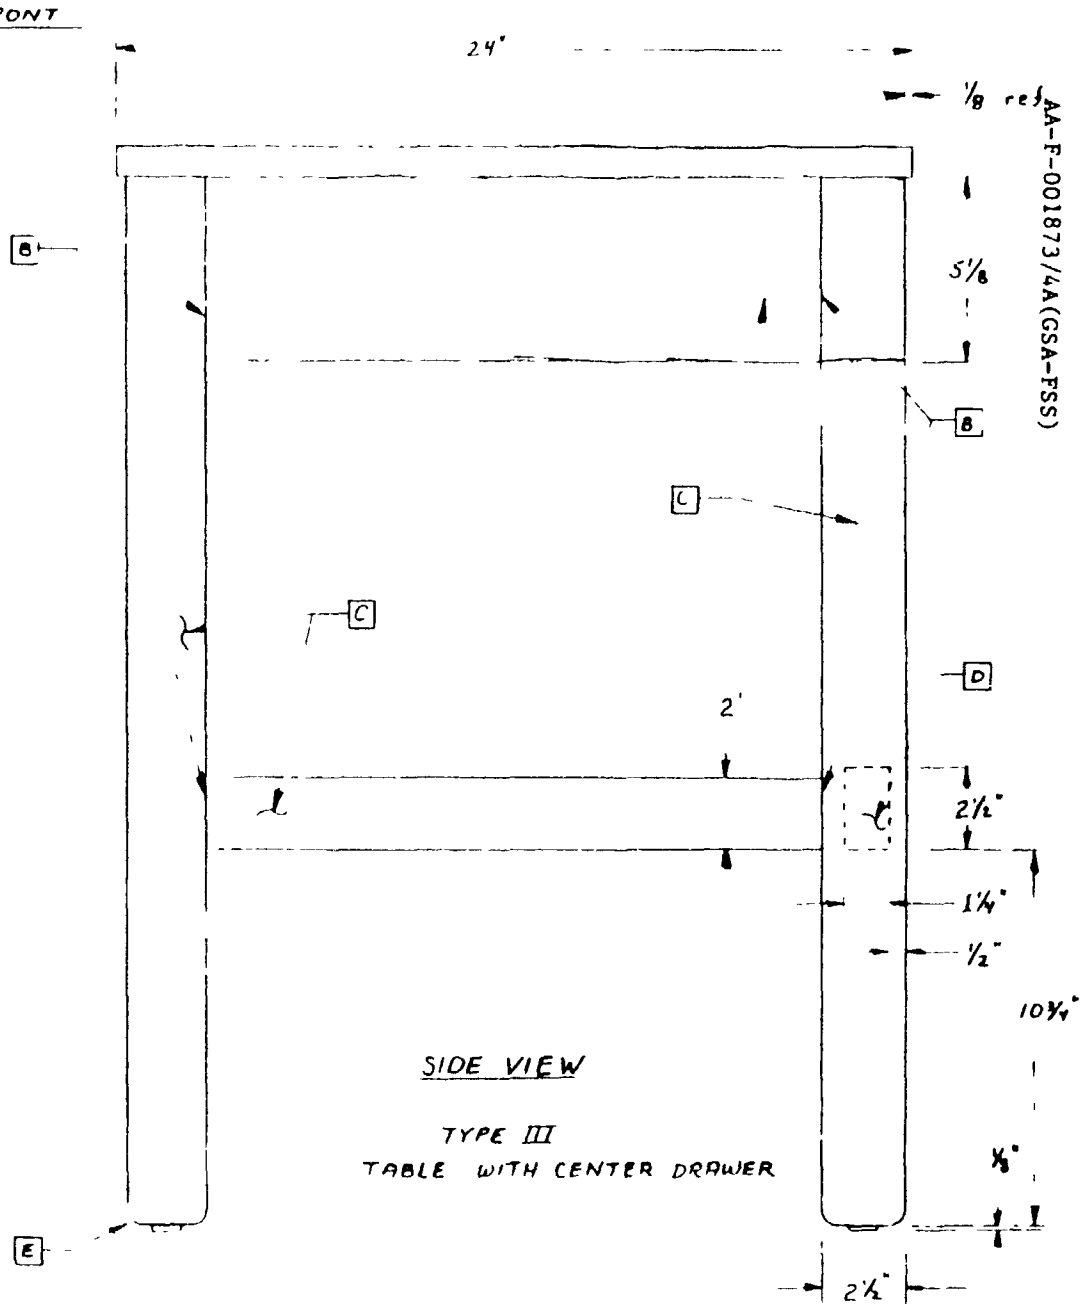


FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

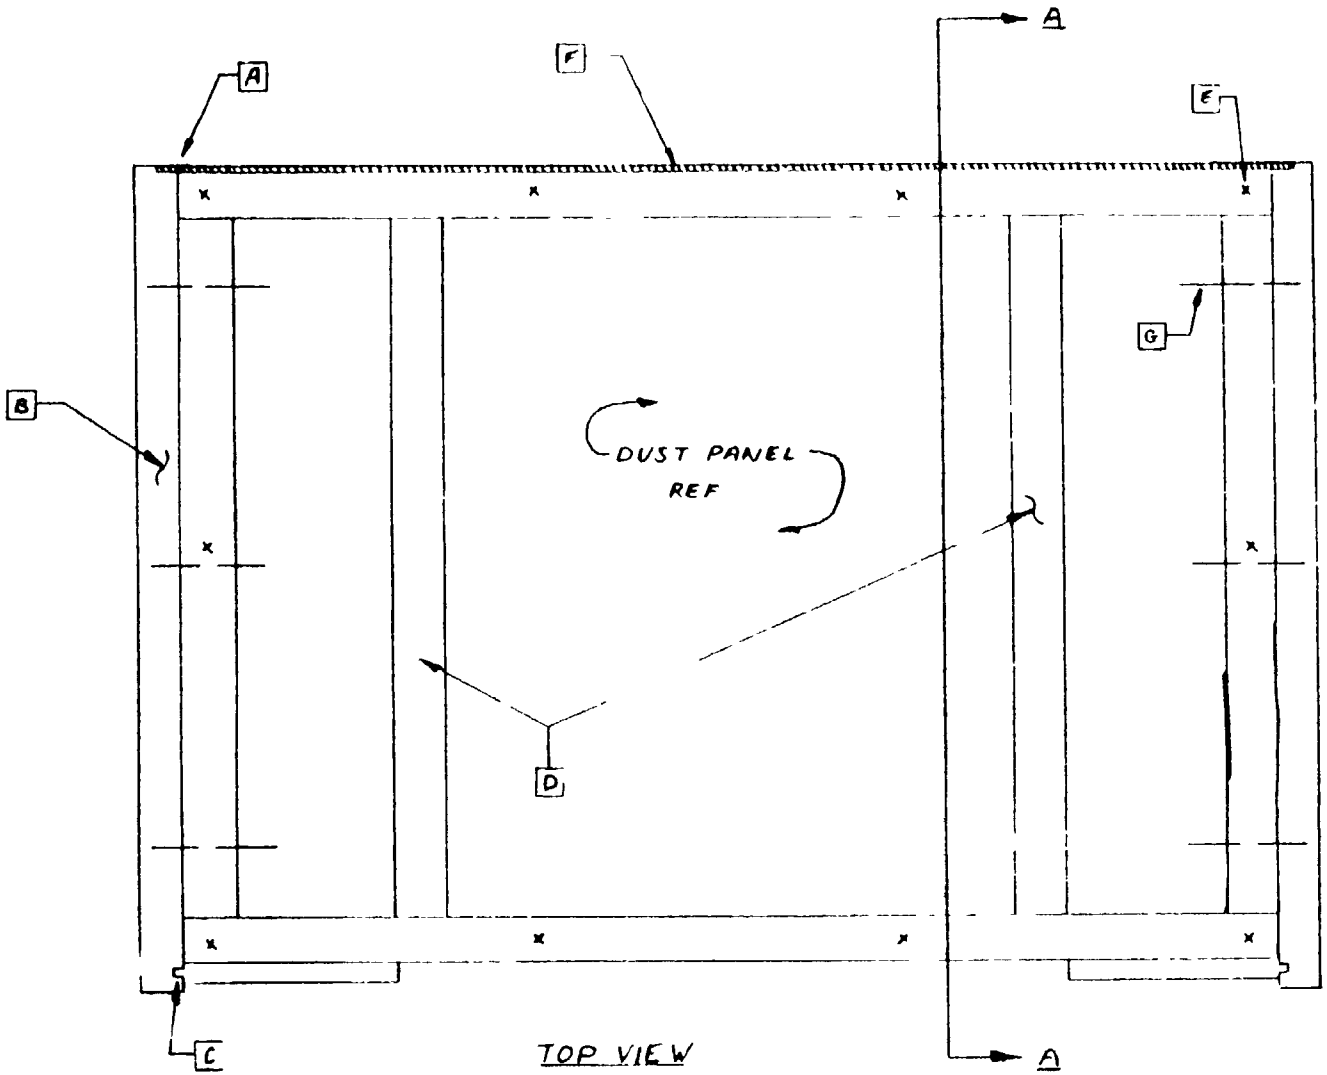

NOTES:

A Back panel rebbitted into 'A' frame. typ 2 plcs

B 'A' frame ref

C Front aprons tenoned into 'A' frame

D Drawer bearer rails

E Top screw attachments typ 10 plcs

F Back panel - ref

G Counter bored screws, 3 per rail, typ for all similar frame attachments

TOP VIEW

TYPE III
TABLE WITH CENTER DRAWER
(TOP REMOVED)

NOT TO SCALE

FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


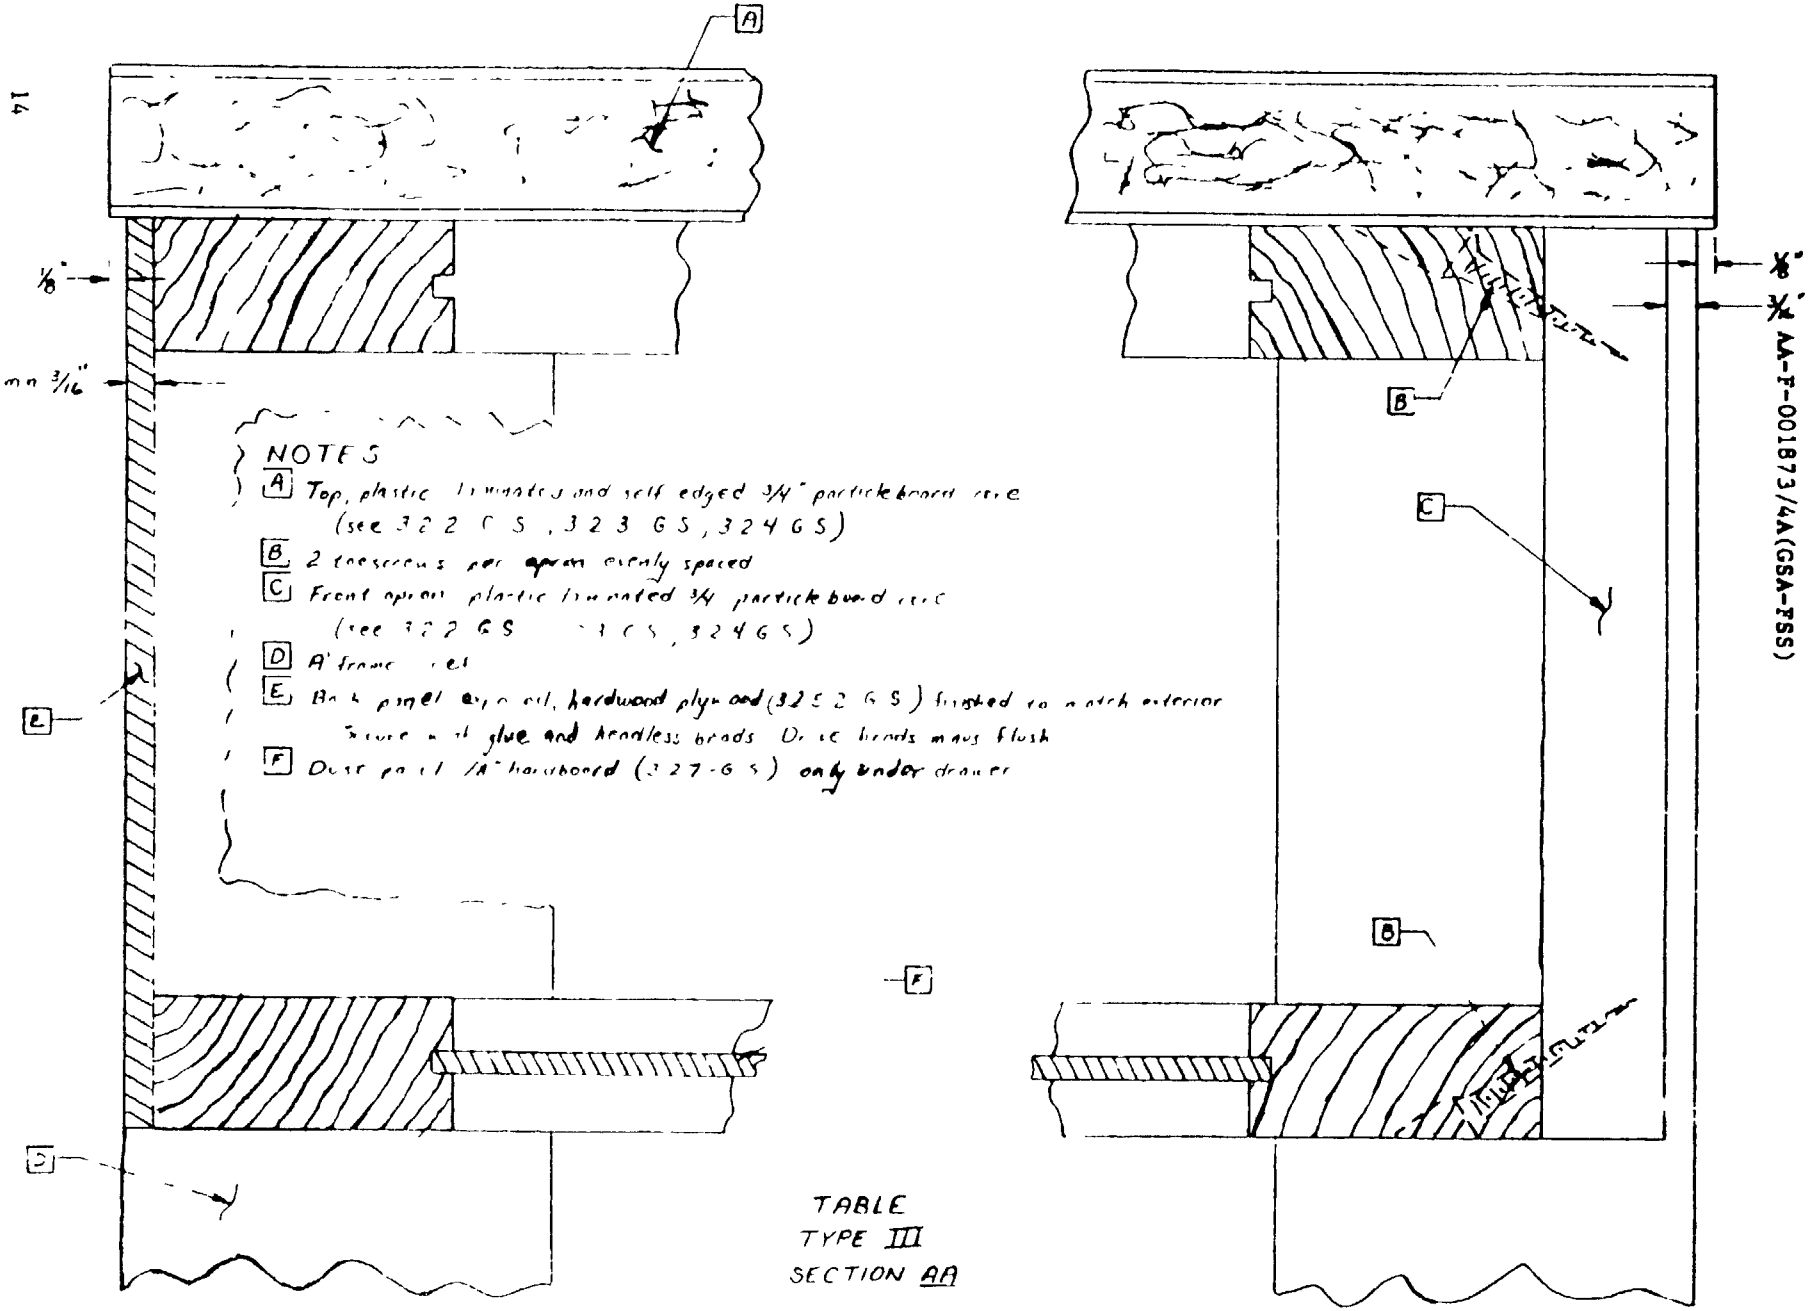


TABLE
TYPE III
SECTION AA

FIGURE 10

AA-F-001873/4A(GSA-FSS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

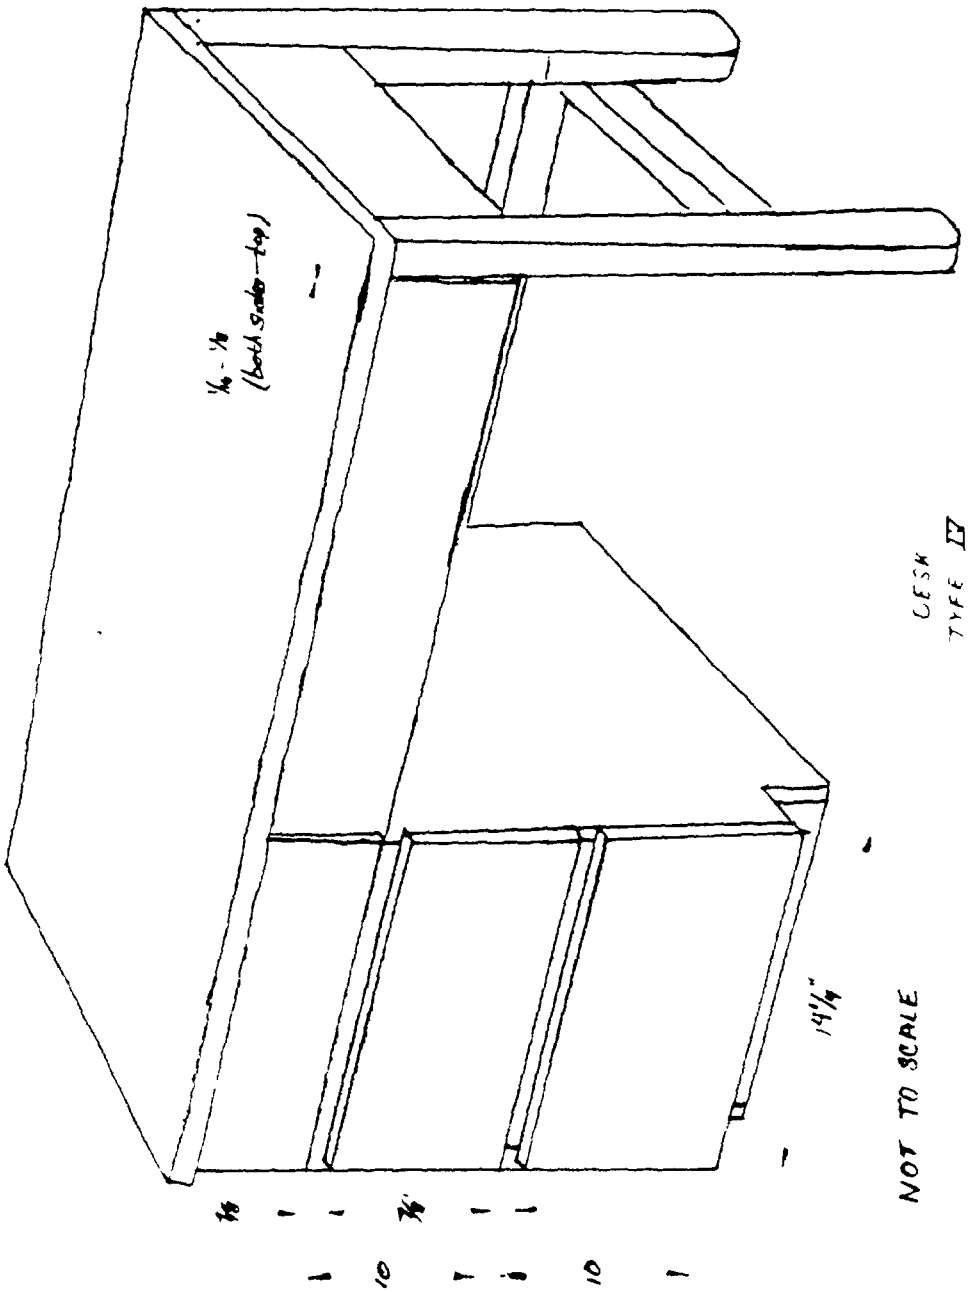

DESK
TYPE II

FIGURE 11

NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


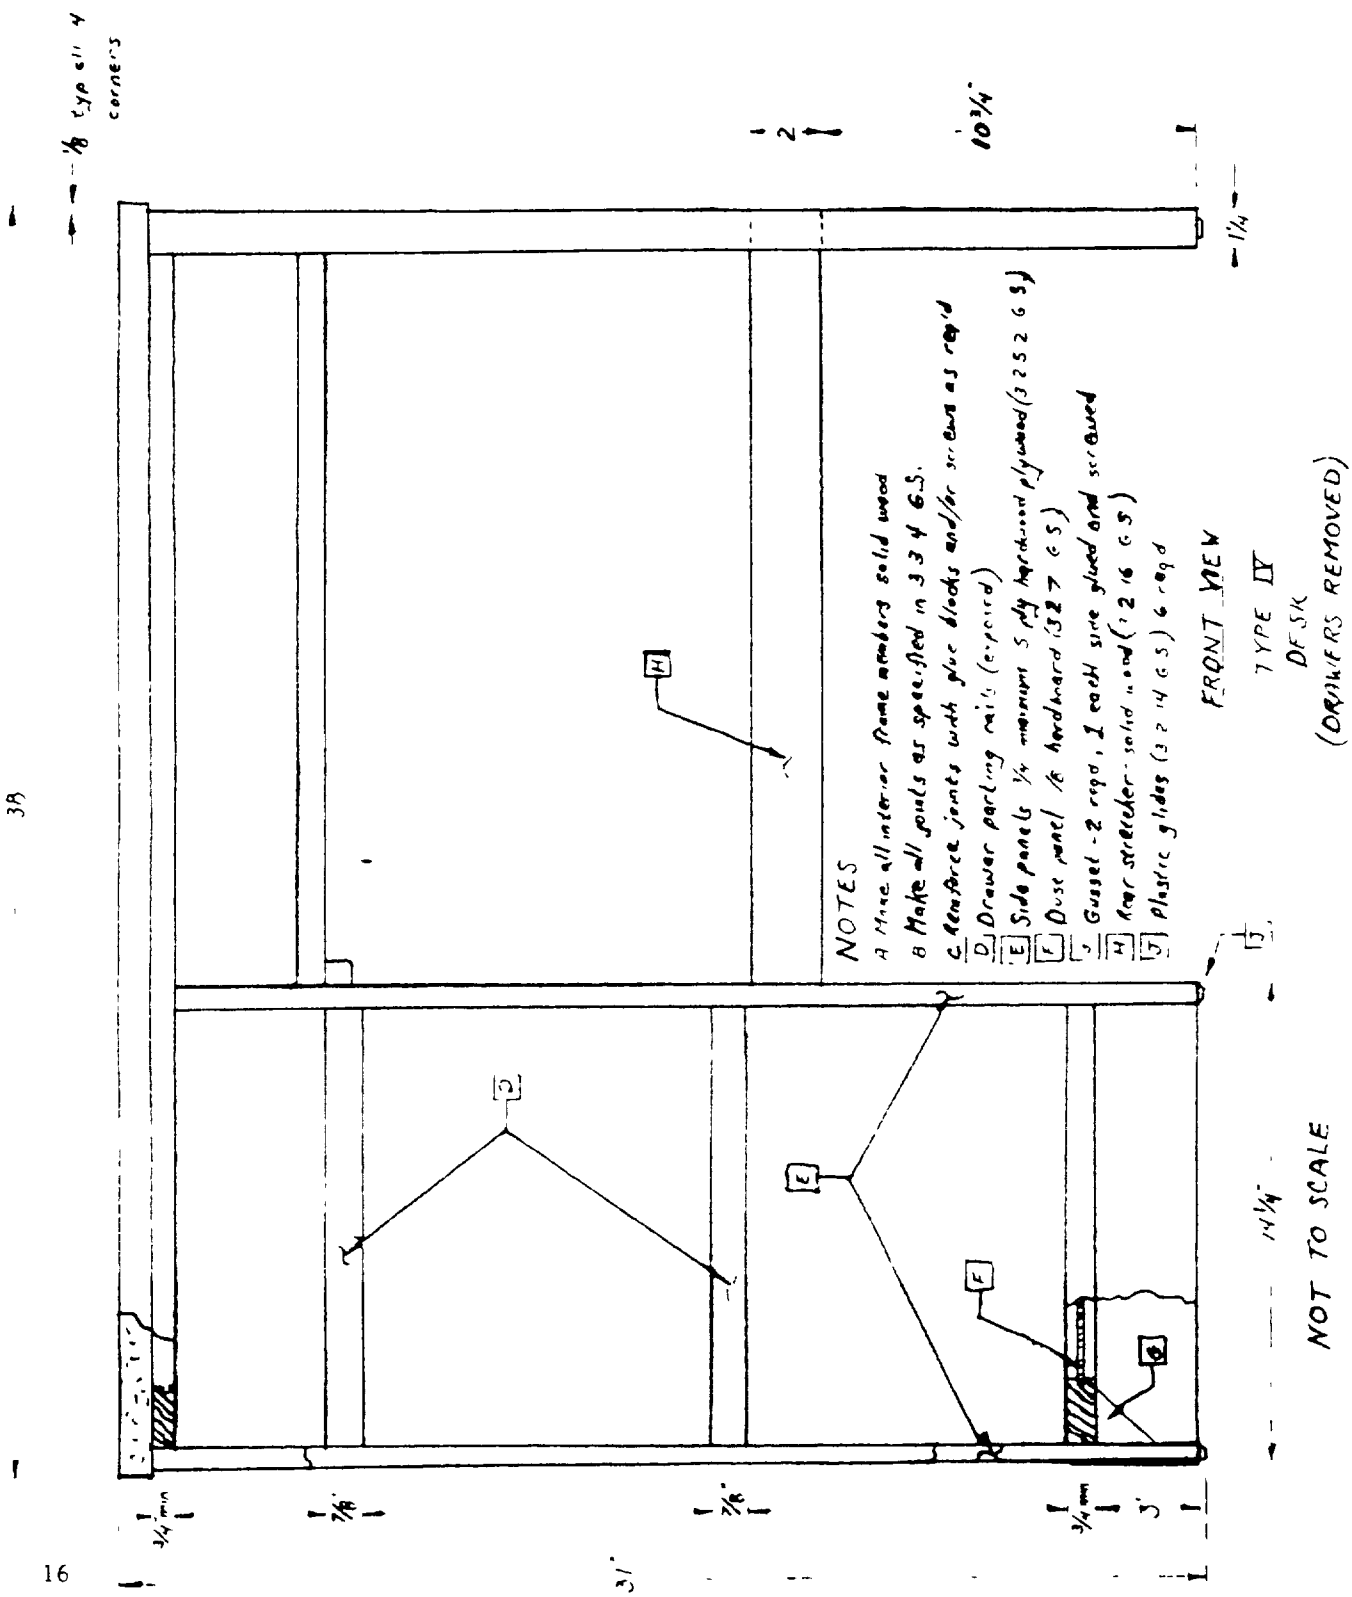


FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

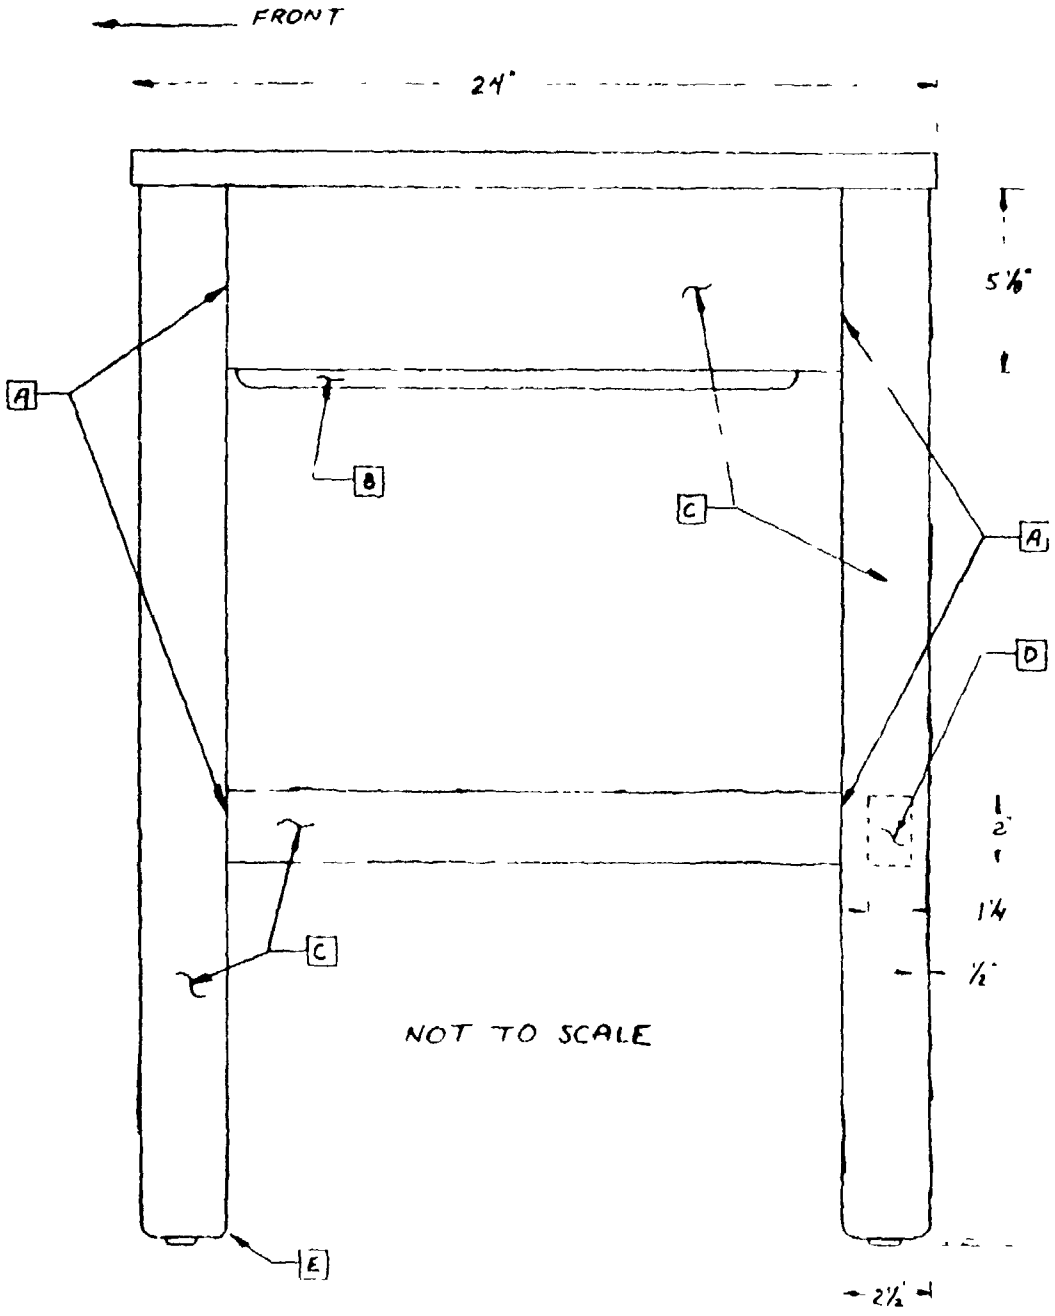

NOTES.


A Make all 'A' frame joints flush
B Screw cleat - ref
C 'A' frame, exposed, make from solid wood (3216-GS)
D Rear stretcher ref
E ½" R - typ 4 plcs
F Make all joints as specified in 334-GS

SIDE VIEW

TYPE IV
DESK

FIGURE 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

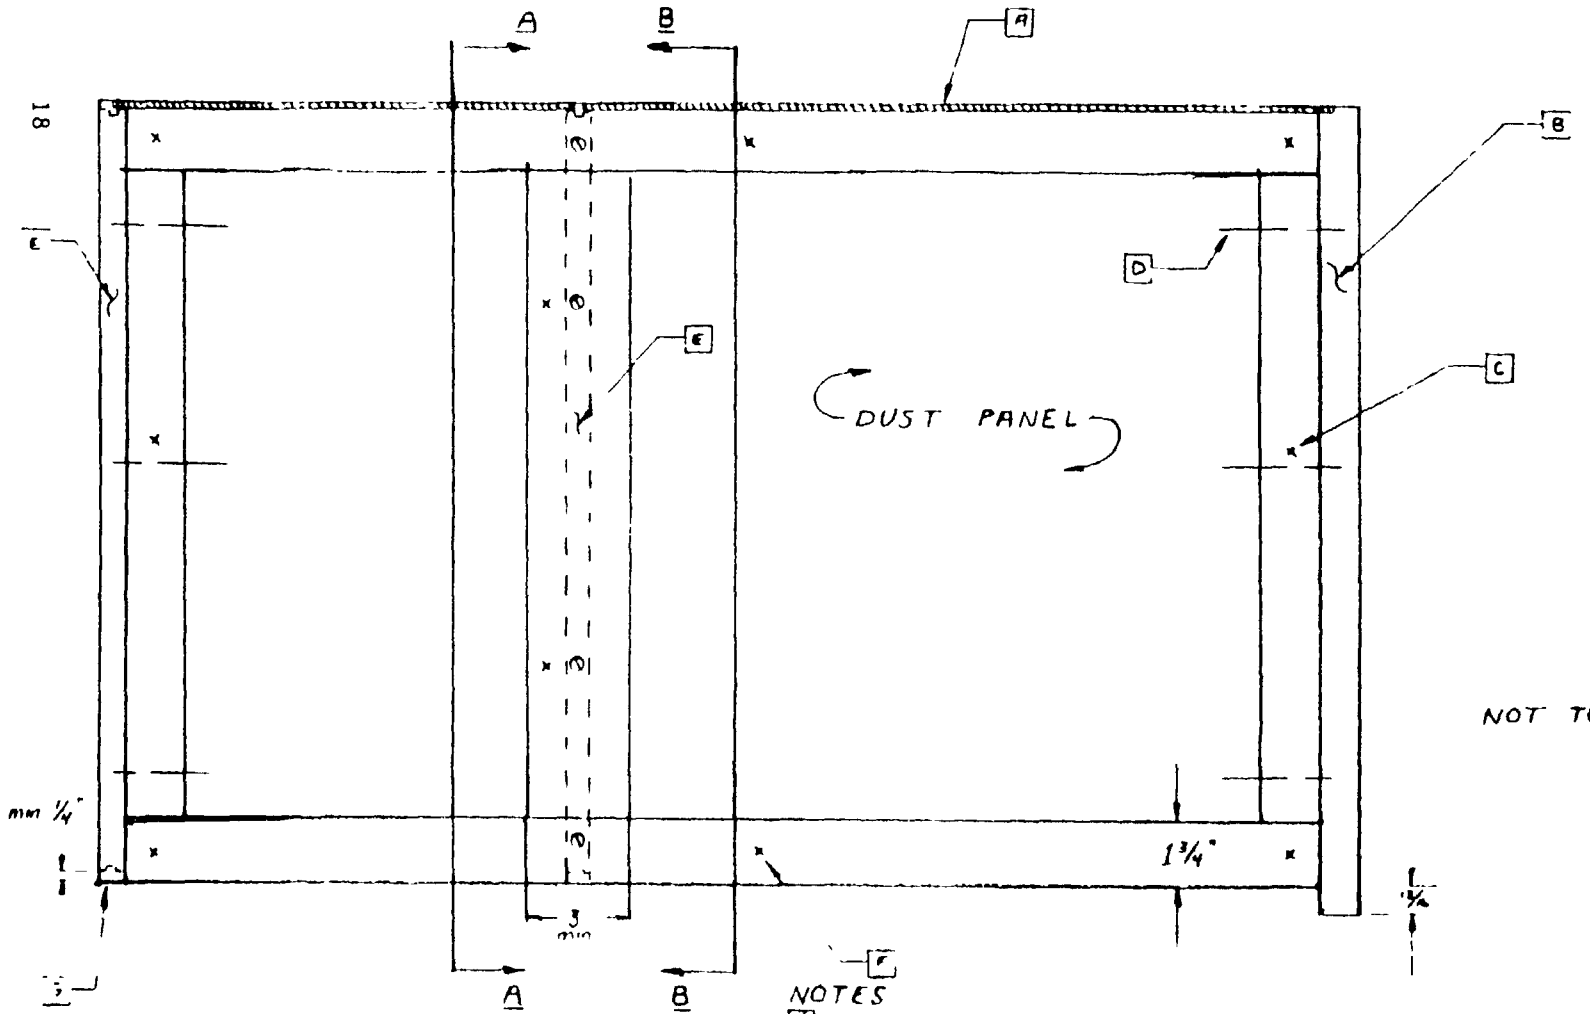

TOP VIEW

TYPE IV
DESK

FIGURE 14


NOTES

A. Back panel ref
B. A" frame ref
C. Hole may be bored in dust panel for access to this screw
D. Counter bored screws, 3 per rail, typ for all similar frame attachments except for frames with dust panels where toe screws shall be substituted.
E. Side panel ref
F. Top screw attachment - typ 10 plcs
G. Lumber band exposed, matl of same wood as face veneer on side panels typ front and rear edges of both side panels

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTES

A Top, plastic laminated and self-edged four sides.
3/4 particleboard core see 222 GS, 323-GS, 324 GS
B Drawer fronts (3.41) exposed
C Drawer parting rails-ref exposed
D Toeboard (exposed) 3/4" min 5 ply hardwood plywood
(8252 GS) Reinforce toeboard as req'd with glue/screw cleats
E Dust panel, ref
F Gusset ref
G Back panel-exposed finished to match exterior, hardwood plywood rabbeted into side panels screwed with glue and headless brads
Drive brads slightly minds flush Fill brad holes

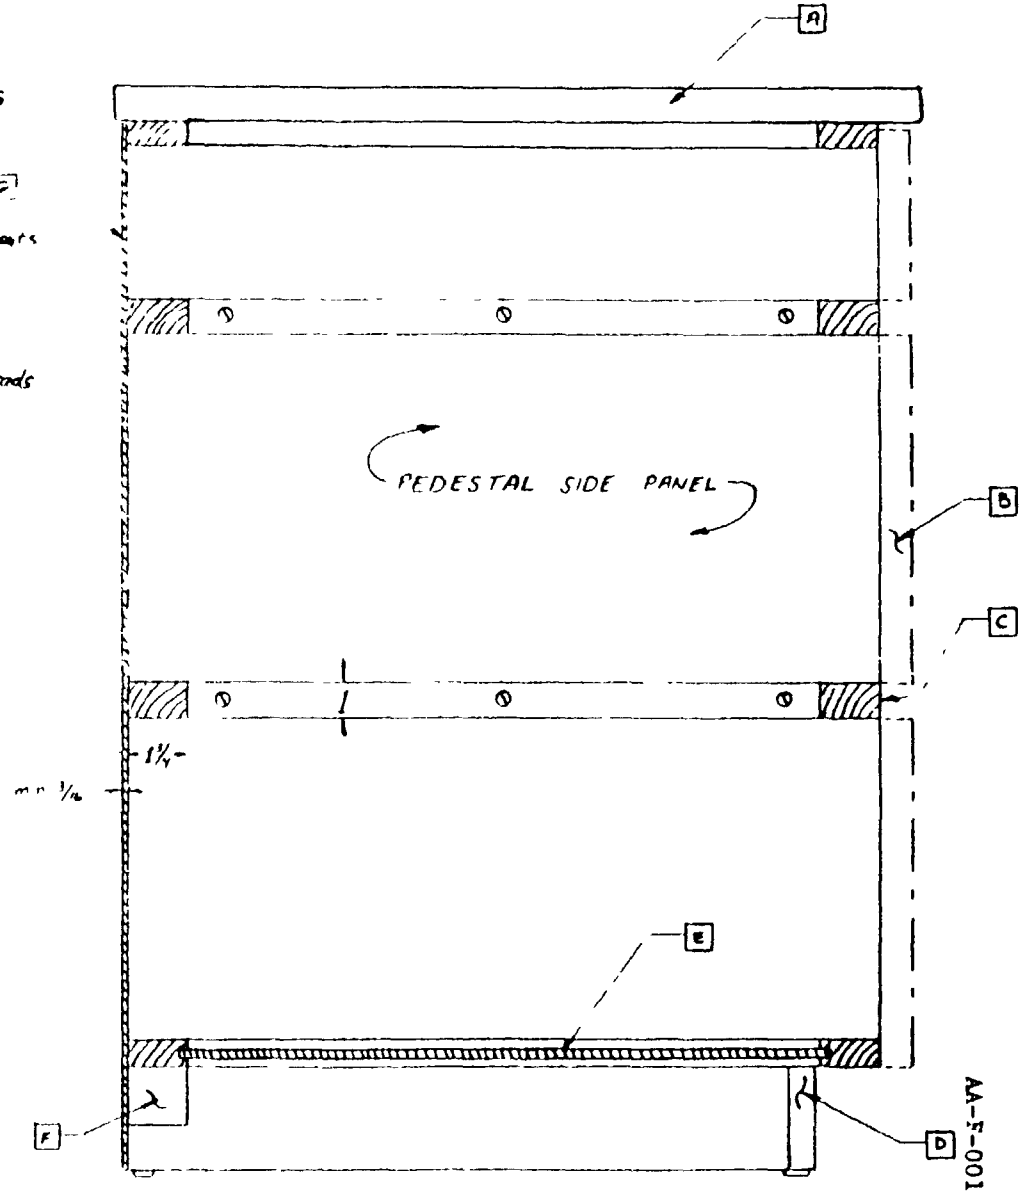

NOT TO SCALE

SECTION AA

TYPE IV
DESK

FIGURE 15

AA-F-001873/4A(GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


NOTES

A Screw cleat, 17" long, inset 2 inches from the front edge of the side panel. Shape ends as shown.

B Back panel, same as pedestal back panel.

C Lumber band (¼") if hardwood plywood has a particleboard core. Lumber band is not necessary if hardwood plywood has a veneer or lumber core. In all cases this surface is considered exposed and shall be finished to match the rest of the unit.

D Rear stretcher, ref.

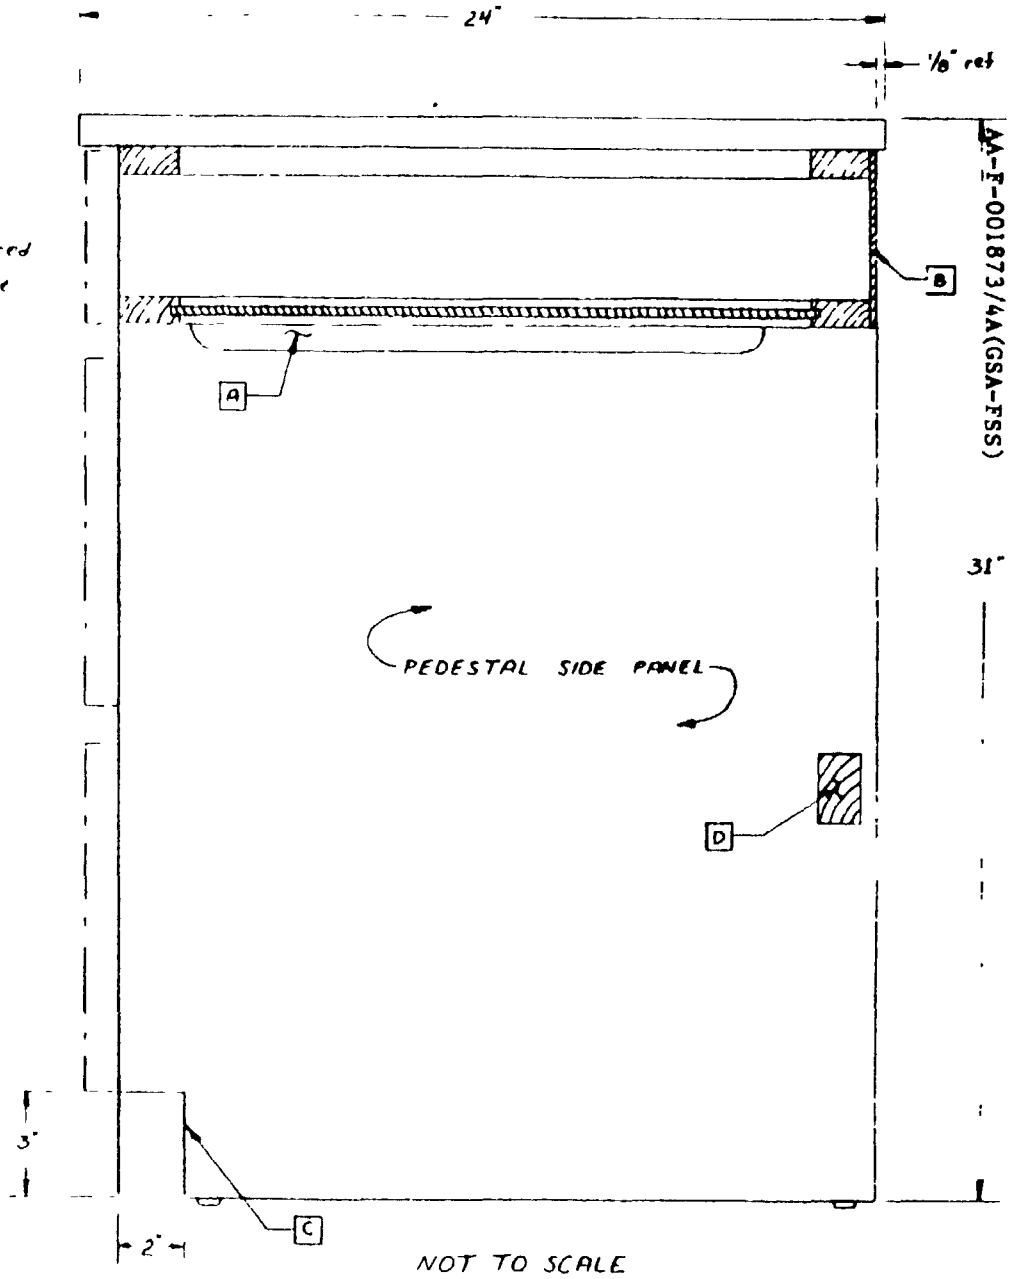

SECTION BB

TYPE IV
DESK

FIGURE 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


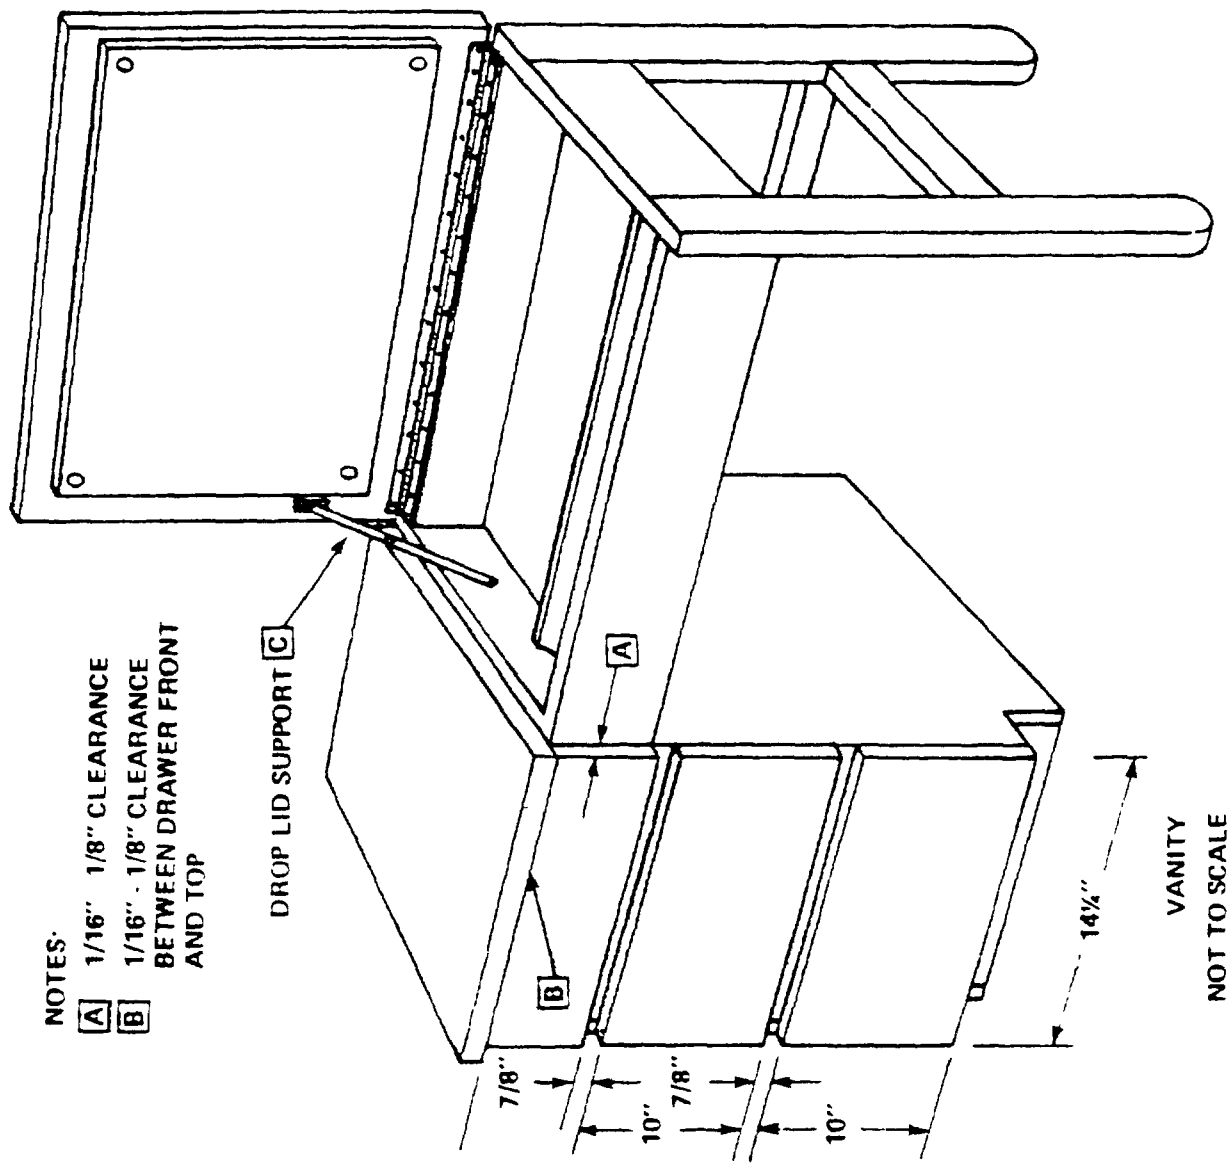


FIGURE 17 VANITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

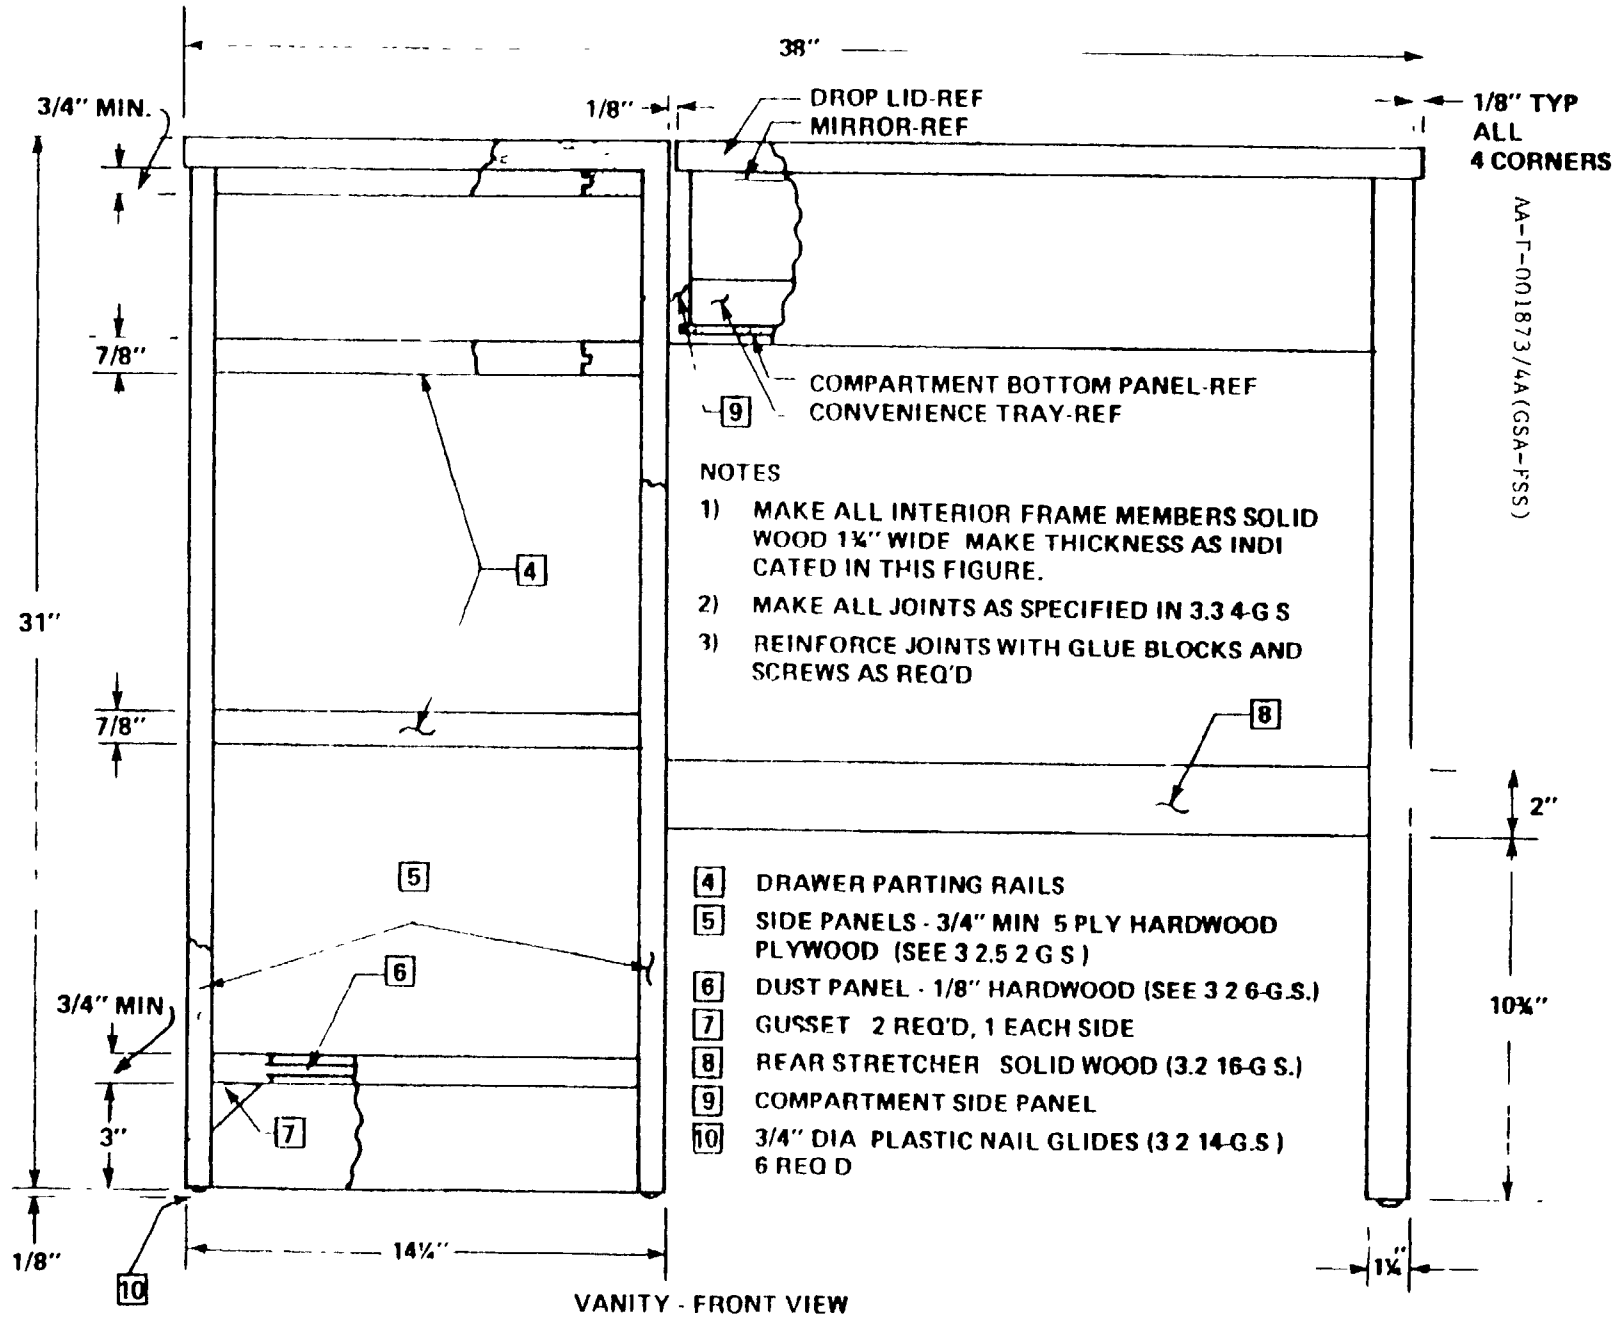

VANITY - FRONT VIEW
DRAWERS REMOVED


FIGURE 18

NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


NOTES

1. ALL JOINTS MADE AS SPECIFIED IN 3 3 4 G S
2. MAKE ALL "A" FRAME JOINTS FLUSH
3. "A" FRAME, MAKE FROM SOLID WOOD (SEE 3 2.16-G S.)

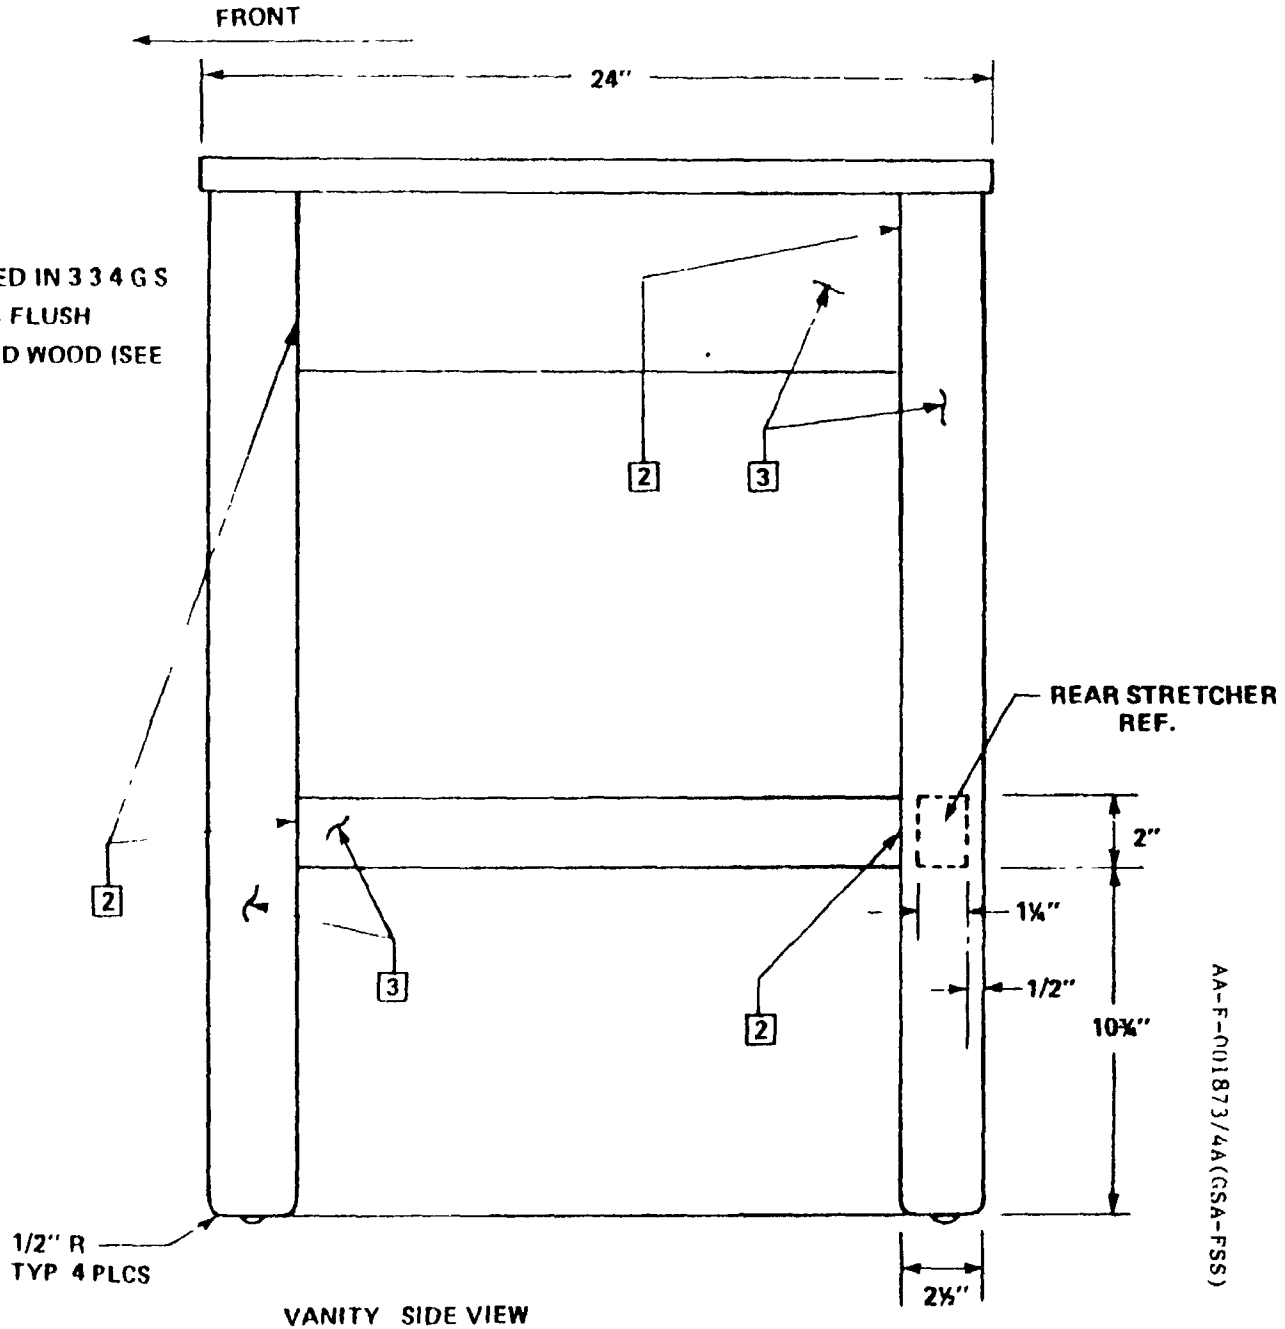

VANITY SIDE VIEW
FIGURE 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

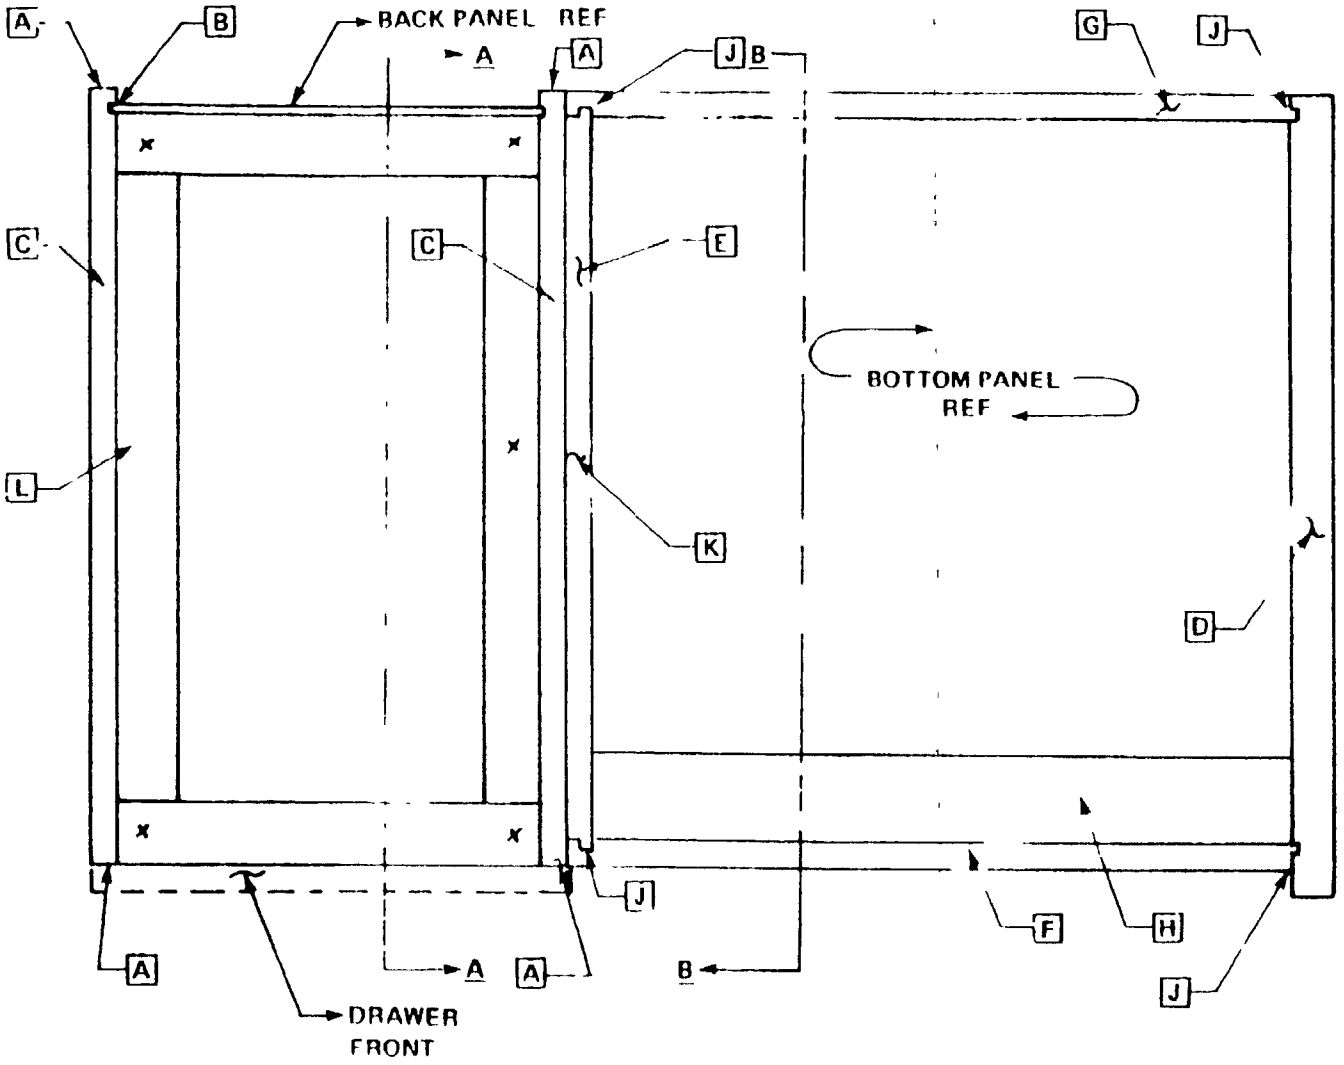

NOTES

A VENEER BAND FRONT AND REAR EDGES OF SIDE PANELS TYP 4 PLCS

B BACK PANEL RABBITTED INTO PED. PED SIDE PANELS TYP 2 PLCS

C SIDE PANELS - PEDESTAL REF.

D "A" FRAME - INTERIOR FACE IN COMPARTMENT FINISHED TO MATCH EXTERIOR

E COMPARTMENT LEFT SIDE PANEL SOLID EXPOSED WOOD - MIN. 3/4" (3 2.16-G.S.) FINISHED TO MATCH EXTERIOR

F COMPARTMENT FRONT PANEL - REF.

G COMPARTMENT BACK PANEL - REF.

H CONVENIENCE TRAY

J FRONT & REAR PANELS BLIND TENONED INTO "A" FRAME AND COMPARTMENT LEFT SIDE PANEL TYP. 4 PLCS

2½"

13/16

K SCREWS THROUGH PED SIDE PANEL INTO COMPARTMENT SIDE PANEL. TYP. 5 PLCS.


L TOP SCREW ATTACHMENT TYP 6 PLCS

AA-F-001873/1A(GSA-FES)

VANITY - TOP VIEW
(TOP, DROP LID AND DRAWERS REMOVED)

NOT TO SCALE
FIGURE 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

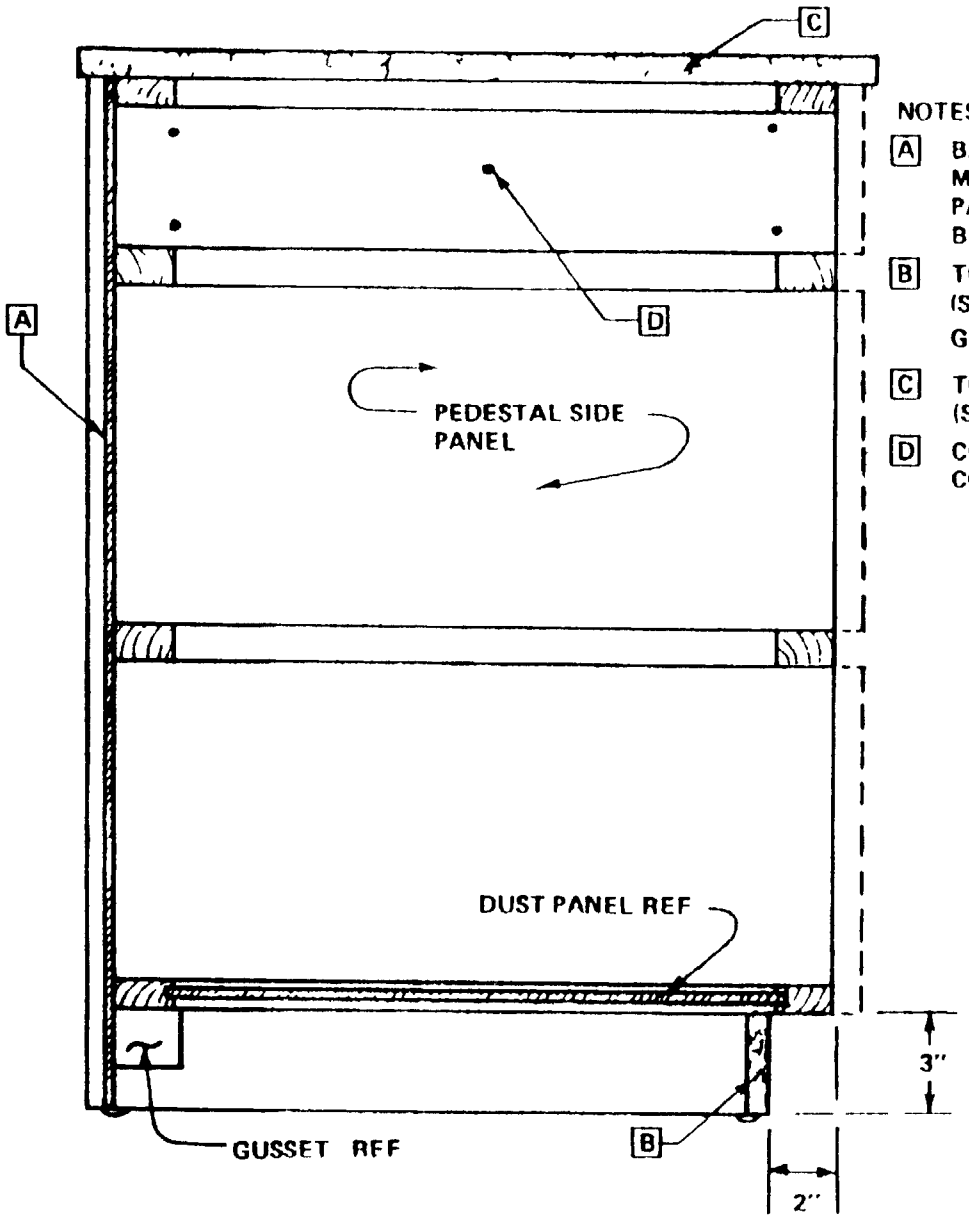

NOTES

A BACK PANEL EXPOSED (FINISHED TO MATCH EXTERIOR) 3/16" MIN HARDWOOD PLYWOOD (3 2 5.2-G.S) RABBITTED INTO SIDE PANELS, SECURED WITH GLUE AND HEADLESS BRADS DRIVE BRADS SLIGHTLY MINUS FLUSH

B TOEBOARD 3/4" MIN 5 PLY HARDWOOD PLYWOOD. (SEE 3 2 5 2-G S) REINFORCE TOEBOARD AS REQUIRED WITH GLUE/SCREW CLEATS.

C TOP, PLASTIC LAMINATED AND SELF-EDGED 3/4" P.B CORE (SEE 3 2 2 G S , 3 2 3 G S , 3 2 4-G S)

D COMPARTMENT SIDE PANEL ATTACHED TO PEDESTAL WITH 5 COUNTER BORED SCREWS.


SECTION AA VANITY PEDESTAL

FIGURE 21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTES

1. DROP LID, PLASTIC LAMINATED DECORATIVE BOTH SIDES, SELF EDGED 3/4" P B CORE (SEE 3.2.2-G S , 3 2 3 G S , 3 2 4 G S)
2. COMPARTMENT BACK PANEL SOLID EXPOSED WOOD-MIN 3/4" (3 2 16 G S) FINISHED BOTH SIDES TO MATCH EXTERIOR
3. BOTTOM PANEL, HARDWOOD PLYWOOD (3 2 5 2 G S) INTERIOR FACE FINISHED TO MATCH EXTERIOR REINFORCE WITH 8 EVENLY SPACED GLUE BLOCKS
4. COMPARTMENT FRONT PANEL, PLASTIC LAMINATED ON 3/4" 5 PLY LUMBER OR VENEER CORE HARDWOOD PLYWOOD DECORATIVE FRONT FACE, BACK FACE, TOP EDGE.
5. RECESSED FOR HINGE MOUNTING

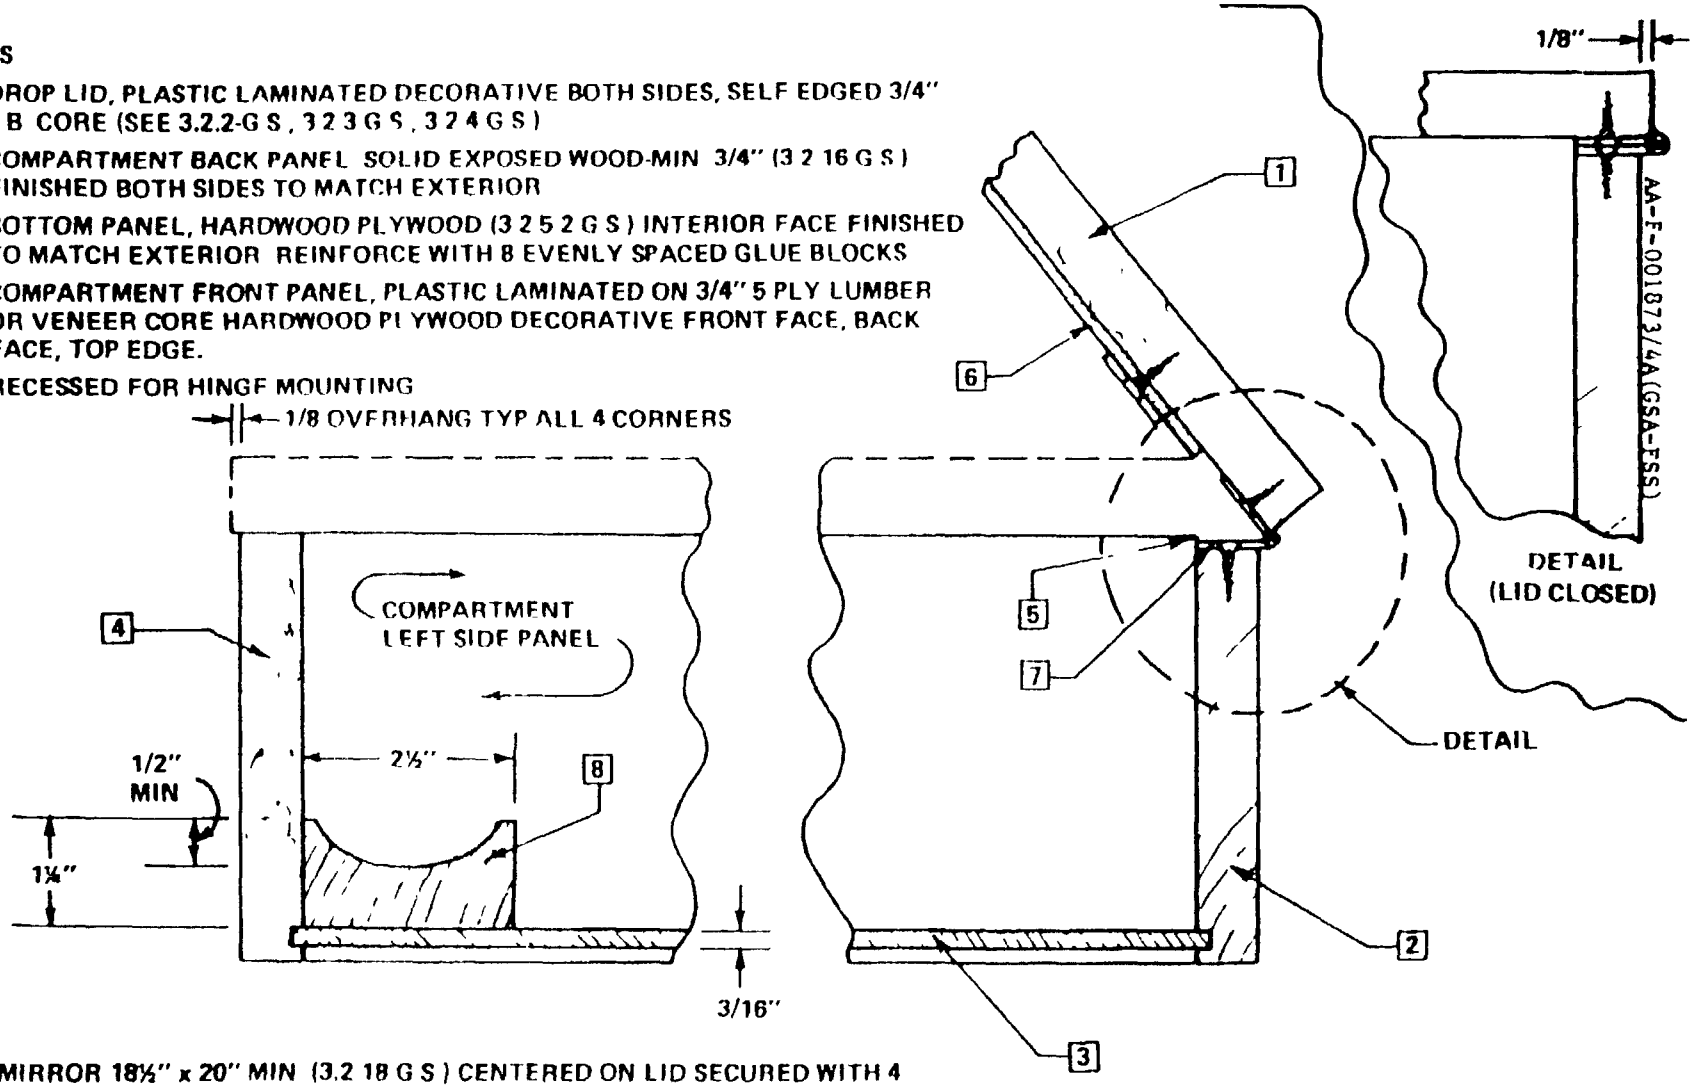

6. MIRROR 18½" x 20" MIN (3.2 18 G S) CENTERED ON LID SECURED WITH 4 PLASTIC MIN. 3/4" DIAMETER ROSETTES POSITIONED 2 INCHES DIAGONALLY FROM EACH CORNER
7. HINGE (3.2.11-G S.)
8. CONVENIENCE TRAY FULL LENGTH-SOLID EXPOSED WOOD (3 2 16 G.S), GLUED INTO POSITION.

SECTION BB SIDE VIEW OF VANITY COMPARTMENT

FIGURE 22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


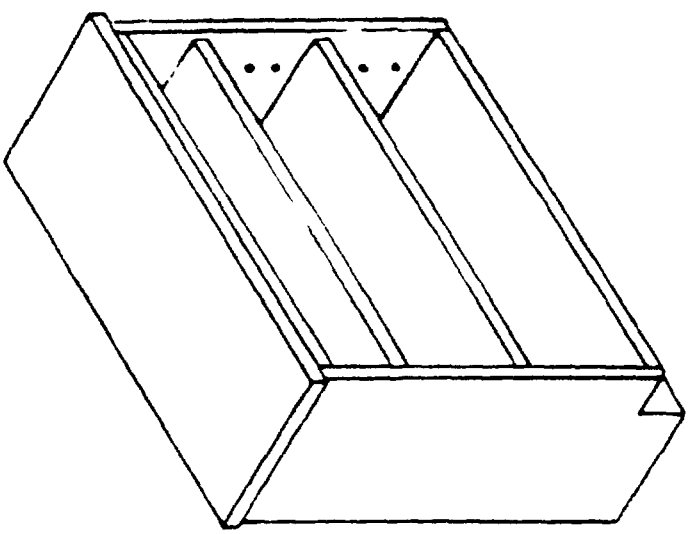


FIGURE 23 - BOOKCASE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

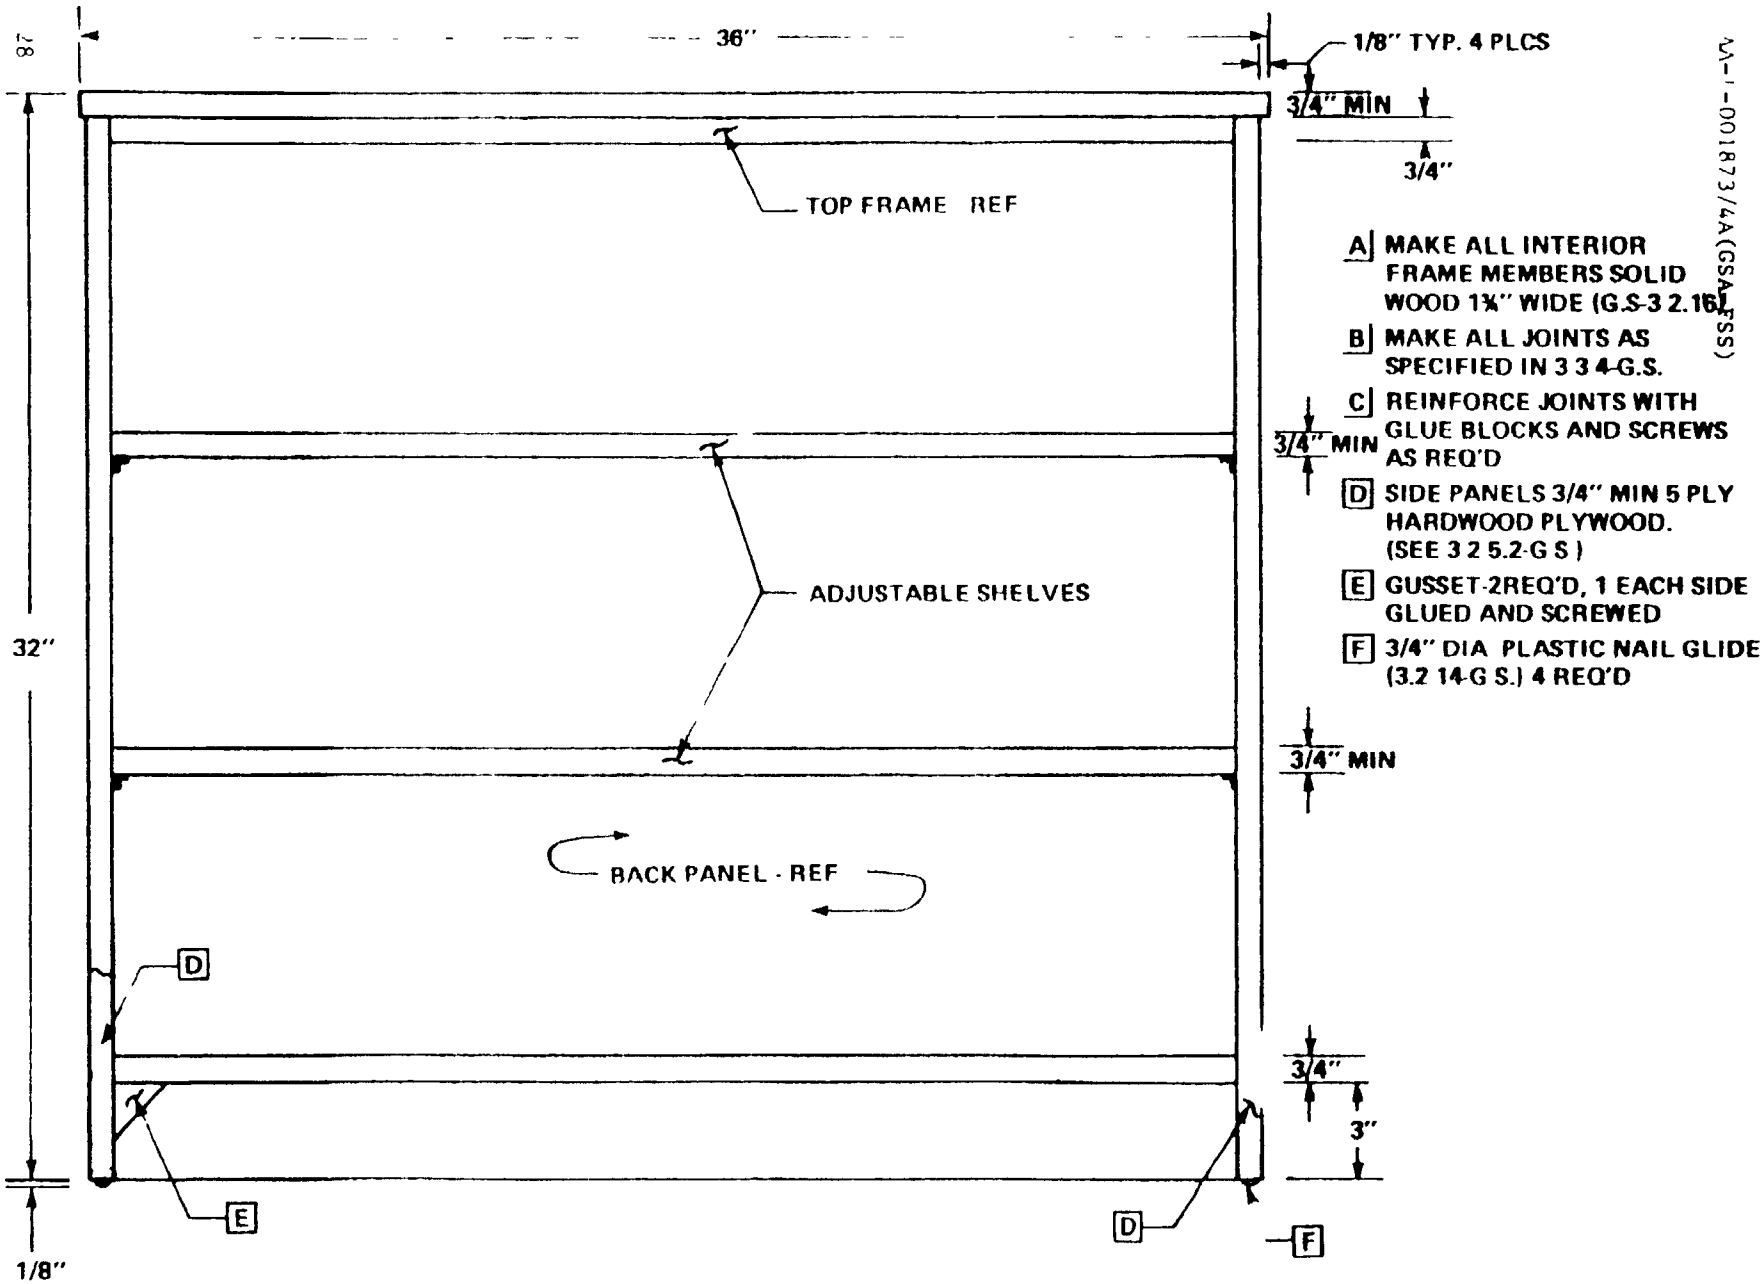

BOOKCASE FRONT VIEW
FIGURE 24

MIL-HDBK-1873/4A(GSA-FSS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

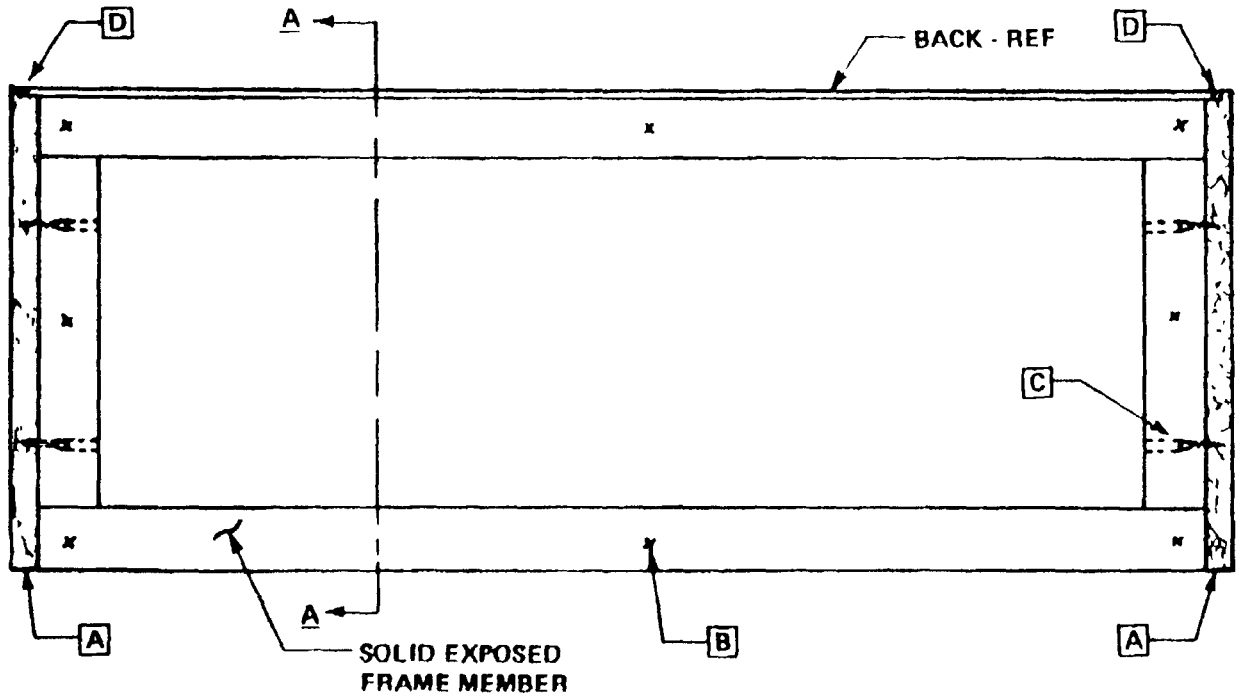


NOTES:

- A VENEER BAND - TYP. 2 PLCS.
- B TOP SCREW ATTACHMENT- TYP 8 PLCS.
- C SCREWS COUNTER-BORED THROUGH SIDE FRAME MEMBERS. TYP. 4 PLCS.
- D REAR EDGES OF SIDE PANELS RABBITTED TO RECEIVE BACK PANEL. TYP. 2 PLCS.

BOOKCASE - TOP VIEW (TOP REMOVED)

FIGURE 25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

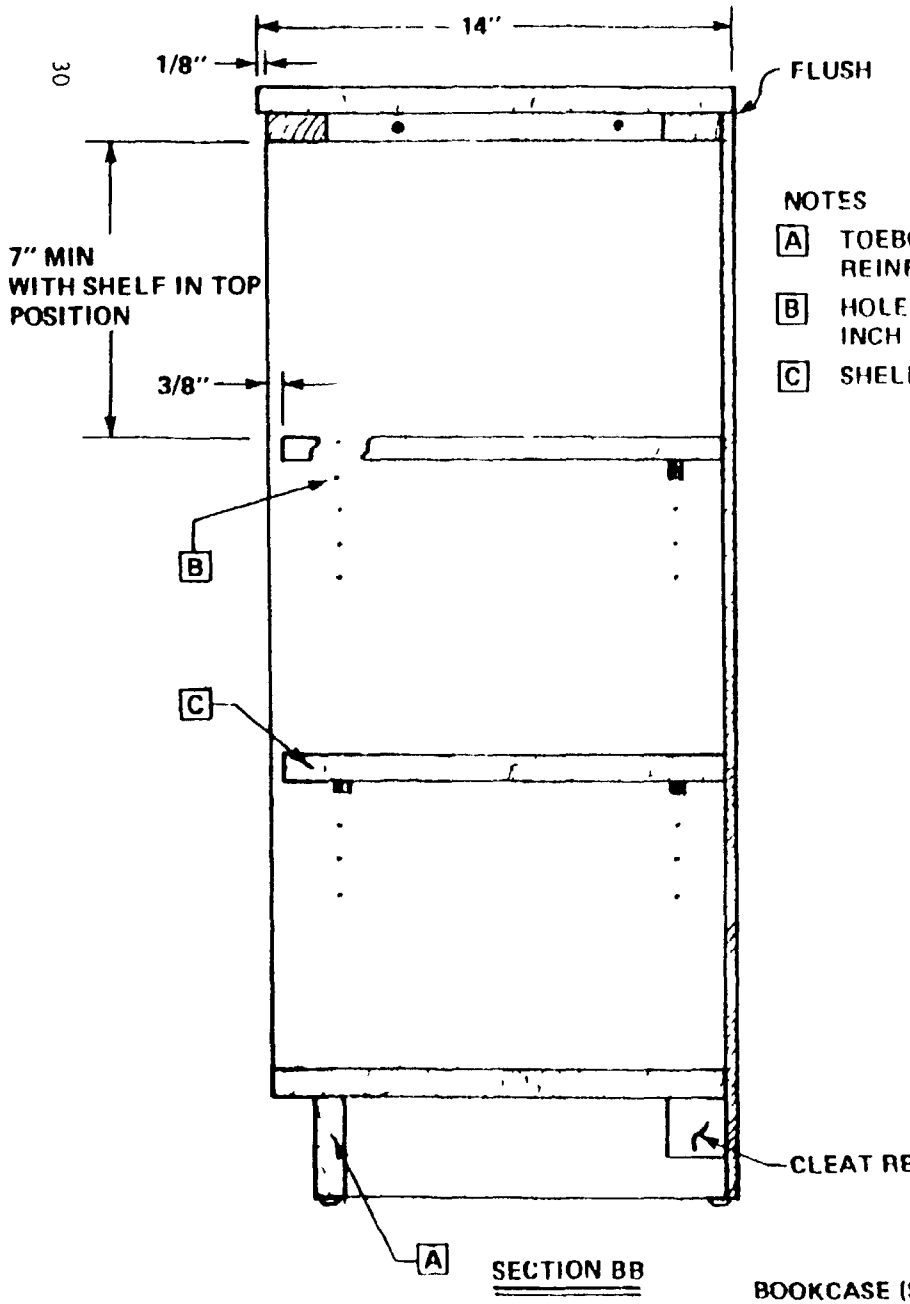

NOTES

[A] TOEBOARD 3/4" MIN 5 PLY HARDWOOD PLYWOOD (SEE 3.2.5.2-G.S.) REINFORCE TOEBOARD AS REQ'D WITH GLUE/SCREW CLEATS.

[B] HOLES FOR SHELF SUPPORTS (TYP 5 PER SUPPORT) SPACED ON 1 INCH CENTERS

[C] SHELF (2 REQ'D) - 3/4" MIN 5 PLY HARDWOOD PLYWOOD (SEE 3.2 5.2-G.S.)
TOP FACE - EXTERIOR VENEER
FRONT EDGE VENEER BANDED (EXTERIOR)
SIDE EDGES VENEER BANDED (EXTERIOR)
BACK - NONE (SEALED)
BOTTOM FACE INTERIOR - OR EXTERIOR GRADE VENEER - FINISHED IN A COLOR MATCHING EXTERIOR

BOOKCASE (SIDE VIEW)

FIGURE 26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.