AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

HOUSEHOLD FURNITURE, WITH ARMS, WOOD AND METAL PERIMETER BASE

This amendment was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20405, based on currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized Federal agencies to use this amendment as a valid exception to Interim Federal Specification AA-H-001198(GSA-FSS) dated November 28,1966.

PAGE 2

Paragraph 3.2.3, line 1, delete "rubber or metal expanding adapter" and substitute "threaded screw".

Add new paragraph 3.2.4 nonwoven fabric and wadding. The nonwoven fabric and wadding shall consist of new materials with or without a binder. The thickness shall be either 1/4 or 1/2 inch (approximately) as specified herein. The minimum weight shall be 1-1/4 and 1-3/4 ounces per square foot for the 1/4 and 1/2 inch nonwoven fabric and wadding, respectively, when tested as specified in 4.4.2. The compression set shall be less than 10 percent of its measured thickness when tested as specified in 4.4.2.

PAGE 3

Paragraph 3.3.3.1, line 3, delete "1-13/16 inches" and substitute "2-1/4 inches." Line 4, delete "1-1/8 inches" and substitute " 1-1/16 inches." Line 6, delete "25 inches" and substitute "24-1/4 inches"; delete "10-3/8 inches" and substitute "10-1/2 inches"; delete "9-3/8 inches"and substitute "9 inches." Line 7, after word "back", add "and the base frame shall be 25-1/4 inches deep measured at floor line." Line 8, delete "1-1/4 by 1-1/4 inches" and substitute "1 3/4 by 1-1/16 inches." Delete the last sentence of the paragraph and substitute the following: "The base frame shall be secured to the seat frame with six No. 10 screws, three into the front seat frame member and three into the rear seat frame member."

Paragraph 3.3.3.2, line 2, after word "except" insert the following: "The rails shall be 2 inches wide." Line 4 add "overall height style A and B shall be 17-3/4 inches to the top welt line of the bench seat without glides.

Paragraph 3.3.3.3, line 3 after "3.3.2" delete the period and add the following: ",except center post of 1 front and back rail may be joined on 3 sides when a channel has been welded to the post and inserted as a sleeve at least 3 inches into the front and back rails. Line 4, delete "10-3/8 inches" and substitute "10-1/2 inches", delete "9-3/8 inches", and substitute "9 inches". Line 5, delete"25 inches" and substitute "24-1/4 inches", at end of line after word "frame" delete period and add, "and the base frame shall be "25-1/4 inches deep at the floor line." Line 7 , delete "spaced not more than 7 inches apart." and substitute the following: "3 screws into front frame member and 3 screws into rear frame member."

Paragraph 3.3.3.4, line 2, delete "7/8 inch" and substitute "3.4 inch."

PAGE 4

Paragraph 3.3.4, delete line 2 starting with "The front rail" through line 11 ending with "back base rail" and substitute the following: "The front rail shall be 2-1/2 inches wide and the front and back base rails shall be 3-1/2 inches wide, glued and doweled with two 7/16 inch dowels on each end. The front and back base rails shall each be fitted with a spring rail strip 2 inches wide and 1-1/16 inches thick glued and secured with No. 9 screws spaced

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

not more than 12 inches apart. At each end of the spring rail there shall be a corner block 1-1/16 inches square by a minimum of 3 inches in length, glued and screwed into the side rail on top of the base rails with No. 9 screws." Delete line 22 from "and securely" to end of sentence and substitute "as specified in 3.4.2.2.3 of AA-H-570."

Paragraph 3.3.4.1 Upholstered frame (for benches). Delete paragraph in its entirety and substitute the following: "Seat frame shall have side and end rails 2-1/2 inches wide and 1-1/16 inches thick. The side base rail shall be 2-1/2 inches wide and 1-1/16 inches thick. The side base shall have a burlap tacking strip 2 inches wide and 1-1/16 inches thick, glued and secured with No. 9 screws not more than 12 inches apart. Seats in excess of 36 inches in length shall be fitted with stretchers as specified in 3.4.2.2.1 of AA-H-570. Springs shall be in accordance with 3.4.2.3.2.1 of AA-H-570 except V-shaped ends are not required. The 60 inch bench frame shall have 10 springs of 9 gage wire, and 8 springs for the 48 inch frame. Springs shall be installed to the seat frame by means of brass clips with not less than three 7/8 inch No. 14 blued nails in each clip. The springs shall be joined across the tops from side to side with steel reinforced tie-wire, covered with kraft paper and clipped to each spring with one clip not less than 3/8 inches wide. Burlap specified in 3.3.1.1 of AA-H-570 shall be applied over the springs as specified in 3.4.2.2.3 of AA-H-570. A flex-o-later pad shall be applied over the burlap on the seat and hog ringed into place with three clips on each end and one on each spring on each side. A layer of cotton specified in 3.3.1.4 of AA-H-570 shall be applied over the burlap and flexolater."

Paragraph 3.3.4.2, line 8, delete "2-1/4 inches" and substitute "4 inches." Line 8, at end of line after "side rails" delete period and insert "and shall be secured to the spring rail so it will be flush with the bottom edge of the side and end rails."

Paragraph 3.3.4.3, line 6, after the words "front rail" insert "and side rails". Line 6, after the words "full width" insert "and depth." Line 8, delete "along the front edge of frame" and substitute "to the 3 ply plywood."

Paragraph 3.3.4.4, line 10, following the words "border flaps", insert "of same upholstering material" and after the words "and side" insert "and bottom."

Paragraph 3.3.4.5, line 4, after "AA-H-570" insert "except that pocket pleats shall be in the back of the seat cushion."

PAGE 5

Paragraph 3.3.4.6, line 4, delete "cotton felt as specified in 3.3.1.4 and substitute "1/2 inch nonwoven fabric and wadding, specified in 3.2.4." Line 6, delete "1-1/2 inch" and substitute "1-3/4 inches."


Paragraph 3.3.4.7, line 1, delete "3.4.1.7"and substitute "3.4.2.2.6."

PAGE 7


Add new paragraphs 4.4.2 Nonwoven fabric and wadding test. The compression set and weight per square yard reference in 3.2.4 shall be determined by Method 5041 of CCC-T-191.

Delete Figures "1 and 2" and substitute new drawings figures " 1 and 2".


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

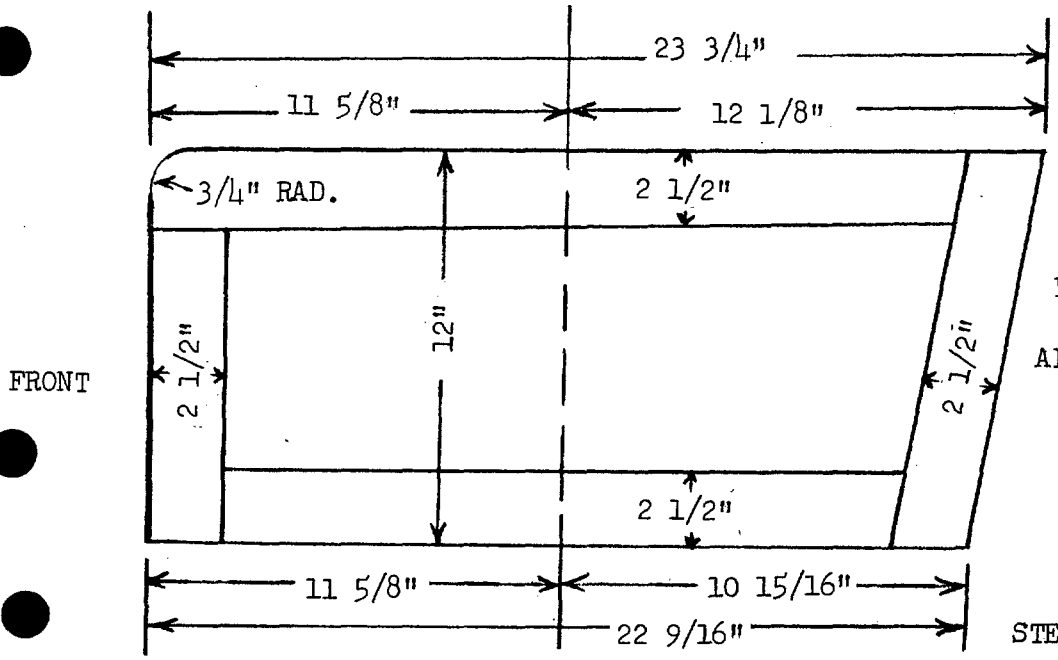

STEEL FRAME CORNER SECTION

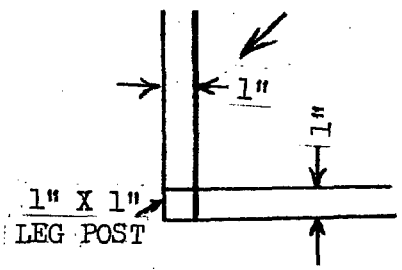

STEEL AND WOOD FRAME OVERALL DIMENSIONS
HEIGHT DIMENSIONS WITHOUT GLIDE

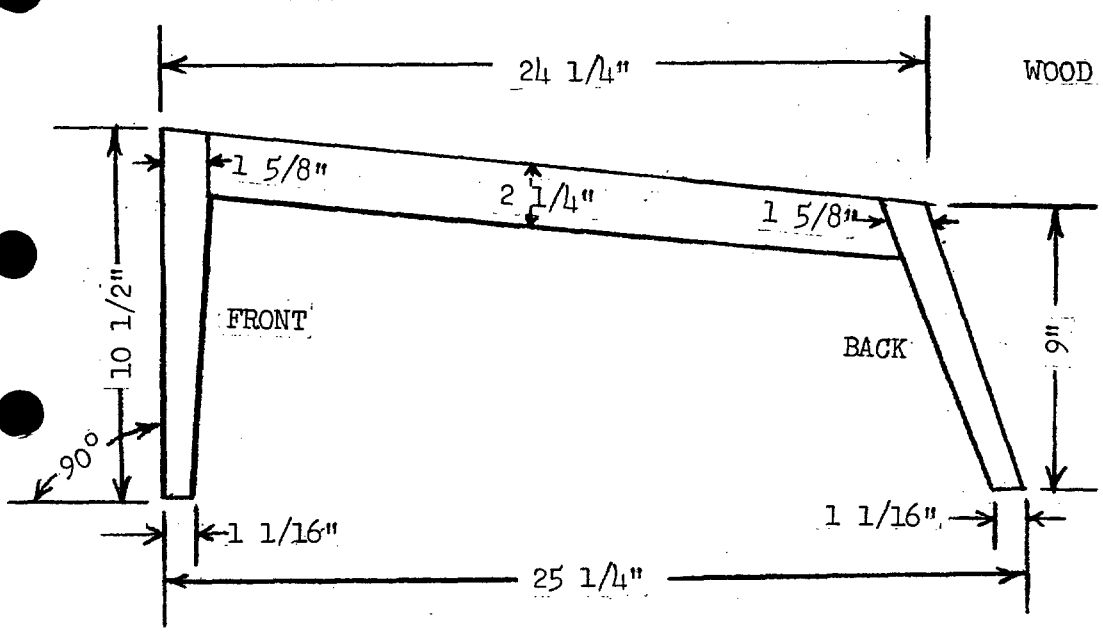

WOOD FRAME CORNER SECTION

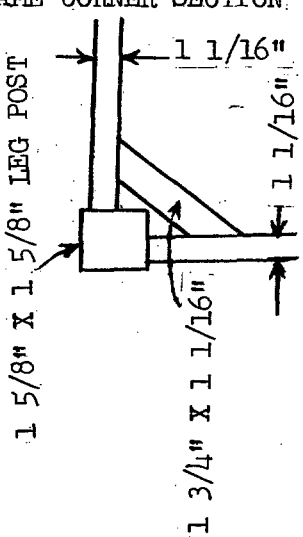


FIGURE 1 ARM FRAME ASSEMBLY AND BASE FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

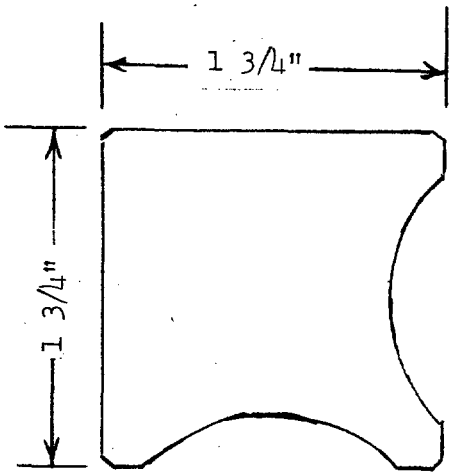


FIGURE 2 BENCH LEG CROSS SECTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.