AA-H-00662(GSA-FSS)
March 27, 1963

INTERIM FEDERAL SPECIFICATION

HOUSEHOLD FURNITURE, STEEL WROUGHT IRON, RACKS, MAGAZINE

This Interim Federal Specification was prepared by Standardization Division, Federal Supply Service, General Services Administration, Washington 25, D. C., based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for components, materials and basic construction of household type steel wrought iron magazine racks.

1.2 Classification.

1.2.1 Types and sizes. The racks covered by this specification shall be of the following types, as specified (see 6.2):

Type I.- 48 inches wide, 12 inches deep, 54 inches high, with angle shelves (fig. 1).

Type II.-36 inches wide, 12 inches deep, 40 inches high, with straight bottom shelf (fig. 2).

(All dimensions are overall and are minimum).

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1 The following specifications, standards and other publications of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

QQ-S-633 - Steel Bars, Carbon, Cold Finished and Hot Rolled (General Purpose).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces For Organic Coatings.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment. (Civilian use)

FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE.

Military Specifications:

MIL-M-17194-C - Metal Expanded Steel.
MIL-Z-17871A - Zinc-Coating (Hot-Dip Galvanizing).

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by the Contractor in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of each item covered by the contract shall be made available to the Contracting Officer or his authorized representative for approval, either at the contractor's plant or at such other place as may be designated. The samples shall be inspected and tested as specified herein to determine conformance with the requirements of this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of reasponsibility for compliance with the requirements of this specification. No changes to or deviations from the approved samples are acceptable without prior written approval from the contracting officer. Approved preproduction samples shall be retained in the contractor's plant throughout the duration of the contract, available to the Government inspector, as a control guide for production under the contract. The approved samples may be included as a part of the last shipment under the contract.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.2 Materials. Materials shall be in accordance with the requirements specified herein. All materials shall be new and unused, and free from all defects and imperfections that might adversely affect the serviceability or appearance of the finished product.

3.2.1 Steel. The bars, angles and flats, shall be made of hot rolled F.S.-1020, commercial quality, having chemical requirements as listed for F.S.-1020 in QQ-S-633a, under Table I. Size of bars, angles, and flats, shall be as specified.

3.2.2 Expanded steel. Expznded steel shall be of 16 gage carbon steel flattened, conforming to Type II, Class 1 of MIL-M-17194c.

3.2.3 Carriage bolts. Carriage bolts shall be cadmium or zinc plated steel, 1/4 inch diameter, U. S. Standard threads. For assembly of knocked-down items, each bolt shall be furnished with a hexagon or square nut and a lock washer.

3.2.4 Glides. Glides shall consist of a steel disc 1-3/8 inch diameter O.D. by .0598-16 gage thick. A rubber snap cap O.D. 1-1/2 inch diameter by 1/4 inch thick, shall be so attached to the disc to prevent its loosening in use.

3.2.5 Welding. The terms weld, welded, and welding as herein used shall be of two types.

(1) Arc welding. A group of welding processes wherein coalescence is produced by heating with an electric arc or arcs, with or without the application of pressure and with or without the use of filler metal.

(2) Spot welding. A resistance-welding process wherein coalescence is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes. The size and shape of the individually formed welds are limited primarily by the size and contour of the elctrodes.

In the case of either welding method, all components shall be rigidly and mechanically held in jigs with devices designed for the purpose and affixed to the welding jig. The use of loose clamps shall not be considered as conforming to this requirement. All arc-welded joints shall be ground to present a smooth finish.

3.3 Construction. The general construction shall be in accordance with the minimum details specified herein. Any details not specified shall be in accordance with the manufacturer's regular current commercial practices of the quality represented by the construction details provided herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.1 Metal parts. Metal parts shall be constructed to provide knocked-down packing. All frame components shall be rigidly constructed to produce a substantial item of furniture. Particular attention shall be given to welding, cleaning and finishing operation as described herein.

3.3.2 Frame. The units shall consist of uprights, shelves, and stretcher. Steel shall be as in 3.2.1 and 3.2.2. Main members of uprights shall consist of 1/2 inch square bar stock with 3/16 by 1/2-inch flat stock welded to 1/2 inch square stock for shelf support. Shelf frames shall be of 3/4 by 3/4 by 1/8-inch angle with a base of 3/4-inch expanded metal welded to the angles frames,with 1/8 by 2-inch flat stock welded to front edge of angle frame to retain magazines. An "X" stretcher of 1/8 by 5/8 inch flat stock shall be bolted to the rear uprights for additional rigidity. Glides as in 3.2.4 shall be welded to bottom of the uprights. (See Figures 1 and 2 for design).

3.4 Finish. Units shall be cleaned and finished in accordance with one of the following methods:

(a) All metal parts (excluding hardware) shall be cleaned by a sand blasting process, using steel grits to provide a rough texture surface. After blasting and cleaning the surface shall be kept free from all deleterious matter prior to application of zinc. Zinc shall be in powder form of 98 percent purity, and converted to a molten state by the use of an acetylene torch simultaneous with the spraying of the zinc powder. This is known as metalizing or the Schori method of coating after application, the zinc thickness shall show the equivalent of a minimum coating of 1 ounce per square foot of surface (one side) of any article used for testing. As soon as possible after zinc application, the frames shall be given two individual coats of high grade exterior glossy lacquer and dried between coats in accordance with manufacturer's instructions.

(b) All metal parts (excluding hardware) shall be cleaned by an approved blasting process in accordance with Method I of TT-C-490. After blasting and cleaning the surface shall be kept free from all deleterious matter prior to the application of zinc. The steel parts shall be coated with not less than 1 ounce of zinc per square foot of surface (one side) of any article used for testing. Zinc coating shall be in accordance with hot-dip (galvanized) method of MIL-Z-17871A. The zinc coated surfaces shall be treated and prepared for painting in accordance with Type I of TT-C-490. After treatment, the frames shall be given two individual coats of high grade exterior glossy lacquer, and dried between coats in accordance with the manufacturer's instruction.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

(c) All hardware, in any method of finish, shall match such finish in color.

(d) A barier coat material of organic copolymers (carbon derivations) shall be applied to the metal finish to insure against migration of vinyl plasticiyers.

(e) Color shall be as specified (see 6.2).

4. QUALITY ASSURANCE PROVISION

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.2.1 Compoment and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Unless otherwise specified (see 6.2) shall be in accordance with the manufacturer's standard practice.

5.2 Packing. Unless otherwise specified (see 6.2) furniture, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or Regulations of other carriers applicable to the mode of transportation.

5.3 Marking.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currenversion before use.

5.3.1 Civilian agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Federal Standard No. 123 and as specified in 5.3.3.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129 and as specified in 5.3.3.

5.3.3 Additional marking. In addition to the marking specified herein arrows or prominent marks shall be placed on the sides of each shipping container to indicate the position in which the container shall be handled during shipment. The word "UP" shall be placed at the point of the arrows in letters at least 2 inches in height.

The front panel of each shipping container shall be plainly marked as follows:

UP FURNITURE UP
FRAGILE, HANDLE
WITH CARE

Top panels shall be plainly marked as follows:

FURNITURE
FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

6. NOTES

6.1 Intended use. The furniture is intended for both indoor and outdoor use in quarters, and other applications as appropriate.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Types and sizes as required (see 1.2).
(c) If preproduction sample is not required (see 3.1).
(d) Finish color required (see 3.4).

6.3 Instructions sheets. Contractor shall furnish an illustrated instruction sheet, printed in English, showing assembly. Contractor shall also furnish wrench for assembly in each package. Instruction sheet and wrench shall be placed in a kraft envelope, glued or strapped to the inside of container.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

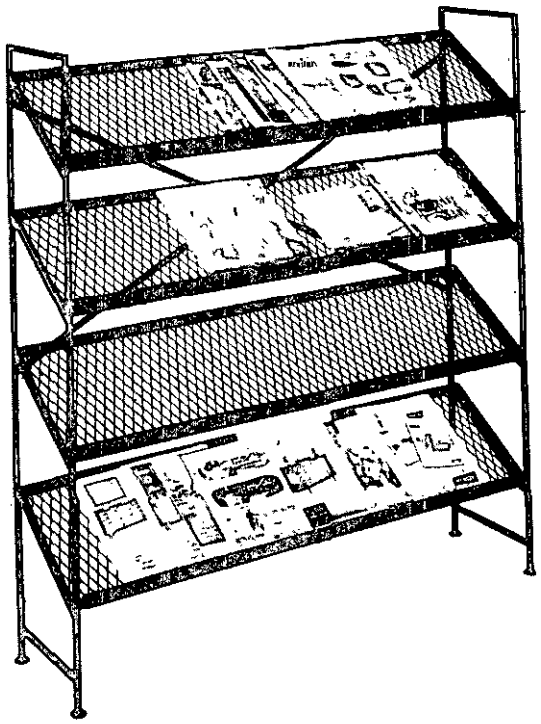


Figure 1

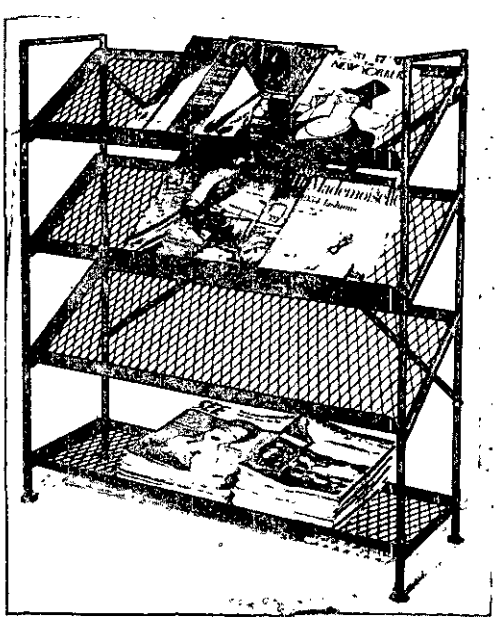


Figure 2

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.