AA-O-001091C (GSA-FSS)
JULY 10, 1990
SUPERSEDING
Int. Fed. Spec.
AA-O-001091B (GSA-FSS)
September 15, 1988

INTERIM FEDERAL SPECIFICATION

Office Furniture: Sofa; Chair, Easy, Executive, Traditional

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, Furniture Commodity Center, Washington, D.C. 20406 based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This purchase description covers minimum requirements for office furniture, sofa and easy chair furnished certain Government personnel. It describes the minimum quality required by the Government. Construction requirements are in section 3 and figures 1, 2, and 3.

1.2 Classification.

1.2.1 Types and classes. The upholstered pieces shall be of the following types and classes, as specified (see 6.2):

Type I - sofa, three seat

- Class 1 - Leather
- Class 2 - Vinyl
- Class 3 - Fabric

Type II - Sofa, two seat

- Class 1 - Leather
- Class 2 - Vinyl
- Class 3 - Fabric

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Type III Chair, Easy

Class 1 - Leather
Class 2 - Vinyl
Class 3 - Fabric

2. APPLICABLE DOCUMENTS

2.1 Government Documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this purchase description to the extent specified herein.

Federal Specification:

CCC-A-680 - Artificial Leather (Cloth-Coated), Vinyl Resin, Expanded Layer (Upholstery)

Federal Test Method:

Standard No. 191 - Federal Standard for Textile Test Methods.
Standard No. 311 - Leather, Methods of Sampling and Testing.

(Federal Specifications and Federal Test Methods are available, for bidding purposes, from General Services Administration, Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Seattle WA.)

Federal Purchase Descriptions:

FNE 80-214 Upholstered Furniture Test Method

(Available from GSA-FSS, Furniture Commodity Center, Engineering Division, Washington, DC 20406.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes.

(Available for bidding purposes from Naval Publications and Forms Center, 5801 Tabor Ave., Philadelphia, PA 19120.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

U.S. Department of Agriculture Handbook:
Forest Service Agriculture Handbook No. 72 - Wood Handbook

(Available from U.S. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.2 Commercial and State Standards and Publications.

American National Standards Institute Publications
ANSI/NFPA 260 - 1989 - Cigarette Ignition Resistance of Components of Upholstered Furniture.

(Available from American National Standards Institute, Inc. 1430 Broadway, New York, NY 10018.)

American Society for Testing and Materials Standards:

D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear by Compression Loading.
D 2061 - Methods of Strength Tests for Zippers.
D 3597 - Woven Upholstery Fabrics - Plain, Tufted or Flocked.
D 3770 - Standard Specification for Flexible Cellular Materials - High Resilience Polyurethane Foam (HR).
D 3776 - Mass per unit Area (Weight) of Woven Fabrics.
D 3884 - Abrasion resistance of textile fabrics (Rotary Platform, Double Head Method).

(Available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Upholstery Furniture Action Council Test Methods.

UFAC Flammability Test Methods for Upholstered Furniture Components - 1983.

(Available from UFAC, Box 2436, High Point, NC 27261).

State of California Technical Information Bulletin

Bulletin 117 - 1980 - Requirements, Test Procedure and Apparatus for Testing the Flame Retardance of Resilient Filling Materials Used in Upholstered Furniture.

(Available from California Department of Consumer Affairs, Bureau of Home Furnishings, North Highland, CA).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 Materials. The following paragraphs describe minimum requirements for materials used in construction and assembly.

Regulatory requirements. The Offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.1.1 Wood.

3.1.1.1 Wood Species. The exposed portion of the front posts of the sofa and chair and the center leg of the sofa shall be in one piece of mahogany (Khaya or Sweitenia), cherry, walnut, andiroba, or pecan. All back posts and the center back leg of the sofa shall be of sweet or yellow birch, hard or sugar maple, or hackberry and shall be in one continuous piece, or of built-up stock with a maximum of one glue line. All other parts of the frames shall be made of domestic hardwood which meets the following requirements at 12% moisture content. See Wood Handbook, USDA No. 72.

Modulus of Rupture - 68,000 Kilopascals min.
Modulus of Elasticity - 9,500 Megapascals min.

3.1.1.2 Wood Characteristics. The wood shall be clear, sound stock without knots, worm holes, shake, or other defects which may affect appearance or serviceability of the finished product.

3.1.2 Dowels. Dowels shall be of birch, maple, beech, or hickory, and shall be dried to a moisture content of from 2 to 5 percent at the time of assembly. They shall be longitudinally or spirally grooved and shall be a minimum of 3/8 inch in diameter.

3.1.3 Seasoning. All wood shall be air-seasoned and then kiln-dried to a moisture content of from 6 to 10 percent at the time of assembly. All wood shall be allowed to temper approximately two weeks before milling.

3.1.4 Adhesive. Block shear strength: 2800 lb/in minimum. See test procedure paragraph 4.4.1.

3.2 Upholstery materials and flammability requirements. All upholstery, cover materials, seat decking, welts, interior fabrics, fillings, and paddings shall meet NFPA-260 Class 1 construction, or UFAC Class 1 flammability requirements. All polyurethane foam shall meet California Technical Bulletin 117, Section A, Part 1 and Section D, Part II.

3.2.1 Leather. Top grain, dyed full depth. The color selection is specified in 3.6 (See 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Requirements: (See 4.4.6 for test methods.)
Thickness - 2 to 3 oz.
Breaking force (grab method) - 100 lb minimum
Elongation - 40% maximum stretch.
Stitch tear (double hole) - 15 lb minimum
Crocking (colorfastness, resistance to rubbing) -
Dry: 8.5 Munsell or better
Wet: 6.5 Munsell or better
Blocking - Specimens must separate with ease and show no grain damage.
PH - 3.3 to 5.0
Fade resistance (colorfastness) - Little or no change in color or finish.
Abrasion resistance - No signs of the finish wearing through (except for gloss change).
Flexibility - Fine cracks, no russet showing.

3.2.2 Vinyl. Class 2, treatments (a)1 and (b) of CCC-A-680 with following exceptions permitted. The color selection is specified in 3.6 (See 6.2).

Base cloth: Minimum 3.2 oz./sq.yd., (terry) loop knit polyester.
Total weight: Minimum 20 oz./sq.yd.
All other requirements must be met. The color selection is specified in 3.6 (see 6.2).

3.2.3 Upholstery fabric. The upholstery fabric shall be 100% nylon, dyed, patterned weave, not less than 18 oz./linear yd. (based on 54 in. width) exclusive of back coating complying with all requirements of ASTM D 3597 with the following exceptions.

Exception to ASTM D 3597:

A. In section 7.6, delete Note 6 entirely;
B. Delete sections 7.6.2, 7.6.3 and 7.6.4 entirely;
C. In Table 1, change requirements of:
Breaking strength (load) to 250 lbf, min for warp and filling;
Tongue tear strength to 20 lbf, min for warp and filling;
Resistance to yarn slippage to 40 lbf, min for warp and filling;
D. In Table 1, surface abrasion shall pass heavy-duty requirements.

Color selection is specified in 3.6. (See 6.2).

3.2.4 Sateen. Sateen shall be rayon and/or polyester, minimum 5.6 oz./sq.yd. (Test procedure: 4.4.3). Color shall be beige.

3.2.5 Sheet fabric. For use over foundation springs. Woven or non woven fabric 3 oz./sq.yd. minimum (Test procedure: 4.4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.6 Cambric. Black or grey non-woven fabric, 1.9 oz./sq.yd. (minus 0.08). Test procedure 4.4.3.

3.2.7 Polyester fiberfill batting. Garnetted (not resinated), min. 2 oz./sq. ft. (test procedure 4.4.3), hollow and slickened, 5.5 to 16 denier, branded polyester fiber (branded by fiber producer).

3.2.8 Garnetted batting. Garnetted material, smoothly carded, clean and free of foreign matter, made in unbroken laminated sheets.
Felt weight: 18.7 oz./sq.yd. minimum (Test procedure 4.4.3) unless otherwise specified.

3.2.9 Polyurethane foam.
Seat: Slab or moulded, high resilience type, polyurethane foam with a minimum 2.2 lb/cu.ft. polyurethane polymer density. 24 to 30 Indentation Force Deflection (IFD) (25 percent deflection) required.
Back: Slab or moulded, conventional or high resilience type polyurethane foam with a minimum 1.5 lb/cu.ft. polyurethane polymer density. 10 to 16 IFD (25 percent deflection) required.
Arms: Slab or moulded, conventional or high resilience type polyurethane foam with a minimum 1.5 lb/cu.ft. polyurethane polymer density. 43 to 51 IFD (25 percent deflection) required.

All foam shall have a minimum recovery ratio of 70% when tested as specified in 4.4.4 and meet flame retardant requirements in 3.2. Flame retardant additives are permitted. Foam for cushions shall be buffed to provide a 4 1/2 inch center thickness and 3 inch edge thickness.

3.3 Hardware.

3.3.1 Seat and back foundation springs. Any steel coil, sinuous wire spring system or drop-in is acceptable provided it gives a moderately firm, comfortable seat and back and meets the Heavy Service level Test in 4.5 and comfort requirements in 3.4.3. "Hammock type" spring systems are not acceptable. "Spring edge" required on front edge of seat foundation. Squeaks or other noise is not acceptable. When springs are "hand-tied", knot twine to springs.

3.3.2 Slide fastener. Minimum 70 lb cross-wise pull required when tested as specified in 4.4.5. Pin lock or cam lock required unless a pocket pleat is provided in upholstery fabric to serve as lock.

3.3.3 Glides. Steel, cushioned nail type with antique copper finish, minimum 1 1/2 inch diameter base on front legs and minimum 1 1/8 inch diameter on rear legs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4 Construction.

3.4.1 Design. Design of sofas and chair shall be traditional as shown in figures 1 and 2.

3.4.2 Tolerances. The following tolerances will be permitted, except where otherwise indicated herein.

3.4.2.1 Overall tolerances.

(a)	Overall width, depth, and height	- plus or minus 1/2 inch
(b)	Height of seat	- plus or minus 1/2 inch
(c)	Height of arms at front	- plus or minus 1/2 inch
(d)	Height of arms at rear	- plus or minus 1/2 inch
(e)	Depth of seat	- plus or minus 1/2 inch

3.4.2.2 Component part tolerances.

(a)	Dimension of any solid wood part	- plus or minus 1/16 inch
(b)	Any dimension, not otherwise specified	- plus or minus 1/8 inch

3.4.3 Seating comfort. Seats shall be moderately firm and not "bottom out." Seat must have adequate "ride" with extra support at edges near arms to prevent "edge sag." Back shall be moderately firm and provide good lumbar and shoulder support. Seat, back and arms shall be adequately and evenly padded to provide comfortable seating units.

Acceptability of "ride," firmness, padding, pitch, and comfort will be determined, during bid sample evaluation, by a minimum 7 member evaluation panel.

3.4.4 Frame. Any solid wood (3.1.1.1) frame is acceptable provided it meets the Heavy Service Level Test in 4.5.

3.4.5 Foundations.

3.4.5.1 Seat foundation.
Spring system (3.3.1). A "spring edge" is required. Cover spring system with sheet fabric (3.2.5), permalator, insulator pad, and any combination of polyurethane foam (3.2.9) and or batting (3.2.7, 3.2.8) materials.

Seat deck shall be independent of arms and back. Apply materials to provide a smooth deck with a cushioned effect and that will remain smooth after testing. A sewn resilient edging is required on front edge of sofa. Seat foundation shall be designed so that there is no gap between bottom of cushion and spring edge.

3.4.5.2 Arm foundation and padding.
Cover frame with high density foam and or sheet fabric (3.2.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Cardboard is not acceptable. Cover sheet fabric with any combination of polyurethane foam (3.2.9) and or batting materials (3.2.7, 3.2.8). Resilient edge roll required.

Apply materials to provide a firm, full, well shaped, padded arm complying with figures 1, 2, and 3 when upholstered. Gap or opening between seat and arm is not acceptable.

3.4.5.3 Back foundation.
Spring system (3.3.1). Cover spring system with sheet fabric (3.2.5), permalator, insulator pad, and any combination of polyurethane foam (3.2.9) and or batting materials (3.2.7, 3.2.8). Resilient edge roll required.

Apply materials to provide a firm, full well shaped padded back complying with figure 1, 2, and 3 when upholstered.

3.4.5.4 Outside back and arms.
Cover with resilient product(s) which will support and cushion the upholstery fabric and resist permanent indentation. Cardboard is not acceptable.

3.4.6 Application of upholstering material. The covering of upholstering material shall be applied so that it is smooth and even. All welt lines shall be true. Pleating at the top of the backs and arms shall be uniform. Panel ends of arms and backs shall be padded and fastened in such a manner as to avoid cutting or puncturing the upholstering material.

The final covering on the deck shall be sateen (3.2.4). The upholstering material facing shall extend over the deck not less than 4 inches. The facing shall be pulled down snugly over the edge roll. There shall be an additional facing of upholstering material and padding applied immediately below with a welt, (3.4.7) attached between the two sections. There shall be no seams in any of the facing upholstering material. There shall be a self-welt applied around the lower perimeter of the sofa and chair and secured to the rails. Completely cover bottom of units with cambric (3.2.6). Bottom cover shall be securely and neatly attached with no sagging. Outside back, when upholstered in leather, may be made up of 3 pieces. When upholstering in leather, place flank areas of the hide and healed scars in areas that are inconspicuous when sofa/chair is viewed by someone standing in front of the piece.

3.4.7 Welts. Welts shall be of upholstering material, uniformly drawn over a suitable welt cord and be of suitable size for each particular application.

3.4.8 Seat cushion cover. The cushions shall be loose and of the nonreversible type, the underside having not less than a 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

inch facing of upholstering material, the remainder of the underside shall be sateen (3.2.4). All cushions shall have a 3-1/2 inch boxing and shall have welts around the top and bottom. No more than four pieces of upholstering material shall be used in the boxing. A slide fastener (3.3.2) shall be sewn in the center of the boxing strip along the back edge and a portion of each side edge of the cushion. Pocket pleats when used, shall be positioned approximately the same distance from the back edge of the cushion. The cover shall be arranged in an overlapping fold on either side of the slide fastener so as to hide the fastener track. When fabric cover is used, the cushion shall be reversible and fully covered with fabric.

3.4.8.1. Seat cushion filling. Cushion shall consist of a polyurethane foam core (3.2.9) covered top and bottom with polyester batting (3.2.7). Foam shall be buffed as specified in 3.2.9. Cover cushion with a sewn interior fabric envelope. Insert this unit into the upholstery cover envelope (3.4.8). The cushion unit shall be oversized in excess of the finished cushion envelope to provide a "plump," full appearance as shown in figures 1, 2, and 3.

3.5 Exposed wood finish Finish to match as closely as possible the overall color of GSA Standard Sample FSS-L-01002 walnut and be stained to equalize color. Suitable clear natural or synthetic top coat, 2 coat process with adequate "build" and a "semi-open pore" finish. Final finish shall pass finish test (4.4.2)

3.6 Upholstery colors: Standard samples are available from GSA-FSS-FCNEW, Washington, DC 20406.

3.6.1 Leather standard sample colors shall be FSS-X-00017 Dark red, FSS-X-00018 Light blue, FSS-X-00019 Dark blue, FSS-X-00020 Green, FSS-X-00021 Brown, FSS-X-00022 Saddle, FSS-X-00023 Dark beige, FSS-X-00024 Black.

3.6.2 Vinyl standard sample colors shall be FSS-V-04009 Dark red, FSS-V-04010 Light blue, FSS-V-04011 Dark blue, FSS-V-04012 Green, FSS-V-04013 Brown, FSS-V-04014 Rust, FSS-V-04015 Dark beige, FSS-V-04016 Black.

3.6.3 Fabric standard sample colors shall be FSS-F-09001 Maroon, FSS-F-09002 Light blue, FSS-F-09003 Navy blue, FSS-F-09004 Green, FSS-F-09005 Brown, FSS-F-09006 Rust, FSS-F-09007 Dark beige, FSS-F-09008 Black.

3.7 Workmanship. A high degree of craftsmanship shall be exercised in order to produce chairs and sofas suitable for use in executive offices. The methods of construction, assembly,

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

upholstering, finishing and the appearance of the chairs and sofas, shall be in strict accordance with the requirements of this purchase description. Chairs and sofas shall have a neatly tailored, taut, stuffed appearance complying with figure 1. Loosely fitted upholstery or uneven padding is not acceptable. The natural grain of the wood shall not be clouded by the finishing materials. Bleaching agents or materials shall not be used. The application of materials, drying time, sanding, cleaning, and rubbing shall be controlled to produce items of smooth, uniform exposed surfaces without blisters, pits, wrinkles, runs, tackiness or more than a trace of orange peel.

3.8 Identification marking. Each item shall be permanently and legibly marked with contrasting ink, or with a white Tyvec (or equal) label, sewn on four sides, on the outside bottom with the contractor's name/trademark, contract number, national stock number, month and year of manufacture, and specification number.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. Unless otherwise specified in the contract or specification, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article approval. The requirement for first article approval and the responsibility (Government and contractor) for first article testing shall be as specified in the contract. The sample for first article approval test shall consist of one of each item awarded unless otherwise specified in the contract. Each item shall be examined and tested as specified herein for all the requirements of this purchase description. The samples shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

First Article samples shall also be compared to the bid sample to ensure they have the same comfort (3.4.1) and appearance, and comply with the materials and components list supplied with bid samples. Approved First Article samples shall serve as a manufacturing standard during the contract and shall be maintained until the last order is shipped, delivered, and accepted.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

4.2.1 Contractor testing. When the contractor is responsible for conducting first article approval test, the sample shall be inspected by the contractor for all the requirements of the contract. A record of this inspection and test, including certificates of conformance for materials, shall be submitted to the government for approval. The Government reserves the right to witness the contractor's inspection and test.

4.3 Inspection provisions.

4.3.1 Workmanship and dimensional examination. Perform examination in accordance with MIL-STD-105 and the following minimum sampling plans.

Workmanship (See 3.8): Defects per hundred units (dhu)
Inspection Level - II. Acceptable Quality Level (AQL) - 4.0 dhu.

Dimensions: Percent defective
Inspection Level S-2. AQL - 6.5%.

4.3.1.1 Overall examination. In addition to workmanship and dimensional examination, inspect each sofa and chair at a viewing distance of 6 feet for the following defects. Reject the item if one or more of the following defects is found.

Wood finish streaked, not uniform.

Piece over 1/4 inch off level.

Scratch or bruise marks on wood.

Poor fit of upholstery as evidenced by wrinkles (other than comfort type in seat) at sides and corners

Welts not straight

4.3.2 Packaging, packing, marking examination. Examine items for compliance with requirements stated in this document and the contract. Perform examination on a percent defective basis in accordance with MIL-STD-105 and the following minimum sampling plan.

Inspection Level S-4. Acceptable Quality Level (AQL) - 4.0%.

4.4 Testing. Failure to comply with the following test requirements will be cause for rejection. Testing is required for first article inspection. Test results shall be not more than one year old at time of First Article Inspection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

Subsequent shipments during the contract period are not required to be tested, however, the component supplier must certify that these shipments will meet all applicable test requirements.

4.4.1 Test for adhesives.

Test for adhesives

Component	Characteristic	Requirement reference	Test Method
Adhesive	Block shear test	3.1.4	ASTM D 905

Rerun test if all three of the following criteria are met: the average shear strength of all samples is below 2,800 p.s.i.; there is a 10 percent or greater difference between high and low specimen values, and at least one test specimen broke at more than 2,800 p.s.i.

Disregard a test specimen in computing the average if it breaks at less than 2,800 p.s.i.; and it has 50 percent or more wood failure.

4.4.2 Finish tests and requirements. The following tests (except UV test) shall be performed on a sample panel finished in the same manner as the legs are finished in production.

Perform finish test at first article inspection and once a month during the contract period. All test panels shall be produced from finish materials currently being used in production. All samples tested shall meet the following test requirement.

Toughness and adhesion. Perform test for thoughness and adhesion on a sample panel finished in the same manner as the furniture using Organic Coating Adhesion Tester, Model No. 1001 in accordance with manufacturer's instructions. Mar the panel both parallel and perpendicular to the grain. Film must conform to resulting indentation. Whitening (film separation) or cracking is not acceptable.

Organic Coating Adhesion Tester Model No. 1001 is available from U.S. Testing Company, Inc. Instrument Marking Division, 1415 Park Avenue, Hoboken, NJ 07030.

4.4.3 Test method for determining weight of material per square area. 5041 of Fed. Test Method Std. 191 or ASTM D - 3776. See test requirements in 3.2.5, 3.2.6, 3.2.7, 3.2.8.

4.4.4 Test method for determining recovery ratio of polyurethane foam. ASTM D-3770, Recovery ratio. Use this test method for both coventional and high resilience type foam. See test requirement in 3.2.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.4.5 Test for slide fastener. ASTM D - 2061, Crosswise Strength Test. See test requirement in 3.3.2.

4.4.6 Leather test methods. Sampling procedures and location from which the sample unit is to be obtained shall be in accordance with FED-STD-311. All tests are to be performed on individual sample units, with the exception of pH which is to be run on a composite. All test reports shall contain individual values utilized in expressing the final result. The lot shall be rejected if any one of the following conditions exist:

a. More than 25% of thickness measurements taken do not fall within the required range.

b. More than three test failures occur for breaking force, elongation, or stitch tear;

c. More than one test failure occurs for the remaining requirements applicable to the sample unit;

d. Any composite fails to meet the specified requirement.

Test	Method	Requirement
Thickness	Fed. Std. 311 1011.1	See 3.2.1
Breaking force (grab method)	Fed. Std. 311 2031	See 3.2.1
Elongation	Fed. Std. 311 2031 at 100 lb load	See 3.2.1
Stitch tear double hole)	Fed. Std. 311 3031.1	See 3.2.1
Crocking (colorfastness, resistance to rubbing Test all colors.	Fed. Std. 311 3031.1	See 3.2.1
Blocking	Fed. Std. 311 3121.1	See 3.2.1
pH	Fed. Std. 311 6621.1	See 3.2.1
Fade resistance (colorfastness) Test all colors	Fed. Std. 311 5660.2 72 hr. exposure	See 3.2.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Test (cont.)	Method	Requirement
Abrasion resistance	ASTM D 3884 1000 cycls using CS-10 wheels and 1000 gram weights	See 3.2.1
Flexibility	ASTM D 2097 60,000 cycles	See 3.2.1

4.5 Performance test for sofas and chair. Sofas and chair shall meet the heavy service acceptance level as defined in FNE 80-214. Test report as required in test method shall be submitted at time of first article inspection. If the construction of the sofa and chair are identical with the exception of cross rail length, number of legs, and number of cushions, the two seat sofa and chair will be accepted on the basis of the 3 seat sofa unit tested.

5. PACKAGING, PACKING, MARKING

Package, pack and mark shipping containers in accordance with the contract or order.

6. NOTES

6.1 Intended use. The executive office type easy chairs and sofa in traditional styling were designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. The chairs and davenports should compliment the traditional decor of executive areas when used with other furniture items within the group.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.


(b) Type and class, (see 1.2.1).


(c) Upholstery color required (see 3.6).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.


NOTES.

1. RECESS FRONT ARM PANEL 3/8" BEHIND FRONT ROLL EDGE ON ARM
2. 7 TO 9 EVENLY SPACED, NEATLY FOLDED, PLEATS REQUIRED ON ROLL EDGE OF ARM.
3. FRONT ARM PANEL 2" WIDE BETWEEN WELTS.
4. TWO OUTSIDE BACK CUSHIONS ON SOFA SHALL BE MAX. 1½" WIDER THAN CENTER BACK CUSHION.
5. CROWN REQUIRED ACROSS FRONT OF EACH BACK CUSHION AS SHOWN
6. 8 TO 9 EVENLY SPACED, NEATLY FOLDED PLEATS REQUIRED ON BACK CUSHION END PANELS.
7. SHAPE BACK EDGE OF SEAT CUSHIONS TO CONFORM TO CROWN OF BACK CUSHIONS.
8. CUSHIONS SHALL BE RETAINED BY FRONT ROLL EDGE TO MINIMIZE GAP BETWEEN CUSHIONS AND ROLL EDGE.
9. WHEN UPHOLSTERING IN LEATHER THE STRIP OF LEATHER IMMEDIATELY BELOW THE CUSHIONS MAY BE MADE UP OF THREE PIECES WITH WELTED SEAMS LINING UP WITH THE BREAKS BETWEEN

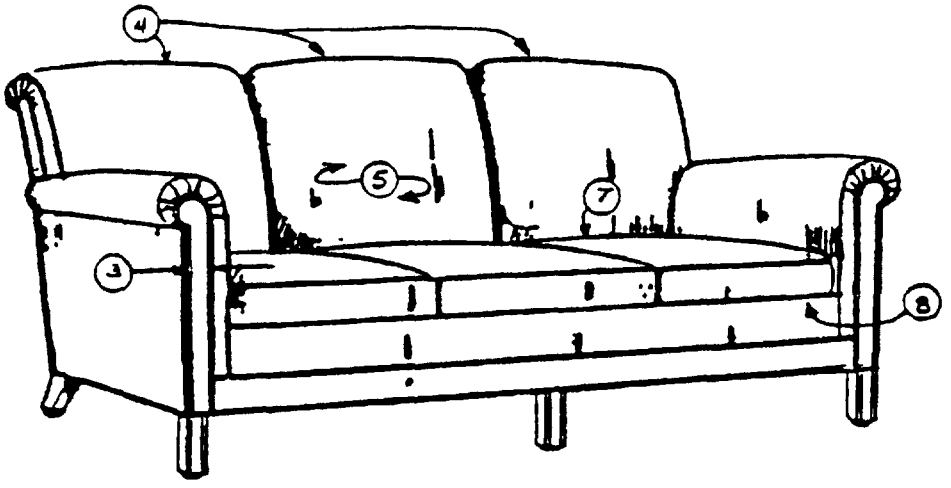


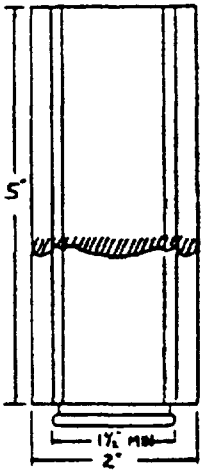

FRONT LEG DETAIL

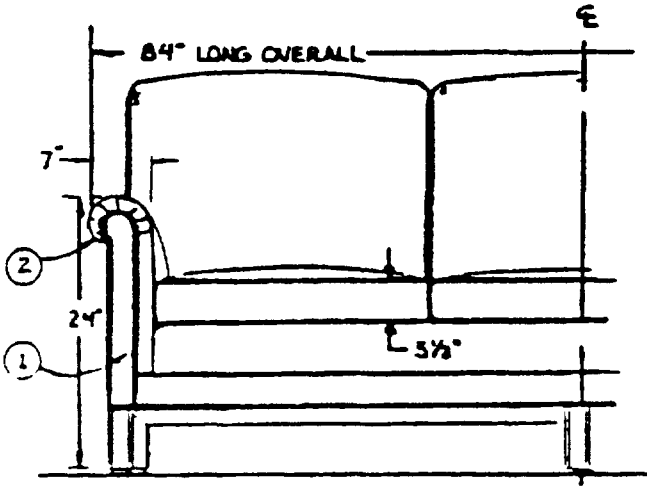

HALF FRONT ELEVATION

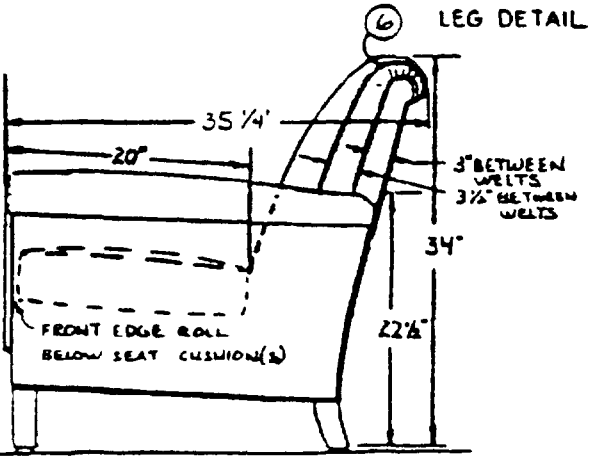

END ELEVATION


SOFAS AND EASY CHAIR

FIGURE 1

TYPE I SOFA, THREE SEAT

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

NOTES: SEE FIGURE 1.

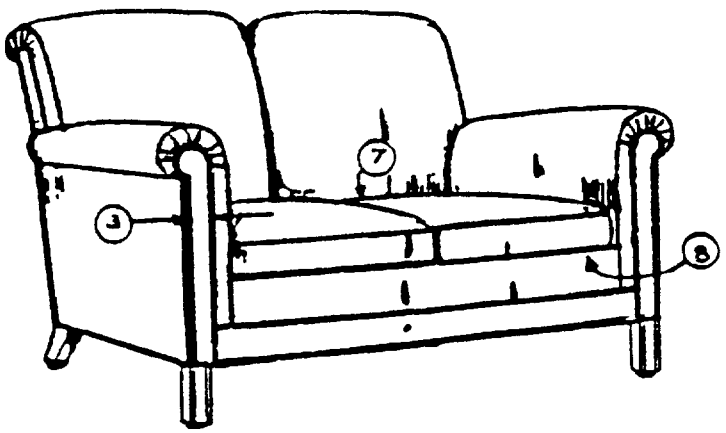

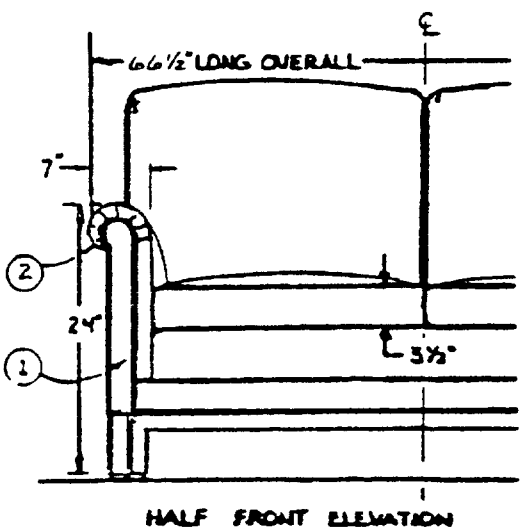


FIGURE 2

TYPE II SOFA, TWO SEAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTES: SEE FIGURE 1.

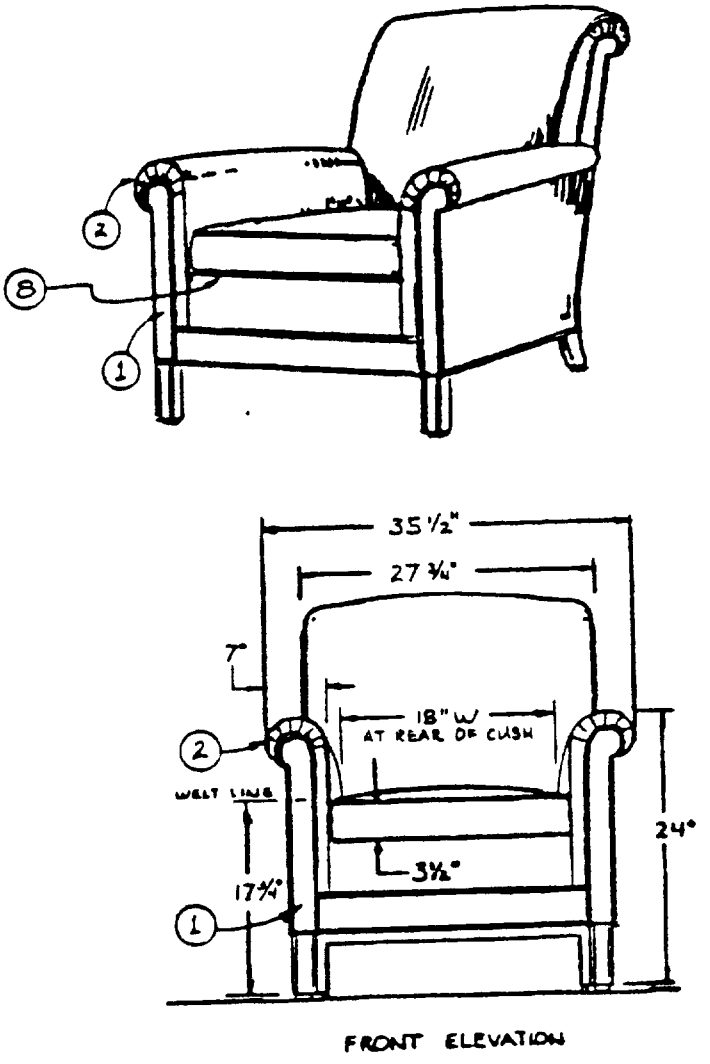


FIGURE 3

TYPE III CHAIR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.