AA-O-001959/1(GSA-FSS)
December 8, 1977

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: DESK AND DESK ATTACHMENTS, EXECUTIVE, CONTEMPORARY FULL PANEL

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes the detailed requirements for executive, contemporary full panel office desks and desk attachments. General requirements and other information pertaining to the desks and desk attachments will be found in Federal Specification AA-O-1959, Office Furniture, Executive, Contemporary Full Panel (General Specification). A complete index of the paragraph numbers and titles of the General Specification will be found on the last page of this document.

1.2 Classification

1.2.1 Types, sizes and styles. Desks and desk attachments covered by this specification shall be of the following types, styles, and sizes, as specified (see 6.2 herein).

Type I - Desk, double pedestal (29 inches high, excluding glides). (Figure 1).
  Size 1 - 66 inches wide by 36 inches deep.
  Size 2 - 72 inches wide by 36 inches deep.

Type II - Desk, single pedestal (29 inches high, excluding glides). (Figure 2).
  Style A - Right pedestal
    Size 1 - 60 inches wide by 30 inches deep.
    Size 2 - 66 inches wide by 36 inches deep.
  Style B - Left pedestal
    Size 1 - 60 inches wide by 30 inches deep.
    Size 2 - 66 inches wide by 36 inches deep.

Type III - Desk attachment with drawer pedestal (29 inches high, excluding glides). (Figure 3).
  Style A - Right pedestal, 48 inches wide by 20 inches deep.
  Style B - Left pedestal, 48 inches wide by 20 inches deep.

Type IV - Desk attachment, secretarial, (top height 26 inches, excluding glides). (Figures 4 & 5).
  Style A - Right pedestal, 42 inches wide by 20 inches deep.
  Style B - Left pedestal, 42 inches wide by 20 inches deep.

Type V - Desk, Table, 2 Drawers - 66 inches wide by 36 inches deep by 29 inches high, (excluding glides). (Figure 6).

1.2.1.1 Pedestal options. Options (a), (b), and (c) shall be available to all desks and desk attachments, except table desks. Option (d) is available only in Type IV (see 6.2 herein).

(a) 3 storage drawers.
(b) Storage drawer on top, file drawer on bottom.
(c) File drawer on top, storage drawer on bottom.
(d) Stationery.

2. APPLICABLE DOCUMENTS

2.1 The specification and standards, of the issues in effect, on date of Invitations For Bid, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-1959, hereinafter called the General Specification.

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2.2 Other publications. Other publications, which form a part of this specification, will be found in of the General Specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with 3.1 of the ieral Specification.

3.2 Materials. The materials used in the construction of the desks and desk attachments shall be of kind and quality specified in 3.2 of the General Specification. The paragraph numbers and titles for various components referenced in the General Specification are listed on the last page of this document.

3.3 Construction. The general construction requirements of the desks, desk attachments, and their com- ient parts shall be as specified in 3.3 of the General Specification. The paragraph numbers and titles the various components as found in the General Specification are listed on the last page of this docu- it.

3.3.1 Design. The design of the desks and desk attachments shall be as shown in Figures 1 through 6. Type II desks may be used alone or in combination with the desk attachments.

3.3.2 Dimensions. The overall dimensions shall be as specified in paragraph 1.2.1 herein. Dimensions component parts will be as specified in the applicable paragraphs and subparagraphs herein.

3.3.3 Drawers. The drawers for the desks and desk attachments shall be constructed as specified in 3.7 and 3.3.8 of the General Specification and shall be suspended as specified in 3.2.5.6 of the General cification. They shall have the capacity and dimensions as indicated in Table I herein. File hanger s shall be furnished in file drawers and the drawers shall be slotted for their accommodation.

3.3.3.1 Pedestal unit doors. Pedestal unit doors shall be constructed as specified in 3.3.7 of the ieral Specification. The hinges shall be as specified in 3.2.5.3 of the General Specification.

TABLE I. (Drawer Capacity)

Drawer	Letter Size	Legal Size	Width	Depth	Height
e Drawer					
pe I sk	2 rows side to side - 1 row front to rear	1 row side to side	Sufficient width to use hanging folders	26" min.	10" min.
pe II sk	1 row side to side or front to rear	1 row side to side	(Same as above)	Size 1-20" min. Size 2-26" min.	10" min. 10" min.
pe III sk Attachment	1 row side to side or front to rear	1 row side to side	(Same as above)	16" min.	10" min.
pe IV sk Attachment	1 row side to side or front to rear	1 row side to side	(Same as above)	16" min.	10" min.
orage Drawer					
pe I Desk			Same width as file drawer	26" min.	5" min.
pe II Desk			(Same as above)	Size 1-20" min. Size 2-26" min.	5" min. 5" min.
pe III sk Attachment			(Same as above)	16" min.	5" min.
pe IV sk Attachment			(Same as above)	16" min.	3" min.
pe V ble Desk			16" min.	18" min.	1-3/4" min.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.4 Drawer pedestal units. The drawer pedestal unit shall consist of two side panels, a rear, bottom, and a top panel as specified in 3.3.6 and Table III of the General Specification. The rear, bottom, and top panels shall be tenoned and glued into the side panels. The pedestal shall utilize the drawers as indicated in Table I and as required in 6.2 herein. The drawers shall be suspended as specified in 3.2.5.6 of the General Specification. The drawer fronts shall conceal the panels of the pedestal unit, when closed. The drawer when fully opened shall provide access to the material in the rear (see 3.2.5.6 of the General Specification).

3.3.5 Stationery pedestal unit. The shell of the unit shall be constructed in the same manner as the drawer pedestal unit specified in paragraph 3.3.4 herein. The unit insert shall have a minimum of four sloped shelves with a minimum clear span of one inch, easily adaptable for legal or letter size paper and at least two compartments for envelopes. The stationery insert shall be suspended as specified in 3.2.5.6 of the General Specification and shall open to within a maximum of 2 inches of its full extension. The insert shall have a self-pull placed in a convenient position to allow the insert to be easily opened and closed. The pedestal shall have a hinged door as specified in 3.2.5.3 and 3.3.7 of the General Specification. The door shall open a minimum of 270° and fit snug against the inside panel in the knee space.

3.3.6 Desk assembly. The desks shall be of the overall sizes specified in 1.2.1. All desks shall consist of an outer shell composed of a top, two end panels and a back panel as specified in 3.3.6 and Table III of the General Specification. The back panel shall be recessed 6 inches from the rear of the desk and shall be tenoned and glued to the two end panels. The end panels shall extend fully to the floor and shall have a base trim as specified in 3.3.11 of the General Specification. When the pedestal units are installed, the bottom edge of the back panel shall be flush with the bottom of the unit. The top with a reveal strip attached as specified in 3.3.10 of the General Specification shall be secured to the end panels and the back panel. The back panel shall be 8 inches from the bottom of the end panels. There shall be a full length 1" x 1" cleat located at the top of the knee space back panel with a minimum 6 screws into the back panel and into the top, as an alternate method, two evenly spaced 10 inch 1" x 1" cleats may be used with a minimum of 3 screws both directions in each cleat. The edge of the top shall be flush with the outer edges of the end panels. The reveal strip shall be flush to the edge of the top minus 1/16 inch. The Type I desk shall have two drawer pedestal units as specified in paragraph 3.3.4 and the Type II desk shall have one drawer pedestal specified in paragraph 3.3.4 (for pedestal options see 1.2.1.1 and 6.2 herein). The Type I desk shall be as shown in Figure 1 and shall have one pedestal attached to the right end panel, back panel, and top and the other pedestal shall be attached to the left end panel, back panel, and top. The pedestal unit shall be secured to the case with four screws into the side panel, top panel, and back panel. The Type II desk shall be as shown in Figure 2, Style A shall have the pedestal unit securely attached to the right end panel, back, and top, and the Style B shall have the pedestal unit securely attached to the left end panel, back, and top. There shall be a 1" x 1" cleat, full length less 2 inches located at the top of the knee space end panel secured with a minimum of 3 screws into the end panel and 3 screws into the top panel. The front of the pedestal unit (drawers closed) shall be flush with the front edge of the side panels and top. There shall be a full length (less 2 inches) 1" x 1" cleat attached by a minimum of 5 screws in each direction, to the pedestal units and the back panel in both the Type I and Type II desks. In the open end of the Type II desk (opposite the pedestal unit) there shall be a full length (less 2 inches) 1" x 1" cleat attached vertically to the back panel and end panels. All file drawers shall have locks as specified in 3.2.5.5 of the General Specification. The lock shall be located in a convenient position on the knee space panel. A convenience tray as specified in 3.3.9 of the General Specification shall be installed in the top drawer of Option A and in the storage drawers of Options B and C as specified in paragraph 1.2.1.1 herein. The drawers shall operate smoothly and shall pass the tests specified in Section 4 of the General Specification. There shall be a hole a maximum of 1-3/4 inches in diameter drilled through the top of the attachment end of the Type II desk. It shall be centered 4 inches from the leading edge and four inches from the outer edge of the top, (see Figure 2 herein). The interior of the hole shall be sanded smooth and finished in a dark brown or black color. There shall be a force-fit grommet of plastic, rubber, or metal inserted in the hole for protection of any wiring utilized. The grommet shall have a solid top that may be removed. Provisions for glides shall be as specified in 3.2.5.4 of the General Specification.

3.3.7 Desk attachment assembly, Type III. The Type III desk attachment shall be of the overall sizes specified in 1.2.1 and Figure 3 herein and will consist of a top, end panel, and a back panel as specified in 3.3.6 of the General Specification. The back and end panel shall extend fully to the floor. The edge of the top shall be flush with the outer edges of the end and back panel. The back panel shall be secure to the top panel in the same manner as specified in 3.3.6 herein for the desk assembly. A reveal strip as specified in 3.3.10 of the General Specification shall be attached to the underside of the top. There shall be a hole a maximum of 1-3/4 inches in diameter drilled through the top of the Type III desk attachment positioned as indicated in Figure 3 herein. The interior of the hole shall be sanded smooth and finished in a dark brown or black color. There shall be a force-fit grommet of plastic, rubber, or metal inserted in the hole for protection of any wiring utilized. The grommet shall have a solid top that may be removed. There shall be a panel base trim securely attached to the bottom of the back panel and the end panel as specified in 3.3.11 of the General Specification. The Type III desk attachment shall have one drawer pedestal unit as specified in paragraph 3.3.4 (for pedestal options see 1.2.1.1 and 6.2 herein). The Style A pedestal unit shall be installed in a right full panel desk attachment, Style B pedestal unit shall be installed in the left full panel desk attachment. The pedestal unit shall be secured to the case in the same manner as specified in 3.3.4 herein, approximately 6 inches from the bottom of the end panel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

e drawer fronts of the pedestal units shall be flush with the front of the end panel and top. The file awers shall have locks as specified in 3.2.5.5 of the General Specification. The locks shall be located a convenient position in the knee space panel. A convenience tray as specified in 3.3.9 of the General ecification shall be installed in the top drawer of Option A and in the storage drawers of Options B and The drawers shall operate smoothly and shall pass the tests specified in Section 4 of the General ecification. Provisions for glides shall be as specified in 3.2.5.4 of the General Specification.

3.3.8 Desk attachment assembly, Type IV. The Type IV desk attachment shall be of the overall size as ecified in 1.2.1 and Figures 4 and 5 herein and will consist of a top, end, and back panel as specified 3.3.4 of the General Specification. The back panel and the end panel shall extend fully to the floor d the back panel shall be tenoned and glued to the end panel. The back panel shall be secured to the top nel in the same manner as specified in 3.3.6 herein for the desk assembly. The height of the back and d panel shall approximate the height of the end panel of the Type II desk to which it is joined. The top all be 26 inches high and shall be tenoned into the back and end panels, which will create a gallery for e unit. There shall be a hole a maximum of 1-3/4 inches in diameter drilled through the top of the Type desk attachment positioned as indicated in Figures 4 and 5 herein. The interior of the hole shall be nded smooth and finished in a dark brown or black color. There shall be a force-fit grommet of plastic, bber, or metal inserted in the hole for protection of any wiring utilized. The grommet shall have a lid top that may be removed. There shall be a panel base trim securely attached to the bottom of the ck panel and the end panel as specified in 3.3.7 herein and 3.3.11 of the General Specification. The pe IV desk attachment shall be available with the options as indicated in 1.2.1.1 and 6.2 herein and all be constructed as specified in 3.3.4 herein. The storage drawer height shall be approximately two ches lower in height than the storage drawer in the Type III desk attachment. Option D is available only the Type IV desk attachment, (see 1.2.1.1, 6.2, and Figure 5 herein). The unit shall be constructed as ecified in 3.3.5 and secured to the top, end, and back panels as specified in 3.3.6 herein. Provisions r glides shall be as specified in 3.2.5.4 of the General Specification.

3.3.9 Table desk assembly, Type V. The table desk shall be of the overall dimensions specified in 1.2.1 d as indicated in Figure 6. It shall consist of an outer shell composed of a top, two end panels, and a ck panel as specified in 3.3.6 and Table III of the General Specification. The back panel will be set 6 inches from the outer back edge of the table and shall be tenoned and glued into the end panels. The ttom of the back panel shall be 8 inches from the bottom of the end panels. There shall be four 1" x 1" 10" cleats, evenly spaced, with a minimum of 3 screws in each direction into the back panel and into the p. There shall be a 1" x 1" x 18" cleat with a minimum of 5 screws in each direction into the inside of e back panel and into each end panel. There shall be two 16 inch deep drawers positioned as shown in gure 6 with an 18" x 3" drawer front flush with the top and each end panel. There shall be a 3" x 1-1/4" ron separating the two drawers to provide a clean line across the front of the table. The drawers shall constructed as specified in 3.3.8 of the General Specification and shall have a 5 inch self-pull routed on center. Each drawer shall have a lock as specified in 3.2.5.5 of the General Specification. The awers shall be interchangeable. One drawer shall have a convenience tray as specified in 3.3.9 of the neral Specification, the other drawer shall have a vertical groove on the inside of the drawer side 3/16" ep centered for the insertion of a partition. The drawer partition shall be constructed of 3/16 inch nimum 3 ply plywood as specified in 3.2.3.7 of the General Specification. The drawer fronts and the ttom edge of the apron shall be self-edged veneered or banded with 1/4 inch solid wood as specified in 3.6 of the General Specification. There shall be a full length minus 3 inches 1" x 1" cleat with screws each direction, a maximum of 3 inches apart, into the apron and into the top or as an alternate two 1" x x 10" cleats, evenly spaced, with a minimum of 3 screws in each direction into the apron and into the pp. The drawer frames shall be constructed in such a manner that the front parting rail shall be securely tached to the apron to insure stability to the front of the table. The drawer frame shall be constructed as to utilize commercial metal suspensions of sufficient size and strength to move easily in and out of e table. The drawers shall have a built-in stop, and open to within 2 inches of their maximum depth. e drawer sides and back shall be a minimum of 1-3/4 inches high. The top shall have a reveal strip as ecified in 3.3.10 of the General Specification and shall be securely attached to the end panels by means toe-screwing from the inside of the end panel into the top, or by cleating, or by a method of construction the drawer frames, or a combination of any of the three methods. There shall be a base trim applied to e bottom of the end panels as specified in 3.3.11 of the General Specification. Provisions for glides all be as specified in 3.2.5.4 of the General Specification.

3.3.10 Method of attachment. There shall be five (5) threaded metal inserts positioned in the underside the open end of the tops of the Type II desk and the Type III and Type IV desk attachments. They shall positioned as shown in Figure 7 for the Type III desk attachment and in Figures 8 and 9 for the Type IV esk attachment. The Type IV attachment shall have a solid wood spacer block used with the "Z" angle tachment bracket secured by 1/4 - 20, truss HD by 5/8" long screws. The spacer block shall fit snugly etween the top of the desk attachment and the underside of the Type II desk. The inserts shall be posi- oned as shown in Figures 7, 8, and 9. The positioning of the threaded inserts in the desks and the desk tachments shall be identical. Before packing, Type II desks and their specified attachment shall be

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

pre-assembled to insure a secure, snug fit. If adjustments are necessary, they shall be made at this time and after a proper mating has been accomplished the desk and the attachment will be disassembled for packing. To facilitate packing provisions shall be made for reversing the attaching brackets to the underside of the respective desk attachment by utilizing the existing threaded inserts. The additional screws necessary for the mating of the attachments to the desks shall be bagged and attached to the underside of the top in the knee space. It shall be the responsibility of the manufacture of the desk and desk attachments to furnish detailed information for the mating of the attachments to the desks. The instructions shall be taped to the inside bottom of a drawer in the drawer pedestal unit and on the door of the stationery unit. The containers for the desks and desk attachments shall be so marked as to indicate their respective pre-assembled mate.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance requirements. The requirements of Section 4 of AA-O-1959 and as specified herein shall apply.

4.2 Visual examination. Examination of the desks and desk attachments shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table IV of AA-O-1959 and for specific requirements in Table II shown herein. The lot size shall be expressed in units of desks and desk attachments for the purposes of determining the sample size in accordance with MIL-STD-105. The sample unit for examination shall be one complete desk except when the Type IV desk attachment is specified and mated to a Type II desk. The Type II desk with a Type IV desk attachment mated shall be considered a unit.

TABLE II - Classification of Defects

Examine	Defects	Classification Major	Classification Minor
Drawer dimensions	Not size specified.	X	
	Will not accommodate filing material as specified.	X	
	File hanger bar not provided.		X
Drawer pedestal units	Will not accommodate drawers specified.	X	
	Not of materials or constructed as specified.	X	
	Not of proper size.	X	
	Drawers when open do not provide easy access to filing material in rear.		X
Stationery pedestal unit	Not proper width.	X	
	Not constructed as specified.	X	
	Proper number and size of compartments not provided in interior section.	X	
	Method of adaption from legal to letter size not easily accomplished.		X
	Method of adaption from letter to legal size, not easily accomplished.		X
	Interior unit does not operate as specified.	X	
	Drawer does not operate independently of interior unit.	X	
	Door does not open 270°.		X
Desk and desk attachment assembly	Not of proper size.	X	
	Not constructed as specified.	X	
	Desk back panel not properly recessed.	X	
	No reveal strip, or not as specified.	X	
	No base trim, or not as specified.	X	
	Drawers do not operate smoothly, interfere with each other.	X	
	Drawers do not open the required amount.		X
	Fastners visible.		X
	Pedestals not securely attached to desk.	X	
	Pedestal out of square.	X	
	Not suspension specified.	X	
	Threaded metal inserts not provided.	X	
	Attaching hardware not provided.		X
	Desk attachment will not attach to single pedestal desk.	X	
	Desk attachment will not properly align with single pedestal desk.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II - Classification of Defects (con.)

Examine	Defect	Classification Major	Classification Minor
Desk and desk attachment assembly (con.)	Wire accommodation hole omitted.	X	
	Hole not positioned as required.		X
	Force-fit grommet or cap missing.		X
Method of attachment	Desk and desk attachments not preassembled before packing.	X	
	Detailed instructions not attached to the unit.	X	
	Attachment bracket not furnished.		X
	Attachment bracket not as specified.	X	
	Attachment bracket, for packing, not reversed as specified.		X
	Attachment screws missing.		X
Finish	Not as specified.	X	

4.3 Dimensional examination. Inspection shall be made of desks and desk attachments for compliance with dimensions specified. Any dimension not within tolerance specified shall be classified as a defect.

4.4 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection Levels	AQL's
For examination in Table II Major	I	4.0
For examination in Table II Total	I	10.0
For examination in 4.2	I	4.0

4.5 Inspection for preparation for delivery requirements.

4.6 Tests. All tests specified in the General Specification shall apply.

5. PREPARATION FOR DELIVERY

(Packaging and packing shall meet the requirements as specified in the General Specification.)

6. NOTES


6.1 Intended use. The desks and desk attachments are intended to be used in executive offices of the Federal government.

6.2 Ordering data. Purchasers should select their preferences as permitted herein and include the following information in procurement documents:

(a) Title, name, and date of this specification.
(b) Type, style, and size of the items required. (see 1.2.1).
(c) Level of packaging and packing.
(d) Marking requirements.
(e) Purchasers shall exercise the pedestal options available for the desks and desk attachments.

For example, when exercising the options available, indicate the pedestal first (left or right) and the required option second as shown in Figures 1 thru 5.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

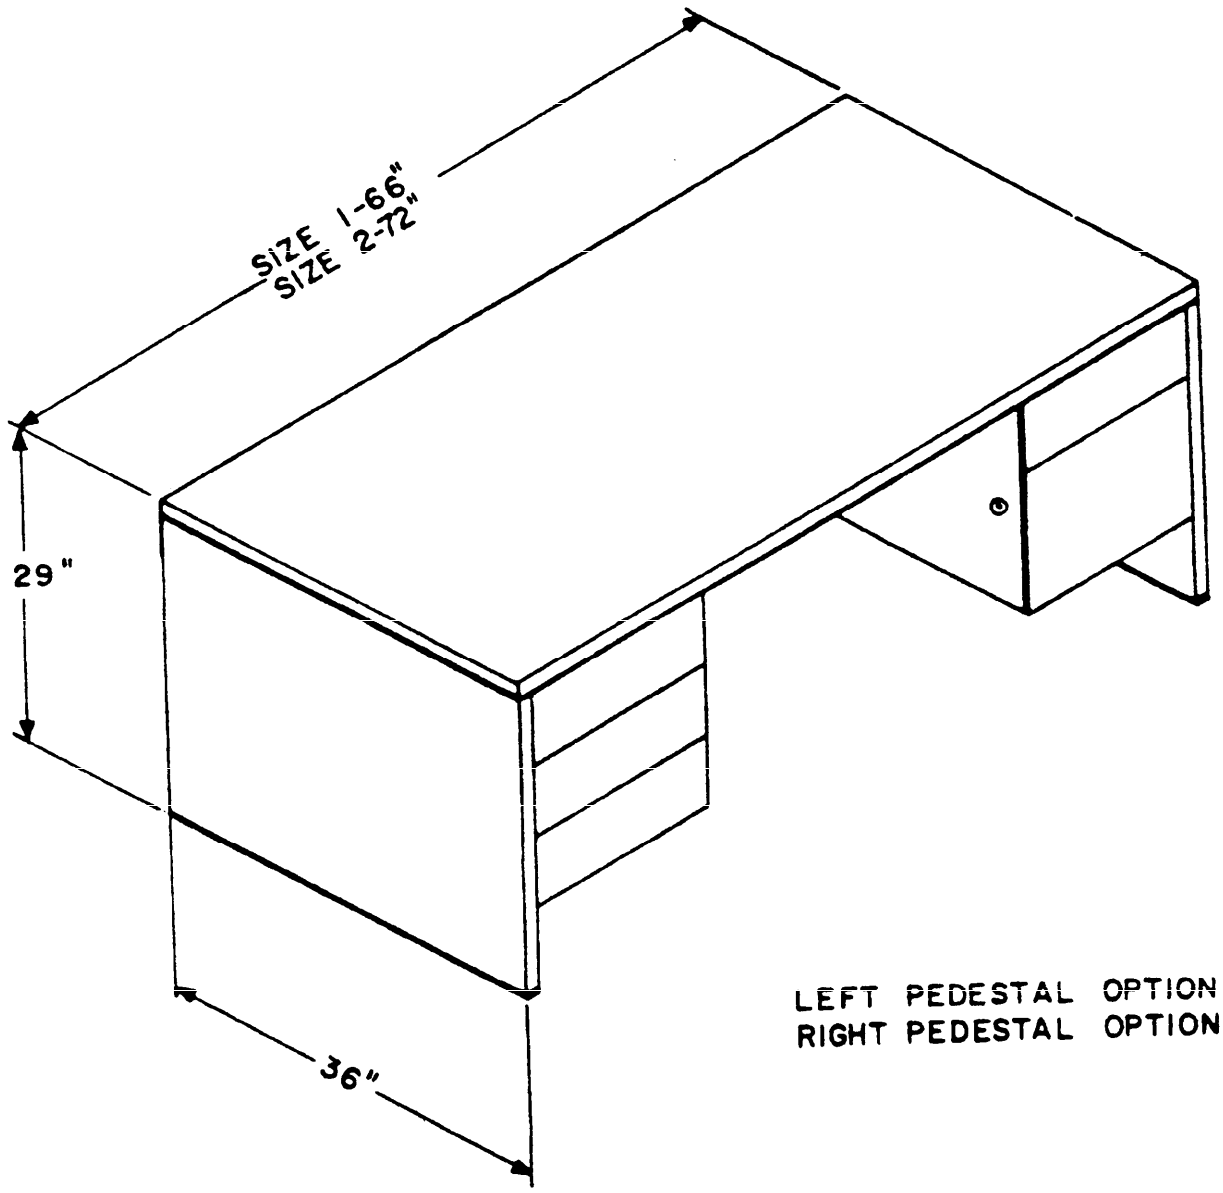

LEFT PEDESTAL OPTION (a)
RIGHT PEDESTAL OPTION (b)

FIGURE 1
TYPE I SIZE 1 & 2 DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

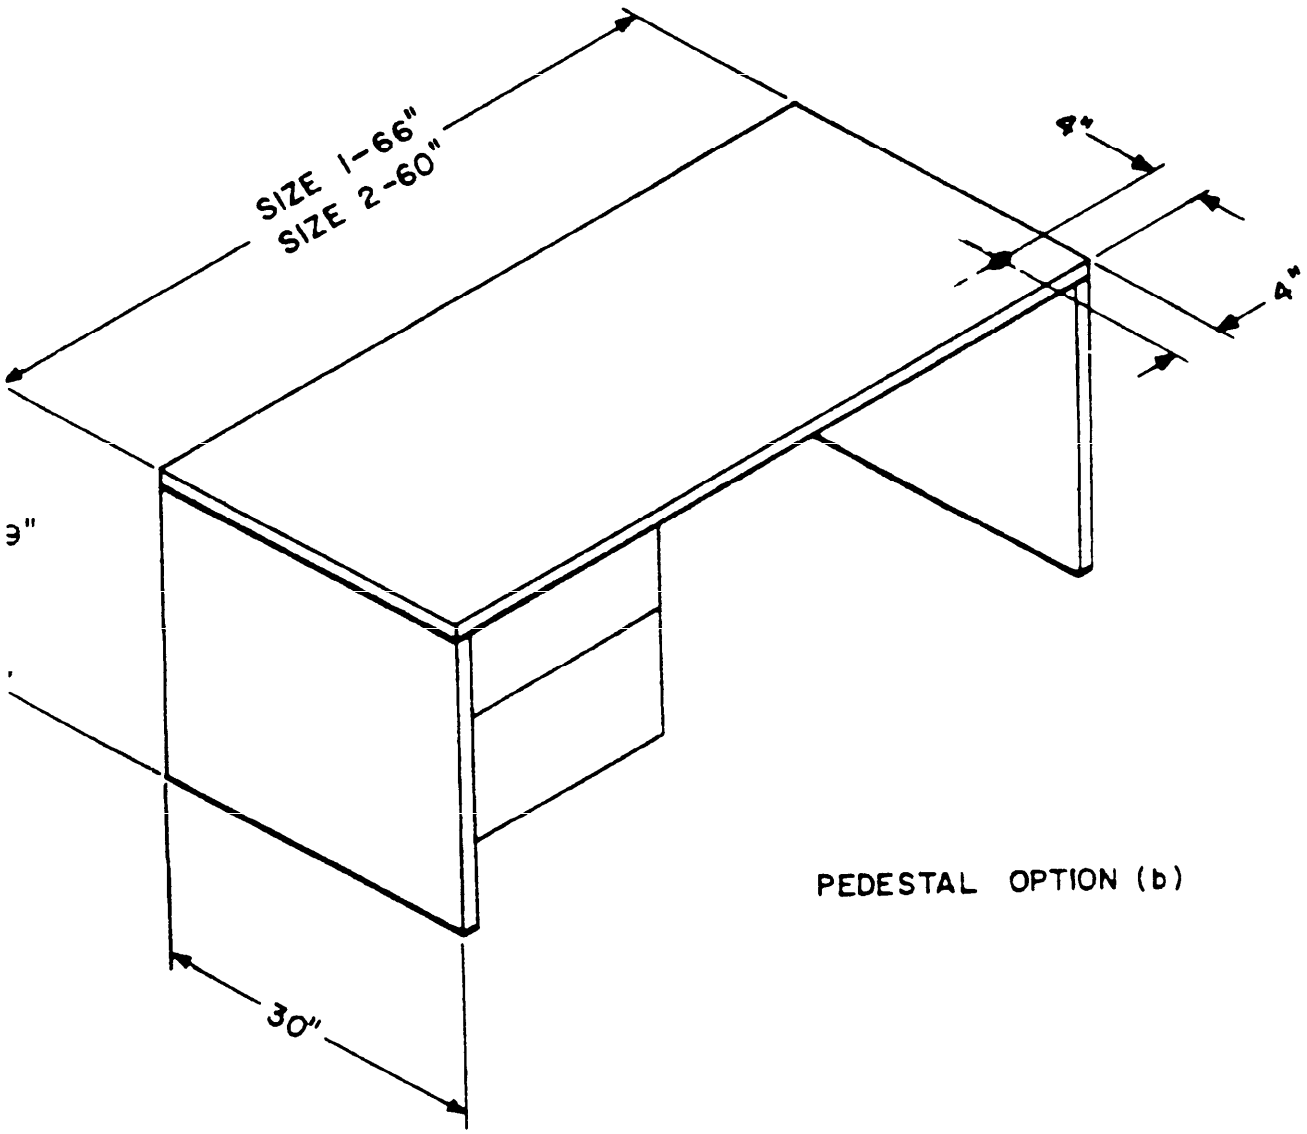

PEDESTAL OPTION (b)

FIGURE 2
TYPE II SIZE 1 & 2 DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

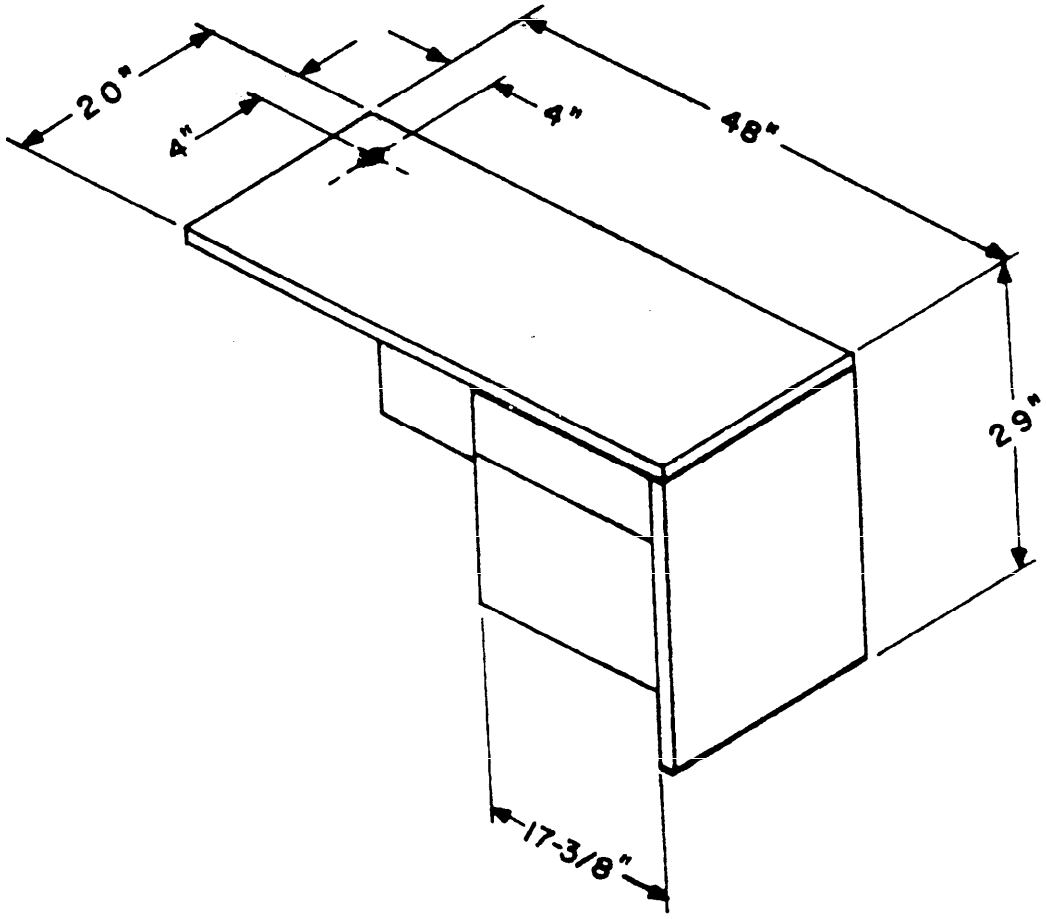


FIGURE 3
TYPE III-STYLE A - OPTION (B)

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

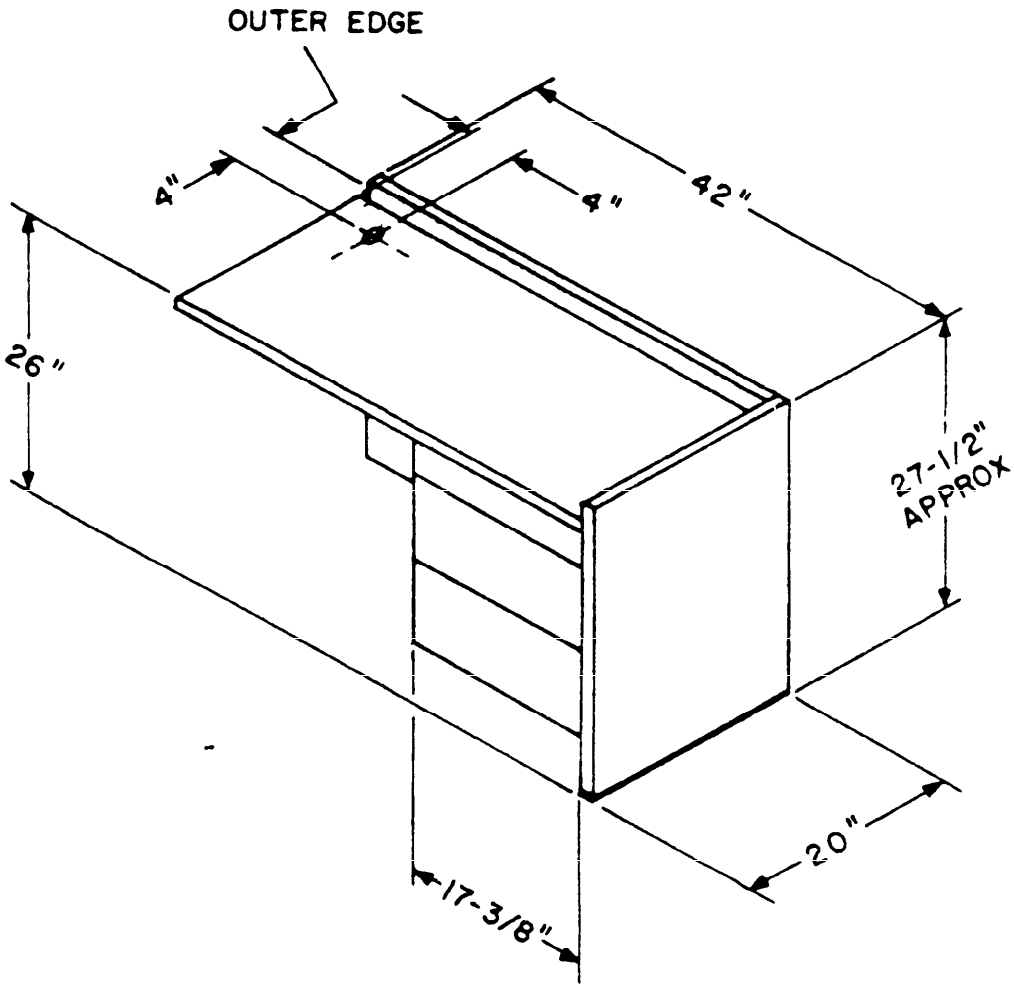


FIGURE 4
TYPE IV- STYLE A OPTION (a)

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

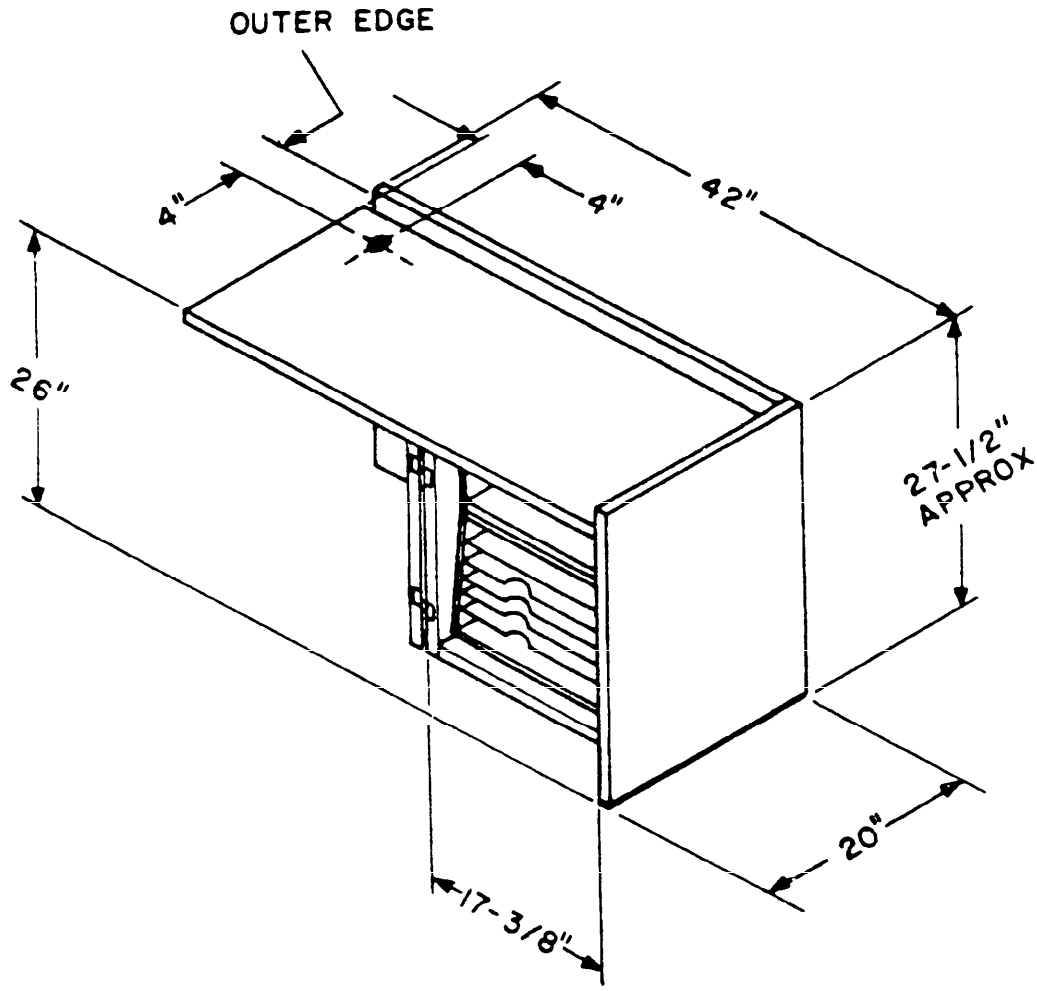


FIGURE 5
TYPE IV - STYLE A OPTION (d)

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

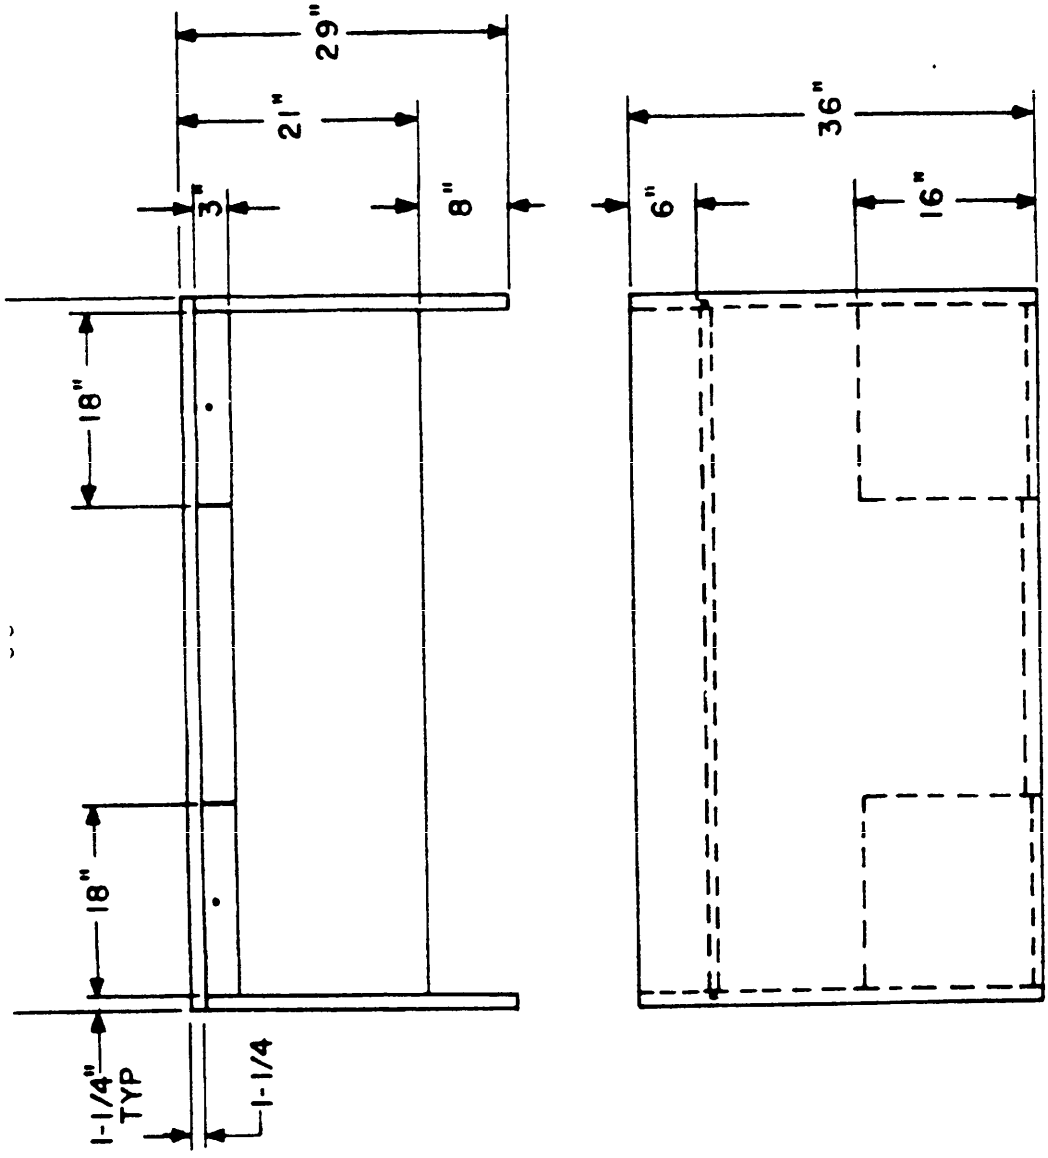


FIGURE 6
TYPE V
TABLE DESK
66 X 36 X 29

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

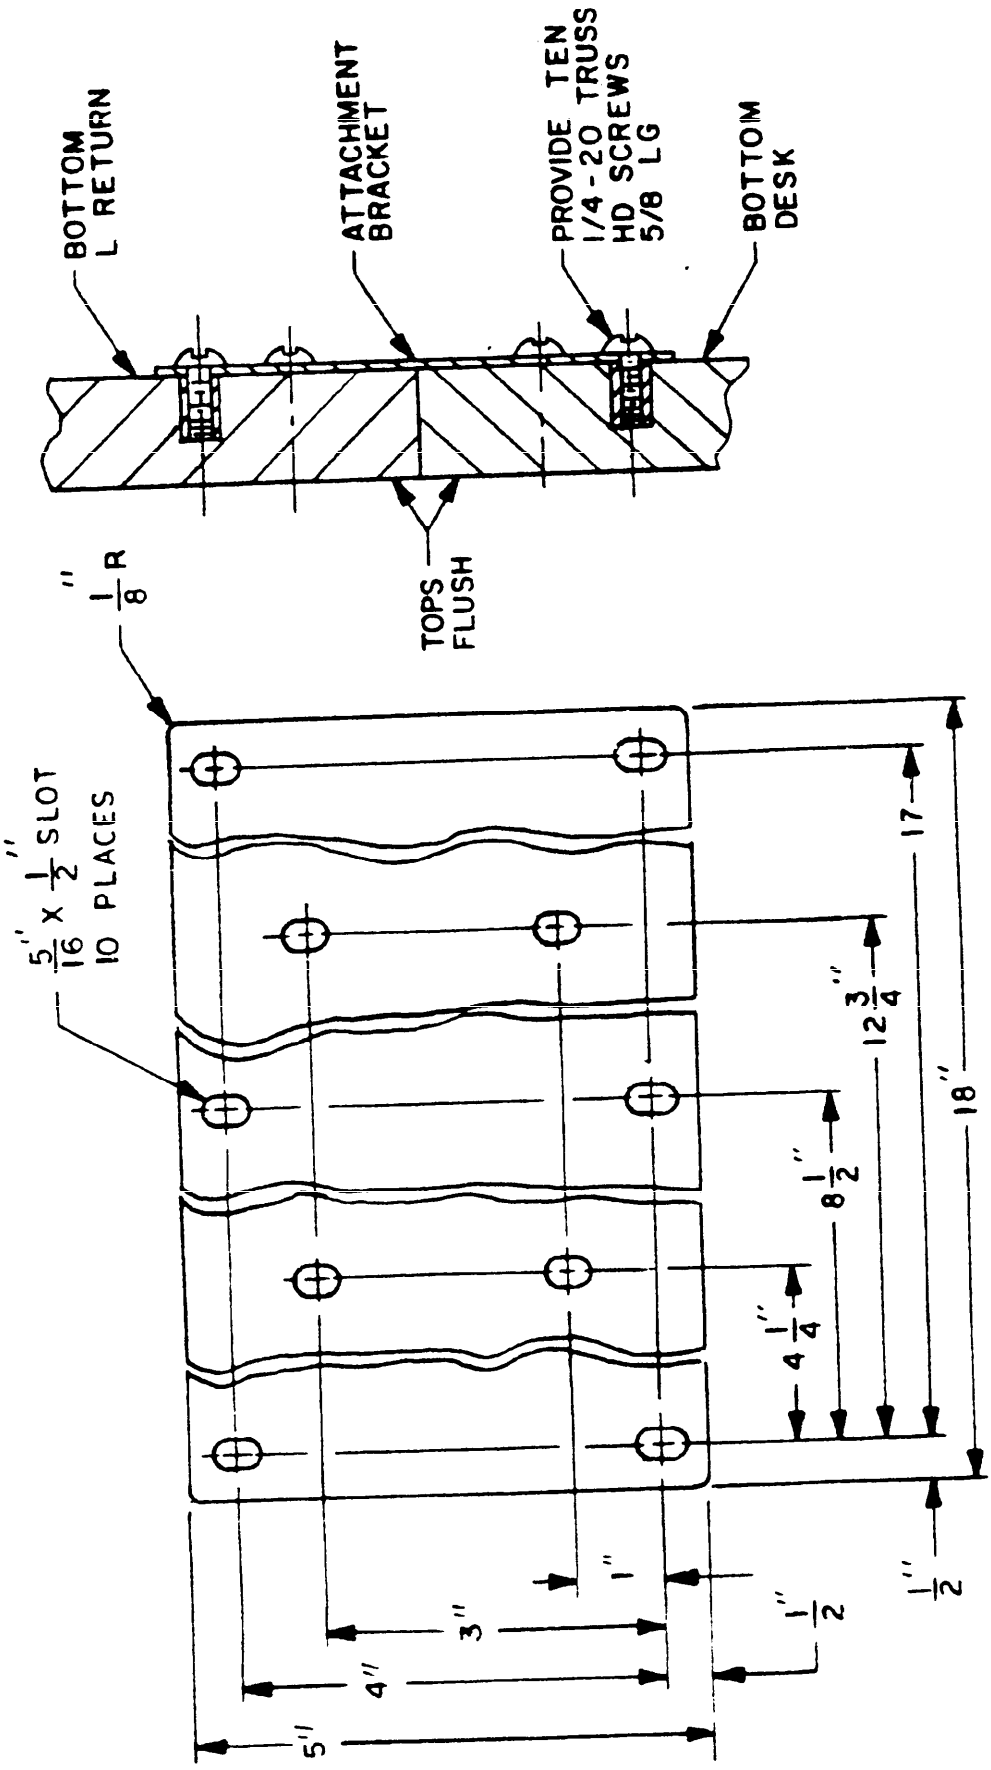


FIGURE 7
ATTACHMENT BRACKET TYPE III RETURN

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


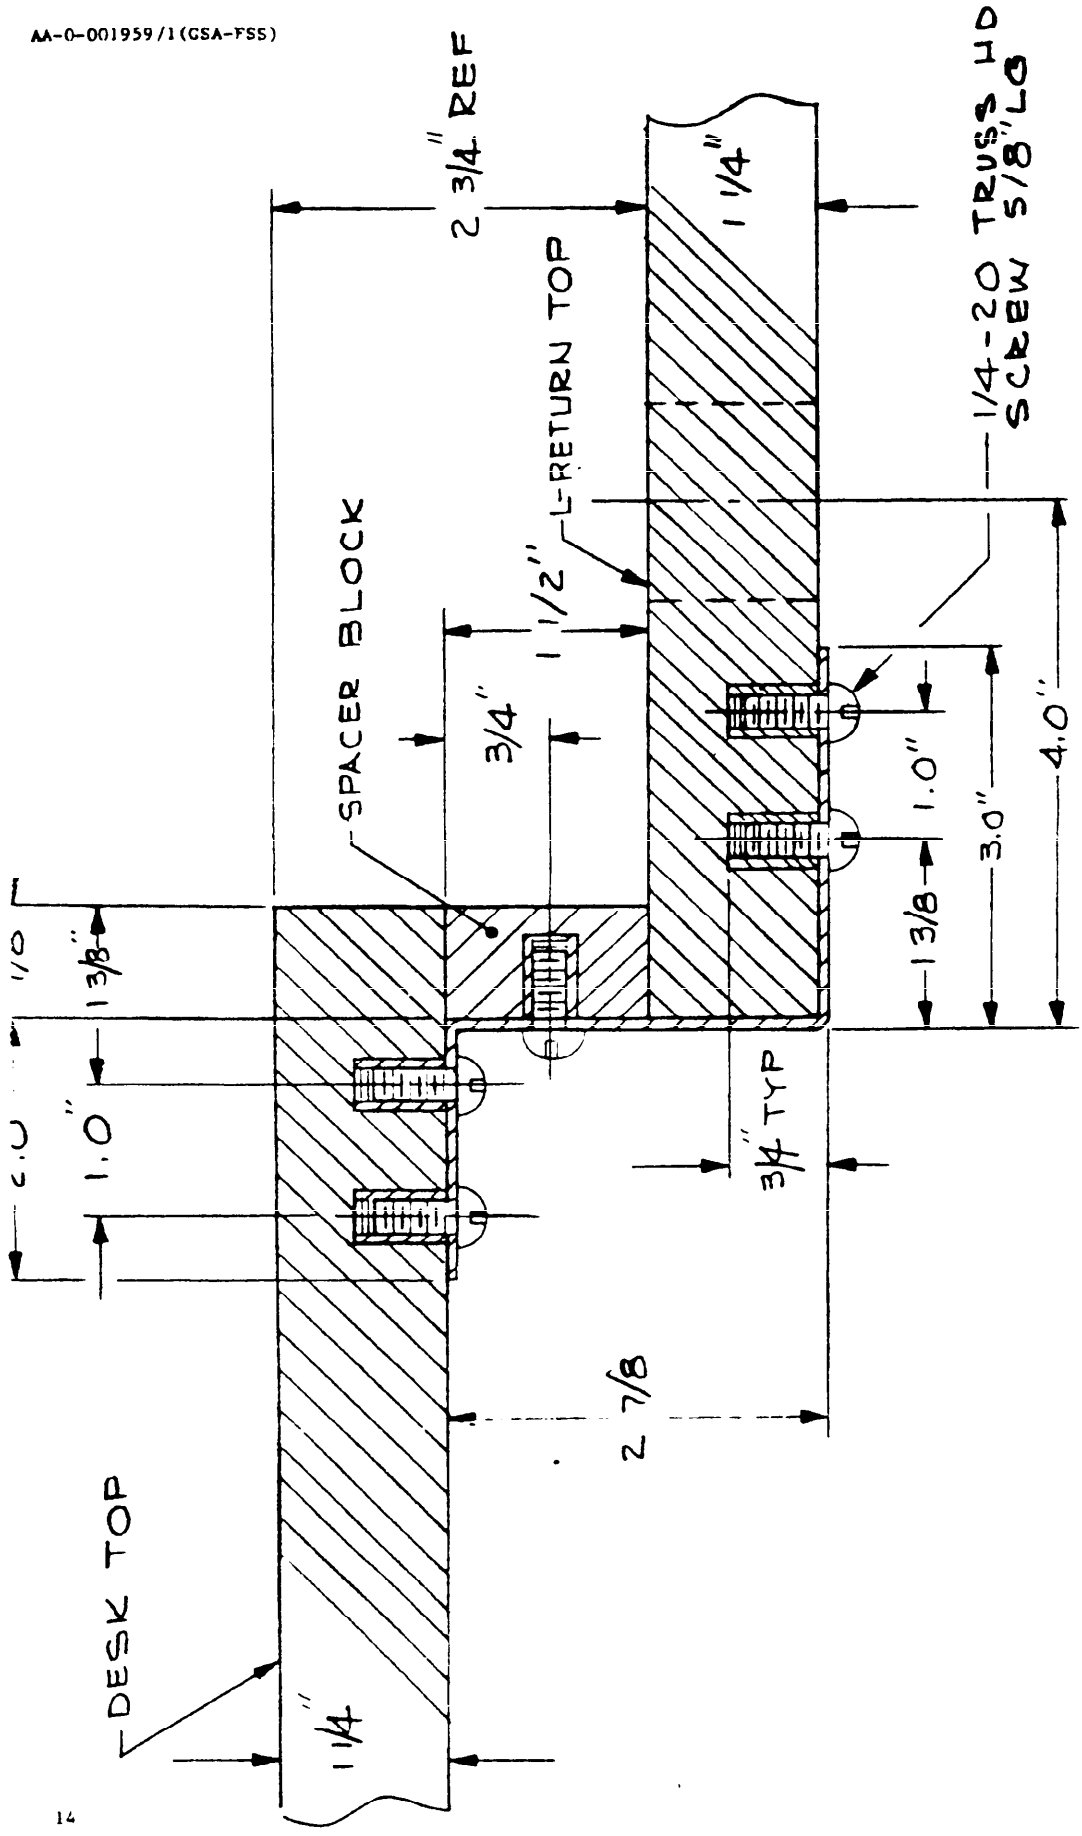


FIGURE 8
ATTACHMENT BRACKET TYPE III RETURN
DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

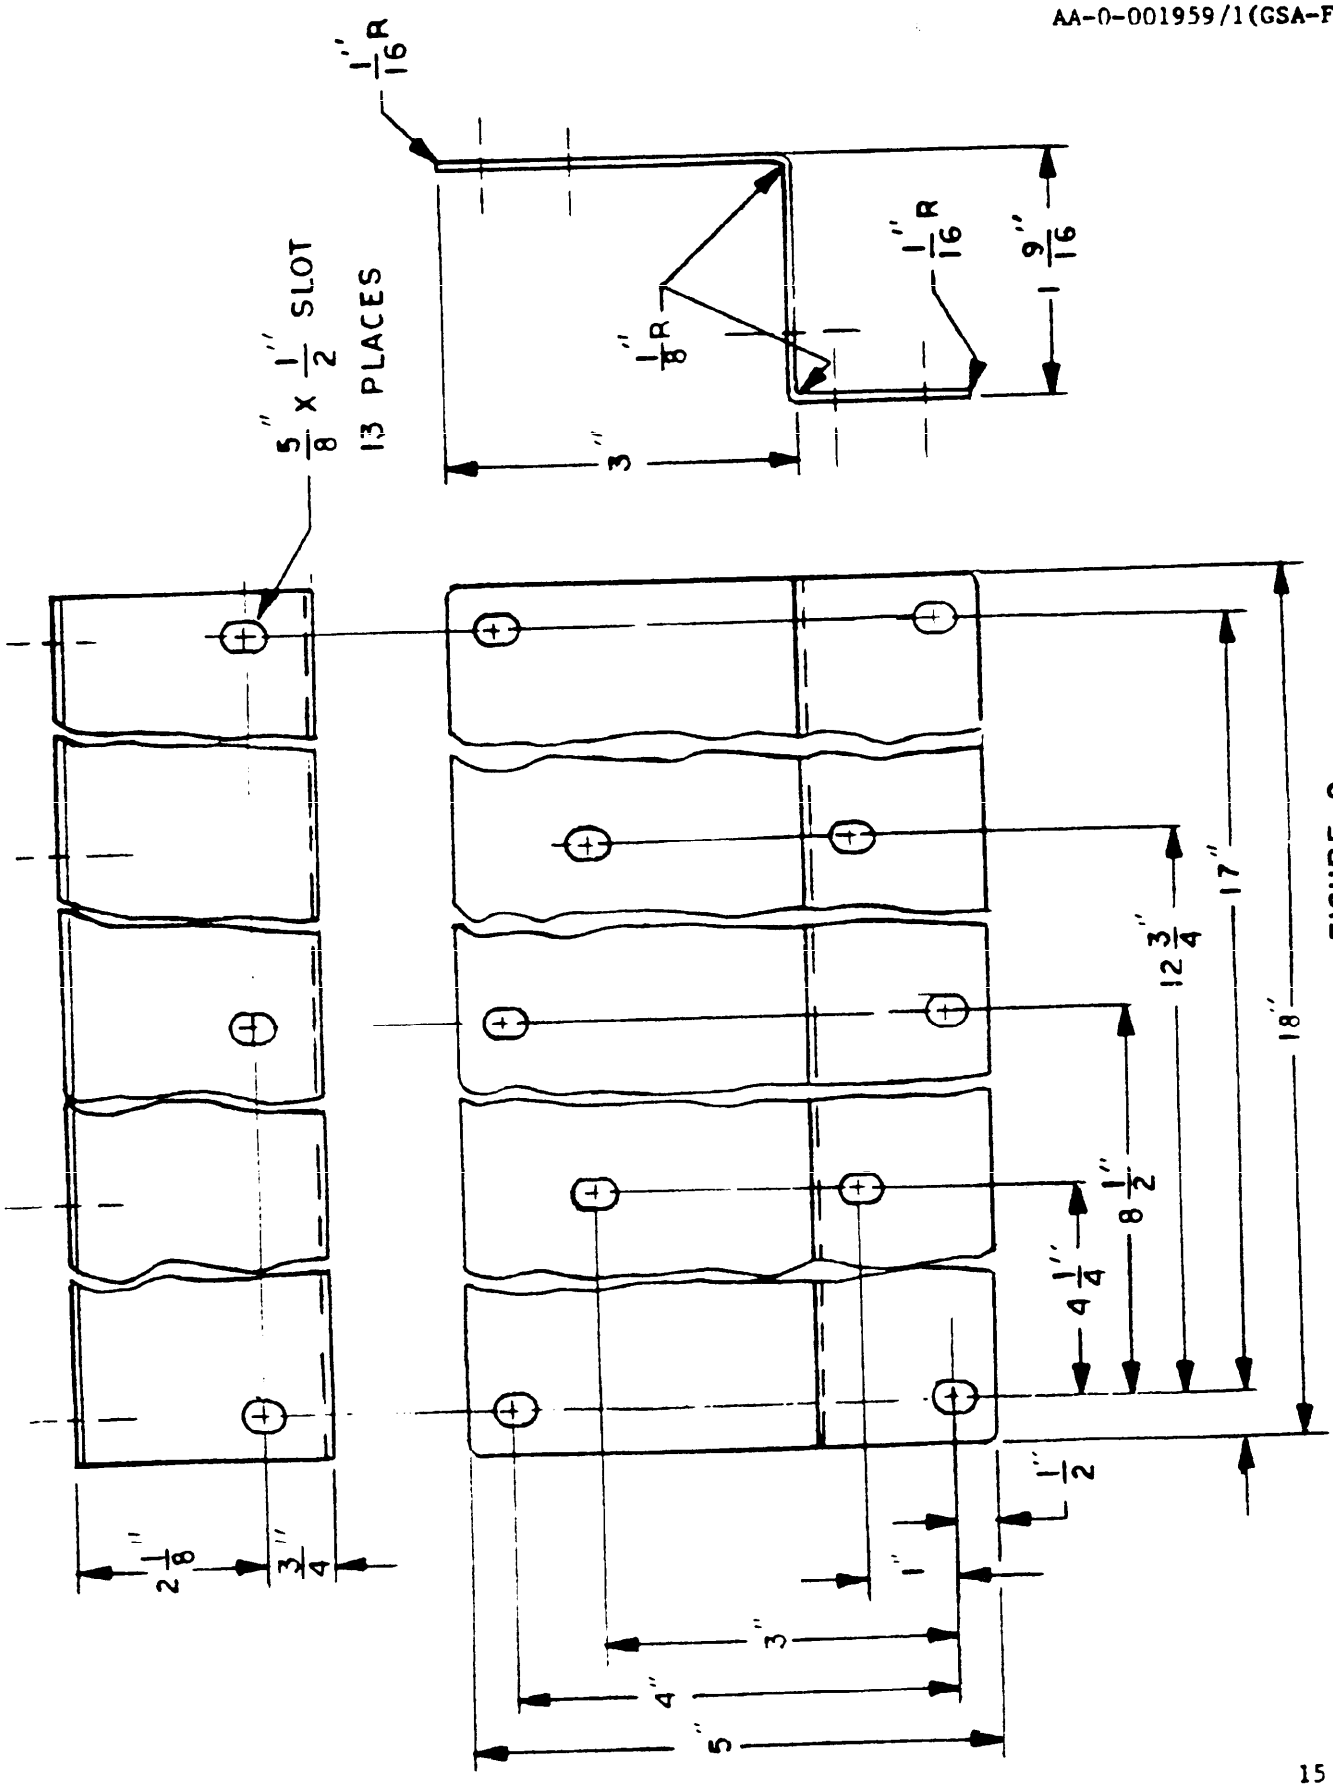

DWG NOT TO SCALE

FIGURE 9
ATTACHMENT BRACKET TYPE IV RETURN

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

INDEX OF PARAGRAPH NUMBERS AND TITLES
(General Specification - AA-O-001959)

1. SCOPE AND CLASSIFICATION

1.1 Scope
1.2 Classification

2. APPLICABLE DOCUMENTS

Federal Specifications
Military Standards
American Society for Testing and Materials (ASTM) Standards
U.S. Department of Commerce (CS) Publications
National Motor Freight Traffic Association
Uniform Classification Committee

3. REQUIREMENTS

3.1 Preproduction sample
3.2 Materials
3.2.1 Adhesives
TABLE I
3.2.2 Particleboard
3.2.3 Wood
3.2.3.1 Wood varieties and parts
TABLE II
3.2.3.2 Characteristics
3.2.3.3 Veneers
3.2.3.3.1 Species
3.3.3.3.2 Matching
3.2.3.4 Seasoning
3.2.3.5 Solid exterior parts
3.2.3.6 Solid interior parts
3.2.3.7 Hardwood plywood
3.2.4 Finishing materials
3.2.4.1 Stain
3.2.4.2 Filler, wood paste
3.2.4.3 Lacquer, spray, clear
3.2.4.4 Sealer
3.2.5 Hardware
3.2.5.1 Screws
3.2.5.2 Door catches
3.2.5.3 Hinges
3.2.5.4 Glides
3.2.5.5 Locks
3.2.5.6 Drawer suspensions
3.2.5.7 Attachment bracket
3.3 Construction
3.3.1 Design
3.3.2 Tolerances and dimensions
3.3.2.1 Tolerances
3.3.2.2 Dimensions
3.3.3 Gluing
3.3.4 Joining and assembly
3.3.5 Direction of grain
3.3.6 Top panel, end panels, and back panels
TABLE III
3.3.7 Drawer and door fronts
3.3.8 Drawers
3.3.9 Convenience tray
3.3.10 Reveal strips
3.3.11 Panel base trim
3.4 Methods of finishing
3.4.1 Procedure for clear wood finish on open pore wood
3.4.2 Appearance of finish
3.5 Identification marking
3.6 Workmanship
3.7 Conflict of text and drawings

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibilities

4.2 Lot acceptance test
4.3 Sampling for inspection and acceptance
4.4 Inspection (end item)
4.4.1 Visual examination
TABLE IV
4.4.2 Dimensional examination
4.4.3 Inspection levels and AQL's
4.4.4 Inspection for Preparation for delivery requirement
4.5 Tests
4.5.1 Test of finish system
4.5.1.1 Working properties
4.5.1.2 Spot test
4.5.1.3 Alcohol
4.5.1.4 Print resistant test
4.5.1.5 Cold check resistance
4.5.1.6 Boiling water
4.5.1.7 Ultra-violet light resistance
4.5.1.8 Toughness and adhesion
4.5.2 Test for adhesives
TABLE V

5. PREPARATION FOR DELIVERY

5.1 Packaging
5.1.1 Level C
5.2 Packing
5.2.1 Level C

6. NOTES

6.1 Intended use
6.2 Ordering data

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.