AA-O-001959/2(GSA-FSS)
December 8, 1977

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: CREDENZA, EXECUTIVE CONTEMPORARY FULL PANEL

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes the detailed requirements for executive, full panel credenzas. General requirements and other information pertaining to the credenzas will be found in Federal Specification AA-O-1959, Office Furniture, Executive, Contemporary Full Panel (General Specification). A complete index of the paragraph numbers and titles of the General Specification will be found on the last page of this document.

1.2 Classification

1.2.1 Type and sizes. Credenzas covered by this specification shall be of the following type, sizes and available inserts, as specified (see 6.2 herein).

Type I

Size 1 - Credenza, one section (telephone stand) (20 inches long by 20 inches deep by 29 inches high), excluding glides, (Fig. 1 herein).

Size 2 - Credenza, two sections (38-1/2 inches long by 20 inches deep by 29 inches high), excluding glides, (Fig. 2 herein).

Size 3 - Credenza, three sections (57-1/8 inches long by 20 inches deep by 29 inches high), excluding glides, (Fig. 3 herein).

Size 4 - Credenza, four sections (75-3/4 inches long by 20 inches deep by 29 inches high), excluding glides, (Fig. 4 herein).

INSERTS:

/A 3 storage drawers.
/B storage drawer and file drawer.
/C left opening door unit.
/D right opening door unit.

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards, of the issues in effect, on date of Invitation For Bid, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-1959, hereinafter called the General Specification.

2.2 Other publications. Other publications, which form a part of this specification, will be found in 2.2 of the General Specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with paragraph 3.1 of the General Specification.

3.2 Materials. The materials used in the construction of the credenzas shall be of the kind and quality specified in 3.2 of the General Specification. The paragraph numbers and titles for the various components referenced in the General Specification are listed on the last page of this document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3 Construction. The general construction requirements of the credenzas and their component parts shall be as specified in 3.3 of the General Specification. The paragraph numbers and titles for the various components as found in the General Specification are listed on the last page of this document.

3.3.1 Design. The design of the credenzas shall be as shown in Figures 1 through 5.

3.3.2 Case construction. The case shall be composed of two side panels, a rear panel, a top panel as specified in 3.3.6 of the General Specification, and a lower frame as specified in 3.3.2.1 herein. The case shall be assembled as indicated in Figure 5. The front openings shall be of sufficient width to allow the placement of the inserts. There shall be a reveal strip attached to the underside of the top as specified in 3.3.10 of the General Specification. The end panels shall have a base trim as specified in 3.3.11 of the General Specification. Provisions for glides shall be as specified in 3.2.5.4 of the General Specification.

3.3.2.1 Lower frame. There shall be a lower frame composed of full length front and back rails a minimum of 2-3/4 inches by 3/4 inches, 2 side rails, and intersection rails 3-1/2 inches wide where required. The lower frame shall be assembled and secured to the side panels and the back panel 8 inches from the bottom of the panels. There shall be a pilaster, 1-1/4 inch wide, let in and secured flush with the front of the front rail and secured to the underside of the top. The front rail shall be set in a sufficient distance to allow the drawer fronts and/or doors of the inserts to be flush with the top and side panels. The leading edge of the front rail shall be banded or veneered with the same species as the case. The pilaster or spacer block shall be solid of like species. Like species only, shall be visible when drawers and/or doors are in an open position. The joinery of the lower frame shall be as specified in 3.3.4 of the General Specification. The frame shall be secured to the end panels by a 1" x 1" cleat a minimum of minus two inches of the full length and shall be secured by a minimum of 3 screws in each direction. There shall be a 1" x 1" cleat a minimum of 10 inches long secured to the back panel and the back rail of the frame centered under each section. There shall be a minimum of 3 screws in each direction.

3.3.3 Drawer and door inserts. The drawer and/or door inserts shall be completely constructed integral units for placement in their assigned sections in the case. They shall consist of 1/2 inch panels on two sides, the top and bottom. The depth of the inserts shall be such that when the unit is installed in the appropriate section, the face of the drawer or door front when closed is flush with the front edges of the end panel and top. Each insert shall be 17-3/8 inches wide and constructed as specified in 3.3.4 of the General Specification. The door insert shall have a hinged door as specified in 3.2.5.3 and 3.3.7 of the General Specification. The door insert shall have one shelf constructed as specified in 3.2.2 and 3.2.3.7 of the General Specification and shall be 3/4 inch thick face veneered on two sides, self-edge veneered or banded on four sides. Provisions shall be made to enable the shelf to be adjustable up or down to any of three one inch spaced vertical positions from the center of the insert. The shelf shall be supported by four shelf support pins. The drawers when fully opened shall provide easy access to material in the rear of the drawer. File hanger bars shall be furnished in file drawers and the drawers shall be slotted for their accommodation. The leading edges of the insert panels shall be banded, or edge veneered with like species as the case. All drawer fronts shall be banded or self-edged on four sides as specified in 3.3.7 of the General Specification. Drawer suspensions shall be as specified in 3.2.5.6 of the General Specification. Locks when used shall be as specified in 3.2.5.5 of the General Specification. The interior of the door inserts shall be finished to match the exterior surface.

3.3.4 Credenza assembly. There shall be an insert as specified (see 6.2 herein), installed in each section of the credenzas. The insert, which shall be a left or right door unit, only, when installed in the Size 1 credenza, shall be secured to the side panels and top with a minimum of four countersunk screws in each and by a minimum of two countersunk screws into the front and rear rails. When the two inserts are installed in the Size 2 credenza, the left insert shall be secured by a minimum of four countersunk screws in the side panel and top, a minimum of two countersunk screws in the front, back rail, and the pilaster. The right insert shall be installed identically in reverse. When the three inserts are installed in the Size 3 credenza, the two outer inserts shall be secured in the same manner as the inserts in the Size 2 credenza. The center insert shall be secured by a minimum of four countersunk screws in the top and a minimum of two countersunk screws in the front rail, rear rail, and each pilaster. The inserts when installed in the Size 4 credenza shall be secured in the same manner as the Size 3. Countersunk Philip's head screws shall be used to secure the inserts to the pilasters and the front rails, all others at the manufacturer's option.

3.4 Finishing. The methods of finishing all components shall be as specified in 3.4 of the General Specification.

3.5 Identification marking. Identification marking shall be as specified in 3.5 of the General Specification.

3.6 Workmanship. Workmanship shall conform to 3.6 of the General Specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance requirements. The requirements of Section 4 of the General Specification and as specified herein shall apply.

4.2 Visual examination. Examination of the credenzas shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table IV of the General Specification and for specific requirements in Table I herein. The lot size shall be expressed in units of credenzas for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for examination shall be one complete credenza.

TABLE I. - Classification of Defects

Examine	Defects	Classification Major	Classification Minor
Drawer dimensions	Not proper depth or width to provide maximum filing space and efficient operation.	X	
	File hanger bars not provided.	X	
Drawer and door inserts	Not constructed as specified in paragraph 3.3.3 herein.	X	
	Will not accommodate specified number and/or size drawers.	X	
	Not 17-3/8 inches wide.	X	
	Shelf not adjustable as specified.		X
	Shelf not provided for door section.	X	
	Shelf not held in place at four points of contact.		X
Case construction	Case partition not secured to bottom panel.	X	
	Rear and bottom panel not tenoned and glued into side panels.	X	
	Stretchers not tenoned and glued into the side panels.	X	
	Suspensions not as specified.	X	
Credenza assembly	Not size specified.	X	
	No reveal strip or not as specified.		X
	No base trim or not as specified.		X
	Back panel not tenoned and glued to end panels.	X	
	Back panel and case or individual section not of same height.	X	
	Top not flush with end panel, back panel, door front and drawer fronts.		X
	When individual section construction is utilized no spacer between sections.	X	
	Spacer does not provide access to finger grip pull.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. - Classification of Defects (con.)

Examine	Defects	Classification Major	Classification Minor
Credenza assembly (con.)	Sections or case not properly secured to credenza shell.	X	
	Drawer not as specified.	X	
	Drawers & doors do not operate smoothly and without interference.	X	
	Door or catch not as specified.	X	
	Doors not properly hinged.	X	
	Does not have proper number of sections for specified size.	X	
	Options specified not available to ordering agency.	X	
Finish	Not as specified.	X	

4.3 Dimensional examination. Inspection shall be made of the credenzas for compliance with dimensions specified. Any dimension not within tolerance specified shall be classified as a defect.

4.4 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection Levels	AQL's
For examination in Table I	I	4.0
For examination in Table I	I	10.0
For examination in 4.3	I	4.0

4.5 Inspection for preparation for delivery requirements.

4.6 Tests. All tests specified in the General Specification shall apply.

5. PREPARATION FOR DELIVERY

(Packaging and packing shall meet the requirements as specified in the General Specification).

6. NOTES

6.1 Intended use. The credenzas are intended to be used in executive offices as a companion item with other executive office furniture items covered under the General Specification.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, name and date of this specification.
(b) Type and size of unit (see 1.2.1 herein).
(c) Installation of locks when required.
(d) Level of packaging and packing.
(e) Marking requirements.
(f) Arrangement and types of inserts (see 1.2.1 herein).

For example, when exercising the options available, indicate the number of the section first, then the letter of the insert. Sections are numbered from left to right.

SIZE 4 CREDENZA - 1/A, 2/C, 3/D, 4/B (see Figure 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

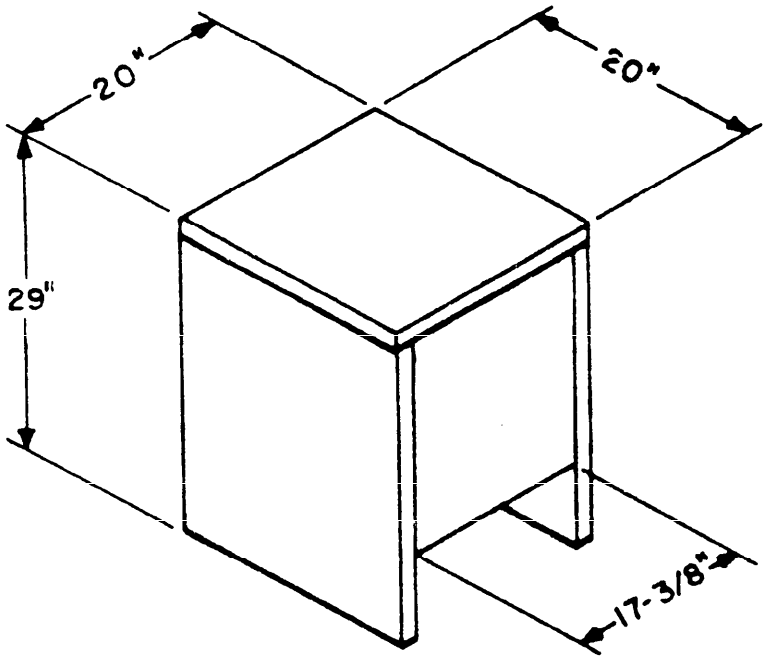


FIGURE 1
TYPE 1
SIZE 1
W/INSERT D
RIGHT OPENING DOOR DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

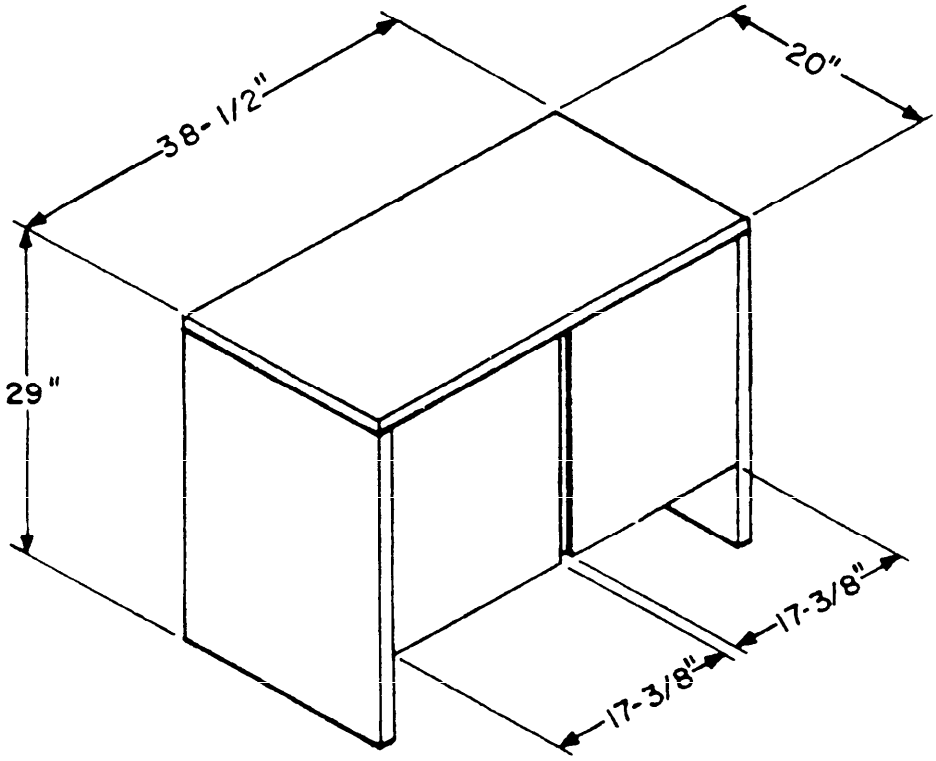


FIGURE 2
TYPE I
SIZE 2
W/ SECTIONS & INSERTS
1/C LEFT OPENING DOOR
2/D RIGHT OPENING DOOR

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

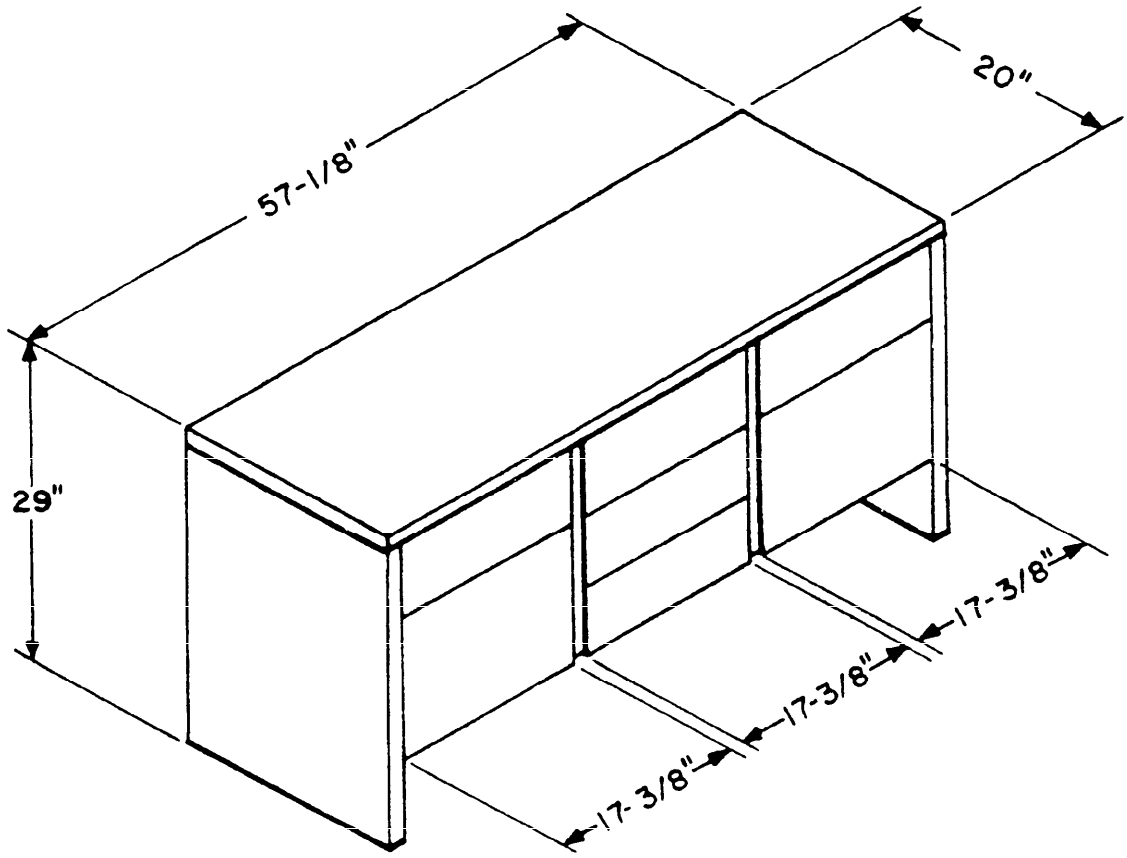


FIGURE 3
TYPE I
SIZE 3
W/ SECTIONS & INSERTS
1/B STORAGE & FILE DRAWER
2/A 3 STORAGE DRAWER
3/B STORAGE & FILE DRAWER

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

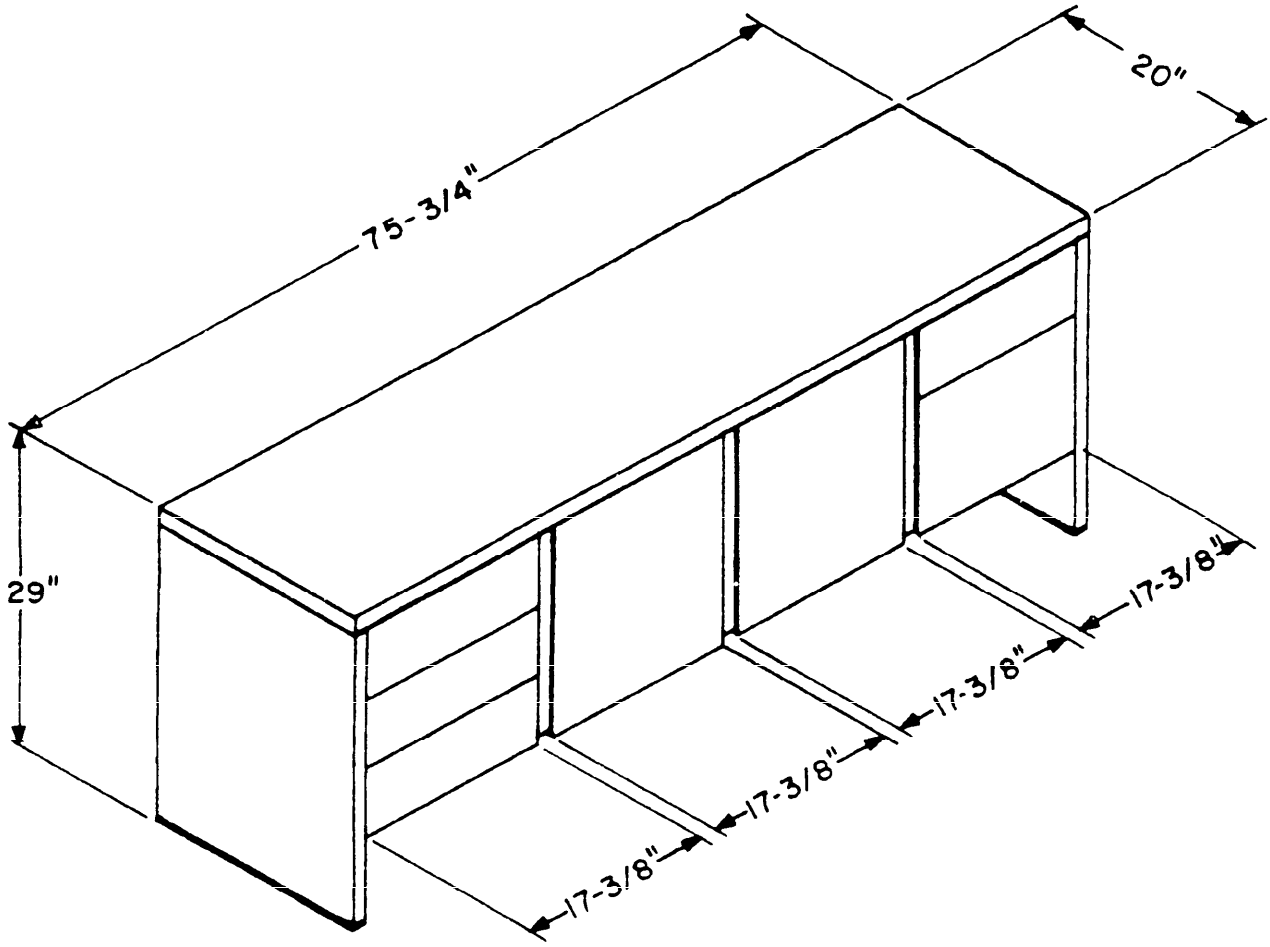


FIGURE 4
TYPE I
SIZE 4
W/ SECTIONS & INSERTS:
1/A 3 STORAGE DRAWERS
2/C LEFT OPENING DOOR
3/D RIGHT OPENING DOOR
4/B STORAGE & FILE DRAWER

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

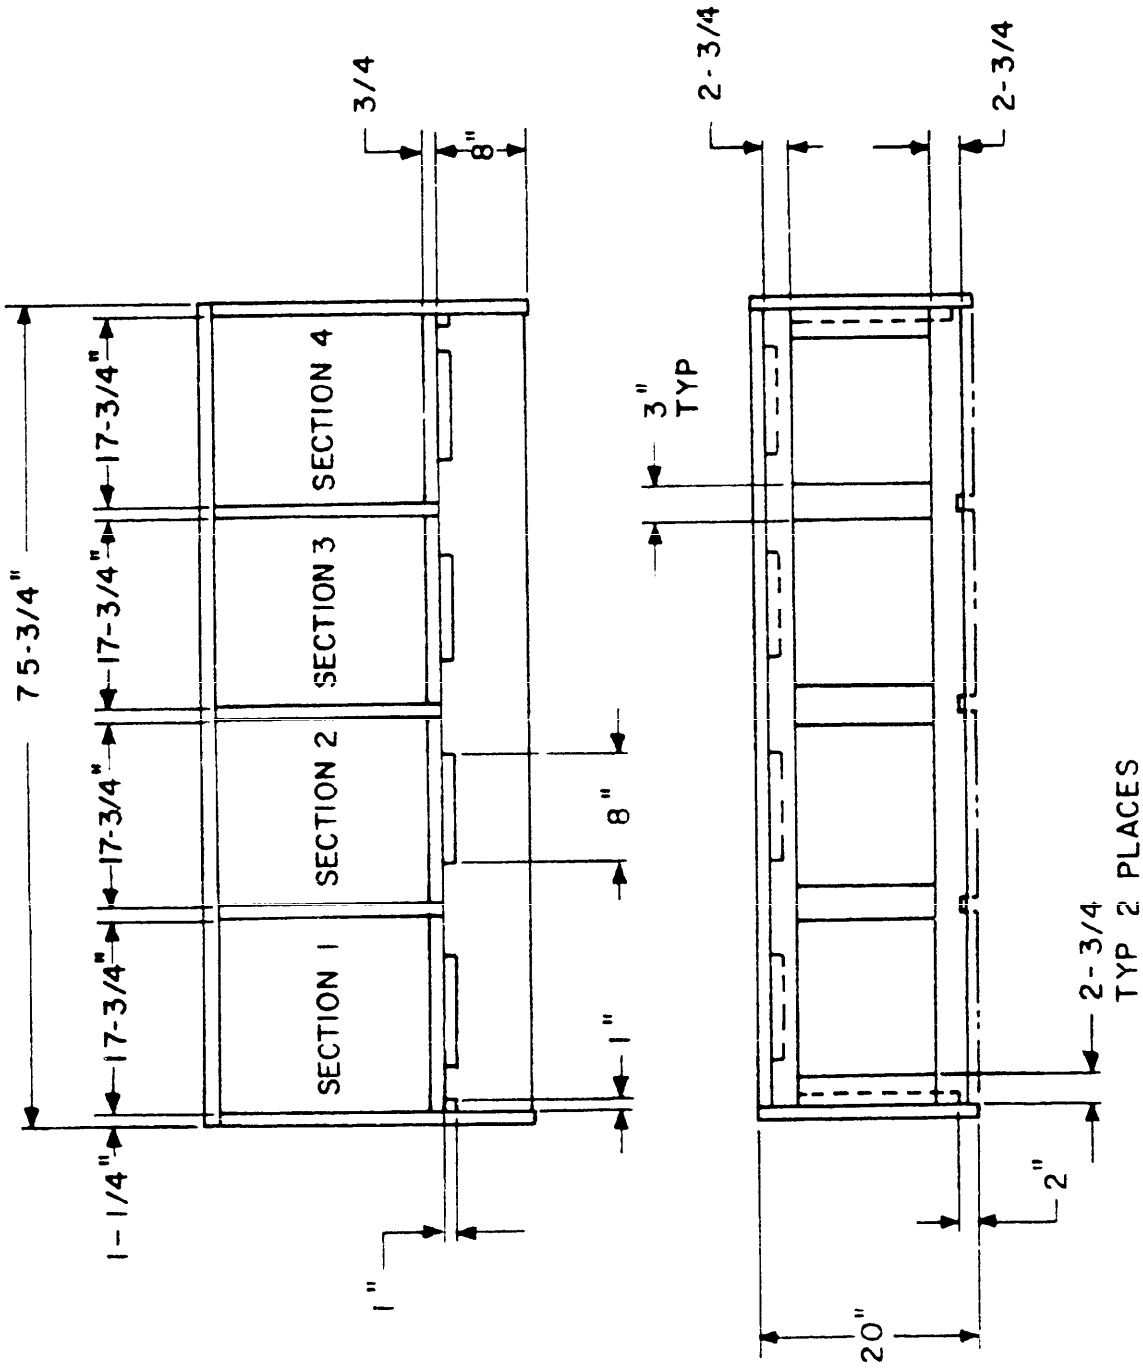


FIGURE 5
TYPE I
SIZE 4
LOWER FRAME ASSEMBLY DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

INDEX OF PARAGRAPH NUMBERS AND TITLES
(General Specification - AA-0-001959)

1. SCOPE AND CLASSIFICATION

1.1 Scope
1.2 Classification

2. APPLICABLE DOCUMENTS

Federal Specifications
Military Standards
American Society for Testing and Materials (ASTM) Standards
U.S. Department of Commerce (CS) Publications
National Motor Freight Traffic Association Uniform Classification Committee

3. REQUIREMENTS

3.1 Preproduction sample
3.2 Materials
3.2.1 Adhesives
TABLE I
3.2.2 Particleboard
3.2.3 Wood
3.2.3.1 Wood varieties and parts
TABLE II
3.2.3.2 Characteristics
3.2.3.3 Veneers
3.2.3.3.1 Species
3.3.3.3.2 Matching
3.2.3.4 Seasoning
3.2.3.5 Solid exterior parts
3.2.3.6 Solid interior parts
3.2.3.7 Hardwood plywood
3.2.4 Finishing materials
3.2.4.1 Stain
3.2.4.2 Filler, wood paste
3.2.4.3 Lacquer, spray, clear
3.2.4.4 Sealer
3.2.5 Hardware
3.2.5.1 Screws
3.2.5.2 Door catches
3.2.5.3 Hinges
3.2.5.4 Glides
3.2.5.5 Locks
3.2.5.6 Drawer suspensions
3.2.5.7 Attachment bracket
3.3 Construction
3.3.1 Design
3.3.2 Tolerances and dimensions
3.3.2.1 Tolerances
3.3.2.2 Dimensions
3.3.3 Gluing
3.3.4 Joining and assembly
3.3.5 Direction of grain
3.3.6 Top panel, end panels, and back panels
TABLE III
3.3.7 Drawer and door fronts
3.3.8 Drawers
3.3.9 Convenience tray
3.3.10 Reveal strips
3.3.11 Panel base trim
3.4 Methods of finishing
3.4.1 Procedure for clear wood finish on open pore wood
3.4.2 Appearance of finish
3.5 Identification marking
3.6 Workmanship
3.7 Conflict of text and drawings

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibilities

4.2 Lot acceptance test
4.3 Sampling for inspection and acceptance
4.4 Inspection (end item)
4.4.1 Visual examination
TABLE IV
4.4.2 Dimensional examination
4.4.3 Inspection levels and AQL's
4.4.4 Inspection for Preparation for delivery requirement
4.5 Tests
4.5.1 Test of finish system
4.5.1.1 Working properties
4.5.1.2 Spot test
4.5.1.3 Alcohol
4.5.1.4 Print resistant test
4.5.1.5 Cold check resistance
4.5.1.6 Boiling water
4.5.1.7 Ultra-violet light resistance
4.5.1.8 Toughness and adhesion
4.5.2 Test for adhesives
TABLE V

5. PREPARATION FOR DELIVERY

5.1 Packaging
5.1.1 Level C
5.2 Packing
5.2.1 Level C

6. NOTES
6.1 Intended use
6.2 Ordering data

GSA FPS 78-1764

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.