INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE: TABLES, CONFERENCE AND OCCASIONAL, EXECUTIVE, CONTEMPORARY FULL PANEL

(DETAILED SPECIFICATION)

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes the detailed requirements for executive, contemporary full panel office tables, conference and occasional. General requirements and other information pertaining to the tables will be found in Federal Specification AA-O-1959, Office Furniture, Executive, Contemporary full Panel (General Specification). A complete index of the paragraph numbers and titles of the General Specification will be found on the last page of this document.

1.2 Classification.

1.2.1 Types and sizes. Tables covered by this specification shall be of the following types and sizes as specified (see 6.2 herein).

Type I - (Heights as indicated, excluding glides).

Size 1 - Conference table, (60 inches long by 30 inches deep by 29 inches high). (Figure 1).

Size 2 - Conference table, (66 inches long by 36 inches deep by 29 inches high). (Figure 1).

Size 3 - Conference table, (72 inches long by 36 inches deep by 29 inches high). (Figure 1).

Size 4 - Conference table, (84 inches long by 42 inches deep by 29 inches high). (Figure 1).

Size 5 - Conference table, (96 inches long by 48 inches deep by 29 inches high). (Figure 1).

Type II - (Heights as indicated, excluding glides).

Size 1 - End table, rectangular, (22 inches by 28 inches by 20 inches high). (Figure 2).

Size 2 - Lamp table, square, (26 inches by 26 inches by 20 inches high). (Figure 3).

Type III - (Heights as indicated excluding glides).

Size 1 - Coffee table, rectangular, (54 inches by 22 inches by 17 inches high). (Figure 4).

Size 2 - Coffee table, square, (30 inches by 30 inches by 17 inches high). (Figure 5).

Type IV - (Height as indicated, excluding glides).

Console table, (54 inches by 22 inches by 29 inches high). (Figure 6).

NOTE: The Console table may be utilized as a free-standing work table to add additional surface work space in lieu of a desk attachment with the Type II desk and may also be used centered at right angles to the Type I desk for a conference type arrangement. The table may also be utilized as a backing unit for any arrangement of desks and/or desks and desk attachments for additional surface work space.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The specifications and standards, of the issues in effect, on date of Invitation For Bid, which form a part of this specification, will be found in 2.1 of Federal Specification AA-O-1959, hereinafter called the General Specification.

2.2 Other publications. Other publications, which form a part of this specification, will be found in 2.2 of the General Specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with paragraph 3.1 of the General Specification.

3.2 Materials. The materials used in the construction of the tables shall be of the kind and quality specified in 3.2 of the General Specification. The paragraph numbers and titles for the various components referenced in the General Specification are listed on the last page of this document.

3.3 Construction. The general construction requirements of the tables and their component parts shall be as specified in 3.3 of the General Specification. The paragraph numbers and titles for the various components as found in the General Specification are listed on the last page of this document.

3.3.1 Design. The design and dimensions of the tables shall be as shown in paragraph 1.2.1 and Figures 1 through 6.

3.3.2 Type I conference table construction. The Type I conference tables shall be composed of two end panels, a top panel, and two support aprons as specified in 3.3.6 and Table III of the General Specification. The joinery shall be as specified in 3.3.4 of the General Specification and the direction of the grain as specified in 3.3.5 of the General Specification. The tables will be assembled as indicated in Figure 1. There shall be two, 6 inch by 1-1/4 inch by the full width support aprons tenoned into the end panels. The top shall be secured to the end panels and the support aprons as indicated in Table I. The aprons shall be set in from the outer edge a maximum of 6 inches and shall be secured to the top by 1" x 1" cleats with screws into the aprons and into the top, the sizes of the cleats and their position shall be as shown in Table I. The support aprons shall be face veneered (two sides) of like species as the top and shall be self-edged veneered or banded with 1/4 inch solid wood on the bottom surface. There shall be a reveal strip attached to the underside of the top as specified in 3.3.10 of the General Specification. The end panels shall have a base trim as specified in 3.3.11 of the General Specification. Each end panel shall have glides installed as specified in 3.2.5.4 of the General Specification.

TABLE I - Sizes and Positions of Cleats For Conference Tables

Size	1" x 1" x 10"	1" x 1" x 5-1/2"	Full length minus 3"
1	four on inside surface of each apron (evenly spaced).	Two on each corner (inside and outside).	Top two end panels between aprons.
2	(Same as above).	(Same as above).	(Same as above).
3	(Same as above).	(Same as above).	Sames as above, except as an alternate, two 10" cleats may be used.
4	Five on inside surface of each apron (evenly spaced).	(Same as above).	Same as Size 3.
5.	Six on inside surface of each apron (evenly spaced).	(Same as above).	Same as Size 4, except as an alternate, three 10" cleats may be used.

NOTE: The 10 inch cleats will have a minimum of 3 screws into the support apron and into the top. The 5-1/2 inch cleats will have a minimum of 2 screws into the support panel and end panel. The full length (minus 3 inch) cleats shall be secured to the end panel and the top with screws spaced a maximum of 3 inches apart. If the alternate method is used, there shall be 3 screws in each direction into the end panel and top for each 10 inch cleat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.3 Type II, Size 1 end table and Size 2 lamp table. The Type II tables shall be composed of two end panels, a top panel, and two support aprons as specified in 3.3.6 and Table III (same as desk panels) of the General Specification. The tables will be assembled as indicated in Figures 2 and 3. The joinery shall be as specified in 3.3.4 of the General Specification, the direction of the grain on the top shall be from end panel to end panel and as specified in 3.3.5 of the General Specification. The two 4 inch by 1-1/4 inch by the full width support aprons shall be tenoned into the end panels. The aprons shall be set in from the outer edge of the front and rear of the tables a maximum of six inches and shall be secured to the top by 1" x 1" cleats. There shall be four 1" x 1" x 8" cleats with a minimum of 3 screws in each direction, one on the inside of each apron into the apron and into the top and one on each side into the end panel and into the top. There shall be a minimum of 3-1/2 inch long 1" x 1" cleat attached to the inside of the apron and into the end panel by a minimum of 2 screws in each direction, and in each corner. The aprons shall be face veneered, both sides, of like species as the top and shall be self-edged veneered or banded with 1/4 inch solid wood on the bottom edge. There shall be a reveal strip attached to the underside of the top as specified in 3.3.10 of the General Specification. The end panels shall have a base trim as specified in 3.3.11 of the General Specification. Each end panel shall have glides installed as specified in 3.2.5.4 of the General Specification.

3.3.4 Type III, Size 1 coffee table and Size 2 coffee table (corner). The Type III tables shall be constructed in an identical manner as the Type II end and lamp tables and as indicated in Figures 4 and 5, with the exception of the size and number of the cleats used to secure the support aprons to the top. In the Size 1 table there shall be three 1" x 1" x 10" cleats, evenly spaced, on the inside surface of the support apron with a minimum of 3 screws into the apron and 3 screws into the top. There shall be a full length (minus 3 inches) 1" x 1" cleat into each end panel and into the top with a minimum of 2 screws in each direction. The tables shall be cleated in the corners as in the Type II tables. The Size 2 coffee table shall have two 1" x 1" cleats, evenly spaced, with a minimum of 3 screws into the inside surface of each apron and into the top. There shall be a 1" x 1" x 10" cleat with a minimum of 3 screws into each end panel and the top. The table shall be cleated in the corners as in the Type III tables. There shall be a reveal strip attached to the underside of the top as specified in 3.3.10 of the General Specification. The end panels shall have a base trim as specified in 3.3.11 of the General Specification. Each end panel shall have glides installed as specified in 3.2.5.4 of the General Specification.

3.3.5 Type IV, console table. The Type IV console table shall be constructed in an identical manner to the Type III, Size 1 coffee table. The exception being that the height of the table (excluding glides) shall be 29 inches. (see Figure 6).

3.4 Finishing. The methods of finishing all components shall be as specified in 3.4 of the General Specification.

3.5 Identification marking. Identification marking shall be as specified in 3.5 of the General Specification.

3.6 Workmanship. Workmanship shall conform to 3.6 of the General Specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance requirements. The requirements of Section 4 of AA-O-1959 and as specified herein shall apply.

4.2 Visual examination. Examination of the tables shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table IV of AA-O-1959 and for specific requirements in Table I herein. The lot size shall be expressed in units of tables for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for examination shall be one table.

TABLE II - Classification of Defects

Examine	Defects	Classification Major	Minor
Table construction	Overall dimensions incorrect	X	
	Panel Thicknesses incorrect.	X	
	Joinery not as specified.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

TABLE II - Classification of Defects (con.)

Examine	Defects	Classification Major	Minor
Table construction (con.)	Joints not properly glued.		X
	Panels not self-edged or banded as specified.		X
	Support apron not faced on both sides as specified.		X
	Support aprons not self-edged or banded on bottom.		X
	Support aprons not size as specified.		X
	Cleats spaced improperly.		X
	Insufficient number of cleats.		X
	Cleats omitted.	X	
	Cleats wrong size.		X
	Insufficient screws in cleats.		X
	Reveal strip omitted or not as specified.	X	
	Base trim omitted or not as specified.	X	
Finish	Finish not as specified.	X	

4.3 Dimensional examination. Inspection shall be made of the tables for compliance with dimensions specified. Any dimension not within tolerance specified shall be classified as a defect.

4.4 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection Levels	AQL's
For examination in Table II	I	4.0
For examination in Table II	I	10.0
For examination in 4.3	I	4.0

4.5 Inspection for preparation for delivery requirements.

4.6 Tests. All tests specified in the General Specification shall apply.

5. PREPARATION FOR DELIVERY

(Packaging and packing shall meet the requirements as specified in the General Specification).

6. NOTES

6.1 Intended use. The tables are intended to be used in executive offices as a companion item with other executive office furniture items covered under the General Specification.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, name, and date of this specification.
(b) Type and size of unit (see 1.2.1 herein).
(c) Level of packaging and packing.
(d) Marking requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

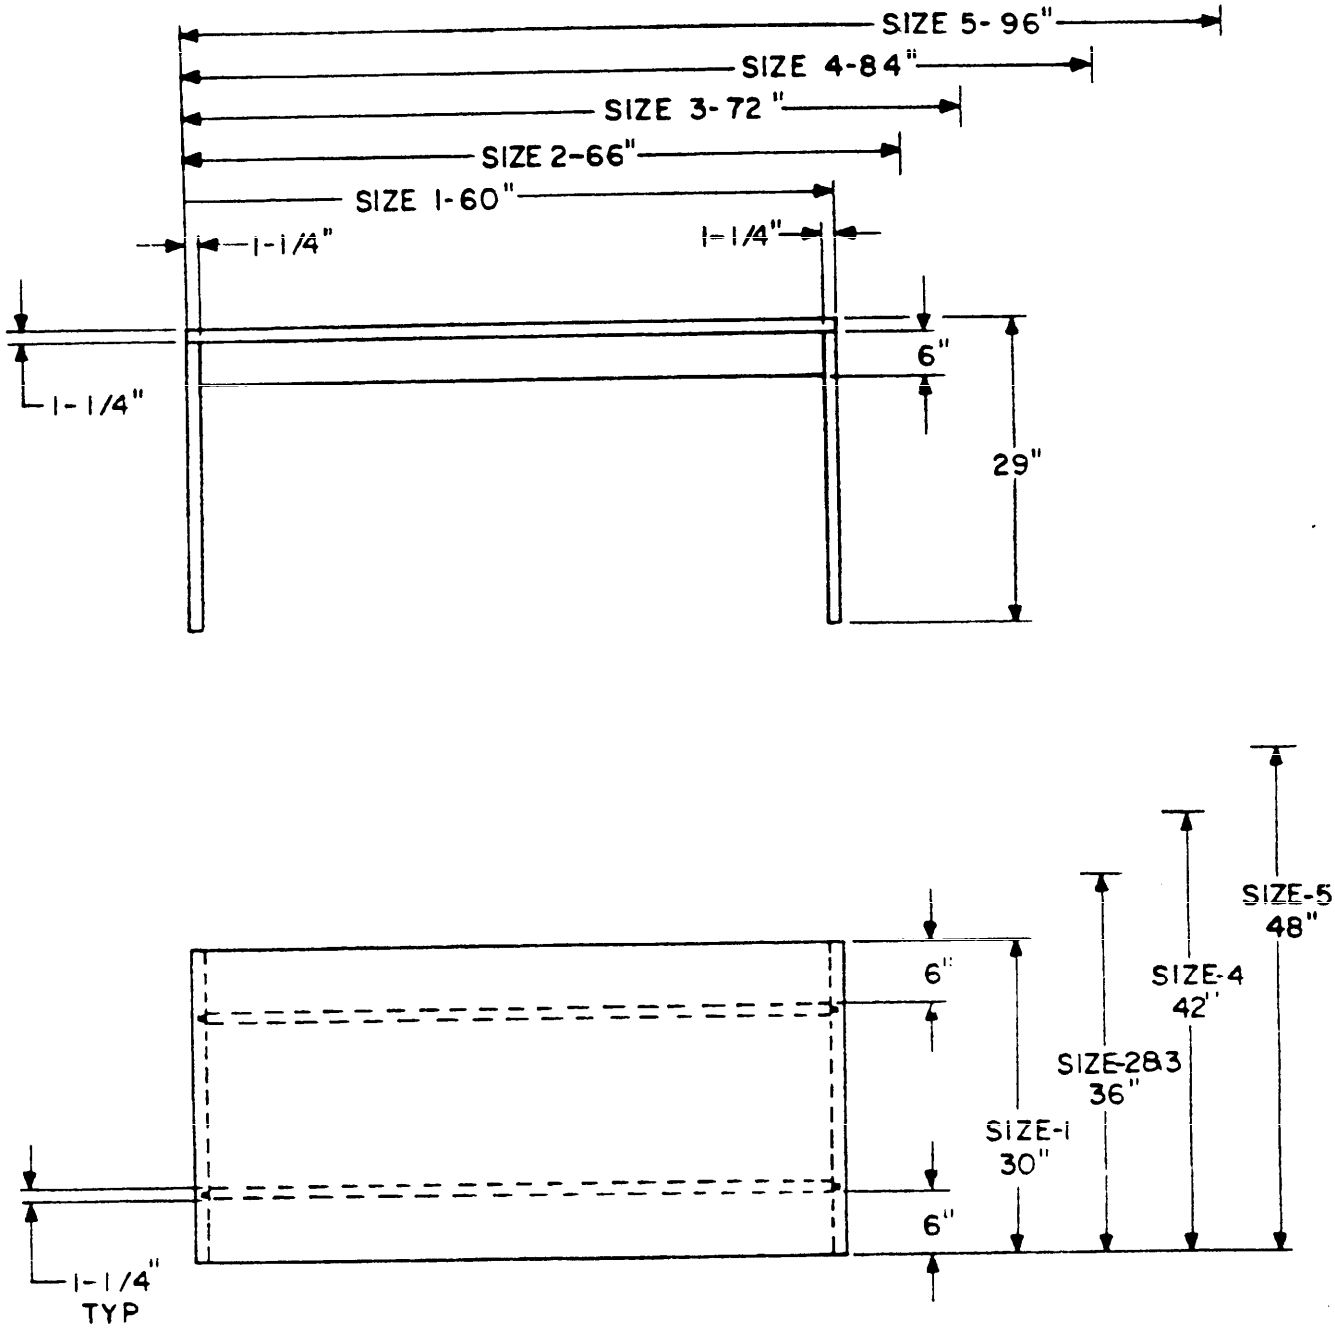


FIGURE 1
TYPE I
CONFERENCE TABLES

SIZES:

SIZE 1 - 60" X 30" X 29"
SIZE 2 - 66" X 36" X 29"
SIZE 3 - 72" X 36" X 29"
SIZE 4 - 84" X 42" X 29"
SIZE 5 - 96" X 48" X 29"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

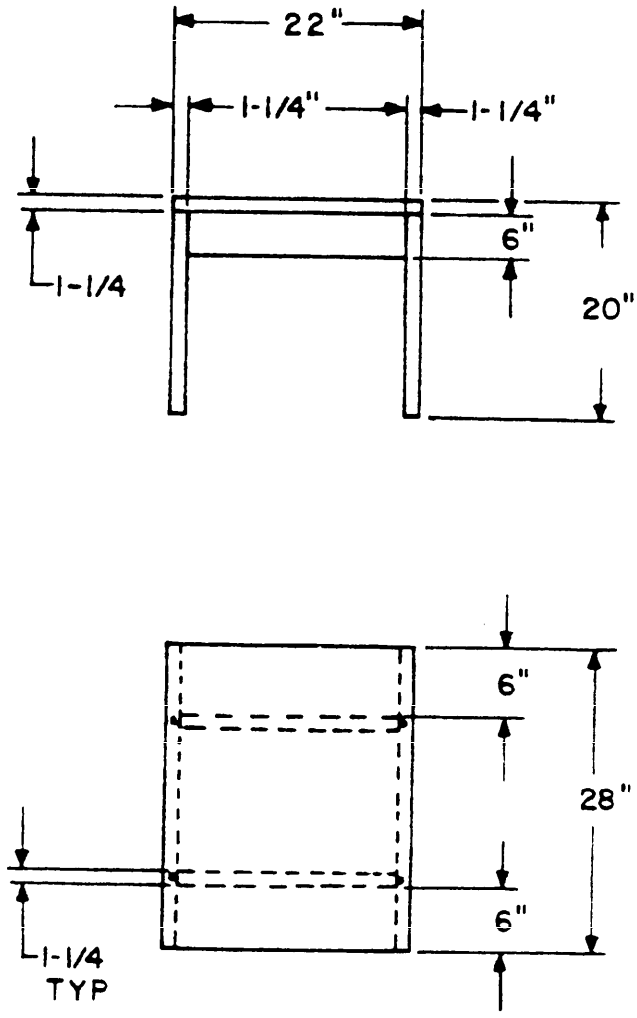


FIGURE 2
TYPE II SIZE I
END TABLE
22"X28"X20"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

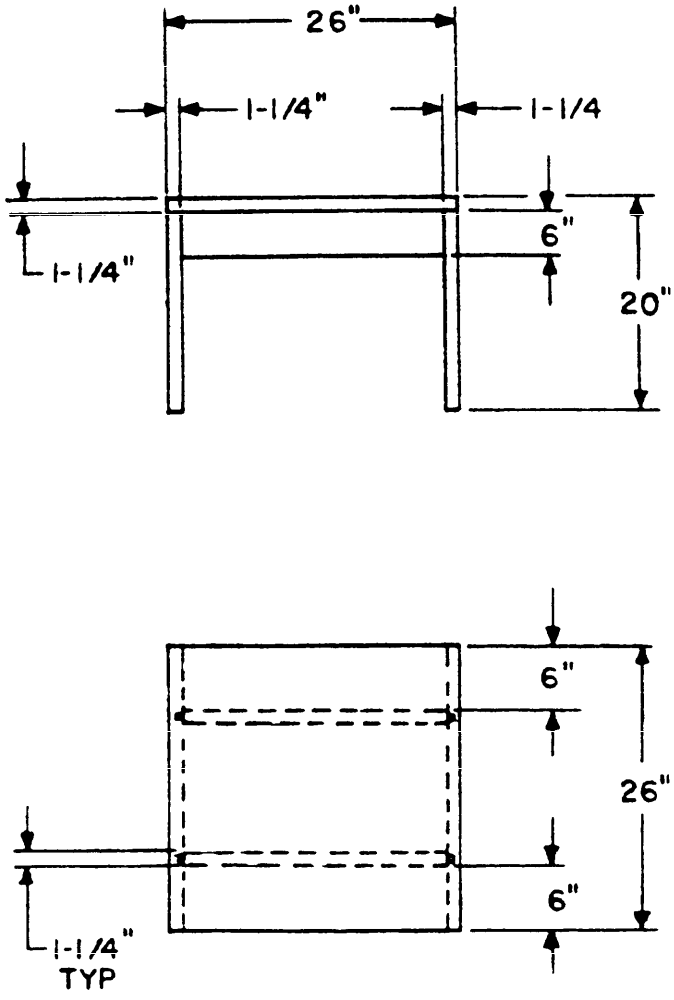


FIGURE 3
TYPE II SIZE 2
LAMP TABLE
26"X26"X20"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

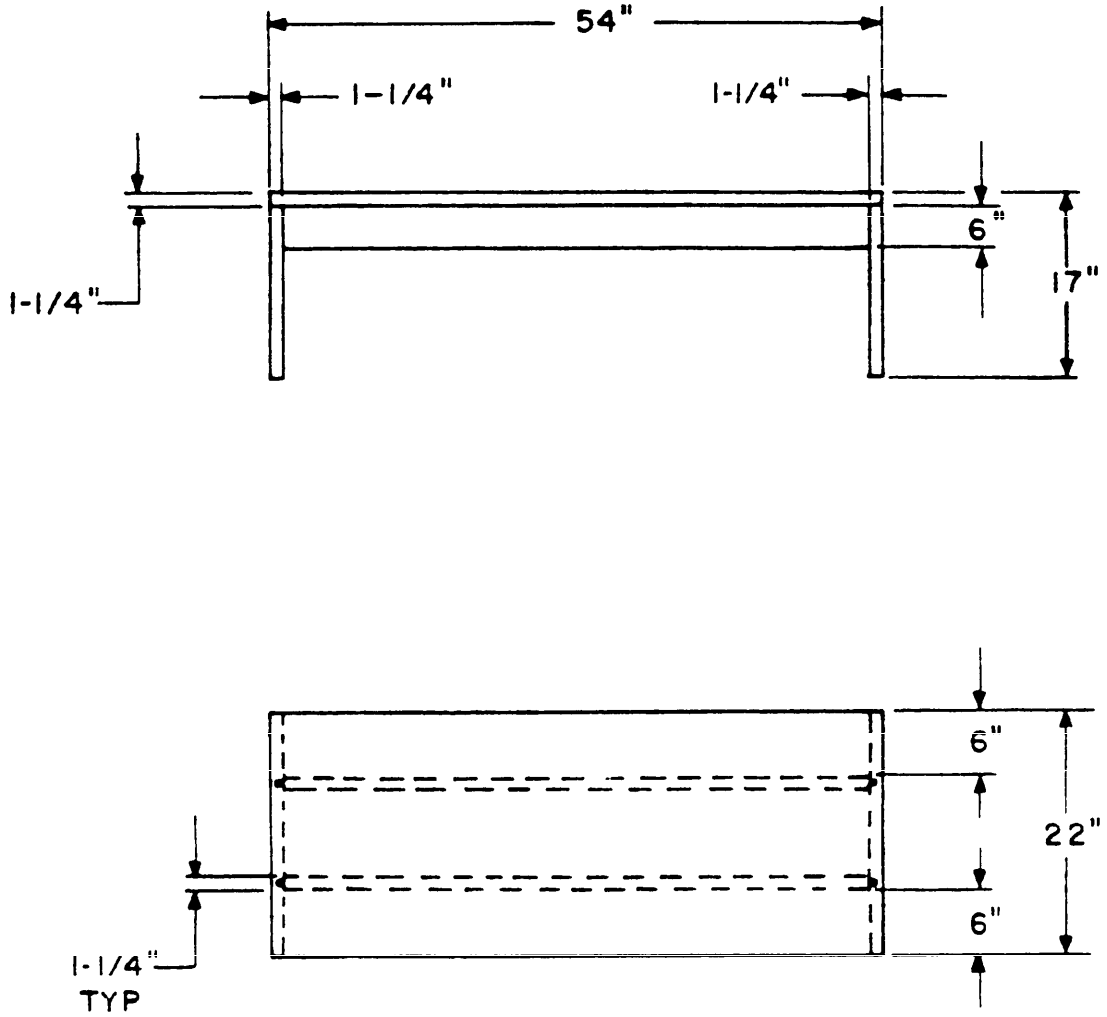


FIGURE 4
TYPE III, SIZE 1
COFFEE TABLE
54" X 22" X 17"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

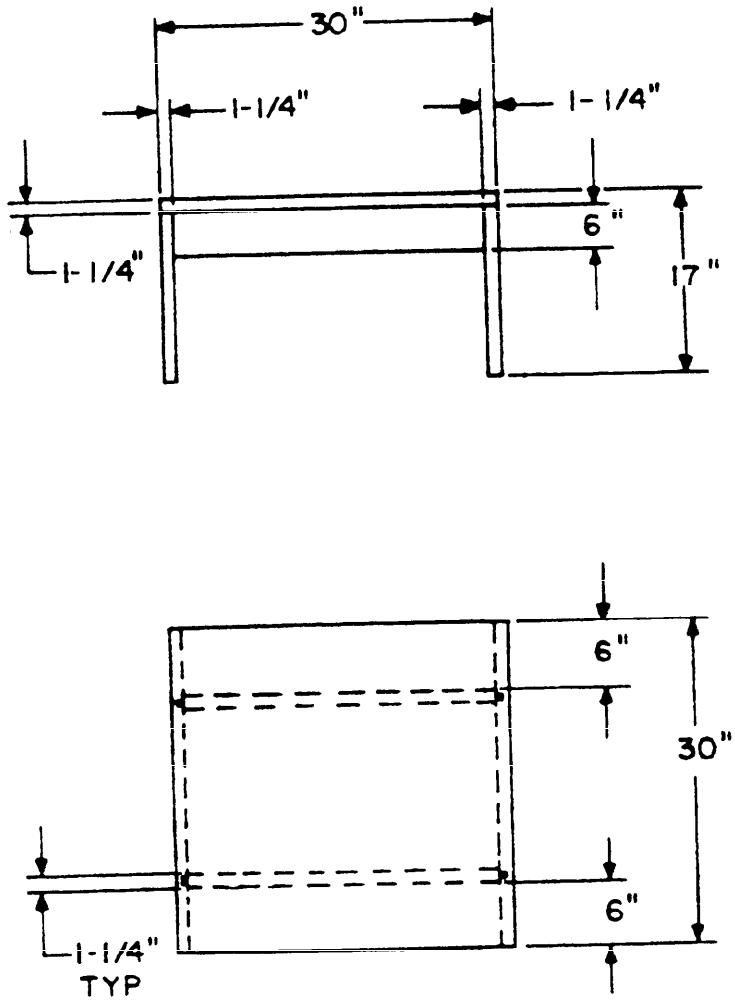


FIGURE 5
TYPE III, SIZE 2
CORNER TABLE
30" X 30" X 17"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

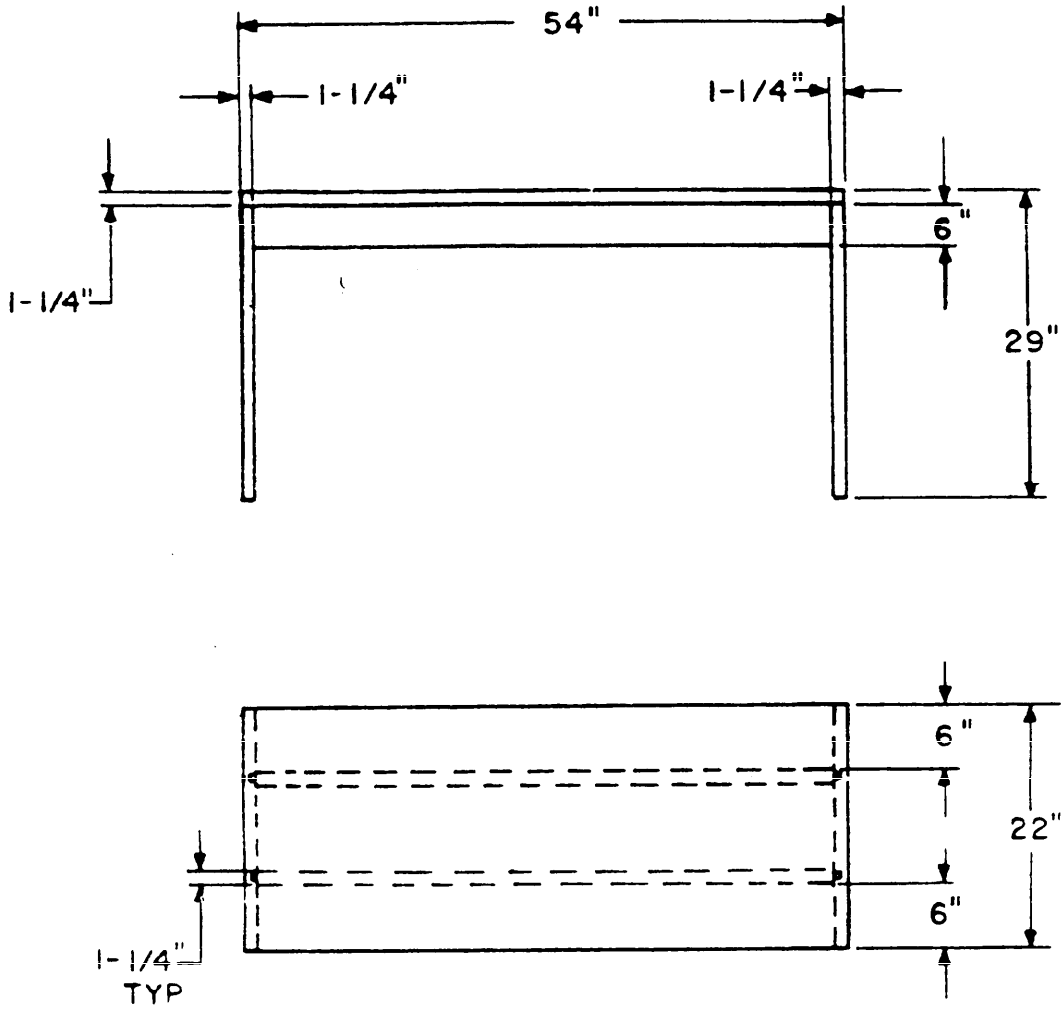


FIGURE 6
TYPE IV
CONSOLE TABLE
54"X 22"X 29"

DWG NOT TO SCALE

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

INDEX OF PARAGRAPH NUMBERS AND TITLES
(General Specification - AA-O-001959)

1. SCOPE AND CLASSIFICATION

1.1 Scope
1.2 Classification

2. APPLICABLE DOCUMENTS

Federal Specifications
Military Standards
American Society for Testing and Materials (ASTM) Standards
U.S. Department of Commerce (CS) Publications
National Motor Freight Traffic Association
Uniform Classification Committee

3. REQUIREMENTS

3.1 Preproduction sample
3.2 Materials
3.2.1 Adhesives
TABLE I
3.2.2 Particleboard
3.2.3 Wood
3.2.3.1 Wood varieties and parts
TABLE II
3.2.3.2 Characteristics
3.2.3.3 Veneers
3.2.3.3.1 Species
3.2.3.3.2 Matching
3.2.3.4 Seasoning
3.2.3.5 Solid exterior parts
3.2.3.6 Solid interior parts
3.2.3.7 Hardwood plywood
3.2.4 Finishing materials
3.2.4.1 Stain
3.2.4.2 Filler, wood paste
3.2.4.3 Lacquer, spray, clear
3.2.4.4 Sealer
3.2.5 Hardware
3.2.5.1 Screws
3.2.5.2 Door catches
3.2.5.3 Hinges
3.2.5.4 Glides
3.2.5.5 Locks
3.2.5.6 Drawer suspensions
3.2.5.7 Attachment bracket
3.3 Construction
3.3.1 Design
3.3.2 Tolerances and dimensions
3.3.2.1 Tolerances
3.3.2.2 Dimensions
3.3.3 Gluing
3.3.4 Joining and assembly
3.3.5 Direction of grain
3.3.6 Top panel, end panels, and back panels
TABLE III
3.3.7 Drawer and door fronts
3.3.8 Drawers
3.3.9 Convenience tray
3.3.10 Reveal strips
3.3.11 Panel base trim
3.4 Methods of finishing
3.4.1 Procedure for clear wood finish on open pore wood
3.4.2 Appearance of finish
3.5 Identification marking
3.6 Workmanship
3.7 Conflict of text and drawings

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibilities

4.2 Lot acceptance test
4.3 Sampling for inspection and acceptance
4.4 Inspection (end item)
4.4.1 Visual examination
TABLE IV
4.4.2 Dimensional examination
4.4.3 Inspection levels and AQL's
4.4.4 Inspection for Preparation for delivery requirement
4.5 Tests
4.5.1 Test of finish system
4.5.1.1 Working properties
4.5.1.2 Spot test
4.5.1.3 Alcohol
4.5.1.4 Print resistant test
4.5.1.5 Cold check resistance
4.5.1.6 Boiling water
4.5.1.7 Ultra-violet light resistance
4.5.1.8 Toughness and adhesion
4.5.2 Test for adhesives
TABLE V

5. PREPARATION FOR DELIVERY

5.1 Packaging
5.1.1 Level C
5.2 Packing
5.2.1 Level C

6. NOTES
6.1 Intended use
6.2 Ordering data

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.