AA-S-00671d(GSA-FSS)
April 27, 1964
Interim Revision of
AA-S-671c
April 10, 1952

INTERIM FEDERAL SPECIFICATION

STANDS, DICTIONARY, WOOD

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it for procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes a wood dictionary stand.

1.2 Classification

1.2.1 Types. The wood dictionary stand covered by this specification shall be of one type and size. (See Figure 1).

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The following specifications and standards of the issue in effect, on the date of the invitation for bids, form a part of this specification:

Federal Specifications:

P-P-554 - Polish, Furniture, Wax
TT-F-336 - Filler, Wood Paste
TT-L-58 - Lacquer, Spraying, Clear and Pigmented (General Use).
TT-S-190 - Sealer, Sanding, Lacquer Type (For Wood Furniture)
TT-S-720 - Stain, Wood, Non-Grain-Raising, Solvent Dye Type
UU-P-271 - Paper, Wrapping, Water-proof Kraft
UU-T-111 - Tape, Paper, Gummed (Sealing and Securing)
PPP-B-583 - Boxes, Wood, Wirebound
PPP-B-591 - Boxes, Fiberboard, Wood Cleated
PPP-B-601 - Boxes, Wood, Cleated Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Box, Fiberboard

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging and Packing Levels
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-A-140 - Adhesive, Water Resistant, Waterproof Barrier Material
MIL-W-6110 - Wood, Determination of Moisture Content

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection for Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking for U. S. Military Property

(Copies of Military Specifications and Standards required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.1.1 Other Publications: The following publications, of the issue in effect on the date of the invitation for bids, form a part of this specification:

Uniform Freight Classification - Abstract No. 6

(Application for copies may be addressed to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois.)

National Motor Freight Classification - Abstract No. A6

(Application for copies may be addressed to the National Motor Freight Assoc., 1616 P. St. N.W., Washington, D. C. 20036).

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished item and each component part conforming to the requirements of this specification shall be offered for approval of the contracting officer or his authorized representative. Approval of the preproduction sample authorizes commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification.

3.2 Materials. The materials used in the construction of the dictionary stands shall be of the kind and quality specified herein.

3.2.1 Adhesives. The adhesives used for assembly of joints and built-up stock shall conform to or exceed the requirements of the following block shear tests:

Room temperature - 2800 p.s.i. minimum average; 50 percent wood failure minimum average

150° F. - Average block shear strength and wood failure shall be not less than 80 percent of the average values obtained at room temperatures.

3.2.2 Wood.

3.2.2.1 Characteristics. The solid wood used for the dictionary stands shall be bright, well-sanded, and free from brashness, discolorations, worm holes, honeycomb, splits and shake, or other defects affecting the appearance or serviceability, except that a few small burls, pin knots not exceeding two per square foot, mineral streaks not exceeding 1/32 inch by 4 inches or 1/16 inch by 2 inches and not more than one per square foot may be admitted.

3.2.2.2 Seasoning. All wood shall be uniformly kiln-dried to a moisture content of from 5 to 8 percent and conditioned.

3.2.2.3 Varieties. The varieties of wood to be used in a single dictionary stand for the color of finish specified, shall be of only one of the woods shown in Table I.

TABLE I

Color of finish	Solid parts
Walnut	Beech
	Birch
	Cherry
	Elm
	Hackberry
	Maple
	Pecan
	Sweetgum
	Walnut

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.3 Filler. The filler shall be as specified in Federal Specification TT-F-336.

3.2.4 Stain. The stain shall be as specified in Federal Specification TT-S-720.

3.2.5 Sealer. The sealer shall be as specified in Federal Specification TT-S-190.

3.2.6 Lacquer. The lacquer shall be as specified in Federal Specification TT-L-58.

3.2.7 Glides. The glides shall be of the nail type or the three-pronged type and shall be made of case-hardened steel, or steel which has been nickel or chromium plated. The glides shall be not less than 1 inch in diameter.

3.2.8 Dowels. The dowels shall be a minimum of 3/8 inch in diameter by 1-1/2 inches in length. They shall be longitudinally or spirally grooved and beveled on each end. The permissible woods are; maple, birch, hickory, or beech dried to a moisture content of from 3 to 5 percent.

3.2.9 Components. The components of the dictionary stand shall consist of one dictionary support strip, four glides, four legs, two panels, two rails, one shelf, four stretchers, one top, and screws, dowels, and glue as required.

3.3 Construction.

3.3.1 The design of the dictionary stand shall be as shown in Figure 1 and as specified herein.

3.3.2 Tolerances. The following tolerances will be permitted: (plus or minus)

Width - 1/4 inch, Depth - 1/4 inch, Height - 1/4 inch

Dimensions of any wood part plus 1/8 inch - minus 1/16 inch.

3.3.3 Framing.- Unless otherwise specified the framing shall be by mortise and tenon and tongue and groove joints. Mortises shall be not less than 3/4 inch deep (except for center stretcher). Tenons shall be not more than 1/16 inch less than the full depth of the mortise and shall be not less than one-third the thickness of panels or rails, or less than 1/2 inch diameter on stretchers.

3.3.4 Legs. The legs shall be of solid or built-up stock. The built-up stock shall be as specified in 3.3.11. The legs shall be not less than 1-3/4 by 1-3/4 inches square at the top and starting 10 inches from the bottom, taper to not less than 1-3/8 inches by 1-3/4 inches. The taper shall be on the inside as shown in Figure 1. The legs shall be mortised to receive the tenons of the panels, rails, and shelf, and drilled to receive the glued in dowels or tenons of the stretchers. The outside corners shall be rounded on a 1/2 inch radius. Each leg shall be furnished with a glide as specified in 3.2.7. The dowels shall be as specified in 3.2.8.

3.3.5 Panels. The end panels shall be of solid wood not less than 3/4 inch thick by such width and length as required to conform to Figure 1. The panels shall be joined to the legs by mortise and tenon and glue. The top edge of each panel shall be drilled and countersunk on the inside for not less than two screws for attaching the top.

3.3.6 Rails. The front and back rails shall be of solid wood not less than 3/4 inch thick by 2-1/4 inches wide by such length as required. The top edge of each rail shall be beveled to fit the top, and shall be drilled and countersunk on the inside to receive not less than two screws for attaching the top. The rails shall be secured to the legs by mortise and tenon and by glue.

3.3.7 Shelf. The shelf shall be made of solid wood strips 2 inches minimum to 6 inches maximum width, and not less than 3/4 inch thick. Each joint shall have either not less than three dowels, or continuous spline or tongue and groove construction for nonelectronic gluing. The shelf shall be chamfered on the corners to fit the mortise milled into the legs. The shelf shall have a thorough application of glue at the joint and shall fit snug. There shall be a screw (No. 8) inserted at an angle (obliquely) to penetrate the underside of the shelf and to enter the leg a minimum of 1 inch on each of the four corners. Lead holes shall be bored in the shelf and countersunk for the screws.

3.3.8 Stretchers. The stretchers shall be a minimum of 7/8 inch wide and the top edge shall be full-rounded. The side stretchers and the back stretcher shall be a minimum of 1-1/2 inches high and shall be mortise and tenoned, chuck-dowelled, or secured by two dowels in each end, as specified in 3.2.8, penetrating a minimum of 3/4 inch into the legs. The center stretcher shall be a minimum of 1-1/4 inches high and shall be mortised and tenoned, chuck-dowelled, or secured with one dowel, as specified in 3.2.8 penetrating a minimum of 5/8 inch into the side stretchers. The bottom edges of the side and center stretchers shall be flush. All stretchers shall be located as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.9 Support. The dictionary support strip shall be not less than 3/4 inch wide by 2 inches high by such length as required. The ends shall be cut quarter round on a 1-1/2 inch radius. All of the exposed edge shall be full-rounded. The support strip shall be secured to the top by glue and by not less than three 1-1/2 inch No. 10 screws with the heads countersunk flush in the underside of the top.

3.3.10 Top. The top shall be made of solid wood strips 2 inches minimum to 6 inches maximum width and shall be not less than 3/4 inch thick. Each joint shall have either not less than three dowels, or a continuous spline or tongue and groove construction for nonelectronic gluing. The four corners of the top shall be rounded on a 1-1/2 inch radius and all edges shall be full-rounded. The top shall be secured to the stands by not less than eight screws inserted through the holes drilled in the panels and rails and screwed into the top. The screws shall be not less than size No. 10 and shall be of such length that not less than three-fourths the thickness of the top will be penetrated.

3.3.11 Built-up stock. The built-up stock which may be used for the legs shall consist of not more than three full-length pieces each of which shall be approximately the same thickness. They shall be carefully matched for color and figure.

3.4 Method of finishing.

3.4.1 Exposed surfaces. All exposed surfaces shall be sandpapered smooth and the corners eased. They shall be stained as specified in 3.2.3 to the color specified. After the stain has dried sufficiently, a prime coat of sealer as specified in 3.2.5 shall be applied to all surfaces. After the prime coat has dried thoroughly, the exposed surfaces shall be sanded and thoroughly filled as specified in 3.2.3 and be completely cleaned. The stain and filler shall not cloud the grain of the wood. One coat of lacquer sanding sealer shall be applied, except on close grain woods, which do not require filling shall have two coats of lacquer sanding sealer. After these coats have dried thoroughly all surfaces shall be sanded. The stand shall then receive two coats of semi-gloss lacquer as specified in 3.2.6.

3.5 Color and appearance of finish. The color and appearance of the finish for the variety of the wood specified in 3.2.2.3 and Table I shall conform to the standard reference panel as adopted by the Federal Supply Services, General Services Administration for color, texture, gloss, and quality.

3.6 Identification marking. Unless otherwise specified each unit shall be marked permanently on the underside of the shelf in a plain and legible manner the specification number, Federal stock Number, the month and year of manufacture, and the contractors name or trademark. When specified the identification marking shall be in accordance with MIL-STD-130.

3.7 Workmanship. The details of construction, including design, joinery, assembly, and finishing and marking, shall be in strict accordance with the requirements of this specification and Figure 1.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 General quality assurance provisions.

4.1.1 Contractor inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Contractor quality assurance system. The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the items under this specification. Results of all examinations and tests performed under the quality assurance system shall be made available to the Government. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by this specification and other documents referenced herein. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that an equivalent control is included in the approved quality assurance procedure. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of the detail specification will be used. The contractor shall notify the Government of and obtain approval for any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.1.3 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operation to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures; or instances of poor practices which might affect the quality of the product will be immediately called to the attention of the contractor. Failure of the contractor to promptly correct the deficiencies discovered shall be cause for suspension of acceptance until corrections have been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor shall designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection. Dictionary Stands shall be inspected to determine compliance with this specification, as to workmanship, materials, design, details of construction, hardware, finish, marking and packing. Inspection may be made at the factory by a representative of the Government at any time during the process of manufacture, or at the point of delivery.

4.3 Preproduction sample inspection. Examination shall be made of the completely fabricated item for all provisions of this specification applicable to end product examination.

4.4 Sampling for inspection and acceptance. Sampling and inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified herein.

4.4.2 Inspection of the end item.

4.4.2.1 Visual examination. The defects found during the examination shall be classified in accordance with 4.4.2.1.1. The sample unit for the examination shall be one end item. The lot size shall be expressed in units of completely fabricated end items.

4.4.2.1.1 Examination of the finished end item. The examination of the finished end item shall be for defects in finish, material, construction and workmanship as specified in Table II.

TABLE II. - Classification of end item defects

Examine	Defect	Classification Major	Classification Minor
Finish and appearance of exposed wood parts visible in normal use position.	Does not match standard reference panel with respect to color, taxture, and gloss.	X	
	Discoloration (bleeding) over 1 square inch.		X
	Spotted, affecting appearance.		X
	Light or dark colored areas, affecting appearance		X
	Area of no lacquer film over 1 square inch in area.	X	
	Glue stain or glue line clearly showing, affecting appearance.	X	
	Excess glue not removed.		X
	Finish peeling, flaking, blistered, cracked, checked or wrinkled.	X	
	Finish cut or rubbed through to wood		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. - Classification of end item defects - (cont'd)

Examine	Defect	Classification Major	Classification Minor
Finish and appearance of exposed wood parts visible in normal use position.	Open grain - Finishing material not filling pores		X
	Orange peel, affecting appearance		X
	Damage or scratch, less than 1 inch long and 1 inch square		X
	Damage or scratch over 1 inch square or 1 inch long	X	
	Finish tacky, i.e., not completely dry	X	
	Rough or gritty surface or foreign matter imbedded in finish		X
	Light colored edge not touched up		X
	Burn-in or repairs not neatly accomplished		X
	Unstained (white) wood visible when item is in normal use position		X
Quality of solid wood or built-up stock on exposed and unexposed surfaces.	Species of wood not as specified	X	
	Component not fabricated of one piece solid wood where required		X
	More than 1 species of wood used for wood components of any one item		X
	Check or split over 1 inch in length	X	
	Wood warped, affecting appearance or serviceability		X
	Loosened grain or shake on exposed surface		X
	Loosened grain or shake on unexposed surface		X
	Honeycomb		X
	Loose or unsound knot		X
	Hole on exterior surface, affecting appearance	X	
	Glue line in built-up stock open over 1 inch in length		X
	Glued up pieces uneven in built-up stock		X
	Wave of uneven sanding		X
	Machine mark on exposed surface, effecting appearance		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. - Classification of end item defects -(cont'd)

Examine	Defect	Classification Major	Classification Minor
Quality of solid wood or built-up stock on exposed and unexposed surfaces.	Any mineral streak on exposed surface over 1/8 inch by 4 inches or 1/4 inch by 2 inches		X
	Wood chipped or splintered on exposed surface of drawer interior		X
	Any manufacturing defect or defect native to the wood filled in with plastic wood or other filler material	X	
Construction, assembly and attachment of unexposed and exposed parts	Not as specified or not as shown on Figure 1.	X	
	Component not size or shape specified	X	
	Component not type or design specified	X	
	Component not assembled as specified		X
	Component missing	X	
	Components in wrong location	X	
	Component loose or insecurely fastened where rigidity is required		X
	Component out of alignment or of square affecting serviceability		X
	Poor fit of component part or on mating part		X
	Wood component not glued as specified		X
	Wood component damaged or not properly machined		X
	Edges not "eased off" where required		X
	Any loose or unsound glued joint	X	
	Wood joint not as specified	X	
	Glue joint open over 1/16 inch on exposed part		X
	Glue joint open over 1/8 inch on unexposed part		X
	Top warped over 1/8 inch in width or length	X	
	Glides improperly positioned		X
	Legs or base uneven		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Identification marking	Missing, incorrect, or illegible		X
	Text incomplete		X
	Marking in wrong location		X
	Size of lettering not as specified		X
	Color of marking not black		X

4.4.2.1.2 Examination of the end product for dimension. Any dimension that is not within the specified tolerances shall be classified as a defect.

4.4.2.1.3 Inspection of preparation for delivery requirements. Inspection shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with Table III. For examination of contents the sample unit shall be one shipping container fully prepared for delivery, selected just prior to closure operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

TABLE III - Classification of preparation for delivery defects

Examine	Defect
Markings (exterior and interior)	Omitted; Incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as: Incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Contents	Not as specified.

4.4.2.1.4 Inspection levels and acceptable quality levels (AQL's). Inspection levels and acceptable quality expressed in defects per hundred units shall be as found in Table IV.

TABLE IV

	Inspection levels	Major	Total
For defects listed in 4.4.2.1.1	II	2.5	10.0
For defects listed in 4.4.2.1.2	S-3		4.0
For defects listed in 4.4.2.1.3	S-2		4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.5 Tests

4.5.1 Test of finish system. The following test shall be made on panels and parts produced in accordance with the specified production procedure.

4.5.1.1 Toughness and adhesion test. The test for toughness and adhesion shall be made by using Bell Laboratories Adhesion Tester, U. S. Testing Company, Model No. 1001, in conformance with the instructions for using, as provided by the manufacturers of the tester. The test shall be made on completely finished wood panel of the same wood and finish used in producing the furniture.

5. PREPARATION FOR DELIVERY

(For civil agency procurement the definitions and application of levels of packaging and packing shall be in accordance with Federal Standard No. 102.)

5.1 Packaging.- Packaging shall be level A, B or C as specified (see 6.2).

5.1.1 Level A. Remove casters from the stand when applicable and place within a suitable bag which shall be secured to the stretcher with twine. The top of each stand shall be completely covered with a sheet of 60-lb-basis-weight (24 by 36 --500) machine glazed kraft paper, folded over the edges and secured on the underside of the top with a 2-inch wide 60-lb-minimum-basis-weight gummed kraft tape complying with Federal Specification UU-T-111. The stand shall be padded with excelsior pads, cellulose wadding blankets, or equivalent cushioning material placed over the stand top and edges and around the leg ends extending upwards approximately 6 inches. Cushioning material shall be secured with twine having a minimum 30 pound breaking strength. Each stand shall be enclosed within waterproof barrier material conforming to Specification UU-P-271, seams and closures shall be sealed with adhesive conforming to Military Specification MIL-A-140.

5.1.2 Level B. Each stand with casters when applicable shall be packaged as specified in 5.1.1 except that the waterproof barrier material shall not be required.

5.1.3 Level C. The stands shall be packaged in accordance with standard commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. One stand packaged as specified in 5.1 shall be packed in a shipping container with adequate blocking and bracing in any of the following containers at the option of the contractor.

Specification	Type and Class
PPP-B-585	Class 3 use
PPP-B-591	Overseas type
PPP-B-601	Overseas type
PPP-B-621	Class 2
PPP-B-636	Class 2

Boxes shall be closed and strapped in accordance with the applicable box specification or appendix thereto except fiberboard boxes may be banded with filament reinforced tape in accordance with the appendix to PPP-B-636. The gross weight of wood-cleated boxes shall not exceed 200 pounds of fiberboard boxes 70 pounds.

5.2.2 Level B. Each stand covered and cushioned as specified in 5.1 shall be packed in a fiberboard box conforming to PPP-B-636, type I or II, class 1, style RSC, bursting strength of not less than 275 p.s.i. Closure shall be by adhesive applied over at least 75 percent of the flap or by the two strip tape method as specified in Rule 41, Section 7 of Uniform Freight Classification using tape conforming to PPP-T-45. Alternatively, triple-wall boxes conforming to PPP-B-640 may be used at the option of the contractor.

5.2.3 Level C. The stands shall be packed in containers of the type, size and kind commonly used for the purpose in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the rules and regulations of carriers as applicable to the mode of transportation.

5.3 Marking

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Federal Standard No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.3.3 Special marking. Each shipping container shall have the sides plainly marked as follows with the lettering at least 1 (one) inch in height:

FURNITURE

FRAGILE, HANDLE WITH CARE

6. NOTES

6.1 Intended use. The wood dictionary stand covered by this specification is designed for use in general offices or libraries for holding heavy books or dictionaries for ready reference.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and should specify the following:

(a) Title, symbol and date of this specification.
(b) When preproduction samples are not required.
(c) Level of packaging.
(d) Level of packing
(e) Marking requirements (see 5.3).

6.3 Special notice. See Addendum.

6.4 Transportation Description

6.4.1 Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Stands, book, wooden.
Carload minimum weights:

In cars 40'9" or less in length, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements, 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Motor:

Stands, book, wooden.
Truckload minimum weights - 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

This specification is a part of Section IV, Part 5, of the Federal Stock Catalog.

GSA "C" 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

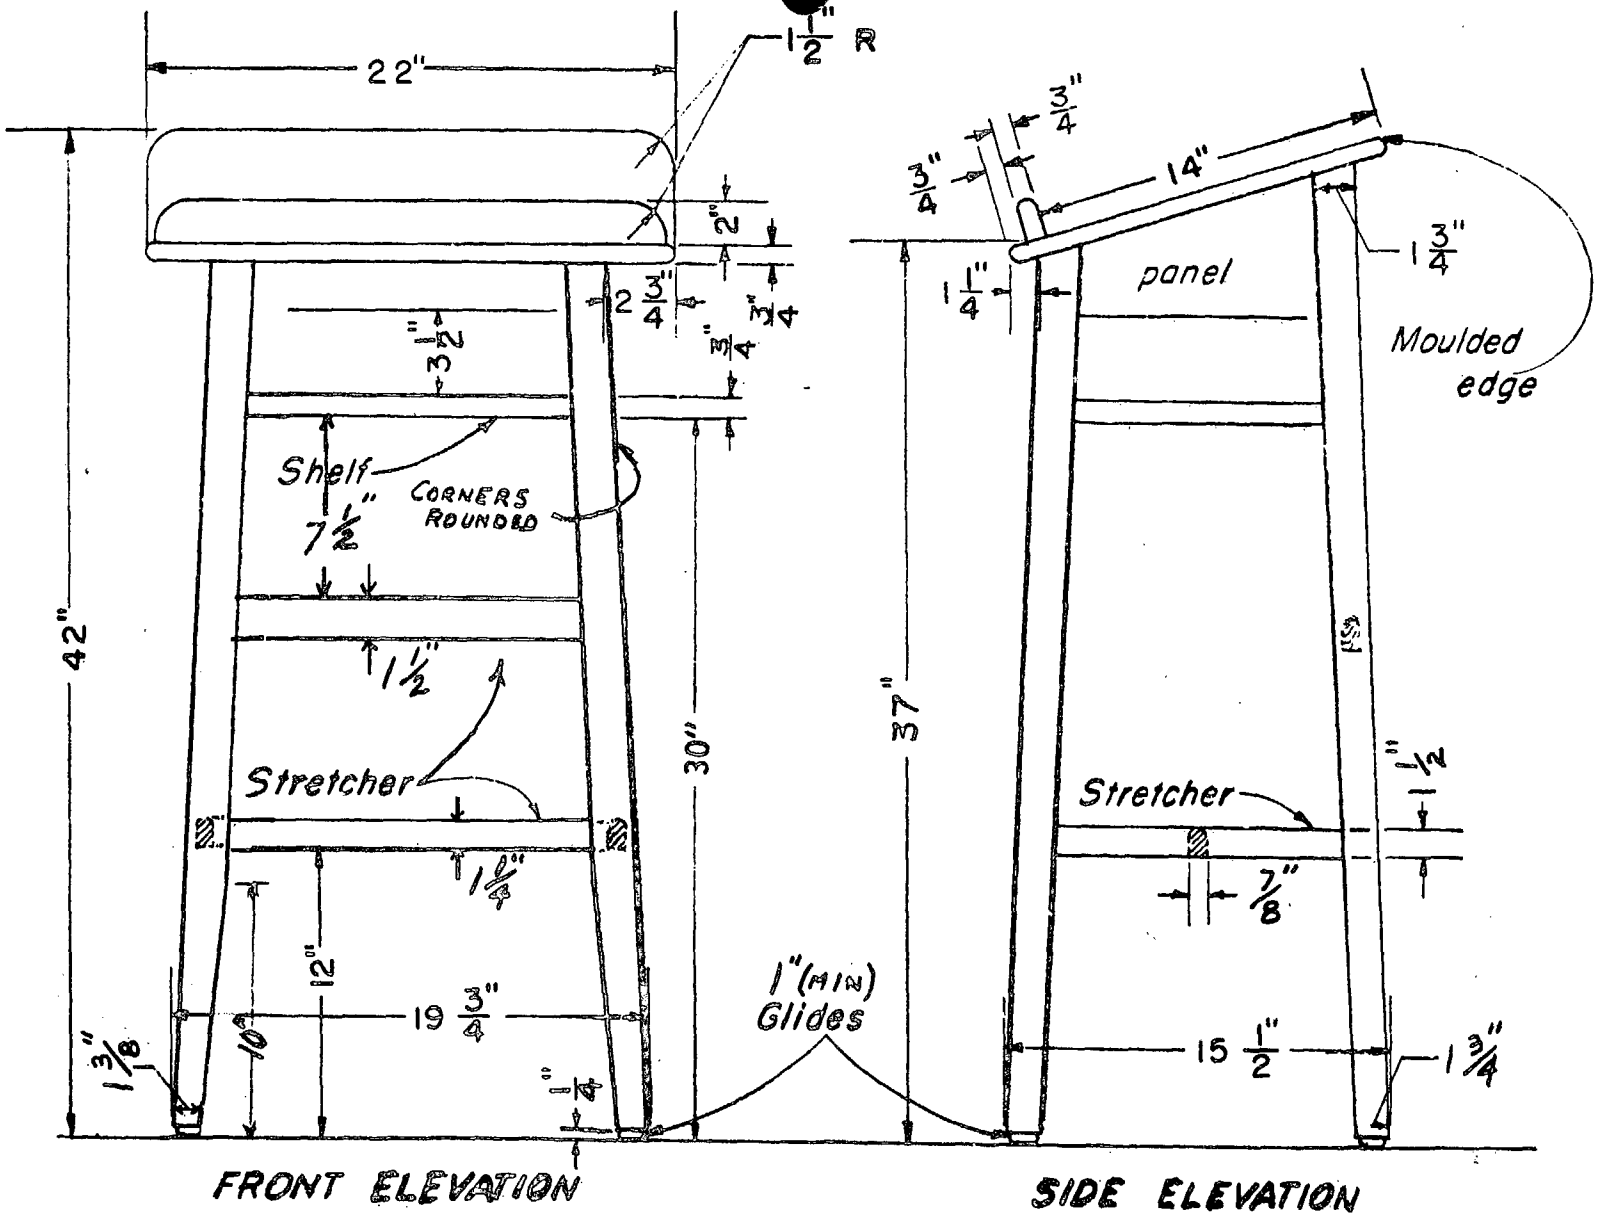


Figure 1. Stool, Dictionary, Wood

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.