AA-S-00697B(GSA-FSS)
June 9, 1969
SUPERSEDING
Int. Fed. Spec. AA-S-00697A(GSA-FSS)
June 27, 1966

INTERIM FEDERAL SPECIFICATION

STOOLS, STEP, STEEL, FOLDING STEPS

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel step stools with upholstered seats and backs.

1.2 Classification. The stools shall be of one type and two classes as specified (see 6.2).

Class 1 - Two folding steps, with back.
Class 2 - Two folding steps, without back.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-375 - Plastic Film, Flexible, Vinyl Chloride.
QQ-C-320 - Chromium Plating (Electrodeposited).
QQ-N-290 - Nickel Plating (Electrodeposited).
CCC-A-700 - Artificial Leather, Cloth, Coated, Vinyl Resin (Upholstery).
MMM-A-250 - Adhesive, Water-Resistant, (For Sealing Fiberboard Boxes).
PPP-B-636 - Box, Fiberboard.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained for the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Steel Products Manual

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

American Society for Testing and Materials (ASTM) Designation:

ASTM Designation D-1055 - Latex Foam Rubbers.

(Copies of ASTM specifications may be obtained from American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103)

Department of Commerce Publications:

Commercial Standards

CS-35 Hardwood Plywood
CS-45 Douglas Fir Plywood

(Application for copies, accompanied by money order, coupon or cash should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402)

3. REQUIREMENTS.

3.1 Preproduction sample. Unless otherwise specified (see 6.2) before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes commencement of production but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material

3.2.1 Steel. The steel sheets shall be commercial quality, cold rolled. The steel tubing shall be FS1010-1020 round section, either seamless or continuously seam welded. The steel shall be smooth, free of scale, pits, wrinkles, laps, crimps and buckles affecting strength or appearance. The gage numbers specified are the manufacturers' standard gage for steel sheets as given in the Steel Products Manual. The decimal equivalent of the steel sheet thicknesses shown are subject to the tolerances given in the Steel Products Manual. The steel sheets shall withstand the test specified in 4.5.2.

3.2.2 Plywood. Plywood, when used shall be not less than 1/2 inch thick and shall be constructed in accordance with CS-45 for Douglas fir plywood or CS-35 for hardwood plywood. Douglas fir plywood shall be A-B, Int. (Sound/solid, interior). Hardwood plywood shall be of veneer core or not less than 3-ply lumber core. Bondage shall be not less than type II, cross banding not less than grade 2 and a minimum of 1/2 inch thick. Lumber core panels shall be regular grade except no end-butt joints will be permitted.

3.2.3 Cellulose fiber. Cellulose fiber for seat and back padding shall be 1/4 inch thick (before application) and have a density of 4.5 pounds per cubic foot. Commercial tolerances will be permitted. It shall be new material, felted and bonded into a homogeneous mat.

3.2.4 Slab stock latex foam. Slab stock latex foam, when specified for seat padding shall be grade RU-55 in accordance with ASTM designation D-1055. The foam shall be a single piece, not less than 1/2 inch thick.

3.2.5 Vinyl film. Vinyl film for seat and back covering shall conform to type I, class 2 of L-P-375. Minimum thickness shall be 10 mils. Color shall be as specified by the contracting officer (see 6.2).

3.2.6 Artificial leather. Artificial leather, when specified for seat and back covering shall be of class 1 or 2 of CCC-A-700, with treatments A-1,b and c as specified therein. Color and grain shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.7 Rubber and molded vinyl. The rubber or vinyl plastic for treads shall be not less than 1/16 inch thick, have a molded ribbed design, and have a shore Durometer hardness of 65 to 75. The color shall be black. The rubber shall be a natural or synthetic compound.

3.3 Construction.

3.3.1 Design. The general appearance of the stools shall be as shown in figure 1 which illustrates an acceptable design. Alternate designs, otherwise in accordance with the requirements of this specification, will be acceptable. The class 2 stool shall be without a back.

3.3.2 Bending of tubes. The tubes shall have true and even curves without flattening (except to receive screws and nuts), crushing or crimping that will affect their strength or appearance.

3.3.3 Tubular frame. The leg and back frame components shall be FS-1010-1020 steel as specified in 3.2.1. The tubular legs shall be a minimum of 3/4 inch, 18 gage; or 7/8 inch 20 gage, and may be tapered at ends to a minimum of 1/2 inch. Legs shall be reinforced with at least three spreaders unless the frame is of a wrap-around design as indicated in figure 1 that provides the seat platform with continuous support. The leg components shall be assembled by means of fusion welding or oval head machine screws and cap nuts (when nuts are exposed). The back frame may be an extension of the front or rear leg members, depending on design; or it may be a separate member secured to the seat platform by means of sheet metal type screws or bolts, or to the tubular leg assembly by fusion welds. The bottoms of the capped legs shall be on the same plane to the extent required by the test specified in 4.5.1.1.

3.3.4 Step frame. The step frame shall be of tubular steel as specified in 3.2.1, formed to support two steps and assembled to the stool frame in a manner that will permit the step assembly to swing beneath the stool. The legs of the frame, when beneath the stool, shall not project more than 1-1/2 inches, measured from the front of the front legs of the stool to the front of the legs on the step frame. The bottoms of the capped leg while steps are in use position shall be on the same plane as the capped legs of the stool to the extent required by the test specified in 4.5.1.1. Exposed open ends of tubes while steps are in use position shall be closed with a non-removable high impact-resistant plastic cap.

3.3.5 Seat pan. The seat pan shall be of plywood as specified in 3.2.2 or of steel as specified in 3.2.1. The steel pan shall be formed or one or two thicknesses of metal. The single thickness pan shall consist of a lower pan of not less than 20 gage (0.0359 inch) steel. The unit with two thicknesses shall consist of a lower pan of not less than 22 gage (0.0299 inch) and a base for the padding and upholstery covering. This base shall be of not less than 24 gage (0.0239 inch) and shall be secured attached to the lower pan. Steel pans shall have a formed vertical flange of not less than 1 inch around their entire perimeters with the lower flange edge formed to eliminate sharp surfaces. Finish shall be as specified in 3.4.2. The seat pan shall be secured rigidly to the tubular frame at a minimum of four places by means of welding, sheet metal screws or bayonet type groove fittings.

3.3.6 Back pan. The back pan shall be formed of one or two thicknesses of steel as specified in 3.2.1 or of plywood as specified in 3.2.2. It shall be contour shaped to fit the users back. The single thickness steel pan shall be of not less than 22 gage (0.0299 inch) and shall have a concealed rubber bumper extrusion around its entire perimeter. The two piece unit shall consist of an inner pan with rolled flanged edges and an outer pan shaped to fit closely inside the flange of the inside pan. The two pieces shall be attached by at least four screws. Each piece shall be of not less than 24 gage (0.0239 inch) steel. The back pan shall be mounted securely to the tubular back support members by means of sheet metal screws, or by the hidden keyhole method.

3.3.7 Seat and back padding. Unless otherwise specified, both the seat and back padding shall be bonded cellulose fiber as specified in 3.2.3. When specified, (see 6.2), the seat padding shall be slab stock latex foam meeting the requirements of 3.2.4.

3.3.8 Upholstery covers. Unless otherwise specified, the seat and back shall be covered with vinyl film in accordance with 3.2.5. When specified (see 6.2) the seat and back covering shall be cloth coated artificial leather meeting the requirements of 3.2.6. The covers shall be secured attached in a manner to assure smooth, even edges completely free of hazardous surfaces.

3.3.9 Steps. The steps shall be of plywood in accordance with 3.2.2, well sanded, solid wood not less than 3/4 inch thick, or of the steel specified in 3.2.1. Wood surfaces shall be sealed and enameled as specified in 3.4.3. When steel is used, the formation shall be similar to that of the steel seat base, the vertical flange being not less than 1/2 inch. The top surfaces may be slightly recessed to receive the tread. Finish shall be as specified in 3.4.2. The treads shall be molded

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

rubber or molded vinyl as specified in 3.2.7 and shall cover all of the top surface of each step to within 1/4 inch of the edges. The treads shall be affixed with a sufficient quantity of adhesive of a type that will assure proper bonding to the wood or the metal surfaces. Attachment of steps to the tubular frame shall be by means of welding, or by not less than four sheet metal screws, or four machine bolts and nuts for each step.

3.3.10 Caps. The ends of stool legs and the ends of the legs of the step assembly shall be closed with non-removable metal caps in a color that harmonizes with the color of the upholstery cover

3.3.11 Dimensions. The dimensions of the stools shall be as specified in Table I. When no tolerance is specified, the dimension is minimum Measurement between legs shall be taken between their inside surfaces at the floor line. Measurement for overall depth shall be taken between the outside surface of the rear leg and the outside surface of the step support at the floor line.

TABLE I. Stool dimensions

	Class 1	Class 2	Tolerance
Seat area (top surface) Sq. in	154	132	
Back area (front surface) Sq in	100		
Step area (top surface) Sq in	45	45	
Overall height, inches	36	24	Class 1, plus or minus 2 inches Class 2, plus or minus 1/2 inch
Height of seat from floor, inches (At both front and back).	24		Plus or minus 1/2 inch
Width between legs, inches	13-1/2	13-1/2	
Depth between legs inches (steps under frame).	10-1/4	10-1/4	
Overall depth, inches (steps outside of frame).	20-1/2	20-1/2	
Distance from floor to top surface of first step, inches.	8	9	Plus 1-1/8 inches, minus 1 inch
Distance between top surfaces of steps, inches	7-1/2	7-1/2	Plus 1 inch, minus 3/4 inch

3.4 Finish

3.4.1 Tubular finish The tubular components of the stools shall be either chromium plated or finished in bronze as specified (see 6.2)

3.4.1.1 Chromium plating (bright) Chromium plating shall be class 1 (decorative) and type I (bright) in accordance with QQ-C-320, with nickel or nickel plus copper undercoat The undercoat shall conform to class 1 (decorative plating), type IV (QS)-on steel base metal - 0.0004 inch (0.4 mil) copper plus nickel as specified in QQ-N-290, except nickel alone may be used in the undercoat. When nickel alone is used, the minimum nickel thickness shall be as specified for the copper plus nickel.

3.4.1.2 Bronze Bronze finish shall be obtained as specified in 3.4.1.2.1 or 3.4.1.2.2 Unless otherwise specified (see 6.2) the selection shall be made by the contractor.

3.4.1.2.1 Electroplating The metal shall be prepared by: (1) cleaning with a cathodic cleaner (2) and an anodic cleaner followed by (3) rinse, after which the work shall be (4) acid dipped and (5) rinsed again This preparation shall then receive the electroplated finish The finish shall then receive a baked-on clear coating of synthetic resin

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.1.2 Electrostatically or spray applied. Tubes shall be prepared for finishing by a suitable buffing and a minimum four-step phosphatizing process. If prime strip is used, buffing is not required, provided no visible defects are evident. Prepared surfaces shall receive a minimum of two coats of metallic bronze coating, electrostatically or spray applied and thoroughly baked hard

3.4.2 Sheet metal finish The metal shall be washed free of grease and dirt by a good grade of metal cleaning compound dissolved in hot water. The metal shall immediately be immersed in hot water to remove the metal cleaning compound. Upon removal from the water, rinse. The metal shall be bonded with a multicoat hot phosphate process to give it a high resistance to rust and provide an excellent base for finish coating. A minimum of two baked-on finish coats of alkyd resin, phenolic or melamine finish shall be applied to exposed surfaces The color of the exposed finish shall be compatible with the upholstery color. The unexposed surface sshall be covered with at least one coat of good quality enamel.

3.4.3 Wood finish When wood is used for steps, a coat of lacquer sealer shall be applied to all surfaces. The surfaces not covered with treads shall be enameled in a color compatible therewith

3.5 Identification marking. Unless otherwise specified (see 6.2) each stool shall be permanently marked in a plain and legible manner with the name or trade mark of the manufacturer, the Federal stock number, month and year of manufacture and the specification number. Other specified stools shall be marked in accordance with MIL-STD-130

3.6 Workmanship The craftsmanship exercised while performing the various operations of manufacture shall be of a degree to eliminate the possibility of personal injury due to burrs and sharp edges, to assure that the occurrence of defects will not exceed the acceptable quality levels specified herein and to produce a finished product that is satisfactory in function, serviceability and appearance

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements

Preproduction sample inspection Before regular production is started a completely fabricated and packaged set of stools shall be tested for all provisions of this specification applicable to the product examination and tests

4.3 Sampling for inspection and acceptance Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105, except where otherwise specified herein

4.3.1 Component and material inspection. In accordance with 4.1 the supplier is responsible for ensuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards or drawings, in accordance with this specification

4.3.2 Fabrication inspection

4.3.2.1 Visual examination The stools shall be examined for the defects listed in Table II. The inspection level and acceptable quality level shall be as specified in 4.3. The lot shall consist of all stools of the same class offered for inspection at one time The lot size shall be expressed in units of stools for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit from this examination shall be one completely assembled stool.

TABLE II. Classification of fabrication defects

Item	Defect	Classification Major
Finish, lacquer finish	Poor adhesion, i.e. blistered, crazed, peeling, tacky (not dry to touch), poor separation, stain, not smooth or uniform, runs, sags, foreign matter in coating, and chips of the coating or abrasion. Scratch through the base material, more than [illegible]	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of end item defects (cont'd)

Examine	defect	Classification Major	Minor
Metallic coating	Omitted or wrong kind	X	
	Blistered, peeling or other poor adhesion; stained, tarnished or discolored.		X
Upholstery material	Wrong color.	X	
	Torn, cut or contains hole.	X	
	Coating peeled, blistered or cracked.		X
	Faded, wrong shade, or shade variations affecting appearance.		X
	Spotted, stained or dirty.		X
	Material has objectional odor.		X
Solid wood	Not single piece.	X	
	Check or spot over 1 inch in length.	X	
	Warped, affecting appearance or serviceability	X	
	Loosened grain or shake affecting serviceability.	X	
	Honeycomb	X	
	Loose or unsound knot.	X	
	Sound, tight knot over 3/8 inch average diameter.		X
	Hole or decay affecting appearance or serviceability.	X	
	Sapwood or mineral streak which may affect serviceability or strength.	X	
	Any nonpermissible defect filled with plastic wood or other filler material	X	
Plywood	Number of plies not as specified.	X	
	Veneer Delaminated.	X	
	Any knothole.	X	
	Sound tight knot over 3/4 inch in diameter		X
	Split or open joint over 1/16 inch wide and not filled or patched.		X
	Decay which may affect serviceability	X	
	Shakes.	X	
	Wormhole over 1/16 inch diameter and not filled or patched; or gun or bark pocket		X
	Any nonpermissible defect filled with plastic wood or other filler material	X	
Construction and workmanship	Any part missing except nuts, bolts or screws.	X	
	More than one nut, bolt or screw missing.	X	
	Threads stripped or more than one fastener loose or not drawn up tight.		X
	Malformed or damaged part affecting use	X	
	Tubes, where bent, not true or even.		X
	Components not of gage specified.	X	
	Poor fit of component parts (except nuts, bolts and screws).	X	
	Exposed open ends of tubes not closed	X	
	Welds missing or not sound (broken, cracked, burnt through, poor fusion, etc.).	X	
	Tucking of upholstery material at corner or fold not neatly accomplished		X
	Seat, back or steps not securely attached	X	
	Sharp edges or projection that may cause an injury or tear clothing	X	
	Tread not securely attached		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II Classification of end item defects (cont'd)

Examine	defect	Classification Major	Minor
Identification marking	Missing, not permanent or is illegible, incomplete or incorrect.		X

4.3.2.2 Dimensional examination. Inspection will be made of stools for compliance with dimensions specified. Any deviation therefrom shall constitute a defect.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with Defects will be scored as specified in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lots.

TABLE III. Classification of preparation for delivery defects

Examine	Defects
Markings	Omitted; incorrect; illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged
Workmanship	Inadequate application of components such as incomplete closure of container inadequate fastening or cushioning, bulging or distortion or containers.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination of	Inspection Level	AQL's Major	Total
Table II	II	4.0	10.0
4.3.2.2 (1 class)	S-4		4.0
Table III	S-4		4.0

4.5 Tests.

4.5.1 Test for performance characteristic. The following test shall be performed on fully assembled stools with the steps outside of the stool frame, using inspection level S-1 for selection of the number of stools to be tested from any lot. Failure of any stool to pass the test shall be cause for rejection of the lot represented by the sample stools under test

4.5.1.1 Test for evenness of legs. The stools to be tested shall be placed on a flat surface A strip at least 1/2 inch but not greater than 3/32 inch thick shall also be placed on the surface An attempt shall be made to slide the strip under each leg, including the legs of the step assembly. If the strip passes under any leg without touching it, the stool shall be considered as having failed the test.

4.5.2 Bend test for steel sheets The steel sheets used for parts to be formed shall withstand a 180 degree bend with and across the grain without showing any crack or fracture on the outside of the bend.

5 PREPARATION FOR DELIVERY

5.1 Packaging Packaging shall be level A, B or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.1.1 Level A or B. All portions of the stool seats and the front and back of the type I stool back shall be covered with two thicknesses of 70 pound kraft paper overlapped on the sides of the back post and securely taped to hold in place. The step assembly shall be immobilized in the stored position and all portions of the front and back legs, and the entire step shall be padded with cushioning material fabricated from one of the following materials:

Macerated paper, plain	Wood fiber felt
Macerated paper, tissue faced	Cellulose wadding
Shredded paper	Excelsior (sealed ends)
Wood wool	Cotton wadding

Cushioning material shall be secured by spiral ties (not more than two inches apart) of a good quality jute twine having a minimum breaking strength of 30 pounds. Prior to tying, three inches of the pad to be used on the legs shall be folded under the leg and the end of the pad tightly tied around the bottom part of each leg. One type II stool shall be packed per container. Type I stools shall be packed two per container. One stool will be inverted with the seat of the two stools together, the backs on opposite sides and the legs at opposite ends of the container. The nested stools shall have the front leg and the back leg post of each stool securely tied together with twine having a minimum breaking strength of not less than 150 pounds.

5.1.2 Level C. The stools shall be packaged in accordance with the manufacturer's standard practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. The stools, packaged as specified in 5.1.1 shall be packed in a snug-fitting shipping container conforming to PPP-B-636, class 2 V3c, style OSC. The container shall be sealed closed with a water-resistant adhesive, applied to the entire area of contact between the flaps. Alternatively, the containers may be closed by a combination of stitching or stapling the bottom set of flaps prior to packing, and closing the top set of flaps with water-resistant adhesive applied to the entire area of contact between the top flaps after packing. The adhesive shall conform to MIL-A-250. Each container shall be waterproof sealed with tape and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.2.2 Level B. The stools, packaged as specified in 5.1.1 shall be packed in a snug-fitting shipping container conforming to type I, class 1, sytle OSC of PPP-B-636, except that the fiberboard shall be of either A or B flute having a bursting strength of 275 p.s.i. and the box dimensions of each container shall be lapped and secured with metal fasteners not more than two inches apart. All flaps of the fiberboard shipping container shall be sealed with an adhesive commercially used for the specific purpose being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. All seams and closures shall be sealed by applying tape a minimum of 3 inches in width conforming to class B of PPP-T-45.

5.2.3 Level C. Stools packaged as specified in 5.1.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The step stools covered by this specification are intended for special purpose seating and to afford access to areas not within normal arm's reach. They are not designed for prolonged seating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents

(a) Title, number and date of this specification.
(b) Class of stool required (1.2)
(c) If preproduction sample requirement is waived. (3.1)
(d) Color and (when applicable) grain of upholstery covering. (3.2.5 and 3.2.6)
(e) If latex foam seat padding is required (3.3.7)
(f) If cloth coating artificial leather is required. (3.3.8)
(g) Tubular finish required. (3.4.1)
(h) Specific means of obtaining bronze finish when selection is not to be made by the contractor. (3.4.1.2)
(i) If special marking is required. (3.5 and 5.3)
(j) Applicable level of packaging and packing (5.1 and 5.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

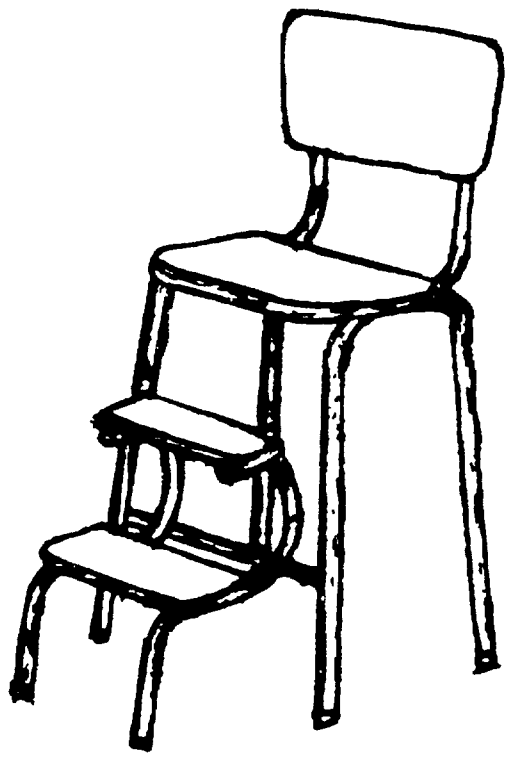


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features All comments will be considered and appreciated, but please do not expect a reply To comment detach, complete, fold, staple, and mail

NOTE Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements

1 SPECIFICATION

Interim Federal Specification AA S 00697B(GSA FSS) Stools, Step, Steel Folding Steps

2 CONTRACT NO *(If any)*	3 QUANTITY ON CONTRACT *(Optional)*	4 DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6 SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7 SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time, temperature ranges in table 2 do not conform to commercially available items.)*

8 RECOMMENDATIONS

9 NAME OF MANUFACTURER ASSOCIATION GOVT. AGENCY ETC	10 ADDRESS *(Number, Street, City, State and Zip Code)*

11 NAME AND TITLE OF SUBMITTER	12 DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

FOLD

GENERAL SERVICES ADMINISTRATION
Federal Supply Service

OFFICIAL BUSINESS

POSTAGE & FEES PAID
GENERAL SERVICES ADMINISTRATION

General Services Administration
Federal Supply Service, FMSF
Washington, D. C. 20406

FOLD

FORM
GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.