AA–S–683a
29 AUGUST 1952
SUPERSEDING
Int. Fed. Spec. AA–S–683 (GSA–FSS)
26 July 1951 and
IN PART
Fed. Spec. AA–T–101
2 February 1932

FEDERAL SPECIFICATION

STANDS, TYPEWRITER, WOOD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—The typewriter stands covered by this specification are intended for use in general offices where space is limited.

1.2 Classification.

1.2.1 *Types and dimensions.*—The stands shall be of the following types and dimensions as specified:

Type I.—Pedestal—22 inches deep, 46 inches wide, and 26 inches high (fig. 1).

Type II.—Leg—17½ inches deep, 33½ inches wide, and 26 inches high (fig. 2).

1.2.2 *Colors of finish.*—The stands shall be of one of the following colors of finish as specified, and the colors shall conform to the standard colors of finish adopted by the Federal Supply Service, General Services Administration:

Light Oak
Walnut

(Samples of the standard colors of finish are maintained on file at the Regional Office Building, Federal Supply Service, General Services Administration, Washington 25, D. C.)

2. APPLICABLE SPECFICATIONS AND STANDARD

2.1 Specifications.—The following Federal Specifications, of the issues in effect on date of invitation for bids, form a part of this specification:

C–G–451—Glue; Animal (for) Woodworking.
C–G–456—Glue; Casein-Type, Water-Resistant.
C–G–496—Glue; Urea-Resin-Type (Liquid and Powder).
TT–L–58—Lacquer; Spraying, Clear and Pigmented (General Use).

203418—52—No. 28

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C., or to the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Seattle. Prices may be obtained from the Superintendent of Documents or from the GSA Regional Offices.)

2.2 Standard.—The following Commercial Standard of the issue in effect on the date of invitation for bids, forms a part of this specification:

CS35–49—Hardwood Plywood.

(Copies of the Commercial Standard referenced above may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Price may be obtained from the Superintendent of Documents.)

2.3 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Materials.—The materials used in the construction of the wood typewriter stands shall be of the kind and quality specified herein.

3.1.1 *Glues.*—The glues to be used and their application shall be as shown in table I.

3.1.1.1 The glue manufacturer's directions for mixing and handling glues shall be accurately followed. The glue when applied shall be of the proper consistency to assure maximum bondage of the pieces to be joined.

3.1.2 *Hardware.*

3.1.2.1 *Footsockets.*—The footsockets shall be made of not less than 0.032-inch thick (22-gage) brass, and shall be 1⅜ inches in height.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I.

Application	Kind of glue
All assembly joints, glue blocks, built-up solid stock, and edge-joining of solid lumber core panels.	Any glue that will meet the test requirements of the following: Animal, of Federal Specification C–G–451, grade J2 or better, or casein of Federal Specification C–G–456 or urea-resin of Federal Specification C–G–496 (for electronic gluing).
All plywood lamination, edge joining of veneers and edge banding.	Any glue that will conform to the requirements of the type II bond or better as described in Commercial Standard CS–35–49 for Hardwood Plywood.

The exterior of the footsockets shall be flush with the wood of the stand leg. The footsocket shall have a flat closed bottom. Each socket shall be secured to the back of the leg by one brass escutcheon nail.

3.1.2.2 *Hinges.*—The hinges for type 1 stands shall be formed from steel not less than 0.072 inch thick. The length of the hinge at the joint shall be not less than $1\frac{3}{32}$ inches and the width of the hinge shall be not less than $2\frac{21}{32}$ inches when open. Hinges shall be of plain steel and shall not be full swaged. Each hinge shall be secured to the stand and leaf by not less than six screws.

3.1.2.3 *Drop-leaf support.*—The drop-leaf support shall be of the folding type and shall have spring tension to hold the drop-leaf rigidly in place in the raised position. The leaf support shall be rigid and shall be secured to the stand and leaf by not less than four No. 8 screws. Support shall be of plain wrought steel.

3.1.3 *Lacquer.*—The lacquer when applied shall conform to Federal Specification TT–L–58. The prime coat shall conform to type I and all other coats shall conform to type I, except that the nonvolatile content shall be not less than 21 percent. The nonvolatile content of semi-gloss lacquer when applied shall be not less than 21 percent.

3.1.4 *Wood.*

3.1.4.1 *Solid wood.*—The solid wood to be used for exposed parts and drawer parts of the stands shall be bright, well sanded, and free from brashness, discolorations, worm holes, honeycomb, splits and shake, or other defects that affect appearance or that might affect serviceability, except that a few small burls, pin knots not exceeding two per square foot average, mineral streaks not exceeding $\frac{1}{32}$ inch by 4 inches or $\frac{1}{16}$ inch by 2 inches and not more than one per square foot average, may be admitted. The wood to be used for the unexposed parts of the furniture may contain small defects, such as sound tight knots or excessive mineral streaks, provided they do not affect the strength or serviceability of the part.

3.1.4.2 *Plywood.*—All plywood shall be constructed in accordance with the requirements of Commercial Standard CS 35–49 for Hardwood Plywood. Bondage shall be not less than type II and all crossbandings shall be not less than $\frac{1}{20}$ inch thick, grade 2. All lumber core panels shall be clear grade. All face and back veneers shall be not less than $\frac{1}{28}$ inch thick and shall be of the grades and the kinds of wood as specified herein. The lumber cores shall be either returned to the kiln or allowed to cure out to a uniform distribution of glue joint moisture before final dressing and crossbanding.

3.1.4.3 *Seasoning.*—The wood shall be uniformly kiln-dried to a moisture content of from 5 to 8 percent. In addition, before milling, the wood shall be held in properly controlled warm dry storage for a sufficient period of time to assure a uniform distribution of moisture among the individual pieces, and to minimize warpage.

3.1.4.4 *Varieties.*—The wood to be used in any one stand for the color of finish specified, shall be as shown in table II:

3.2 Construction.

3.2.1 *Design.*—The design of the stands and the construction details shall be in strict accordance with the details shown in figures 1 and 2, unless otherwise specified herein.

3.2.1.1 *Tolerances.*—The following tolerances will be permitted:

Overall width of top—$\pm\frac{1}{8}$ inch
Overall depth of top—$\pm\frac{1}{8}$ inch
Overall height of stands—$\pm\frac{1}{8}$ inch

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II.—*Varities of wood*

Colors of finish	Exposed parts		Drawer sides, backs, and bottoms	Unexposed parts			
	Veneers and solid drawer fronts	Other solid parts		Solid	Face veneers	Corestock [1]	Cross-band
Light oak	Oak	Oak	Ash Oak	Ash [2] Beech [2] Birch [2] Cherry Hackberry [2] Hickory [2] Magnolia Maple [2] Oak [2] Pecan [2] Sweetgum Sycamore Tupelo Walnut [2]	Alder Ash Aspen Basswood Beech Birch Butternut Cherry Cottonwood Magnolia Mahogany [4] Maple Oak Sweetgum Sycamore Tupelo Walnut Yellow poplar	Aspen Basswood Butternut Cherry Chestnut Cottonwood Douglas fir [3] Magnolia Mahogany [4] Ponderosa pine [3] Red Alder Redwood [3] Sitka spruce [3] White pine Yellow poplar	Alder Aspen Basswood Beech Birch Butternut Cherry Chestnut Cottonwood Magnolia Mahogany [4] Maple Sweetgum Sycamore Tupelo Yellow poplar
Walnut	Walnut	Beech Birch Cherry Maple Pecan Red gum Walnut	Beech Birch Cherry Maple Oak [5] Sweetgum [5] Sycamore				

[1] Only one of the species listed shall be used in any one panel.
[2] Attaching rails and drawer bearers must be of one of these species.
[3] Vertical grain only.
[4] True and African mahogany only.
[5] Must be same wood in any one stand.

Dimensions of any wood or plywood part—plus 1/16 inch, minus 1/32 inch.

3.2.2 *Type I, pedestal stand.*—Unless otherwise specified herein, the stands shall conform in detail to the construction and design shown in figures 1 and 2.

3.2.2.1 *Framing.*—The framing shall be as shown in the figures and as specified herein. Mortises shall be at least 1/2 inch deep and tenons shall be approximately the full depth of the mortise. The thickness of tenons on panel rails shall be not less than 1/4 inch. The thickness of tenons on drawer rails shall be 7/16 inch. The woods to be used shall be as shown in table II. Corner braces shall be accurately fitted and secured in each corner of each pedestal of type I stands above the dust bottom and in each rear corner of the knee-space at the bottom rail, as shown in figure 1.

3.2.2.2 *Gluing.*—All joints shall be true and shall be thoroughly glued and held under pressure until the glue has set sufficiently to handle. Nails or brads to accomplish the holding of glue joints will not be permitted. Starved or poorly glued joints will not be permitted. Excess glue shall be carefully cleaned from all exposed surfaces.

3.2.2.3 *Legs and posts.*—The legs shall be square and tapered from 1 3/4 by 1 3/4 inches at top to 1 3/8 by 1 3/8 inches at bottom as shown in the figures. The taper shall be from the lower edge of panel rail. The outside corner of all legs shall be rounded on not less than a 3/16 inch radius. The outside corner of the knee-space front post shall be rounded on not less than 3/4-inch radius. The back knee-space post of type I stands shall be not less than 1 3/4 by 1 1/8 inches. The top and bottom ends of the back knee-space post shall be milled to fit over the back rails, allowing the post to fit against

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

the back panel. The back knee-space post shall be secured to the back panel rails by glue and by either two screws at each joint, or one screw and a steel angle secured to the post and rail.

3.2.2.4 *Panels.*—The panels shall be not less than ¼ inch thick and shall be at least 3-ply. The face veneer of oak and walnut panels shall be either plain sliced or flat cut and all exposed face veneers shall be grade 1, and the back veneers shall be not less than grade 2 as described in Commercial Standard CS35–49.

3.2.2.5 *Rails.*—The panel rails shall be not less than ¾-inch-thick solid wood, and shall be joined to legs and posts by mortise and tenon, and the face of the rails shall be either finished flush or they may be set back from the face and the legs and posts not in excess of ⅛ inch. The top attaching rails of type I stands shall be as shown in figure I and shall be of the wood specified in table II for unexposed solid wood parts. Each attaching rail shall be drilled for not less than three No. 12 screws, and shall also be secured by screws and glue to the top panel rails. The attaching rails shall be housed into legs and posts as shown in figure 1, and shall also serve as the reference slide bearer.

3.2.2.6 *Tops.*—The tops and drop leaves shall be of 5-ply lumber core plywood construction. The face veneer shall be grade 1 either plain sliced or flat cut, and back veneer shall be not less than grade 2, as specified in Commercial Standard CS35–49 for Hardwood Plywood. The surface veneers, cross-bandings, and lumber cores shall be of the woods specified in table II. After 5-ply gluing, the edges of all tops and drop leaves shall be banded all around with a solid molding which shall be 5/16 inch thick. This molding shall be rounded, except where drop leaves abutt the top, on a radius of ¼ inch. The tops shall be 13/16 inch thick and shall be securely fastened to the base by not less than 9 screws inserted through holes drilled in the attaching rails. The screws shall be of such length that not less than ⅘ of the thickness of the top shall be penetrated. A steel angle bracket shall be secured to the top and back-panel rail in the center of the knee-space. Each drop leaf shall be supported by not less than two hinges and one leaf support bracket. The hinges and support bracket shall be as specified in 3.1.2.2 and 3.1.2.3.

3.2.2.7 *Reference slides.*—The reference slides shall be of the same construction as the tops and not less than ¾ inch thick and shall be banded on the front edge with the same kind of wood as the solid exterior parts. The front corners shall be rounded on not less than a ¼-inch radius. A metal stop shall be provided to prevent the reference slide from falling out, but will permit the removal of the slide when desired.

3.2.2.8 *Drawers.*—The drawer fronts shall be not less than ¾ inch thick, one piece of solid wood. The drawer sides and backs shall be not less than 7/16 inch thick solid wood and shall be not more than ⅛ inch less in height than the drawer opening. Drawer clearance shall be full but not excessive (⅛ inch) and drawer-front, sides, and back shall be flush on the top. The drawer sides shall be dovetailed flush and glued to the front and back and held under pressure until the glue has set. The drawer bottoms shall be not less than 3/16 inch thick nor less than 3-ply plywood, and shall be framed into the drawer-front, sides, and back not less than 3/16 inch, and shall be additionally reinforced by glue blocks. The face and back veneer of drawer bottoms shall be not less than grade 2 as specified in Commercial Standard CS35–49. The drawer bearers and guides shall be of the wood specified in table II and shall be housed into the legs at front and back as shown in figure 1, and shall have hardwood drawer stops secured in place by glue and screws. Drawer pulls shall be of the same kind of wood as the drawer fronts and shall be secured by 2 screws inserted through the inner face of the drawer into the pull. The screw heads shall be countersunk flush.

3.2.2.9 *Pedestal.*—The pedestal on type I stands shall be on the right side and shall have 3 drawers and a reference slide. The openings for the drawers shall be not less than 10 inches wide by 4 7/16 inches high. The pedestal partition rails shall be not less than ¾ inch thick by 1½ inches wide. The front bottom pedestal rail shall be not less than 1⅛ inches thick by 1¾ inches high. A dust bottom of plywood not less than 3/16 inch thick shall be let into the bottom pedestal rail at the front, and shall be secured to the bottom drawer bearers by cleats and screws. The face and back veneers of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

dust bottom shall be not less than grade 2 as specified in Commercial Standard CS35–49.

3.2.3 *Type II, leg stands.*—The leg stands shall be constructed as specified herein and as shown in figure 2 and shall be of the wood specified in table II for the color of finish specified. The joining shall be by mortise and tenon reinforced by glue blocks and corner braces as shown in figure 2.

3.2.3.1 *Legs.*—The legs shall be not less than 1¾ inches square at the top tapering to 1⅜ inches square at the bottom. The legs may be tapered on the two outside faces only. The legs shall be either one piece solid or built up of not more than two full length pieces. The legs shall be mortised to receive the full width of the aprons and stretcher rails.

3.2.3.2 *Aprons and stretcher rails.*—The aprons shall be not less than ¾ inch thick by 3 inches wide and shall be tenoned full width to join the legs, and drilled and countersunk for attaching the tops. The front apron shall be cut out as shown in figure 2 and shall be rounded on the bottom edges. The stretcher rails shall be not less than ¾ inch thick by 1¾ inches wide and shall be tenoned to join the legs. The top edges of the rails shall be rounded.

3.2.3.3 *Drawer.*—The drawer shall be constructed as specified in 3.2.2.8, except drawer pulls are not required. The size and suspension shall be as indicated in figure 2.

3.2.3.4 *Reference slide.*—The reference slide shall be the same as specified in 3.2.2.7. See figure 2 for reference-slide-bearer construction.

3.2.3.5 *Tops.*—The tops shall be of the same construction as specified in 3.2.2.6, and they shall be not less than 13/16 inch thick. The tops shall be secured to the aprons by not less than 11 number 10 flat-head screws.

3.3 Method of finishing.

3.3.1 *Exposed parts and surfaces.*—All exterior surfaces normally exposed to view shall be sanded smooth and all corners and edges eased, thoroughly cleaned, and finished as herein specified.

3.3.1.1 *Stain.*—All exposed surfaces requiring stain to produce the color of finish specified shall be stained with a light-fast, nongrain-raising, solvent-type stain.

3.3.1.2 *Wash coat.*—A wash coat of either shellac or lacquer sealer shall be applied to all surfaces to be finished.

3.3.1.3 *Filler.*—All pores of exposed open grain wood shall be thoroughly filled with a good grade of paste filler. As the filler dries it shall be worked into all pores completely filling them, and the excess filler wiped away from all surfaces and corners. All close grain wood not requiring filler shall have a second coat of lacquer sanding sealer.

3.3.1.4 *Retouching.*—All filled or sealed surfaces shall be inspected and carefully corrected with lacquer shading-stain to the required standard color specified. The color of all exposed parts and surfaces shall be uniform.

3.3.1.5 *Final coats.*—After the above requirements are completed, the body of the stands shall receive one coat of lacquer sealer and two coats of semigloss lacquer. The tops shall have three coats of clear lacquer and shall be rubbed to an egg-shell finish. The lacquer when applied shall be as specified in 3.1.3 and each coat shall be heavy enough to assure ample body for sanding and rubbing. Application, drying time, sanding, and cleaning shall be controlled to produce a clean, smooth, heavy, even film of finish, without blisters, pits, wrinkles, runs, or more than a trace of orange-peel. The finish shall not cloud the natural grain of the wood. The reference slide shall be finished the same as the top except that the underside shall be oil-stained, sealed with lacquer sealer, and sanded smooth.

3.3.2 *Interior parts.*—After the drawer fronts have been finished as specified in 3.3.1, the drawer interior and exterior surfaces, except the fronts, shall be sanded smooth and completely cleaned. The entire surfaces of the interior parts of the drawer, including partitions, and the drawer runs and bearers shall be given a moisture-retarding and lubricating treatment. The liquid used shall be an odorless (after 48 hours) nongrain-raising solution which shall contain not less than 20 percent nonvolatile, nontoxic matter of which not less than 5 percent shall be wax. The natural color of the wood shall not be materially changed. The entire surfaces of the unexposed parts of the drawers shall be submerged in the moisture-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

retarding solution for not less than 3 minutes. The drawers shall be allowed to drain before insertion into the stand and all surplus of the solution shall be thoroughly wiped from finished surfaces to insure a smooth finish.

3.4 Identification marking.—Each stand shall be permanently marked on the underside of the top drawer in a plain and legible manner with the Federal specification symbol, the Federal stock number, the date of manufacture, and the manufacturer's name or trade-mark of such known character that the source of supply may be readily determined.

3.5 Workmanship.—The details of construction, including veneering, joining, assembly, and finishing shall be in strict accordance with the requirements of this specification and figures 1 and 2.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.—A representative sample stand shall be selected from those under construction or from each delivery, for purposes of inspection.

4.2 Inspection.—The stand shall be inspected to determine compliance with this specification as to workmanship, materials, design, details of construction, hardware, finish, markings and packing. Inspection shall be made at the factory by a representative of the Government at any time during process of manufacture, or at point of delivery.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Unless otherwise specified, commercial packages are acceptable.

5.2 Packing.—The stands shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.—Unless otherwise specified, shipping containers shall be marked with the name of the commodity, the Federal stock number, and the quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, the number of the contract or order, and the full name and address of the consignee.

6. NOTES

6.1 Ordering data.—The purchaser should specify the type and color of finish of the stand required, and should exercise any desired options offered herein (see 1.2.1, 1.2.2, 5.1, 5.3, and sec. 7).

6.2 Federal Specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and standard, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments:

7.2 Navy and Air Force.

7.2.1 *Applicable specifications and standard.*

Federal Specifications:

NN-B-591—Boxes; Fiberboard, Wood-Cleated (for Domestic Shipment).[1]

NN-B-601—Boxes; Wood-Cleated-Plywood, for Domestic Shipment.[1]

[1] Applicable to Navy purchases only.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

NN-B-621—Boxes; Wood, Nailed and Lock-Corner.[1]
UU-C-843—Cushioning Materials, Cellulosic.

Military Specifications:
JAN-P-103—Packaging and Packing for Overseas Shipment—Boxes; Wood-Cleated; Solid Fiberboard.[2]
JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes, Wood-Cleated, Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.
JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.
MIL-A-140—Adhesive, Water-Resistant, Waterproof Barrier-Material.

Navy Department Specification:
General Specifications for Inspection of Material.[1]

Military Standard:
MIL-STD-129—Marking of Shipments.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Packaging.*

7.2.2.1 *For domestic or overseas shipment.*—Each stand shall be wrapped and padded sufficiently to insure against scratches, rubbing or mars to the finish with type III, class B cellulosic cushioning conforming to Federal Specification UU-C-843. Cushion wraps shall be securely fastened to the item by means of tape or twine. Drawers shall be securely fastened so they will not come open in transit. Care shall be taken so that no damage to finish will be caused by the method used.

7.2.2.2 Stands shall be wrapped with waterproof paper conforming to Military Specification JAN-P-125. Seams and closures shall be sealed with adhesive conforming to Military Specification MIL-A-140.

7.2.3 *Packing.*

7.2.3.1 *For domestic shipment.*—Stands, packaged as described in 7.2.2.1 shall be packed in wood-cleated fiberboard, wood-cleated plywood or nailed wood boxes conforming to Federal Specifications NN-B-591, NN-B-601, and NN-B-621, respectively, for Naval purchases, and in accordance with Military Specification JAN-P-103 for Air Force purchases.

7.2.3.2 *For overseas shipment.*—Stands, packaged as described in paragraph 7.2.2.1, shall be packed in either cleated plywood, or nailed wood boxes conforming to Military Specifications JAN-P-105 and JAN-P-106, respectively, for Naval purchases, and in accordance with Military Specification JAN-P-106 only for Air Force purchases.

7.2.4 *Marking.*—In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

7.2.5 *Ordering data.*—Procurement documents should specify whether domestic or overseas shipment is required (see 7.2.3 and 7.2.4).

7.2.6 *Inspection procedures (Navy only).*—General inspection procedures shall be in accordance with General Specifications for Inspection of Material.

Navy Interest: S Y

7.3 Army.

7.3.1 *Applicable specifications and standards:*

Federal Specifications:
LLL-B-631—Boxes; Fiber, Corrugated (for Domestic Shipment).
LLL-B-636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:
JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.
JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.
MIL-A-140—Adhesive, Water-Resistant, Waterproof Barrier-Material.

Military Standards:
MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

[1] Applicable to Navy purchases only.
[2] Applicable to Air Force purchases only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

MIL-STD-129—Marking of shipments.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.3.2 *Sampling and inspection.*—Sampling shall be conducted in accordance with procedures set forth in Military Standard MIL-STD-105. Inspection shall be made by the Government to determine compliance with the requirements of this specification.

7.3.3 *Packaging.*

7.3.3.1 Complete top shall be covered with a sheet of 60-pound basis weight (24x36-500) glazed paper, folded over the edges and taped in place on the underside of the top. The stand shall be padded with excelsior pads, cellulose wadding blankets, or equivalent padding materials at all points of contact with walls of shipping container.

7.3.4 *Packing.*

7.3.4.1 *For domestic shipment.*—Each stand shall be packed in a snug fitting corrugated or solid fiberboard container conforming to the requirements of Federal Specifications LLL-B-631 and LLL-B-636, style RSC, respectively, except boxes shall test not less than 200 pounds. All flaps of fiberboard containers shall be securely sealed, with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps.

7.3.4.2 *For overseas shipment.*—Each stand, packaged as described in 7.3.3 shall be packed in containers constructed and strapped in accordance with one of the following specifications: In quantities as specified by the contracting officer, except gross weight of shipping containers shall not exceed approximately 125 pounds, style 2 or 2½, type 2 load of Military Specification JAN-P-106, or style A or B, type 2 load of Military Specification JAN-P-105.

7.3.4.3 Each overseas shipping container shall be provided with a sealed case liner or prefabricated bag conforming to Military Specification JAN-P-125, type L-2 or M. Closures and seams shall be completely sealed with a continuous seam at least ¾ inch wide of water-resistant adhesive conforming to Military Specification MIL-A-140.

7.3.5 *Marking.*

7.3.5.1 *Labeling.*—Each intermediate container shall be printed or stenciled with the following information:

Nomenclature
Stock number
Quantity
Contract number
Date of contract
Name and address of manufacturer


7.3.5.2 *Marking.*—Each shipping container shall be marked in accordance with Military Standard MIL-STD-129.

7.3.6 *Ordering data.*—Procurement documents should specify whether the subject commodity is to be packed and shipping containers marked for domestic or overseas shipment. (See 7.3.4 and 7.3.5.)

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog


U. S. GOVERNMENT PRINTING OFFICE: 1952

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

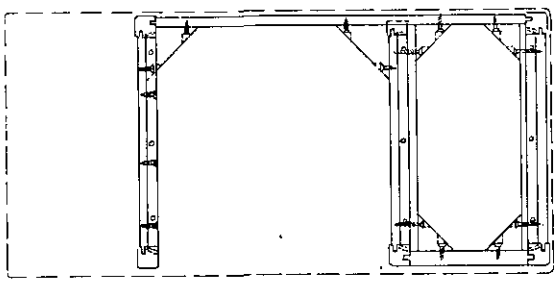


TOP PLAN


(TOP, SLIDE, & DRAWERS REMOVED)

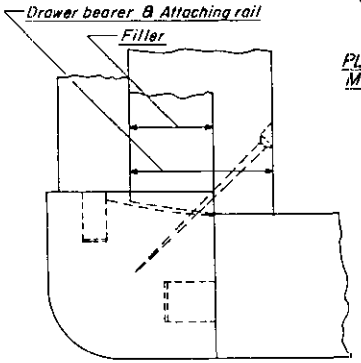


PLAN CONSTRUCTION OF CORNER POSTS



PLAN SECTION OF POST THRU MORTISE & DADO CUTS

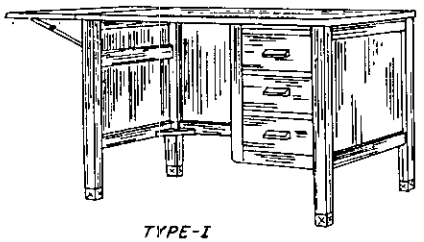

TYPE-I

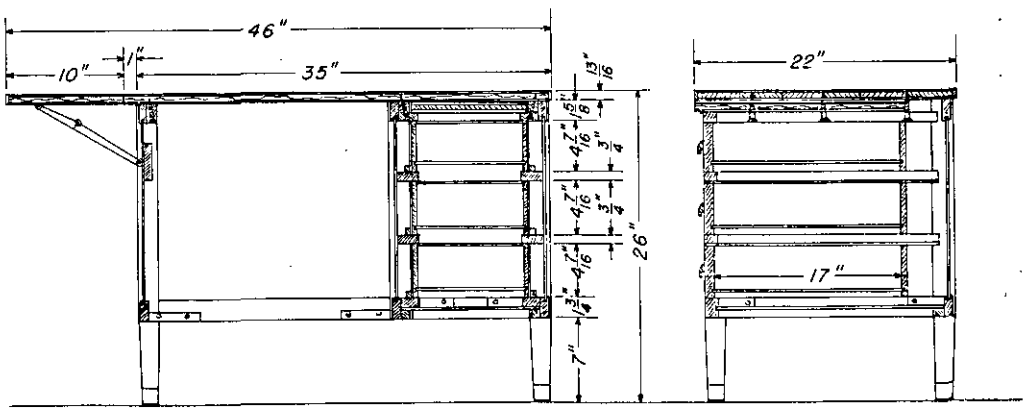


FRONT SECTION

(CUT BEHIND FRONT LEGS)

SIDE SECTION

(CUT THRU CENTER OF DRAWERS)

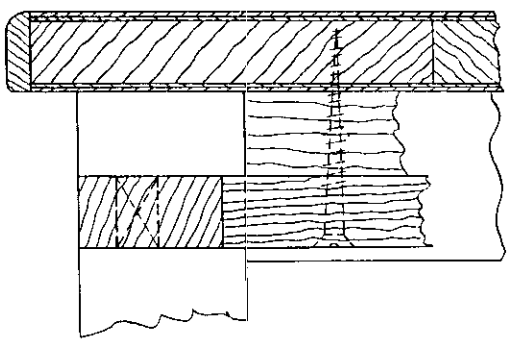

PART SIDE SECTION SHOWING ATTACHING CONSTRUCTION


TYPE I.- PEDESTAL


STAND, TYPEWRITER WOOD, PEDESTAL


SCALE: 1 1/2" = 1'-0" & FULL SIZE

FIGURE-1


Source: https://assist.dla.mil -- Downloaded: 20260-26T11:41Z
Check the source to verify that this is the current version before use.

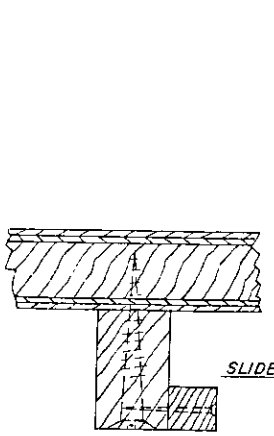

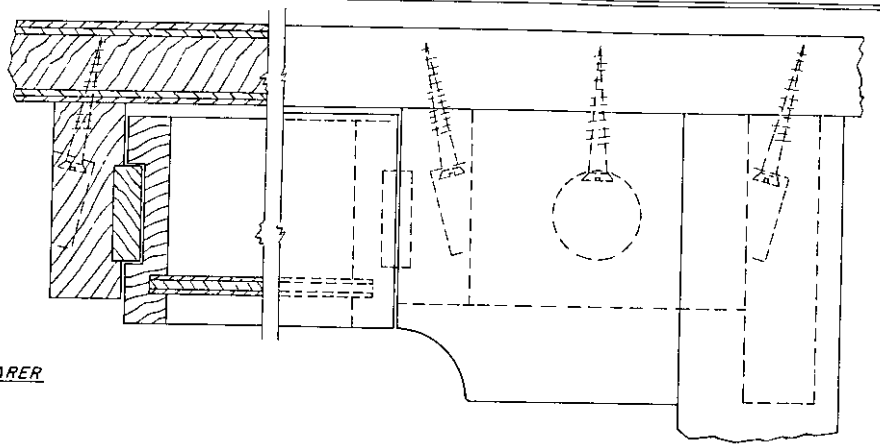


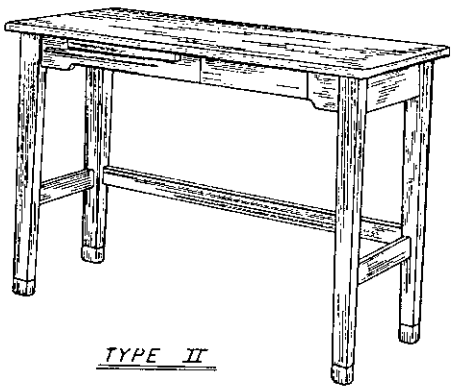


TYPE II

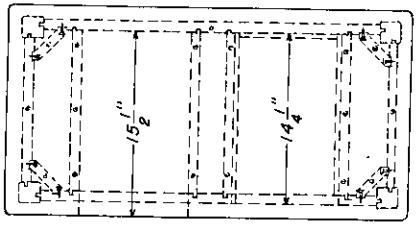

— TOP PLAN —

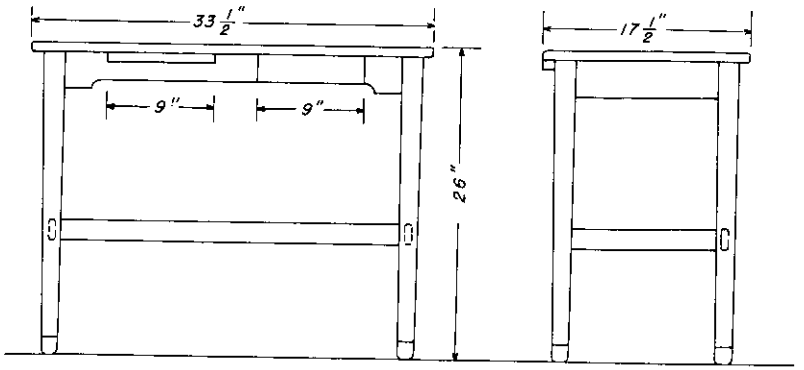

— FRONT ELEVATION — — SIDE ELEVATION —

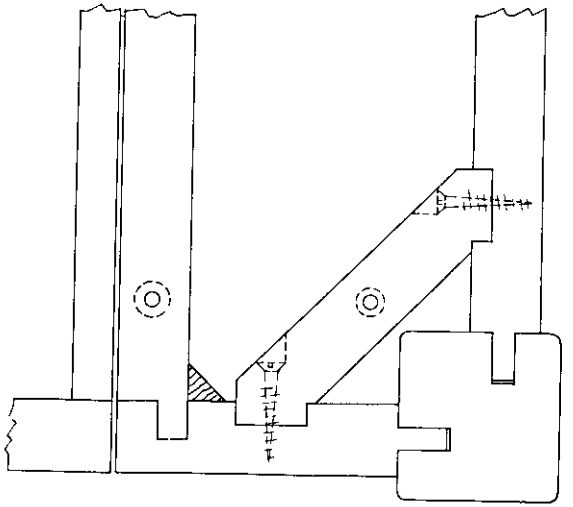

TYPE-II-LEG STAND

STAND, TYPEWRITER WOOD, LEG	
SCALE: 1 1/2" = 1'-0" & FULL SIZE	FIGURE -2-

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:41Z
Check the source to verify that this is the current version before use.