AA-T-001197(GSA-FSS)
May 19, 1967

INTERIM FEDERAL SPECIFICATION

TABLES, WOOD OR METAL, BASE

This Interim Federal Specification was developed by the Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION.

1.1 Scope. This specification covers a group of occasional tables with plastic top surfaces and bases of metal or wood.

1.2 Classification.

1.2.1 Types, styles, and sizes. The tables shall be of the following types, styles, and sizes as specified:

Type I - Wood base frame
Type II - Metal base frame

Style A - Square
  Size 1
  Size 2

Style B - Rectangular
  Size 1
  Size 2
  Size 3

Style C - Round
  Size 1

2. Applicable Specifications, Standards, and other Publications.

2.1 The following specifications and standards, of the issue in effect on the date of the invitation for bids, form a part of this specification:

Federal Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative, and Nondecorative.
L-T-0041 - Table Top and Furniture Assemblies (Plastic Thermosetting Resin Laminate).
P-P-554 - Polish, Furniture, Wax.
QQ-C-320 - Chrome Plating (Electrodeposited).
QQ-N-290 - Nickel Plating (Electrodeposited).
TT-F-336 - Filler, Wood Paste.
TT-S-00190 - Sealer, Sanding Lacquer Type for Wood Furniture.

Federal Standards:

Fed. Std. No. 102 - Preservation Packing and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Botston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-20 - Welding Terms and Definitions.
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U. S. Military Property.
MIL-STD-171 - System for Preparation, Painting and Finishing Metal and Wood Surfaces.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Commercial Standards:

CS-236 Mat-Formed Wood Particleboard.

(Copies of the Commercial Standard referenced above, which is a Department of Commerce publication, may be obtained upon application, accompanied by money order, coupon or cash, to the Superintendent of Documents, Government Printing office, Washington, D. C. 20402. Prices may be obtained from the Superintendent of Documents).

2.2 Other publications. The following publications, of the issue in effect on the date of the invitation for bids, form a part of this specification:

Steel Products Manual, Carbon Steel Sheets

(Application for copies may be addressed to the American Iron and Steel Institute, 350 Fifth Avenue, New York, New York).

Uniform Freight Classification Rules

(Application for copies may be addressed to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois).

National Motor Freight Classification

(Application for copies may be addressed to National Motor Freight Traffic Association 1616 Pst., N. W., Washington, D. C. 20036).

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified, (see 6.2) before production is commenced, a sample of the finished item and each component part conforming to the requirements of this specification shall be offered for approval of the contracting officer or his authorized representative. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without the written approval of the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2 Materials. The materials used in the construction of the tables shall be as follows:

3.2.1 Adhesives. Adhesives to be used and their permitted application shall be as shown in Table I.

Table I. - Adhesives

Application	Kinds of Adhesives
All assembly joints, glue-blocks, and dowels	The adhesive shall conform to or exceed an average block shear strength of not less than 2,800 pounds per square inch when tested as specified in Test Method 1031 of Federal Test Method Standard No. 175. Except as follows:

1/ The following modifications apply when testing casein-type adhesive. The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours.

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ Whenever a specimen fails at a load of less than 2,800 pounds per square inch and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 pounds per square inch or higher, and the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 pounds per square inch.

3.2.2 Dowels. Dowels shall be of ash, hickory, maple, birch, beech or oak. Dowels shall be longitudinally or spirally grooved and shall have beveled ends, and shall be dried to a moisture content not exceeding 5 percent at the time of assembly. Diameter and length shall be as large as practicable to insure maximum serviceability of jointed members.

3.2.3 Hardware.

3.2.3.1 Glides. Glides for type I tables shall be of nickel or chrome-plated steel, or corrosion-resisting steel, and shall be nail type not less than 7/8 inch in diameter. Glides for type II tables shall be of the snap-in type polyethylene material, color black.

3.2.3.2 Screws. Screws shall be of the type and size required to securely fasten the components or assembly specified.

3.2.4 Plastic Laminate. Plastic laminate used on the top and self-edge of the table tops shall conform to specification L-P-508, style D, type I, grade HP, class 1, and shall be 0.062 + 0.005 inch thick. The backing sheet shall also be in accordance with specification L-P-508, style ND, type V, grade HP and shall be a minimum of 0.030 ± 0.005 inch thick. The color and finish of the plastic laminate tops shall be limited to the following:

White, Formica Plastic - W1004 Textured walnut; W1104 Standard or equal.

3.2.5 Steel. The tubular steel used in fabrication of the metal base shall be SAE 1010-1020 commercial quality cold rolled strip steel. It shall be bright, smooth, free from ruts, scale, pits, scratches, laps and buckles affecting strength or appearance. The gage numbers specified are the manufacturers standard gage for steel.

3.2.6 Wood. Exposed solid wood parts shall be constructed of walnut or pecan, and shall be of the same kind of wood for any single item. Unexposed parts (corner blocks) used shall be of the hardwood varieties.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.6.1 Characteristics. The wood shall be clear, sound stock without knots, worm holes, shakes, or other defects which may affect appearance or serviceability of the finished product.

3.2.6.2 Seasoning. All wood shall be air-seasoned and then kiln-dried to a moisture content of from 5 to 9 percent at the time of assembly. All wood shall be allowed to temper approximately two weeks before milling.

3.2.7 Zinc plating. Zinc plating shall be in accordance with MIL-STD-171 (ORD), paragraph 5.1.1 (organic finishes), and of the kind shown in Table I, Finish 1.9 (zinc plating). The type and class shall be as in 1.9.2 and 1.9.2.1. The final finish shall be bright.

3.2.8 Chromium plating, (satin). Chromium plating shall be in accordance with QQ-C-320, class I, type II. The copper plus nickel undercoat on the steel base metal shall conform to class 1, Type III, of QQ-N-290 on steel base metal.

3.3 Construction. The basic component parts of the tables shall be the top and the base, which shall consist of legs and stretchers.

3.3.1 Design. The design and style of the tables shall approximate closely that illustrated in the attached photographs.

3.3.1.1 Dimensions. The overall dimensions of the furniture units covered herein shall be as follows:

Types I and II
Style A - Square
Size 1 - 24 inches by 24 inches by 20 inches high
Size 2 - 30 inches by 30 inches by 15 inches high

Style B - Rectangular
Size 1 - 20 inches by 28 inches by 20 inches high
Size 2 - 29 inches by 42 inches by 15 inches high
Size 3 - 18 inches by 54 inches by 15 inches high

Style C - Round
Size 1 - 40 inches in diameter by 15 inches high

3.3.1.2 Tolerances. Unless otherwise specified, the following tolerances are permissible:
(a) Height, width and depth dimensions of tables - plus or minus 1/8 inch.
(b) Thickness dimension of particleboard - plus 1/16, minus 1/32.
(c) Metal gages - Tolerance shall be as specified in the pamphlet "Steel Products Manual" Carbon Steel Sheets.

3.3.2 Welding. All brazing and welding shall be as specified in MIL-STD-20 and shall be thoroughly cleaned of flash and spatter. All exposed brazing and welding shall also be ground smooth.

3.3.2.1 Definition of welding terms. Welding terms used herein shall be as defined in MIL-STD-20 and are as follows:

Fusion welding. Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from an external source.

Brazing. Brazing is the joining of metals with the aid of a filler metal of a different composition having a melting point above 800 degrees Fahrenheit. Brazing method shall be gasflux, using nickel bronze rod (nickel content 9.5%, tensile strength 70,000 - 75,000 (p.s.i) actylene, and oxygen (or propane) gases.

3.3.3 Table Tops, Type I and Type II. Table tops shall be 13/16 inch thick and shall be constructed in accordance with any of the types in specification L-T-0041 except that when Types III or IV are used the following deviations shall apply:

Type III core material shall conform to Commercial Standard CS326, Type 2, Grade A, Class 2 or Type I, Grade A, class 1.

Type IV core material shall conform to Commercial Standard CS263 Type I, Grade B, Class 2, except that screw holding values for the latter shall be 285 pounds for face and 235 pounds for edge.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

Top construction shall be completed using the decorative laminate specified in 3.2.4. The underside of the top shall be surfaced with a backing sheet as specified in 3.2.4, and shall be free of projections. The top overhang shall be one (1) inch for style A and style B table.

3.3.4 Table, Type I. The base frame for the type I table shall be made of solid wood listed in 3.2.6. Legs shall be 1-3/8 inches by 1-3/8 inches shaped as in figure 1. Aprons shall be 1 inch thick by 1-7/8 inches wide, double doweled and glued to the legs. Corner blocks not less than 3/4 inches thick shall be glued and accurately fitted into all four corners and secured by two No. 10 screws. The aprons shall be fastened to the top by means of No. 10 sheet metal screws spaced a maximum of 12 inches apart to secure base to top. The screws shall penetrate the top a minimum of 5/8 inch. The legs shall be furnished with glides for Type I tables as specified in 3.2.3.1.

3.3.5 Table, Type II. The metal base frame shall be fabricated of the tubular steel specified in 3.2.5. Legs and aprons shall be 1 inch square, 16 gauge tubing. All members shall be joined by welding or brazing as specified in 3.3.3. The aprons shall be bored and countersunk for No. 10 sheet metal screws a maximum of 12 inches apart to secure base to top. The screws shall penetrate the top a minimum of 5/8 inch. The legs shall be furnished with glides for Type II tables as specified in 3.2.3.1.

3.4 Finish.

3.4.1 Wood. Type I table base shall be finish sanded smooth, all corners and edges eased, and thoroughly cleaned and finished as specified herein and unless otherwise specified match the color of the plastic laminates specified in 3.2.4.

Procedure for clear wood finish on open pore wood:

1. Sap stain to equalize wood color.
2. Apply selected colorant to wood to produce color specified. Stain and colorant shall conform to tests specified in 4.4.1.7.
3. Wash coat with adhesive sealer. Sealer shall withstand toughness and adhesion test specified in 4.4.1.8.
4. Scuff sand, using fineness of sandpaper grit needed to produce proper surface.
5. Fill to degree necessary to match sample. The filler shall conform to the test specified in 4.4.1.7.
6. Seal with adhesive type sealer. Sealer shall withstand toughness and adhesion test specified in 4.4.1.8.
7. Sand, using fineness sandpaper grit needed to give proper surface.
8. Shade to tie in color variation, if necessary. Shading shall conform to the test specified in 4.4.1.7.
9. Top coat with lacquer.
10. Top coat with lacquer. The lacquer and finish shall be of a quality to meet the requirements specified in 4.4.1 and subparagraphs thereunder.
11. Rub, steel wool, wax or polish, if required.

NOTE: Operation number 8 may be performed where shown or after operation number 5.

3.4.2 Metal. Type II table base shall be chromium plated in accordance with 3.2.8 and shall be satin finished.

3.5 Identification marking. Unless otherwise specified, each table shall be permanently marked on the underside in a plain and legible manner with the specification number, Federal Stock number, the year of manufacture, and the contractor's name or trademark so that the source of supply may be readily determined, when specified, the identification marking shall comform to MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.6 Workmanship. Care in fabrication and quality control shall be exercised in order to produce tables suitable for use in dormitories, lobbies and reception areas and conforming to the acceptable quality level specified herein. The methods of construction, finishing, assembly and the appearance of the tables, in general, shall be in accordance with the requirements of this specification. Tables shall be free from defects that affect appearance, or may affect serviceability during a reasonable service life.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Standard MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2.2 End item inspection.

4.2.2.1 Visual examination. Examination of the furniture units shall be in accordance with the classification of defects and acceptable quality levels (AQL's) specified in Table III. The lot size shall be expressed in units of any one type and class of reception room furniture for the purpose of determining the sample size in accordance with standard MIL-STD-105.

Table I. Classification of defects

Examine	Defect	Classification Major	Minor
Material	Steel components not of material or gage specified.	X	
	Species of wood in any wood component not of material or size specified.	X	
	More than 1 species of wood used for exposed wood components of any one item.		X
Laminated plastic	Not material specified.	X	
	Face or backing sheet missing.	X	
	Sheet containing area of no adhesion.		X
	Face sheet damaged, dented, cracked, marred, or discolored.	X	
	Scratch or nicks in face sheet, affecting appearance		X
	Table tops not self edged.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Table I. Classification of defects (con't)

Examine	Defect	Classification Major	Classification Minor
Workmanship and Construction	Any component missing, malformed, or fractured.	X	
	Welds not ground smooth or free of pits and splatter.		X
	Welds cracked, factured, burned through or not fused.	X	
	Burrs or sharpness on any component.		X
	Corner block missing	X	
	Component loose or insecurely fastened where rigidity is required.		X
Finish	Steel components not finished as specified.	X	
	Wood components not finished as specified.	X	
	Color of wood finish does not match plastic laminate top (unless otherwise specified).	X	

4.2.2.2 Dimensional examination. Any dimension that is not within the specified tolerances shall be classified as a defect.

4.2.2.3 Examination of preparation for delivery requirements. An examination will be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects will be scored in accordance with Table II. The sample unit shall be one shipping container fully prepared for delivery, selected just prior to closure operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Table II. Classification of Preparation for delivery defects

Examine	Defect
Marking	Incorrect, illegible, of improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud.
Contents	Not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in Table III.

Table III. Acceptable quality levels in accordance with MIL-STD-105

	Inspection levels	Major	Total
For defects listed in 4.2.2.1	II	4.0	10.0
For defects listed in 4.2.2.2	S3		4.0
For defects listed in 4.2.2.3	S2		4.0

4.4 Tests.

4.4.1.1 Test of finish system. The following test shall be made on panels produced in accordance with the production procedures used in finishing the furniture.

4.4.1.1 Working properties. Working properties shall conform to the requirements of 4.2.3.1 of Federal Specification TT-L-57.

4.4.1.2 Spot test. Spot test shall conform to 4.2.3.3 of Federal Specification TT-L-57.

4.4.1.3 Alcohol. Alcohol test shall conform to 4.2.3.3.1 of Federal Specification TT-L-57.

4.4.1.4 Print resistant test. Print resistant test shall conform to the requirements of 4.2.3.4, 4.2.3.5.1, 4.2.3.5.2 and 4.2.3.5.3 of Federal Specification TT-L-57.

4.4.1.5 Cold check resistance. Cold check resistance shall conform to the requirements of 4.2.3.5, 4.2.3.5.1, 4.2.3.5.2 and 4.2.3.5.3 of Federal Specification TT-L-57.

4.4.1.6 Boiling water. The boiling water test shall conform to the requirements of 4.2.3.6 of Federal Specification TT-L-57.

4.4.1.7 Ultra-violet light resistance. Ultra-violet light resistance shall be as specified in 4.2.3.7 of Federal Specification TT-L-57, except that panel preparation as specified shall be disregarded, and tests shall be made on complete finished wood panel of the same wood as used in production. The finish shall be produced in accordance with production procedures used in producing the furniture.

4.4.1.8 Toughness and adhesion. The test for toughness and adhesion shall be made using a Bell Laboratories adhesion tester with setting at 2-1/2, in accordance with instructions for using the tester, as provided by Bell Laboratories. The panel shall be marred both parallel and perpendicular to the grain. The resulting indentation shall show no whitening which is evidence of film separation. The film shall conform to the contour of the indentation and shall not crack in a brittle manner in or along the indentation. The test shall be made on completely finished wood panels of the same wood as used in production. The finish shall be produced in accordance with production procedures used in producting the furniture.

4.4.2 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the bend.

5. Preparation for delivery. Packaging, packing and marking shall be as specified in the invitation for bid.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

6.1 **Intended use.** The combination metal and wood tables covered by this specification are designed for use in dormitories, lobbies and reception areas of bachelor officers quarters and are correlated with other furniture item groups.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and should specify the following:

(a) Number, title and date of this specification.

(b) Type, style and size required.

(c) When finish of wood members need not match plastic laminate top (Type I)

(d) When preproduction sample requirement is waived.

(e) Plastic laminate color required.

(f) Level of packaging and packing required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


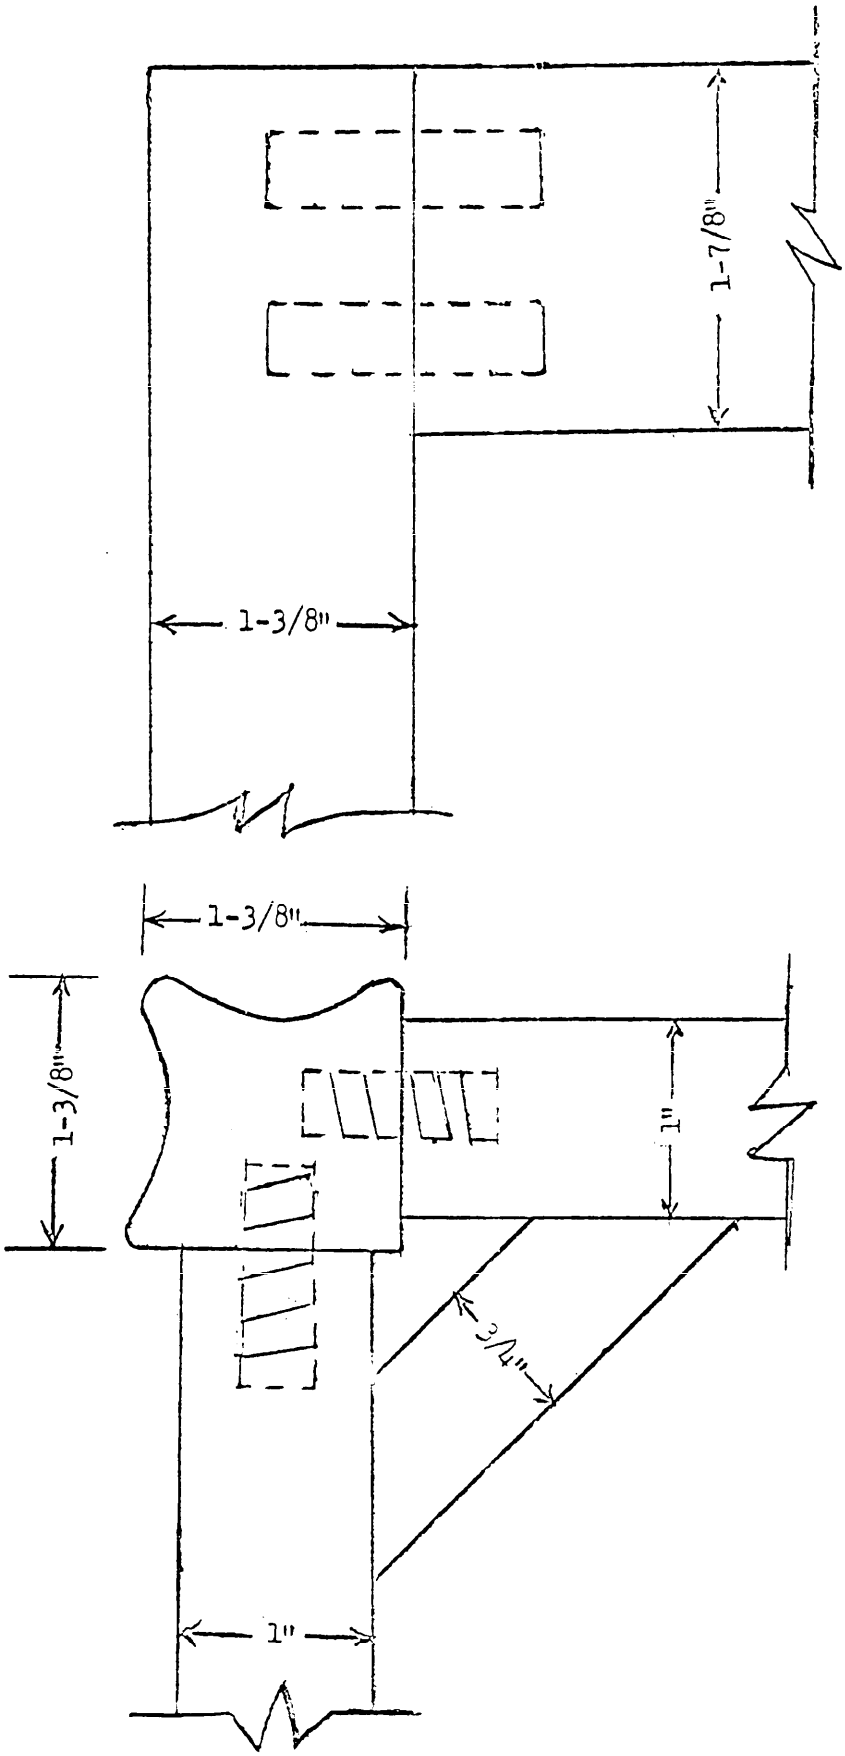



FIGURE 1 Corner detail - Type I tab

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

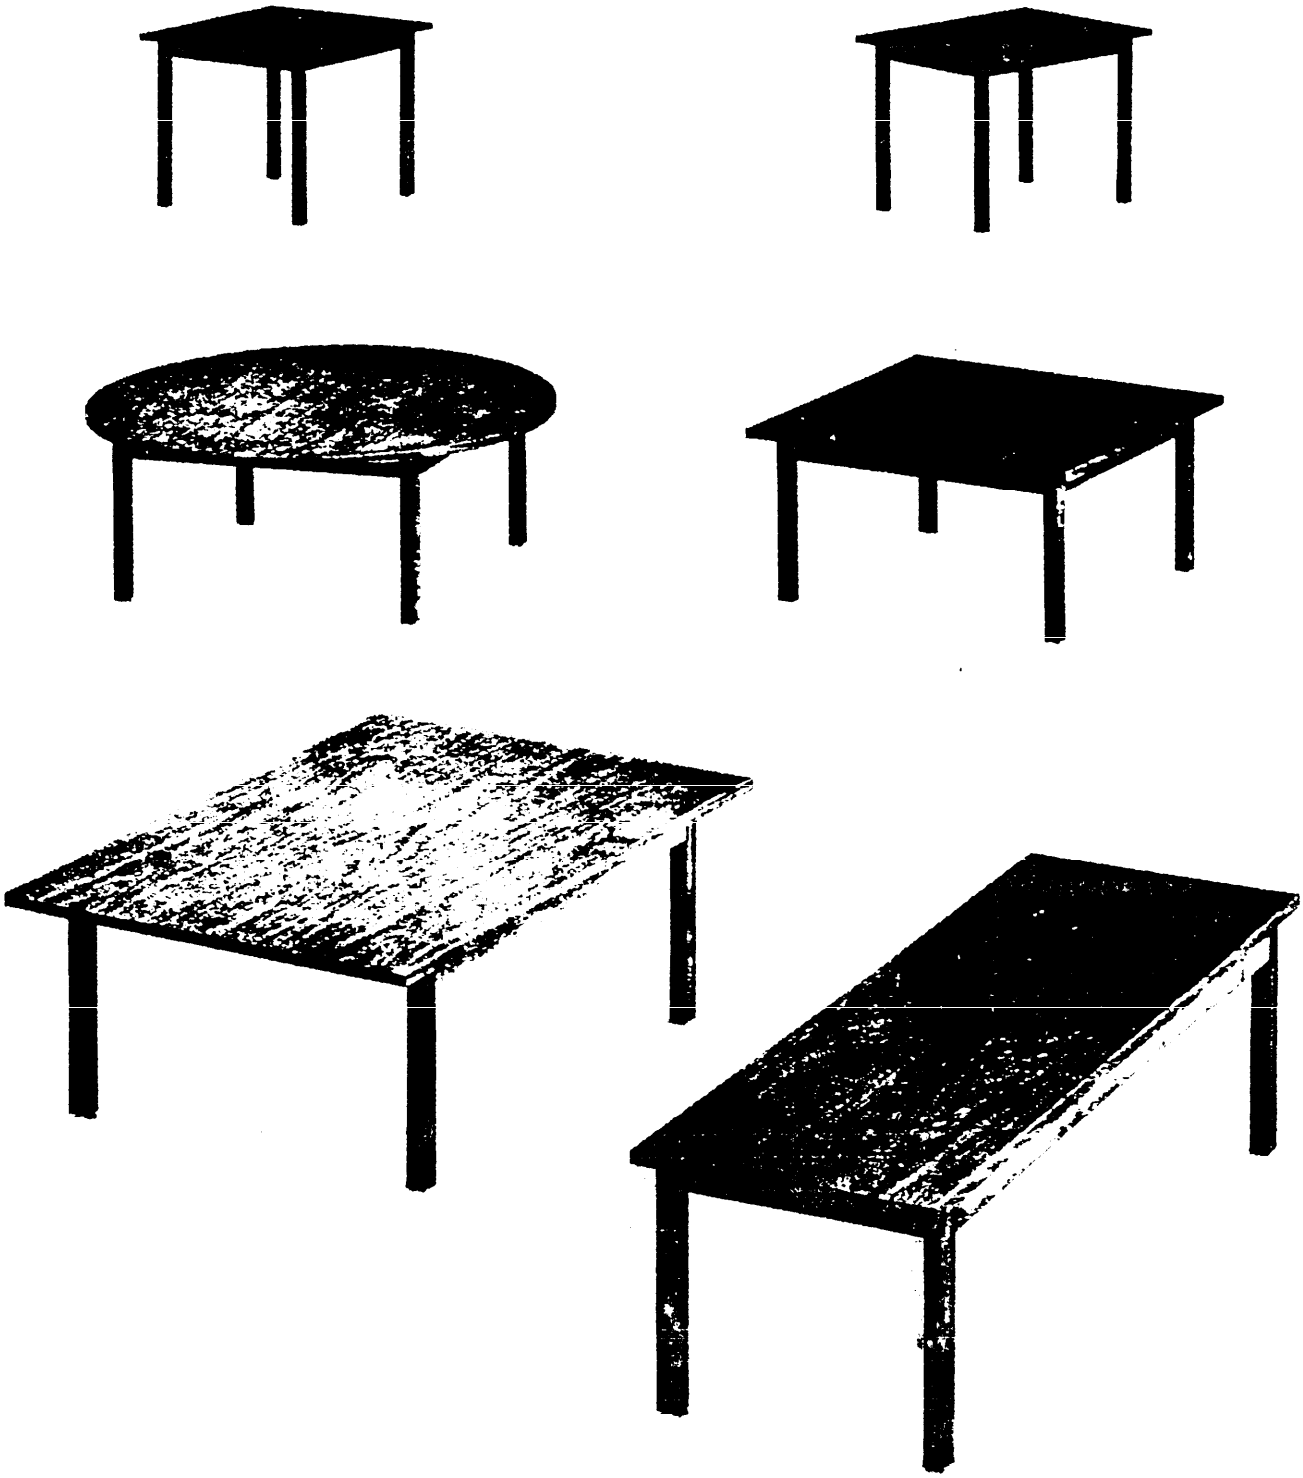

TYPE I - WOOD BASE FRAME

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

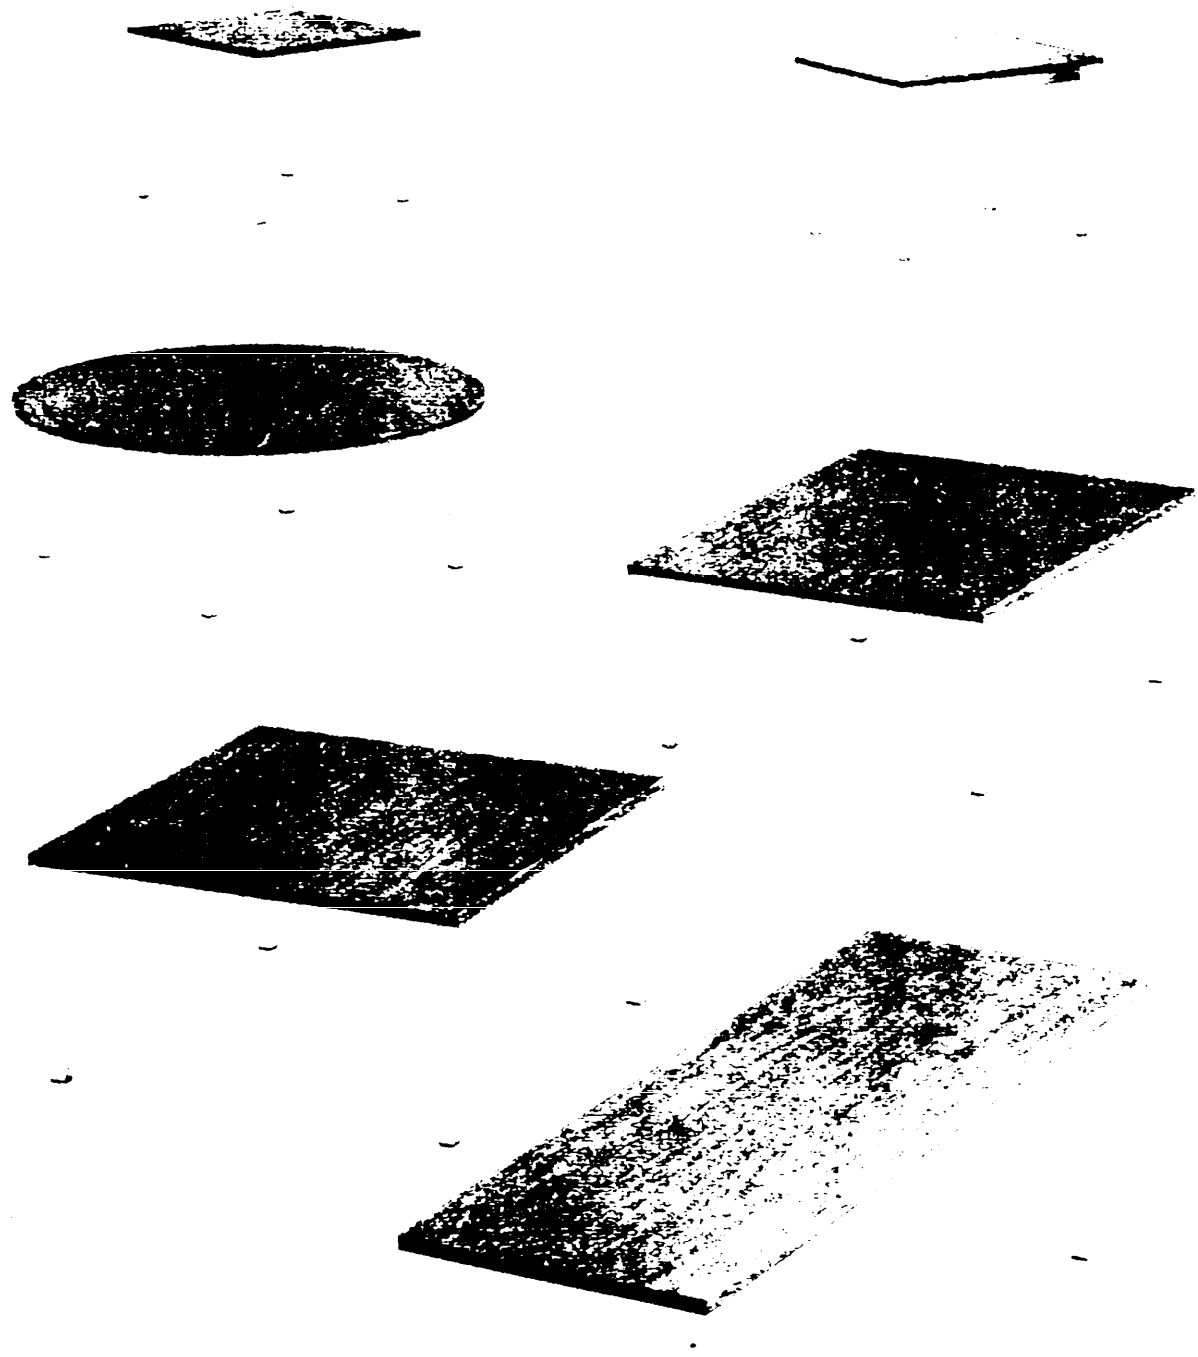

TYPE II - METAL BASE FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.