AA-T-00670 (GSA-FSS)
March 27, 1964

INTERIM FEDERAL SPECIFICATION

TRAY, STATIONERY, METAL, FOR STEEL DESKS

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 Scope. This specification covers one type and size of metal stationery tray (see 6.1).

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS.

2.1 Specifications and standards. The following specifications and standards of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

Federal Specifications:

TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams and Joints (Sheet Metal).
Fed. Std. No. 595 - Colors

(FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following publication of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

Steel, Products Manual, Carbon Steel Sheets.

(Copies may be obtained from American Iron and Steel Institute, 150 East 42nd Street, New York 17, N.Y.)

3. REQUIREMENTS.

3.1 Material.

3.1.1 Steel. The steel sheets used in the fabrication of the trays shall be 24 gage (0.0239 inch) commercial quality, cold rolled or cold rolled oiled, which shall have a stretcher leveled standard of flatness as defined in the Steel Products Manual. The steel shall be bright, smooth, free of rust, scale, pits, scratches, laps and buckles affecting strength and appearance and shall withstand the bend test specified in 4.3.1. The gage number specified is the manufacturer's standard gage for steel sheets. The decimal equivalent shown for the steel thickness is subject to the tolerances given in the steel products manual for cold rolled sheets.

3.2.2 Finishing materials.

3.2.2.1 Primer. The primer, when used, shall be compatible with the finishing enamel used.

3.2.2.2 Enamel. Enamel for the finishing shall be the manufacturer s commercial product except the color shall be as specified in 3.2.2.2.1. Enamel shall withstand the test specified in 4.3.2.

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.2.2.1 Color of finish. The color of the finishing enamel shall be gray, color No. 26134 of Federal Standard No. 595. Sample panels of the standard color are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D. C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

3.3 Construction. The design of the tray shall be as shown in Figure 1. Alternatively, the top may have a centered and uniformly rounded cut-out not more than 4 inches wide by 2 inches deep to facilitate removal of paper. Other dimensions shall be as shown in Figures 1 and 2. The tray shall be made of the steel specified in 3.2.1. The top edge shall be formed to a 1/4 inch open fold and the side and bottom edges shall be formed to a return flange. The open fold and the return flange formations shall be as illustrated in Fed. Std. No. 187. A tab (see figure 1) shall be die punched, permitting the tab to be manually formed (at option of the user) at 90 degrees to the face to lock in place the initial or primary tray to the drawer divider. If tray with a cut-out is furnished, tabs shall be formed on each side of the cut. Two projections not less than 1/4 inch or more than 3/8 inch in depth shall be provided on the underside of each tray. The projections shall be 1-3/4 inches from the outside bottom edge and shall be designed to permit contact with the outside edge of the tray directly underneath as shown in Figure 2. The trays shall interlock with each other and with the vertical partition in the storage drawers to maintain their slope and position. They shall not interlock with the sides of the drawer.

3.3.1 Dimensions. The dimensions of the tray shall be as shown in Figure 1. A tolerance of plus or minus 1/16 inch will be permitted in the overall height, width and depth dimensions.

3.4 Pretreatment and finishing.

3.4.1 Pretreatment. The tray surfaces shall be cleaned and processed in accordance with any of the methods specified in TT-C-490.

3.4.2 Priming. Except as otherwise specified herein, all surfaces treated as specified in 3.4.1 shall be coated with primer as specified in 3.2.2.1.

3.4.3 Enameling. All primed surfaces shall be coated with enamel as specified in 3.2.2.2 which shall be baked in accordance with the enamel manufacturer's directions. Total dry film thickness of enamel and primer shall be not less than 1.4 mils. Primer may be omitted from any surface prepared for painting in accordance with type I or type II of TT-C-490 provided the dry enamel film thickness is not less than 1.0 mil. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grits, areas of thin film or no film and separation of color. Finish panels shall withstand the test specified in 4.3.2.

3.5 Identification marking. Unless otherwise specified (see 6.1) the underside of each tray shall be marked with the manufacturer's name or trade mark of such known character that the source of manufacture may be readily determined. When specified (see 6.1) trays shall be marked for identification in accordance with MIL-STD-130.

3.6 Workmanship. The workmanship shall be of a quality to produce a serviceable and neat item. Bends shall be straight and smooth and corners shall be neatly closed. There shall be no sharp, exposed edges.

4. SAMPLING, INSPECTION AND TEST PROCEDURES.

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order (see 6.1). The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2.2 End item inspection.

4.2.2.1 Visual examination. Examination of the trays shall be in accordance with the classification of defects specified in Table I. The lot size shall be expressed in units of trays for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely fabricated tray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Table I. Classification of defects in accordance with MIL-STD-105

Examine	Defect	Classification	
		Major	Minor
Finish	Indication of rust under coating	X	
	Poor adhesion, i.e. blistered, checking or peeling		X
	Tacky (not dry to touch)		X
	Color separation, stain, or not uniform		X
	Runs, sags, or foreign matter in coating		X
	Scratch through to base metal or bare spots	X	
	Abrasion or area of thin coating		X
Workmanship	Malformed	X	
	Dirt, smudges, oil, grease or other foreign matter		X
	Punctured	X	
	Dents		X
	Sharp exposed edge or projection	X	
	Buckled or warped	X	
Identification marking	Missing	X	
	Defective, i.e. illegible, incorrect, wrong location		X

4.2.2.2 Dimensional examination. Inspection will be made of trays for compliance with dimensions specified (including gage of metal). Any deviation therefrom shall constitute a defect.

4.2.2.3 Inspection levels and AQL's. The inspection level and the acceptable quality levels (AQL's) expressed in defects per 100 units shall be as follows:

For examination in	Inspection level	AQL's Major	AQL's Total
Table I	II	4.0	6.5
4.2.2.2 (1 class)	S-4		4.0

4.3 Tests.

4.3.1 Bend test for steel sheets. The steel sheets used shall withstand bending through 180 degrees at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the bend. A slight granulation of the surface at the point of greatest deformation in the bend shall not be cause for rejection.

4.3.2 Finish test. A panel prepared in accordance with 3.4 shall be bent at room temperature around a 1/4 inch rod to 180 degrees, without evidence of cracking, flaking or loss of adhesion of the enamel.

5. PREPARATION FOR DELIVERY.

5.1 Preservation and packaging. Unless otherwise specified (see 6.1) trays shall be packaged in accordance with the supplier's commercial practice, and packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules and regulations of carriers as applicable to the mode of transportation.

5.2 Marking.

5.2.1 Civil agencies. In addition to any special markings required by the contract or order, the interior packages and shipping container shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to any special markings required by the contract or order, the interior packages and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES.

6.1 Intended use. The stationery tray covered by this specification is designed to fit the storage drawers of all steel general office, unitized and conference type desks.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) If special marking is required (3.5 and 5.2).
(c) Inspection record details (4.1).
(d) If special packaging and packing is required (5.1).


GSA DC 84-13883

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

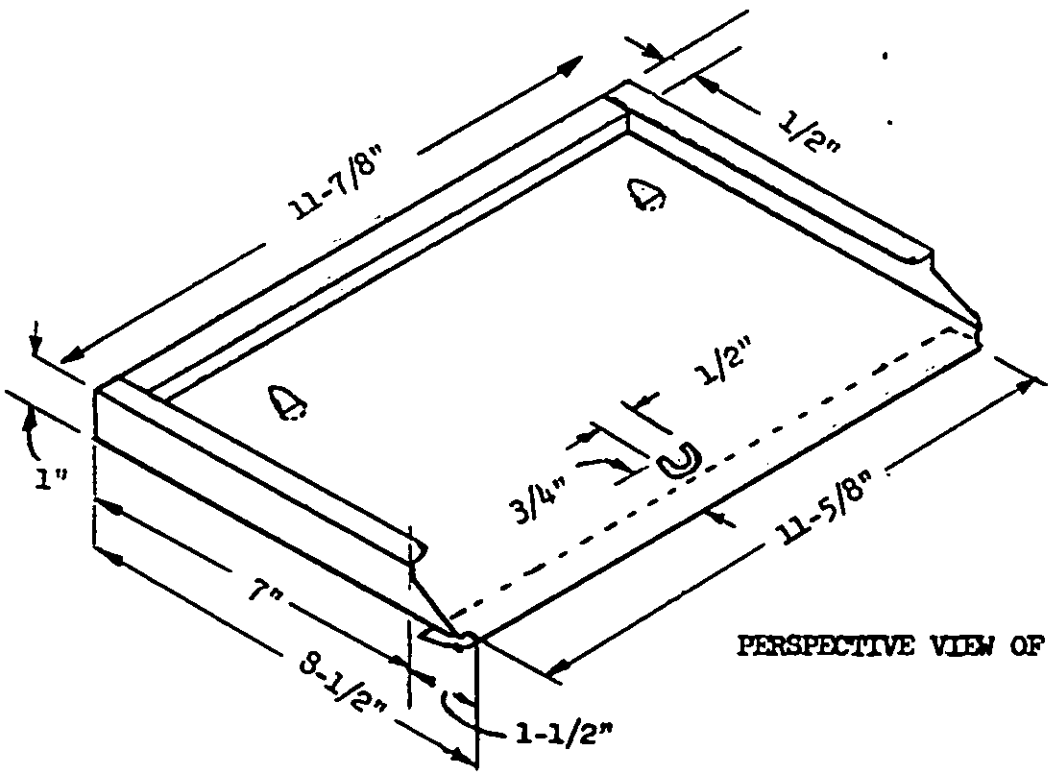

PERSPECTIVE VIEW OF SINGLE TRAY

FIG. 1

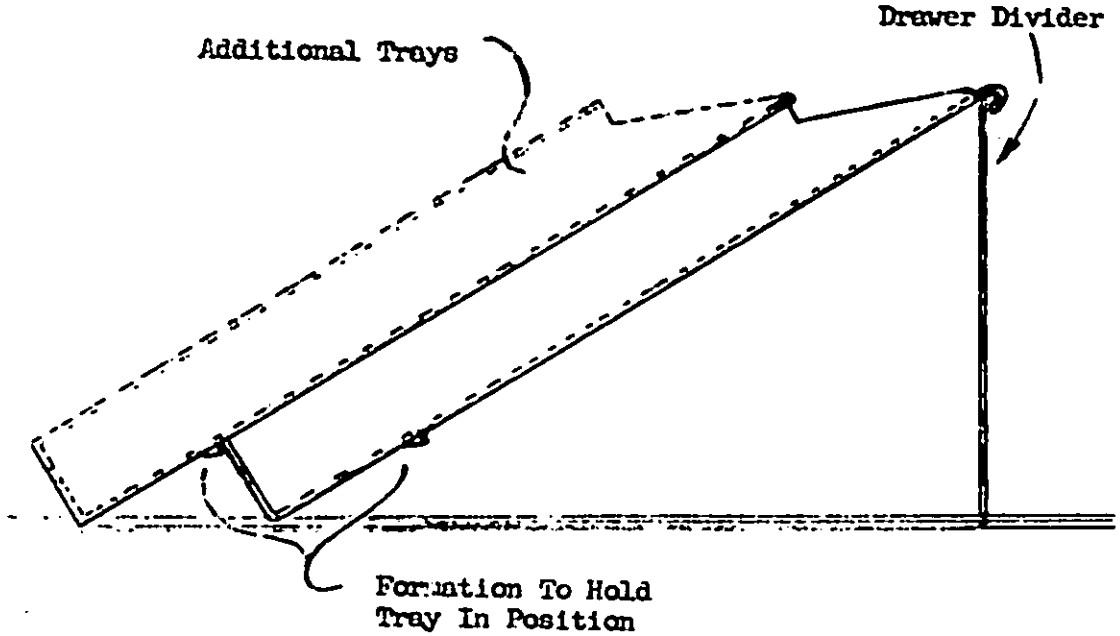

END VIEW

FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.