AA-T-1315a
April 29, 1968
SUPERSEDING
Int. Fed. Spec. AA-T-001315(Army-GL)
July 21, 1967, and
MIL-T-18129b
December 23, 1963

FEDERAL SPECIFICATION

TRAY, DESK, STEEL, AND SUPPORT SET, STACKING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of steel desk tray and one post-type stacking support set (see 6.1).

1.2 Classification.

1.2.1 Desk trays shall be of the following items and sizes specified (see 6.2).

Item 1. Desk trays.

Size I - Letter.
Size II - Legal.

Item 2. Support set, stacking, post-type.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-S-698 - Steel, Sheet and Strip, Low-Carbon.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes, Paperboard, Metal-Stayed (Including Stay Material).
PPP-B-676 - Box, Setup.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks, as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample of the finished desk tray and stacking support set shall be submitted or made available to the contracting officer or his authorized representative for approval. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. The desk tray and the stacking support sets covered by this specification shall be the regular commercial product of the manufacturer except for changes necessary to comply with the specification requirements.

3.3 Materials. Materials not definitely specified shall be of the quality normally used for the purpose in standard industry practice.

3.3.1 Steel, sheet and strip, low carbon. The steel shall conform to hot rolled, pickled, or cold rolled, 1009-1020 of QQ-S-698. The thickness shall be 0.0299 inch plus or minus .0015 (22 ga.) thick.

3.3.2 Primer. The primer shall be compatible with the finishing enamel.

3.3.3 Enamel. The enamel shall be of the baking type in accordance with manufacturer's commercial product. Unless otherwise specified (see 6.2), the color shall be Grey, Color No. 26134 of Fed. Std. No. 595 (see 6.3).

3.4 Construction.

3.4.1 Desk trays. The desk trays shall be fabricated from steel specified in 3.3.1 in accordance with the design and dimensions as shown on figure 1. The dimensions of the length and the width in figure 1 shall be measured from center to center of the formed vertical corners. The end panels shall be fabricated with corner flanges to provide an overlap to the side to form a lap joint. The lap joint shall be secured by not less than two spot welds in accordance with the manufacturer's commercial practice. All exposed edges shall have a tight hem or bead by folding the edges of the metal in an inward position no less than 1/8 inch. All corners shall be rounded. The four vertical corners shall be shaped to accept either the desk tray hardware specified in 3.4.2 or the stacking support set specified in 3.4.3, as applicable, without the use of any tools. The desk trays shall be capable of being tiered in vertical alignment when assembled with the stacking sets specified in 3.4.3. The bottom of the desk tray shall be embossed to provide rigidity in accordance with commercial practice. All four sides shall be provided with cutouts extending into the bottom of the desk tray as illustrated in figure 1.

3.4.2 Desk tray hardware. Unless otherwise specified (see 6.2), each tray shall be furnished with four each corner caps, feet and foot covers. The corner caps and the feet shall be fabricated from nickel-or chromium-plated steel. The foot covers shall be fabricated from nonmarring plastic or rubber material and shall not mark, discolor or mar desk tops. The desk tray hardware shall be similar to the components identified as Part Nos. 2, 3, and 4 on figure 1. The feet shall be constructed to solidly support the desk tray approximately 1/2 inch above a flat surface.

3.4.3 Stacking support set. The stacking support set shall consist of four posts fabricated from nickel-or chromium-plated steel and shall be constructed in accordance with the design and dimensions as shown on figure 2.

3.5 Finish.

3.5.1 Pretreatment. All unplated ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.5.2 Priming. Unless otherwise specified herein, all surfaces treated as specified in 3.5.1 shall be coated with primer specified in 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.5.3 Enameling. All primed surfaces of the desk tray shall be coated with enamel specified in 3.3.3 and shall be baked at a time-temperature cycle recommended by the enamel manufacturer. Total dry film thickness of enamel and primer shall be not less than 1.0 mil on all surfaces inside and outside. Primer may be omitted from any surface prepared for painting in accordance with type I or type II of TT-C-490, provided the dry enamel film thickness is not less than 1.0 mil on all surfaces. Finish panels shall show no cracking, flaking, or loss of adhesion of the enamel when tested as specified in 4.3.1.1.

3.6 Marking for identification. The desk tray shall be marked on the outside or on the inside of the bottom surface with the manufacturer's identification or readily identifiable trademark, or both.

3.7 Workmanship. The surface of the desk tray, the desk tray hardware and the stacking support set shall be free from burrs, slivers, and rough or sharp edges. The welding shall be free from pits, burn-through, flashes, scales or other foreign matter. The enamel coating shall level out to a continuous, smooth dry film thickness without runs, wrinkles, grits or area of no film and separation of color. The coating shall be free from embedded foreign matter and shall show no evidence of peeling, flaking or blistering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, it shall be examined for the defects listed in table I and dimensions specified.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 In process testing. During the painting operations, the enamel shall be tested for adhesion and flexibility: at the beginning of each production lot and in the middle of each production lot and at the end of each production lot of trays being produced, one 4 by 6-inch piece of 22 gauge steel shall be prepared and enameled in the same manner, using the same materials and under the same conditions as production items. The panel shall be bent 180 degrees around a 1/8 inch diameter rod at room temperature. The panel shall then be examined for cracking, flaking or loss of adhesion of the enamel. Failure of any test panel shall be cause for rejection of all trays represented by the panel.

4.3.2 End item inspection. The lot shall be all the desk trays of one size and all the stacking support sets offered for inspection at one time. The sample unit shall be one completely fabricated and tiered desk tray or one single desk tray or one stacking support set, as applicable.

4.3.2.1 Visual examination. The end item shall be examined for the defects in table I. The inspection level shall be level II and the acceptable quality level (AQL) shall be 2.5 major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish (enamel)	Not color specified		X
	Not continous or not smooth		X
	Foreign Matter embedded		X
	Area of no film	X	
	Contains runs, wrinkles, or grits		X
	Separation of color		X
	Evidence of peeling, flaking, or blistering	X	
Hardware	Not as specified	X	
Construction and workmanship	Overlapping panels not joined by welding	X	
	Less than two spot welds per lap joint	X	
	Not specified design	X	
	Exposed edge improperly formed	X	
	Vertical corners not properly shaped		X
	Bottom not embossed for rigidity	X	
	Cutouts not provided	X	
	Burrs, slivers, rough or sharp edges	X	
	Welding not free from pits, burn-throughs, flashes or scales	X	
Identification marking	Missing or incomplete		X
	Not specified position		X
	Not legible; if applicable, manufacturer's trademark not identifiable		X
Desk tray hardware and stacking support set (when applicable)	Less than four each desk tray hardware items per tray (when applicable)	X	
	Less than four stacking support post per set	X	
	Foot covers mar, mark or discolor desk top	X	

4.3.2.2 Dimensional examination. Examination shall be made of the desk tray and the stacking support set for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S3 and the AQL shall be 4.0. expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery.

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged. Bulging or distortion of containers.
Contents	Number per package is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.3.4 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and reinforcing shall be made in accordance with the appendix of the specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging.

5.1.1.1.1 Desk trays. Tray hardware for one tray shall be packaged in a kraft paper or polyethylene envelope, the envelope sealed, and taped inside the tray to the bottom surface. Each tray shall be individually wrapped in kraft paper and the wrap secured.

5.1.1.1.2 Stacking support sets. One stacking support set (four support posts) shall be packaged in a kraft paper or polyethylene envelope, and the envelope sealed.

5.1.1.2 Intermediate packaging (stacking support sets). Thirty stacking support sets, packaged as specified in 5.1.1.1.2, shall be packaged in the most compact manner in a snug-fitting paperboard or fiberboard box conforming to PPP-B-566, PPP-B-676, or PPP-B-636. Closure shall be in accordance with the applicable specification or appendix thereto.

5.1.2 Level C. Desk trays or stacking support sets shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Desk trays or stacking support sets, packaged as specified in 5.1, shall be packed in the most compact manner in a snug fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636 Desk trays shall be packed twelve of one size only per shipping container. Stacking support sets shall be packed within the gross weight limitations of PPP-B-636.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), desk trays or stacking support sets, packaged as specified in 5.1, shall be packed in the most compact manner in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636. The number of trays or stacking support sets per container shall be as specified in 5.2.1.

5.2.2.1 When specified (see 6.2), the shipping container shall conform to style RSC, V3c, or V3s of PPP-B-636.

5.2.3 Level C. Desk trays or stacking support sets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.


5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123. Polyethylene bagged packages shall have the required information printed or stamped directly on the bag or on a paper label inserted within the bag so as to permit ready identification.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. Polyethylene bagged packages shall be marked as specified in 5.3.1.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

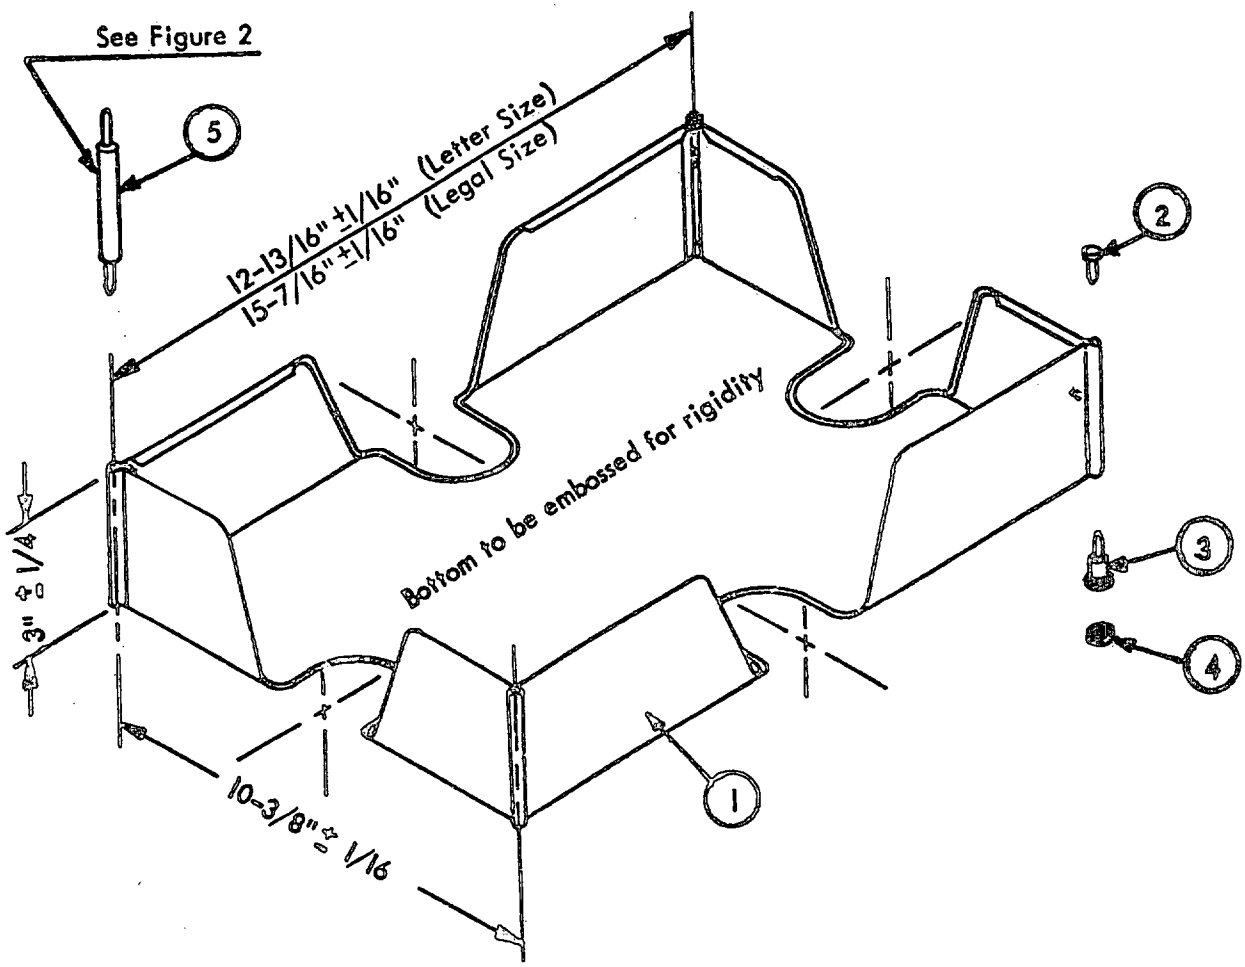

Part No.	Name
1	Desk tray
2	Corner Cap
3	Foot
4	Foot cover
5	Stacking support post

FIGURE 1. Desk tray with hardware and stacking support post.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

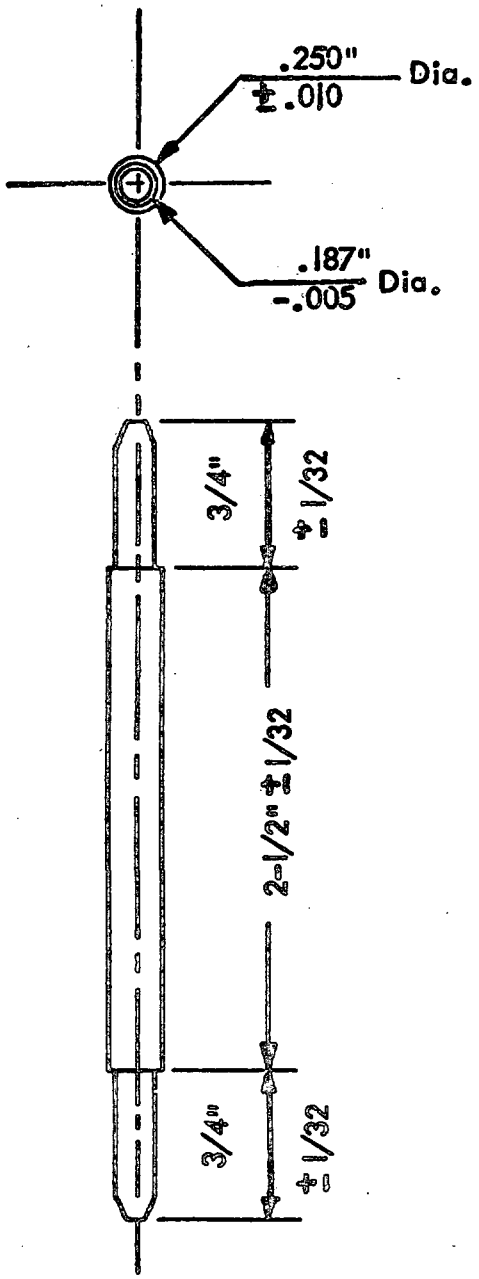


FIGURE 2. Stacking support post.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Desk trays covered by this specification are intended for use on desks or tables as receptacles for correspondence, folders, leaflets, et cetera. The trays may be used as single units or may be tiered when assembled with the stacking support sets.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Item and size of item I required (see 1.2.1).
(c) Color if other than gray is required (see 3.3.3).
(d) When preproduction sample is required (see 3.1)
(e) When desk tray hardware is not required (see 3.4.2).
(f) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(g) When V3c or V3s fiberboard is required for Level B Pack (see 5.2.2.1).

6.3 Sample panels of the standard color are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D.C. 20407, or from the Business Service Center of the nearest GSA Regional Office (see 3.3.3).

MILITARY CUSTODIANS:

Army - GL
Air Force - 84

Review activities:

Army - MD
Navy - SA, MC
Air Force - 84, 85

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
VA

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Tray, Desk, Steel, And Support Set, Stacking - AA-T-1315a

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.