AA-T-633
1 JUNE 1950

FEDERAL SPECIFICATION

TRAYS, DESK, WOOD, EXECUTIVE OFFICE TYPE

This specification was approved on the above date by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. CLASSIFICATION

1.1 Type.—Executive-office-type wood desk trays covered by this specification shall be of but one type.

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications, of the issues in effect on date of invitation for bids, form a part of this specification:

C-G-451—Glue; Animal (for) Woodworking.
TT-F-336—Filler; Wood, Paste.
TT-L-58—Lacquer; Spraying, Clear and Pigmented (General-Use).

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by postal note, money order, coupon or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

2.2 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Materials.—All materials used in the construction of the desk trays shall be of the kind and quality specified herein.

3.1.1 *Wood.*—All exposed wood surfaces of the desk trays shall be of mahogany (*Khaya* or *Swietenia*) or walnut (*Juglans nigra*), as specified, and shall be constructed of both solid and veneered parts as shown in figure 1. Wood for laying up the cores of the plywood side and end panels shall be of the same wood as the face veneers. Wood for laying up the cores of the plywood bottom shall be of full length strips of mahogany, walnut, red alder, aspen, chestnut, basswood, or poplar. The face veneers shall be sliced or sawn. The face veneers shall be not less than 1/28 inch thick and shall be matched as to figure and color, with invisible joints. All exposed wood surfaces shall be free from defects which affect the finished appearance or which may affect the serviceability. The moisture content of the wood at the time of assembly of the trays shall be from 5 to 8 percent.

3.1.2 *Felt.*—The felt used for covering the bottom of the desk trays shall be dark brown in color. The felt shall weigh not less than 5 ounces per square yard and shall contain not less than 25 percent wool.

3.1.3 *Filler.*—The filler shall conform to Federal Specification TT-F-336.

3.1.4 *Glue.*

3.1.4.1 Glue for applying all veneers shall be either phenol-formaldehyde resin or urea-formaldehyde resin. Phenol-formaldehyde resin glue may be either the dry-film type or the emulsion type.

3.1.4.2 Glue for laying up cores shall be phenol-formaldehyde resin, urea-formaldehyde resin, resorcinol-formaldehyde resin, or melamine-formaldehyde resin of a cold-setting type.

3.1.4.3 Glue for assembly work shall conform to grade S2 of Federal Specification C-G-451.

3.1.4.4 The manufacturer's directions for mixing and handling glues shall be followed accurately.

3.1.5 *Lacquer.*—Lacquer used for the prime coat shall conform to type I of Federal Specification TT-L-58. All other lacquer coats shall conform to type I of Federal Specification TT-L-58, except that the solid content shall be not less than 21 percent.

3.2 Construction.

3.2.1 *Design.*—The design of the desk trays shall be as shown in figure 1.

3.2.2 *Side and end panels.*—The panels shall be 3-ply ¼-inch plywood, good on two sides and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

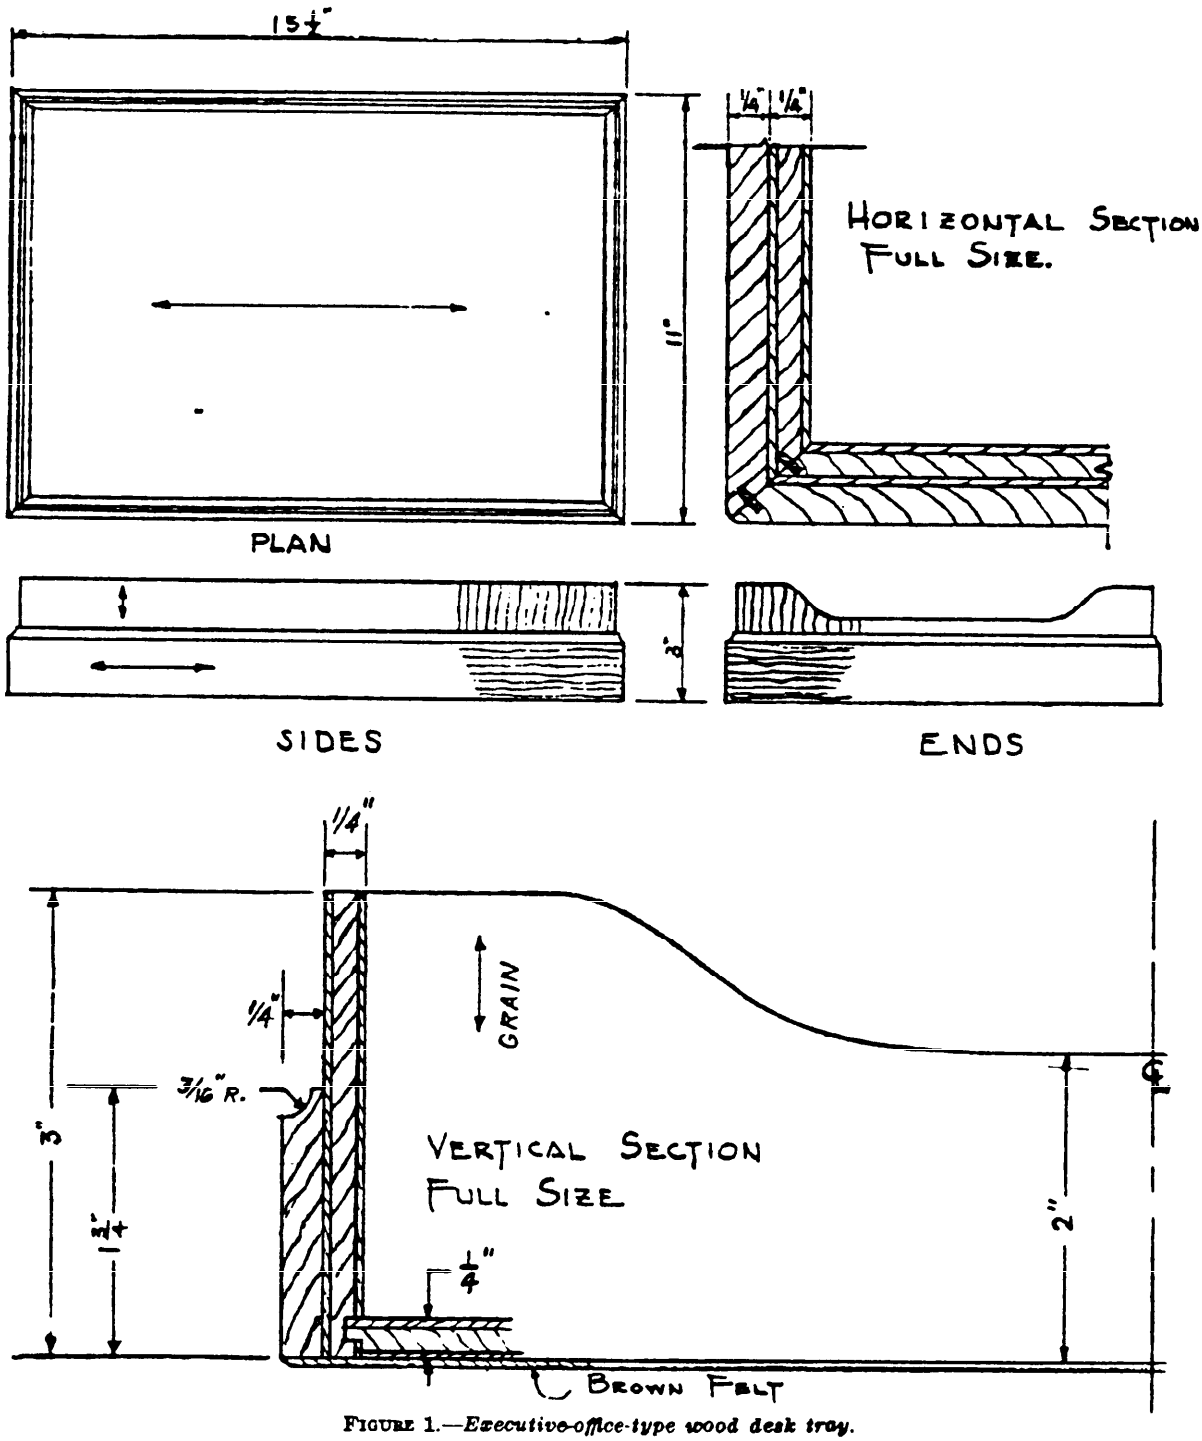


FIGURE 1.—*Executive-office-type wood desk tray.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

with straight grain running vertically on both sides. The panels shall be grooved to receive the bottom. Both ends shall be shaped as shown in figure 1. The corners shall be blind-splined and glued.

3.2.3 *Bottom.*—The bottom shall be of 3-ply ¼-inch plywood and shall have a tenon cut on all edges to fit into the grooves in the side and end panels. The bottom shall be glued in place and shall be flush with the bottom edges of the side and end panels.

3.2.4 *Outside frame.*—The outside frame shall be of ¼-inch-thick solid wood with straight grain running horizontally and shall be shaped and applied as shown in figure 1. The corners shall be blind-splined and glued. The frame shall be securely glued to the side and end panels.

3.2.5 *Application of felt.*—The felt shall be evenly and securely glued to the bottom of the tray.

3.3 **Finish.**—All exposed wood surfaces shall be finished to a true and smooth surface and stained to the required color with a non-grain-raising, lightfast, solvent-type stain. After the stain has been allowed to dry thoroughly all exposed wood surfaces shall be filled. After the filler has dried sufficiently, it shall be thoroughly rubbed into the wood to fill all pores, wiped off, and completely cleaned from all surfaces and corners. The filler shall be allowed to dry for at least 24 hours. Differences in color shall then be corrected by careful retouching and one prime coat of clear lacquer shall be applied, allowed to dry for at least 6 hours and then scuff-sanded. One coat of clear lacquer shall then be applied, and allowed to dry. Two coats of lacquer sanding sealer shall then be applied. Each coat shall be allowed to dry properly. All surfaces shall then be sanded and a final coat of flat lacquer applied.

3.4 **Colors of finish.**—The colors of finish shall conform to the standard colors of finish as adopted by the Federal Supply Service, General Services Administration. The standard colors of finish designated for the desk trays are as follows:

Mahogany, genuine (for mahogany wood).
Walnut, genuine (for walnut wood).

(Samples of the standard colors of finish are maintained on file at the Standards Division, Federal Supply Service, General Services Administration, Washington 25, D. C.)

3.5 **Workmanship.**—The details of construction, including veneering, jointing, assembly, and finishing shall be characteristic of first-class furniture and cabinet work.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Sampling.** — Representative samples shall be selected from the desk trays under construction or from each delivery for purposes of inspection.

4.2 **Inspection.**—The desk trays shall be inspected to determine compliance with this specification with respect to workmanship, materials, details of construction, design, and finish. Inspection may be made at the factory by a representative of the Government at any time during process of manufacture, or at the point of delivery. Final inspection will be made at destination.

5. PREPARATION FOR DELIVERY

5.1 **Packaging.**—Unless otherwise specified, commercial packages will be acceptable.

5.2 **Packing.**—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 **Marking.**—Unless otherwise specified, shipping containers shall be marked with the name of the commodity, the finish, the quantity contained therein, the name of the contractor, and the number of the contract or order.

6. NOTES

6.1 **Ordering data.** — Purchasers should specify the kind of wood required and should exercise any desired options offered herein. (See 3.1.1, 5.1, 5.3, and 7.3.4.)

6.2 Federal Specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

Patent notice.—When Government drawings, specifications, or other data, are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 **Army.**

7.2.1 *Applicable specifications.*

Federal Specifications:

LLL-B-631—Boxes; Fiber, Corrugated (for Domestic Shipment).

LLL-B-636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN-P-103—Packaging and Packing for Overseas Shipment—Boxes; Wood Cleated; Solid Fiberboard.

JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.

JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.

JAN-B-107—Boxes, Wood, Wirebound (Overseas Type).

JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.

JAN-P-140—Packaging and Packing for Overseas Shipment—Adhesives, Water-Resistant, Case-Liner.

U. S. Army Specification:

100-2—Standard Specification for Marking Shipments by Contractors.

(Copies of specifications required for Army purchases may be obtained from the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.)

7.2.2 *Packing.*

7.2.2.1 *For domestic shipment.*—Eight trays shall be packed in snug-fitting corrugated or solid fiberboard containers conforming to the requirements of Federal Specifications LLL-B-631 and LLL-B-636, respectively. The minimum bursting strength of the fiberboard shall be not less than 200 pounds per square inch. Each tray shall be separated from other trays by a separator pad constructed of nontest fiberboard. All flaps shall be securely sealed with a good-quality adhesive applied throughout the entire area of contact between the flaps.

7.2.2.2 *For overseas shipment.*—Four boxes of trays (32 trays), packed as specified in 7.2.2.1, shall be overpacked in containers constructed, strapped, and sealed in conformance with the requirements of Military Specification JAN-P-103, JAN-P-105, JAN-P-106, or JAN-B-107. Each shipping container shall be provided with a case liner or prefabricated bag made of waterproof barrier-material conforming to the requirements of Military Specification JAN-P-125, type L-2 or M, which shall be completely sealed with a continuous application of adhesive conforming to Military Specification JAN-P-140.

7.2.3 *Marking.*—Shipping containers for the Army shall be marked in accordance with U. S. Army Specification 100-2.

7.3 Navy.

7.3.1 *Applicable specifications and other publications.*—

Federal Specifications:

NN-B-591—Boxes; Wood-Cleated-Fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NN-B-601—Boxes; Wood - Cleated - Plywood, for Domestic Shipment.
NN-B-621—Boxes; Wood, Nailed and Lock-Corner.
NN-B-631—Boxes; Wood, Wirebound, for Domestic Shipment.
LLL-B-631—Boxes; Fiber, Corrugated (for Domestic Shipment).
LLL-B-636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN-P-105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment — Boxes; Wood, Nailed.
JAN-B-107—Boxes, Wood, Wirebound (Overseas Type).
JAN-P-108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.
JAN-P-138—Packaging and Packing for Overseas Shipment—Boxes, Wood, Fiberboard-Lined.
JAN-P-140—Packaging and Packing for Overseas Shipment—Adhesives, Water-Resistant, Case-Liner.

Navy Department Specification:

General Specifications for Inspection of Material.

Bureau of Supplies and Accounts Publication:

Navy Shipment Marking Handbook.

(Copies of Federal and Military specifications required for Navy purchases, Navy Department specifications, and the Navy Shipment Marking Handbook may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Supply Officer in Command, Naval Supply Center, Norfolk 11, Va. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.)

7.3.2 *Packing.*

7.3.2.1 *For domestic shipment.*—Desk trays, packaged as specified in 5.1, shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, except that when wood-cleated fiberboard boxes, wood-cleated plywood boxes, nailed wood boxes, wirebound wood boxes, corrugated fiber boxes, or solid fiber boxes are used, they shall conform to the requirements of Federal Specifications NN-B-591, NN-B-601, NN-B-621, NN-B-631, LLL-B-631, and LLL-B-636, respectively. The weight of wood boxes and contents shall not exceed approximately 200 pounds; and of fiberboard boxes and contents, approximately 90 pounds.

7.3.2.2 *For overseas shipment.*—Desk trays, packaged as specified in 5.1, shall be packed in wood-cleated plywood boxes, nailed wood boxes, wirebound wood boxes, fiberboard boxes, or fiberboard-lined wood boxes conforming to the requirements of Military Specifications JAN-P-105, JAN-P-106, JAN-P-107, JAN-P-108, and JAN-P-138, respectively. The weight of wood boxes and contents shall not exceed approximately 200 pounds; and of fiberboard boxes and contents, approximately 70 pounds. Contents shall be enclosed within a sealed waterproof bag, or its equivalent, made from material conforming to the requirements of Military Specification JAN-P-125, for case liner material. The seams and closures shall have strength and water resistance equal to that of the body material, and shall be sealed with water-resistant adhesive conforming to the requirements of Military Specification JAN-P-140.

7.3.3 *Marking.*

7.3.3.1 *Interior packages.*—Interior packages shall be marked with the following information:

Trays, Desk, Wood, Executive Office Type
Supplier or manufacturer
Contract or order number
Navy stock number
Fed. Spec. AA-T-633
Quantity contained
Date packed

7.3.3.2 *Shipping containers.*—In addition to any special marking required by the contract or order, shipping containers for the Navy shall be marked in accordance with the requirements of the Navy Shipment Marking Handbook.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

7.3.4 *Ordering data.*—Requests, requisitions, schedules, and contracts or orders should specify whether the subject commodity is to be packed and shipping containers marked for domestic or overseas shipment. (See 7.3.2 and 7.3.3.)

NAVY: *MC* S

7.4 Air Force.—Unless otherwise specified in the contract or order, each shipping container for the Air Force shall be marked in accordance with the requirements of U. S. Army Specification 94–40645, Marking; Exterior, Domestic and Export Shipment, by Contractors.

(Copies of specifications required for Air Force purchases may be obtained from the Commanding General, Air Matériel Command, Wright-Patterson Air Force Base, Dayton, Ohio.)

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

For sale by the Superintendent of Documents, Washington 25, D. C. Price 5 cents.

(No. 105)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specation in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obing information on the use of this specification which will insure that suitable products can be procured with a num amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on s on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

IFICATION

NIZATION *(Of submitter)* | CITY AND STATE

RACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

RIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

AS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

OMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

S THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

EMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

ITTED BY *(Printed or typed name and activity)* | DATE

FORM 1426
APR 63

REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

FOLD

PARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDING GENERAL
U. S. ARMY NATICK LABORATORIES
ATTN: AMXRE-SS
NATICK, MASS. 01762

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

PLATE NO. 15410 (BACK