AA-T-00633A(GSA-FSS)
December 16, 1968
INTERIM REVISION OF
Fed. Spec. AA-T-633
June 1, 1950

INTERIM FEDERAL SPECIFICATION

TRAY, DESK, WOOD, EXECUTIVE OFFICE TYPE

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D.C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-T-633, dated June 1, 1950.

1. SCOPE.

1.1 This specification covers an executive office-type wood desk tray.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specifications:

TT-L-57	Lacquer, Rubbing, Clear (For Wood Furniture).
TT-F-336	Filler, Wood, Paste.
TT-S-190	Sealer, Sanding, Lacquer Type (for Wood Furniture).
TT-S-720	Stain: Wood, Nongrain Raising, Solvent-dye Type.
UU-P-268	Paper, Kraft, Untreated, Wrapping.
CCC-T-191	Textile Test Methods.
MMM-A-100	Adhesive, Animal Glue.
PPP-B-636	Box, Fiberboard.

Federal Standard:

Fed. Std. No. 123 Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-W-6110 Wood; Determination of Moisture Content of.

Military Standards:

MIL-STD-105 Sampling Procedure and Table for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document form a part of this specification to the extent specified herein. Unless a specific issue is indicated, the issue in effect on date of inviation for bids or request for proposal shall apply.

Commercial Standard:

CS35 - Hardwood plywood.

(Copies of the Commercial Standard referenced above which is a Department of Commerce Publication, may be obtained upon application, accompanied by money order, coupon or cash, to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402. Price may be obtained from the Superintendent of Documents.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Wood. The desk tray shall be constructed of both solid and veneered walnut (Juglans nigra) or mahogany (Swietenia or khaya). All component wood parts shall be uniformly kiln-dried to a moisture content of from 5 to 8 percent and shall be held in properly controlled storage for a sufficient period of time to insure a uniform distribution of moisture among the individual pieces. After gluing, built-up solid panels shall be returned to the kiln or permitted to cure out to a uniform distribution of glue-joint moisture before planing and sanding. All wood shall be uniformly kiln-dried to the specified moisture content at time of finishing when tested in accordance with 4.1.1.1.

3.1.1.1 Solid wood. The solid wood shall be not less than 1/4 inch thick; free from brashness, discolorations, worm holes, honeycombs, checks or splits, shakes, knots over 1/4 inch diameter (provided they are not in a cluster), or other defects which may affect the appearance or serviceability of the desk tray.

3.1.1.2 Plywood. All plywood shall be constructed in accordance with the requirements of Commercial Standard CS35-61 and as specified herein. Type II, 3-ply, 1/4 inch plywood of multiple veneer core construction shall be used. Face and back veneer plies shall be not less than 1/32 inch thick for walnut and 1/28 inch thick for mahogany. The exposed face shall have grade 1 veneer ply, either sliced or sawn. Grade 2 veneer ply may be used for the face of the unexposed bottom. Veneer plies shall be full lengths and shall be applied in balanced construction form with no ply joints less than 1 inch from the edge of any panel. All face veneers shall be edge glued. Full lengths veneer strips shall be a minimum of 3-1/2 inches wide.

3.1.2 Adhesives. Adhesives used in the construction of the desk tray and their permitted application shall be as shown in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Table I. Adhesives

Application	Kind of adhesive
Assembly joints and securing felt to bottom	Animal glue, grade J-2, Federal Specification MMM-A-100, or Any adhesive that will conform to or exceed the performance of the above specified glue.[1]
All plywood gluing, edge-joining of veneer plies, and edge-joining of lumber core panels	Any adhesive that will conform to or exceed the performance of the Type II bond, as described in the Commercial Standard CS35-61 for hardwood plywood.

[1] If requested by a Government Quality Control Inspector, it shall be the responsibility of the contractor to furnish an actual test and inspection report verifying that the adhesive being used equals or exceeds the performance of Grade J-2 animal glue.

3.1.3 Felt. The felt used for covering the bottom of the tray shall have a fiber content of not less than 25 percent of new, reused, or reprocessed wool or combination thereof, the balance shall be of any other type fibers except bast fibers. The weight of the felt shall be not less than 4 ounces per square yard. (See 4.1.1.2).

3.1.4 Filler. The filler shall be in accordance with the applicable requirements of TT-F-336.

3.1.5 Lacquer. The lacquer shall be in accordance with the applicable requirements of TT-L-57.

3.1.6 Stain. The stain shall be in accordance with the applicable requirements of TT-S-720.

3.1.7 Sealer. The sealer shall be in accordance with the applicable requirements of TT-S-190.

3.2 Design

3.2.1 Dimensions. The dimensions of the desk tray shall be as shown in figure 1. A tolerance of plus or minus 1/16 inch will be permitted in the overall dimensions. Minute deviation from other dimensions, resulting from normal manufacturing process, will be permitted.


3.2.2 Side and end panels. The panels shall be of plywood with the grain pattern running vertically on both sides. The panels shall be grooved to received the bottom. Both ends shall be as shown in figure 1. The corners shall be blind-spliced and glued.

3.2.3 Bottom. The bottom shall be of plywood with the grain pattern running horizontally with the side panels and shall have a tenor cut on all edges to fit into the grooves in the side and end panels. The bottom shall be glued in place and shall be flush with the bottom edges of the side and end panels.

3.2.4 Outside frame. The outside frame shall be of solid wood with grain pattern running horizontally and shall be shaped and applied as shown in figure 1. The corners shall be blind-spliced and glued. The frame shall be securely glued to the side and end panels.

3.2.5 Application of felt backing. Felt shall cover the entire back of the tray except for a maximum distance of 1/8 inch from all edges. The felt shall be neatly and securely attached with adhesive.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

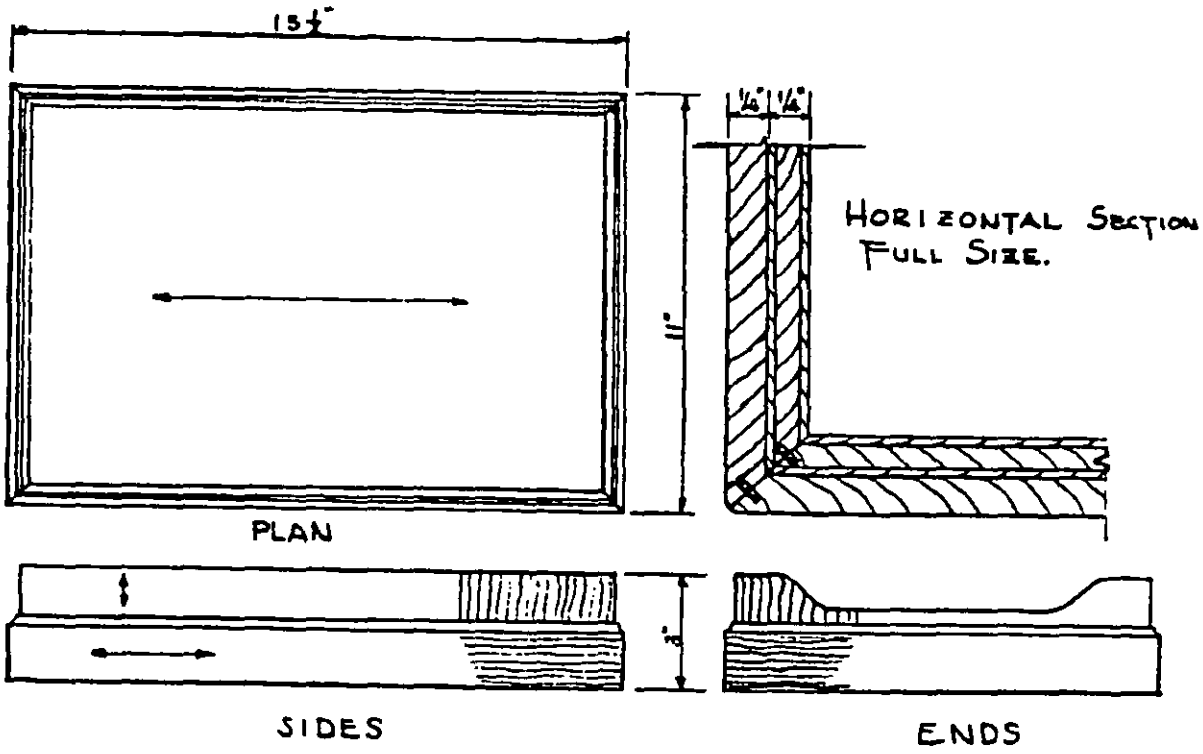

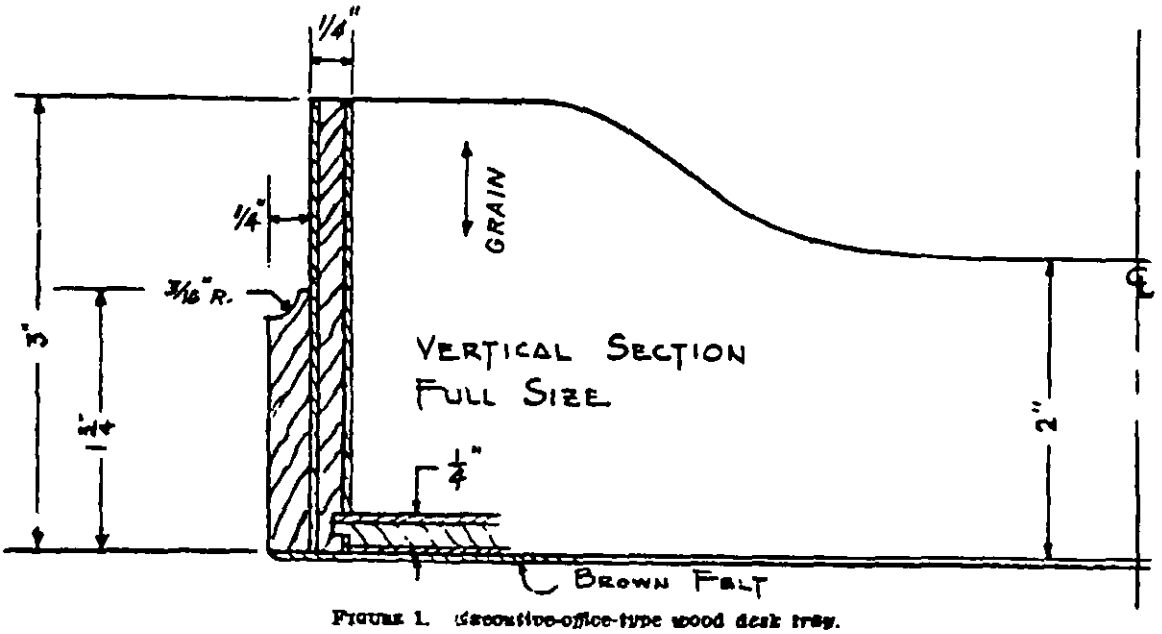


FIGURE 1. Executive-office-type wood desk tray.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.6 Joints. All joints shall be tight and finished flush without openings or cracks. Glue, specified in 3.1.2, shall be applied to all joining surfaces and the joints held under pressure until the glue has set. Nails or brads shall not be used for holding the joints while glue is setting. The application of glue shall be of the proper consistency to assure maximum bondage, and starved or poorly glued joints will not be acceptable.

3.3 Color and appearance of finish. Color and appearance of the exposed wood surfaces shall be walnut and shall conform to the standard reference panel adopted by Federal Supply Service, General Services Administration for color, texture, and gloss (6.3).

3.4 Finish. All wood surfaces, with the exception of the underside of the desk tray, shall be sanded smooth, all corners and edges eased, thoroughly cleaned, and finished as follows:

1. Sap stained to equalize color.
2. Apply selected colorant to produce color specified. Stain shall be as specified in 3.1.6.
3. Wash coat with adhesive sealer.
4. Scuff sand, using sandpaper grit of fineness needed to produce proper surface.
5. Fill to degree necessary to match standard reference panel. The filler shall be as specified in 3.1.4.
6. Seal with adhesive type sealer. Sealer shall be as specified in 3.1.7.
7. Sand, using sandpaper grit of fineness needed to produce proper surface.
8. Shade to tie-in color variation, if necessary. Note: This may be performed after operation #5, above.
9. Top coat with lacquer (2 individual coats). The lacquer shall be as specified in 3.1.5.

The application of materials, drying time, sanding, cleaning and rubbing shall be controlled to produce a smooth uniform exposed surface without blisters, pits, wrinkles, runs, tackiness or more than a trace of orange peel. The natural grain of the wood shall not be clouded by the finishing materials. Bleaching agencies or materials shall not be used.

3.5 Workmanship. Superior craftsmanship shall be exercised in order to produce an item of furniture suitable for use in executive offices.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection and testing of components and material. In accordance with 4.1, the supplier is responsible for insuring that the following components and materials used were manufactured, examined, and tested in accordance with this specification or referenced subsidiary specifications.

4.1.1.1 Moisture content of wood. Moisture content of wood specified in 3.1.1 shall be examined at least once each production day. Moisture content shall be determined in accordance with MIL-W-6110.

4.1.1.2 Felt. Each shipment of felt received at one time, of the same description, and from the same source of supply shall be examined for compliance with 3.1.3 in accordance with the following test procedures:

Test	Method	Reference
Wool fiber identification	1100	CCC-T-191
Wool content	2100 or 2101	CCC-T-191
Weight of felt	5041	CCC-T-191

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.1.1.3 Evidence of compliance. In lieu of utilizing his own facilities, the contractor may submit a report of analysis of component materials from a laboratory acceptable to the Government, whether an independent test facility or laboratory of raw material supplier, as evidence of compliance with the specification requirements. The report of analysis shall include, in addition to the actual test data, the manufacturer's name, the name and address of the testing laboratory, date of test(s), and quantity of material represented by the test report. When certification of compliance or report of analysis are submitted, the Government reserves the right to verify the test to determine the validity of the certification or analysis.

4.2 Sampling.

4.2.1 Lot. A lot shall consist of all desk trays offered for inspection at one time.

4.2.2 Sampling of end item for visual examination. A random sample of desk trays shall be taken from each lot in accordance with MIL-STD-105, inspection level S-4. The acceptable quality level (AQL) shall not exceed 4.0 percent defective. The sample unit shall be one desk tray.

4.2.3 Sampling for preparation for delivery requirements. For examination of interior packages the sample unit shall be one shipping container fully prepared for delivery, and selected at random just prior to the closing operation. Sampling shall be in accordance with MIL-STD-105. Closure defects shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be II with an AQL of 4.0 defects per hundred units.

4.3 Examination

4.3.1 Visual examination of end item. Samples taken in accordance with 4.2.2 shall be examined for defects listed in table II. Any sample containing one or more defects shall be rejected. The Government reserves the right to classify as a defect any departure from the specification not listed in table II.

Table II. Classification of desk tray defects

Examine	Defects
Material:	
Wood; general	Species of wood not as specified (3.1.1). Wood warped, affecting appearance and serviceability. Sharp contrast of grain between panels.
Solid wood	Not free of imperfections listed in 3.1.1.1. Not of thickness dimension specified (3.1.1.1).
Plywood (3.1.1.2)	Not of type and grade specified. Veneer plies not full length. Veneer strips less than 3-1/2 inches wide. Veneer joints less than 1 inch from edge of panel. Open joints in face veneer. Any cross breaks in veneer. Veneer blistered. Veneer chipped or splintered. Veneer patched. Decay present. Not of thickness dimension specified.
Design:	Not as specified or not as shown in drawing, figure 1. Solid wood used in place of veneer or vice versa. Wood joints not as specified or joints fit improperly. Not glued as specified; loose or unsound glued joints. Direction of grain not as specified. Felt not covering bottom within 1/8" of all edges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Table II. Classification of desk tray defects (cont'd)

Examine	Defects
Dimensions and tolerance:	Does not meet the dimension requirements of 3.2.1.
Finish and appearance:	Does not match standard reference panel with respect to color. Light or dark colored areas, affecting appearance. Spotted, affecting appearance. Area of no lacquer film. Finish tacky, i.e., not completely dry. Rough or gritty surface or foreign matter imbedded in finish. Light colored edges not touched up. Discoloration (bleeding). Excessive orange peel. Finish peeling, flaking, blistered, cracked, checked or wrinkled. Finish cut or rubbed through to wood. Sanded through face ply. Waves of uneven sanding or machine marks, affecting appearance. Open grain. Finishing material not filling pores. Excess glue not removed. Glue stain or glue line clearly showing, affecting appearance. Damaged or scratched.

4.3.2 Examination of preparation for delivery. Samples selected in accordance with 4.2.3 shall be examined to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with Table III.

Table III. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, filament tape inadequately applied. Bulging or distortion of container.

4.4 Tests

4.4.1 Moisture content of wood. Test for moisture content of wood shall be as specified in 4.1.1.1.

4.4.2 Felt. Tests for wool fiber identification, content, and weight of felt shall be as specified in 4.1.1.2.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A. The trays shall be individually wrapped in paper conforming to UU-P-268, grade B, and packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style RSC. The box shall be closed, waterproof sealed with tape and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.1.2 Level B. Eight trays, separated by sheets of kraft wrapping paper or pads on non-test fiberboard, shall be packed in a box conforming to PPP-B-636,type, class and style optional, grade not less than 250. Closure shall be in accordance with the appendix to the box specification.

5.1.3 Level C. The trays shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.2 Marking (see 6.2).

5.2.1 Civil agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The desk tray covered by this specification is intended for use in any executive office within the Federal agencies. The item was designed to achieve uniformly and to be harmonious with modern architectural decor.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Selection of applicable level of packing and any special marking for shipment required (5.1 and 5.2).

6.3 Standard sample. Sample panels of the standard color for the walnut finish are obtainable, without charge from the Business Service Center, Regional Office Building, Federal Supply Service, General Services Administration, Washington, D.C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.