AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

WARDROBE WITH ACCESSORY PIECES, WOOD, STEEL FRAME

This amendment was developed by General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. The General Services Administration has authorized this amendment as a part of Interim Federal Specification AA-W-001950, dated November 25, 1975

PAGE 3

Paragraph 3 1 Preproduction sample Line 12, delete "(4.4 4)" and substitute "(4.4.3)"

Paragraph 3 2 3 2 Hardwood plywood. Line 4, after "1/24 inch thick" add the following "All face veneers shall be grade 2 (sound grade) or better Veneer cores shall be grade 3 (utility grade) or better and any voids at panel edges shall be filled Lumber core panels shall be regular grade except that no butt joints or knots in excess of 1/2 inch diameter, will be permitted At time of assembly, the moisture content shall be from 5 to 9 percent "

Paragraph 3 2 4 Hardboard Delete entire paragraph and substitute the following: "3 2 4 Hardboard Hardboard shall be type II minimum, surface 1, finish A, design A, and 1/8 inch thick as specified in LLL-B-810 "

PAGE 4

Paragraph 3 2 7 Plastic laminate Lines 3 and 4, delete phrase beginning with "(except laminate" and ending with "Subclass F)". line 5, delete "0.031 ± 004." and substitute "0 028 ± 004 " line 7, delete "0 030 ± 004 inches and substitute "0 020 ± 005 inches "

Paragraph 3 2 7 1 Plastic laminate (Three drawer chest, top) At the end of the paragraph add the following

"except that it shall be 0.050 ± .005 inches thick "

TABLE I line 5, delete "Black" and substitute "English Oak" After line 7 insert the following new line "shelf S-S" in appropriate columns

PAGE 5

TABLE I (con) line 6, delete. "3)" and, "subclass F" Line 9 delete "Black" and substitute "English Oak" Under footnote 1), delete: "Black FSS-L-01013" Delete footnote "3)" entirely At the end of footnote 4) add the following "Grain of the top shall run from side to side "

Paragraph 3.2 9 1 Door handle, latching mechanism and associated hardware Delete entire paragraph and substitute the following

"3 2 9 1 Door handle - mechanism assembly Only approved handle-mechanism assemblies (handles) may be used New designs must be submitted to the Technical Support Branch of the National Furniture Center for evaluation, testing and approval before they can be used New designs shall be functionally equal to the handles already approved and meet the salient characteristics listed below A current list of manufacturers making approved handles with a drawing of each unit is available from

Technical Support Branch - FEHS
National Furniture Center
GSA-FSS
Washington, DC 20406

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Approved handles shall be purchased as a complete unit from the manufacturer except for "T" nuts, screws, nuts and bolts No part substitutions may be made to any of the assemblies Handles shall conform in all respects to the original sample of that unit which is kept on file at the National Furniture Center

The Government reserves the right to take handles from production and test and inspect them to insure that they conform to the original sample unit Manufacturers, whose handles are found not to conform to their original sample, will be subject to removal from the approved list of suppliers Salient characteristics of the handles are as follows

A Components

1 General

Hardware shall consist of a minimum of parts making it possible to easily mount the handle and keeper to the door in the field. Design hardware to minimize the possibility of injury to the user

2 Exterior

Lever type handle with keeper (attached to left door) which accomodates padlock (minimum padlock hole diameter - 7/16 inch) Handle must be in vertical position when doors are closed and locked

3 Interior

Three point latching mechanism shall engage behind the top shelf support frame member, through the bottom frame member and at the approximate center of the right door When doors are closed and locked, there shall be minimum play between the rods and engagement points

Locking rods

a Thicknesses 1/2 inch minimum
1/4 inch minimum at points of engagement
b Engagement 1/2 inch minimum
c Lower rod length 35 3/4" $\pm$ 1/32" (tip to tip)
d Shape on end of top rod offset and flattened
e Shape on end of bottom rod rounded bull nose or beveled with blunted tip (no sharp tips)

Rod guides 4 total, 2 for each rod

a. Location One rod guide as close to the tip of each rod as practical
One near the middle of each rod

b Attachment Top and bottom rod guides Two outer holes attached with 1/4-20 capped T-nuts (3 2 9 10) or 1/4-20 blind head bolts (3 2 9 11) Two inner holes attached with No 10 x 5/8 round head, sheet metal screws
Middle rod guides, four No. 10 x 5/8" round head, sheet metal screws per guide

B Finish

1. Exterior parts

All exposed hardware (except T-nuts) shall be satin chrome This finish appearance may be achieved with other metals or platings Burrs and rough surfaces are not permitted T-nuts shall be satin or bright polished chrome or nickel

C Operation

Smooth, quiet, without binding or rattle, minimum free play between handle and 3 point latching mechanism

D. Test

Unit must pass 2 minute forcible entry test (see 4 4.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

PAGE 6

Paragraph 3 2 9 4 Elbow catch and strike Line 2, after "cadmium plating" add the following "or cast aluminum with a lacquer finish "

3 2.9 6 Mirror Last line, after "eased" add the following "or formed so they do not present a hazard to the user".

Paragraph 3 2 9 7 Glides At end of paragraph add the following "Nail type plastic glides, 5/8 inch minimum diameter, shall be used on the three drawer chest "

Paragraph 3 2 9 9 Drawer suspensions Line 1, after "metal", insert "finished to resist corrosion "

Paragraph 3.2 9 11 Bolts, blind head. Line 2, delete "Cap nuts" and substitute "Hex nuts" line 3, after "with these bolts" insert the following new sentence "Bolt length shall be such that it will engage all the threads in the hex nut but not protrude beyond it "

PAGE 7

Paragraph 3.3 6 1 Rear frame Line 2, after, "see figure 5" insert, "and 17"

Paragraph 3 3 6 2 Front frame Line 2, after, "see figure 4" insert, "and 17" Line 7, delete "rubber or" Line 8, delete "top" and substitute "shelf support"

PAGE 8

Paragraph 3 3 8 Doors Line 16, delete, "and 9" Line 20, after "required" insert the following "only when using Bassick Sack handle-mechanism assembly " Line 25, after, "manufacturer" insert, "with 10, evenly spaced, No 10 x 3/4 inch S M screws "

PAGE 9

Paragraph 3 3 11 Bottom Delete last sentence.

Paragraph 3.3 13 Toeboard assembly Delete entire paragraph and substitute the following new paragraph

"3 3 13 Toeboard assembly The toeboard shall be 3/4 inch particleboard (3 2 6) It shall be 3-7/8 inches high by 36 inches long (size 1), 42 inches long (size 2), 46 inches long (size 3), including "Tee mold or edge banding Both faces shall be covered with plastic laminate, as specified in 3 2.7 and TABLE I, securely applied with adhesive (3 2 5) Both ends shall either have "Tee" molding (3 2 8) securely applied or be edge banded The "Tee" molding or edge banding shall match the end panel The bottom edge of the toeboard shall be sealed and finished in a color compatible with the interior of the wardrobe Two wood blocks (1-1/2" W x 1-1/2" D x 3-1/4" H) shall be glued and screwed to the back of the toeboard with a minimum of two sheet metal screws (No 10 x 2 inch) per block The top of the block shall be flush with the top of the toeboard and each block shall be positioned laterally to give the toeboard a snug fit when mounted to wardrobe One T-nut or internally threaded nylon or metal insert (1/4 x 20) shall be installed by the manufacturer in each of the wood blocks for mounting the adjustable glides (3 2 9 7) Clearance holes shall be bored to allow the glides to be screwed in fully Each end of the toeboard assembly shall be attached to the end panels with two sheet metal type screws (No 10 x 2 inch) Lead holes shall be drilled into the end panels to provide for easy installation of the toeboard assembly None of the screws shall be counter-sunk When unit is assembled, the edges of the toeboard, including self-edge or "Tee" mold, shall be flush with the outside surface of the end panels

PAGE 11

Paragraph 3 5 1 Design Lines 1 and 2,delete "figures 2, 11, 12 and 13" and substitute "figures 2A, 10A, 12A, 13A, 15 and 16

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

PAGE 12

Paragraph 3 5 6 5 Toeboard Line 3, delete "The decorative laminate shall be black "

Paragraph 3 5 6 6 Drawer fronts Delete entire paragraph and substitute the following new paragraph

"3 5.6 6 Drawer construction, method 1 The drawers shall consist of a drawer body and a separate drawer front attached to the drawer body The drawer body shall have a front and a back panel, two side panels and a bottom panel The front, back and side panels shall be constructed of minimum 3/8 inch solid wood or 5-9 ply hardwood plywood (see 3 2 3 through 3 2 3 3) Front, back and sides shall be of the same construction The outside dimensions of the drawer body shall be 5 1/2 inches high by 18 inches long, minimum Bottom shall be 1/8 inch thick (minimum) hardboard (3 2 4) Drawer front, sides, and back shall be grooved to receive the bottom The bottom shall be reinforced with a minimum of 6 rubbed in place glue blocks The top edges of the drawer body shall be rounded The drawer sides shall be multiple finger dovetailed and glued to the front and back panels. The dovetails shall be milled true and even, and any open, poorly milled or poorly glued joints shall be unacceptable. The drawer body shall be sealed The exterior drawer front shall be a minimum of 6 1/2 inches high It shall have a 3/4 inch thick particleboard core Both faces shall be covered with plastic laminate as specified in 3 2 7 and TABLE I, securely applied with adhesive This drawer front shall be attached to the drawer body with a minimum of 5-No 10, counter bored, S M screws The top edge of the drawer front shall be covered with a full width aluminum pull as shown in figures 2A, 8A and 10A The pull shall be secured with a minimum of 3-No 8 S M screws The remaining three edges shall be self-edged to match the drawer fronts The drawer shall be equipped with drawer suspensions specified in 3 2 9 9 Each suspension channel (4 channels per drawer) shall be attached to the drawer side/case with a minimum of 5-S M screws A locking hasp shall be mounted to the top drawer and case as shown in figure 10A The offset on part A may be formed, brazed or welded The amount of offset in part A may vary to accomodate variations in drawer construction The face of the drawer shall be notched sufficiently to allow for mounting the locking hasp The finish of the locking hasp shall be either black enamel, sating nickel, or chrome plated The holes in the two hasp members shall align when top drawer is closed "

Paragraph 3 5 6 7 Drawer sides, back, and bottom Delete entire paragraph and substitute the following

"3 5 6 7 Drawer construction, method 2 Sides and back shall be not less than 3/8 inch solid wood or 5-9 ply hardwood plywood (see 3 2.3 through 3 2 3 3) The back and side panels shall be of the same construction Sides shall be minimum 5 1/2 inches high by minimum 18 inches long before assembly Bottom shall be 1/8 inch thick (minimum) hardboard (3 2 4) Drawer front and sides shall be grooved to receive the bottom The drawer bottom shall overlap the back and be securely glued and stapled in position. The drawer bottom shall be reinforced with a minimum of 5 rubbed in place glue blocks The top edge of the drawer sides and back shall be rounded Drawer sides shall be joined to the front with glued and driven (French) dovetails The drawer back shall be joined to the sides with either a driven (French) dovetail or with multi-finger dovetails milled true and even Any open, poorly milled, poorly glued, or unevenly assembled dovetails are not acceptable The drawer shall be sealed Drawer front shall be 6 1/2 inches high minimum and shall have a 3/4 inch thick, 5 ply-lumber core, hardwood plywood core (see 3.2 3 2). Both faces shall be covered with plastic laminate as specified in 3.2.7 and TABLE I, securely applied with adhesive The top edge of the drawer front shall be covered with a full width aluminium pull as shown in figures 2A, 8A, and 10A The pull shall be secured with a minimum of 3-No 8 S M screws. The remaining three edges shall be self-edged to match the drawer fronts The drawer shall be equipped with drawer suspensions specified in 3 2 9 9 Each suspension channel (4 channels per drawer) shall be attached to the drawer side/case with a minimum of 5-S M screws A locking hasp shall be mounted to the top drawer and case as shown in figure 10A The offset on part A may be formed, brazed or welded The amount of offset in part A may vary to accomodate variations in drawer construction The face of the drawer shall be notched sufficiently to allow for mounting the locking hasp The finish of the locking hasp shall be either black enamel, satin, nickel, or chrome plated The holes in the two hasp members shall align when top drawer is closed "

PAGE 13

Paragraph 3 5 7 Assembly method 1, wood Delete entire paragraph

Paragraph 3 5 8 Assembly method 2, steel angles Line 1, delete "Assembly method 2, steel angles " and substitute the following "Case assembly " Line 2, after "(3 5 5)" insert the following, "as shown in figures 15 and 16" Lines 2, 3 and 4 delete sentences beginning with, "A sufficient number" and ending with, "figures 11 through 13"

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

Paragraph 3.6.1 Identification marking Delete entire paragraph and substitute the following new paragraph

"3 6 1 Identification marking Each item shall be permanently, neatly and legibly marked with the following information National Stock No., Date of manufacture, Name of manufacturer, Contract No , Specification number

Position of this marking shall be as follows

Wardrobe	bottom surface of shelf
Overchest	bottom surface of top panel
Three drawer chest	outside face of back panel

PAGE 21


Paragraph 6.4 Sources of supply Delete lines 3 through 6 entirely

FIGURES


delete figures 1 through, 5, 7, 8, 9, 9A, 10, 11, 12, and 13 and substitute the following new figures 1A through 5A, 7A, 8A, 10A, 15, 16, and 17 Note Wherever figures 1 through 5, 7, 8, and 10 are referenced in the specification, please refer to new figures 1A through 5A, 7A, 8A and 10A

GSA DC 76 9834

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

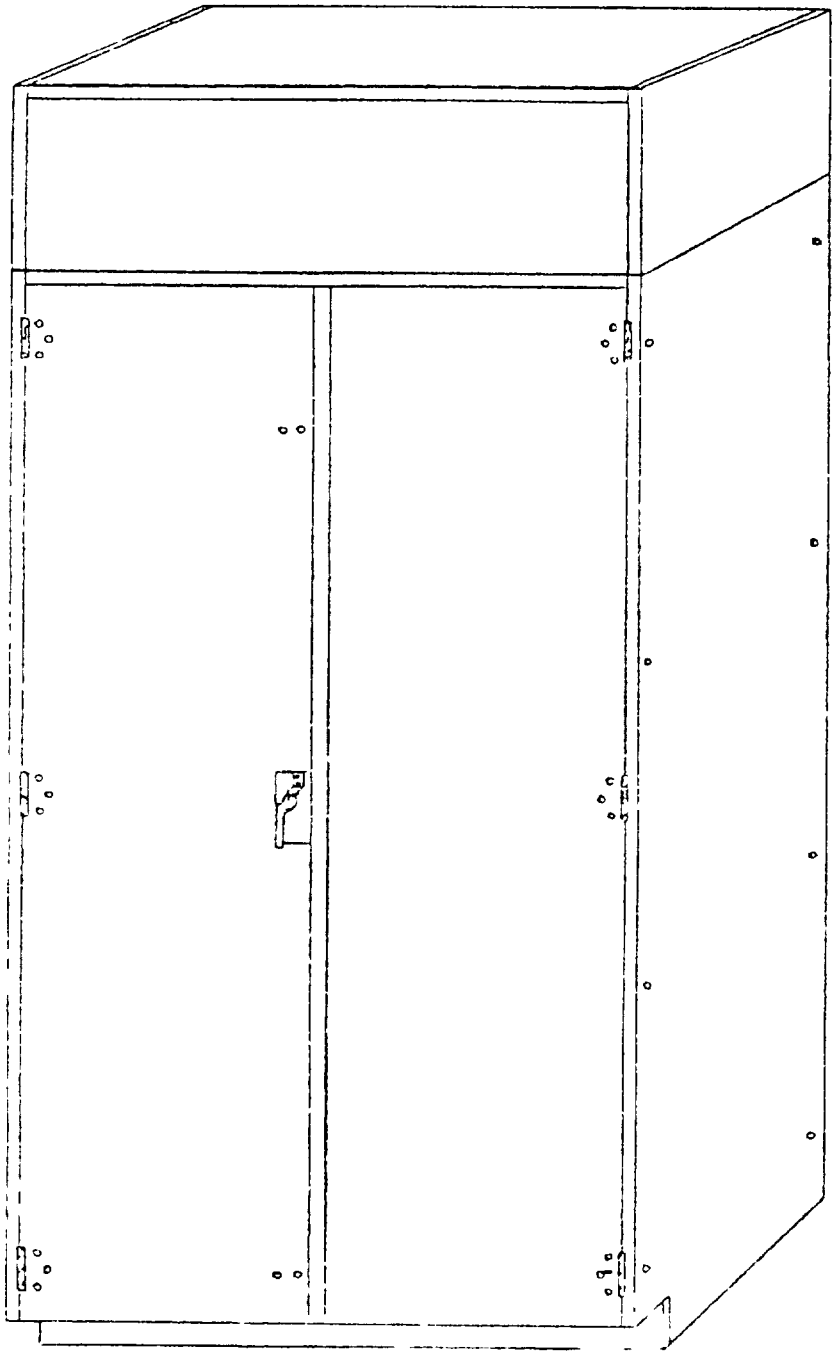

Front View

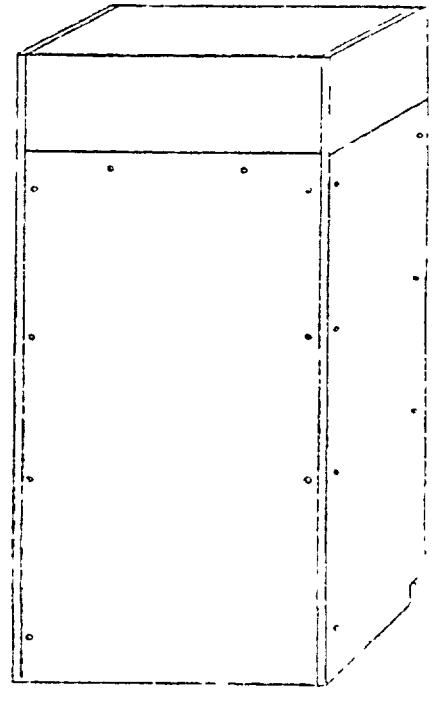

Back View

Wardrobe and Overchest

Figure 1A Not to scale

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


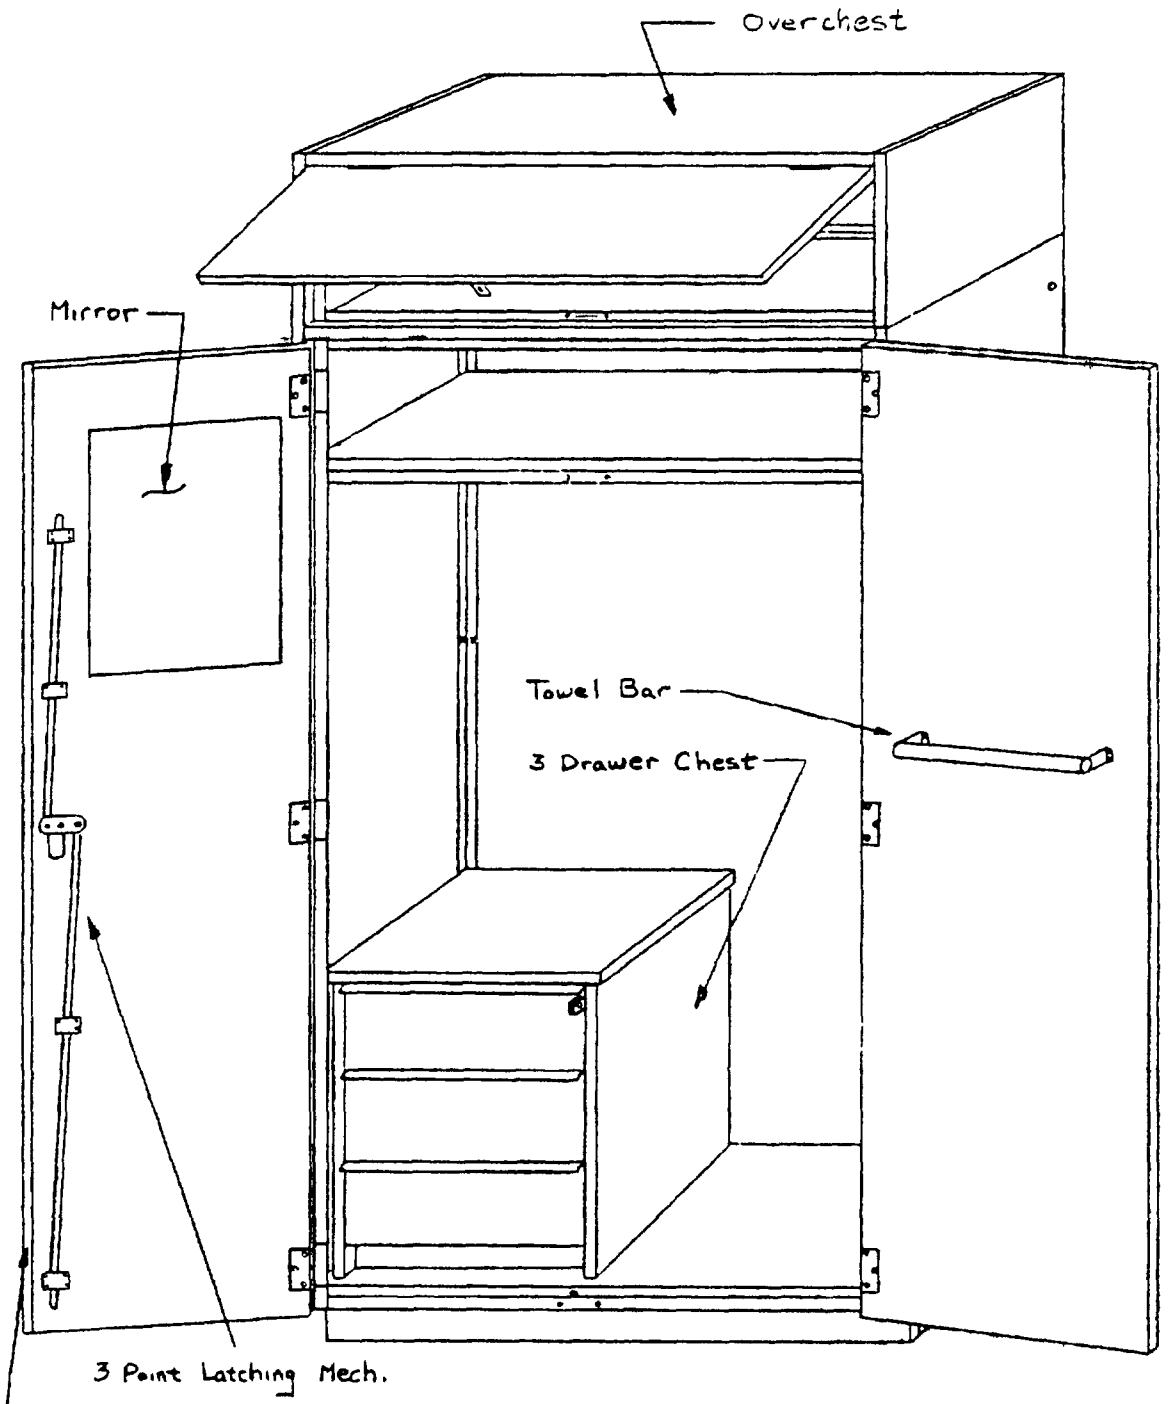


Figure 2A Not to scale

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

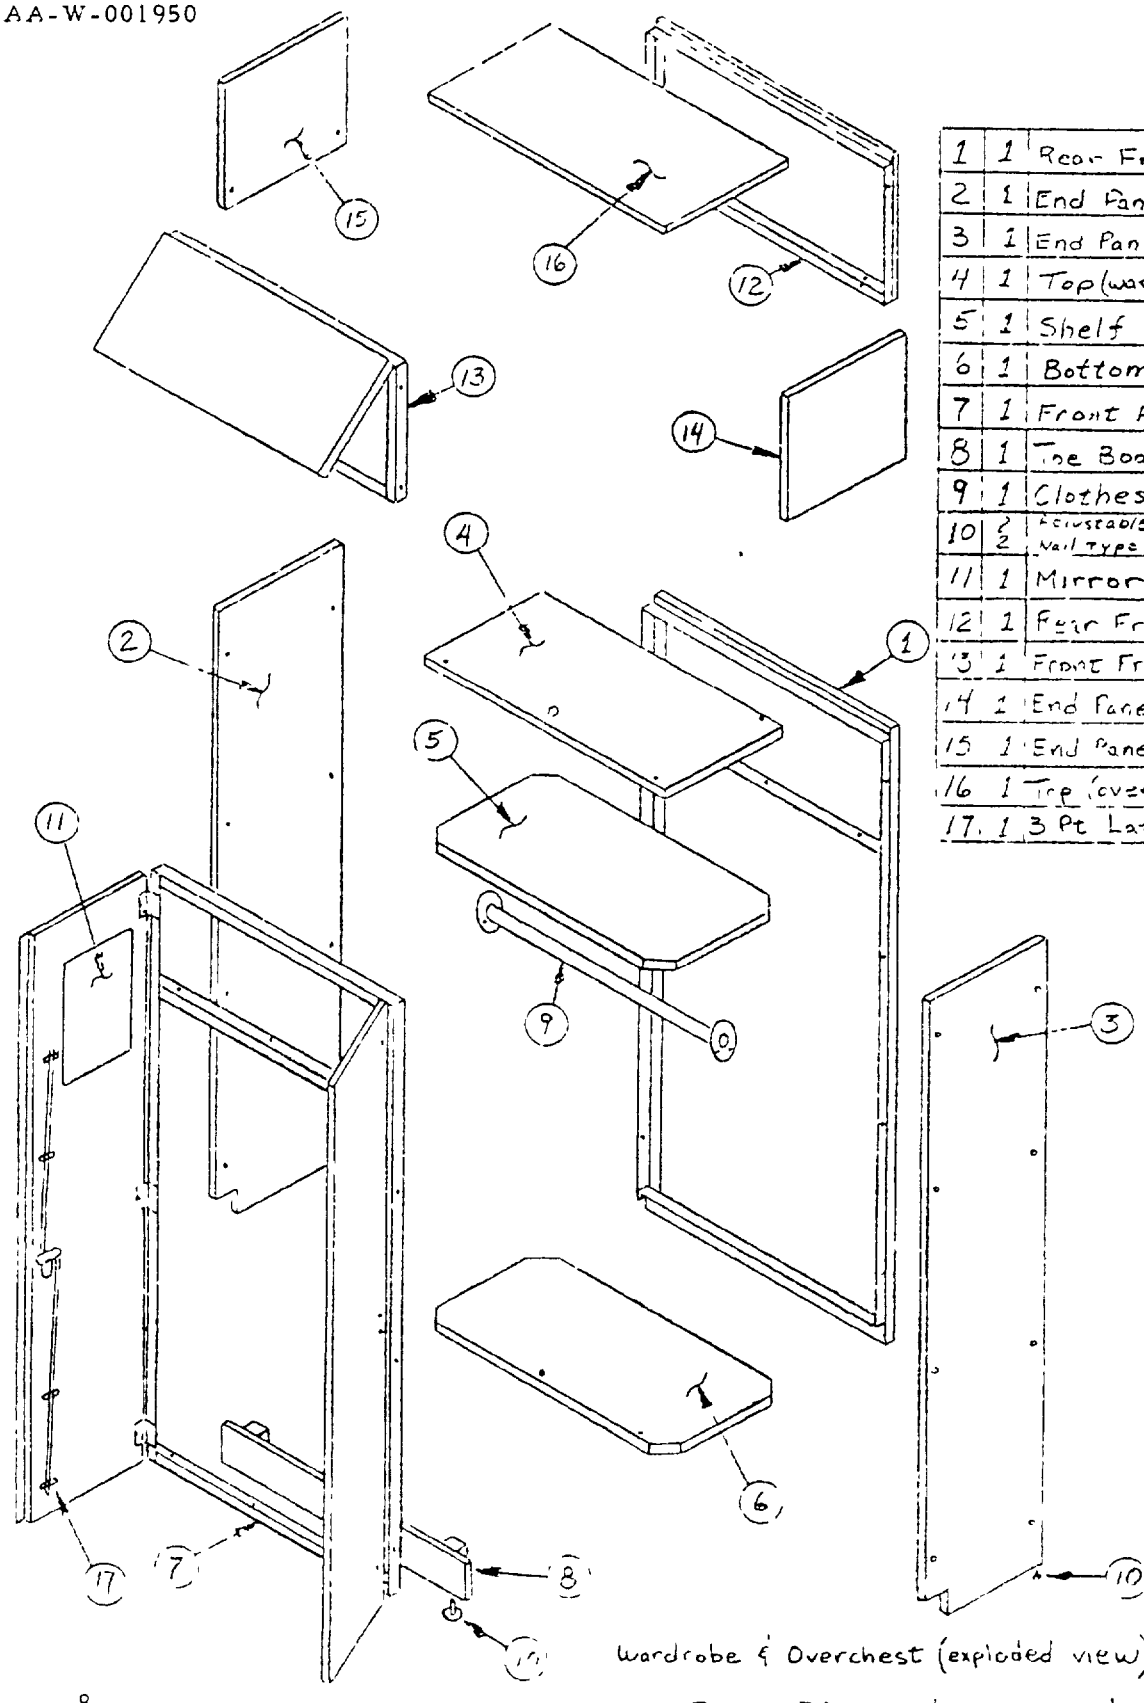


1	1	Rear Frame Assem
2	1	End Panel (left side)
3	1	End Panel (right side)
4	1	Top (wardrobe)
5	1	Shelf
6	1	Bottom
7	1	Front Frame Assem
8	1	Toe Board Assembly
9	1	Clothes Rod
10	2	Adjustable glides
	2	Nail type glides
11	1	Mirror
12	1	Rear Frame Assem
13	1	Front Frame Assem
14	1	End Panel (right side)
15	1	End Panel (left side)
16	1	Top (overchest)
17	1	3 Pt Latch Mech.

Wardrobe & Overchest (exploded view)

Figure 3A Not to scale

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

DO NOT SCALE

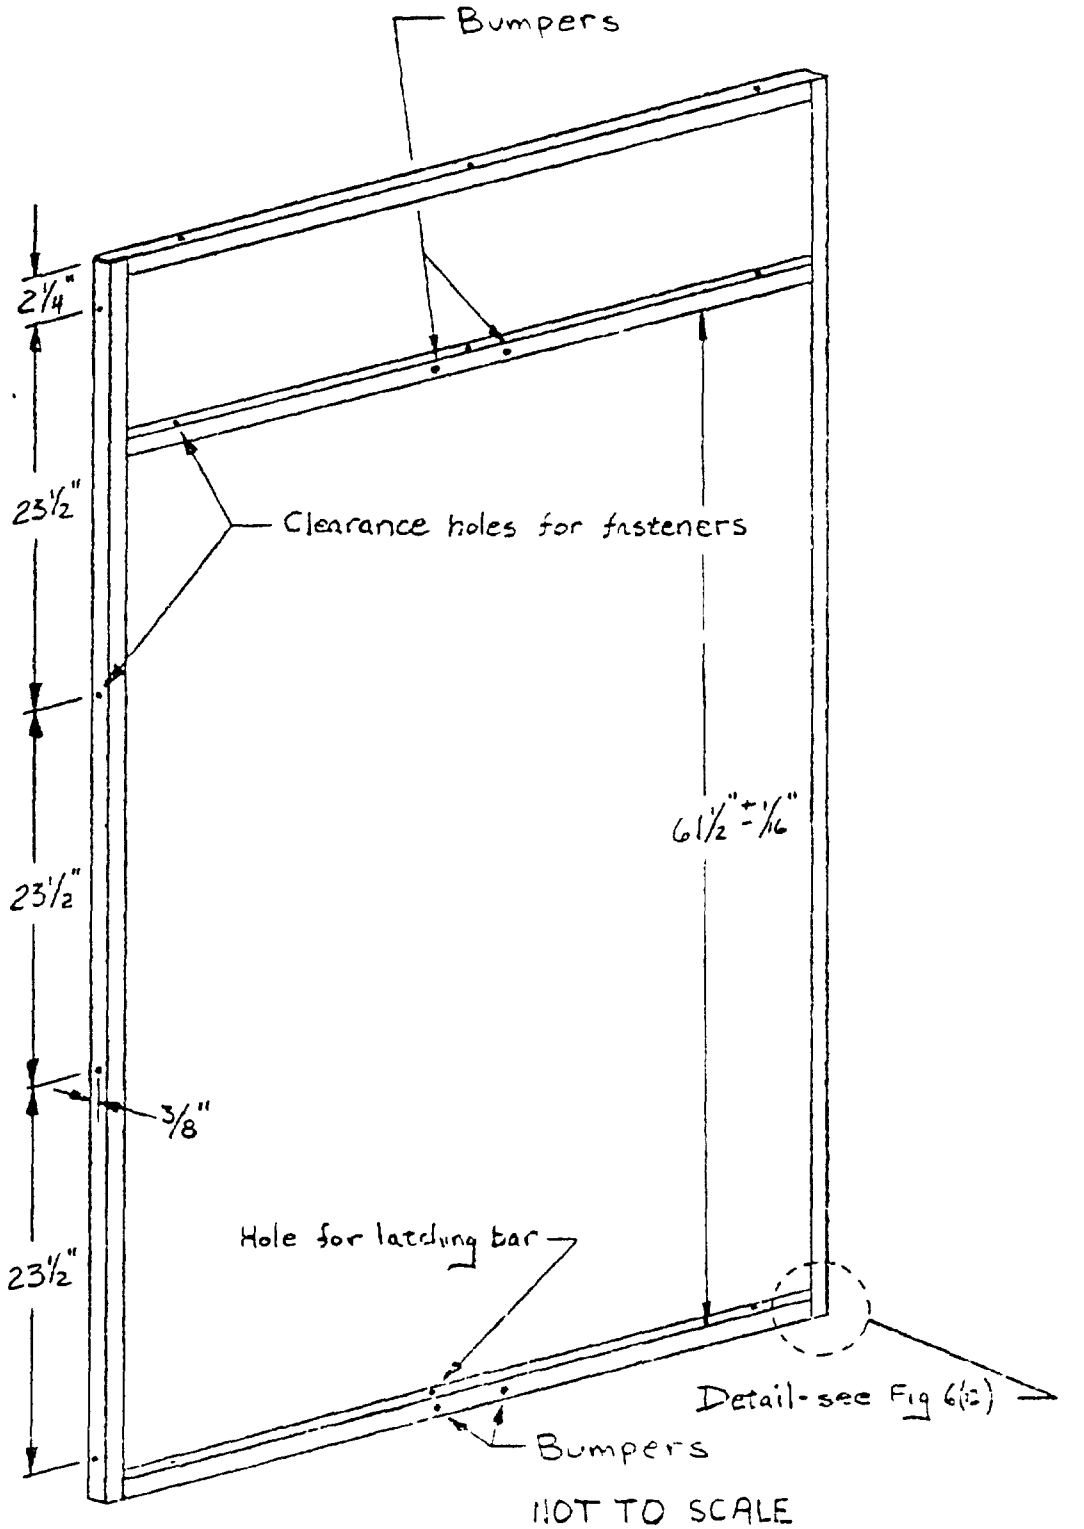


Front frame assembly for wardrobe

Figure 4 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

DO NOT SCALE

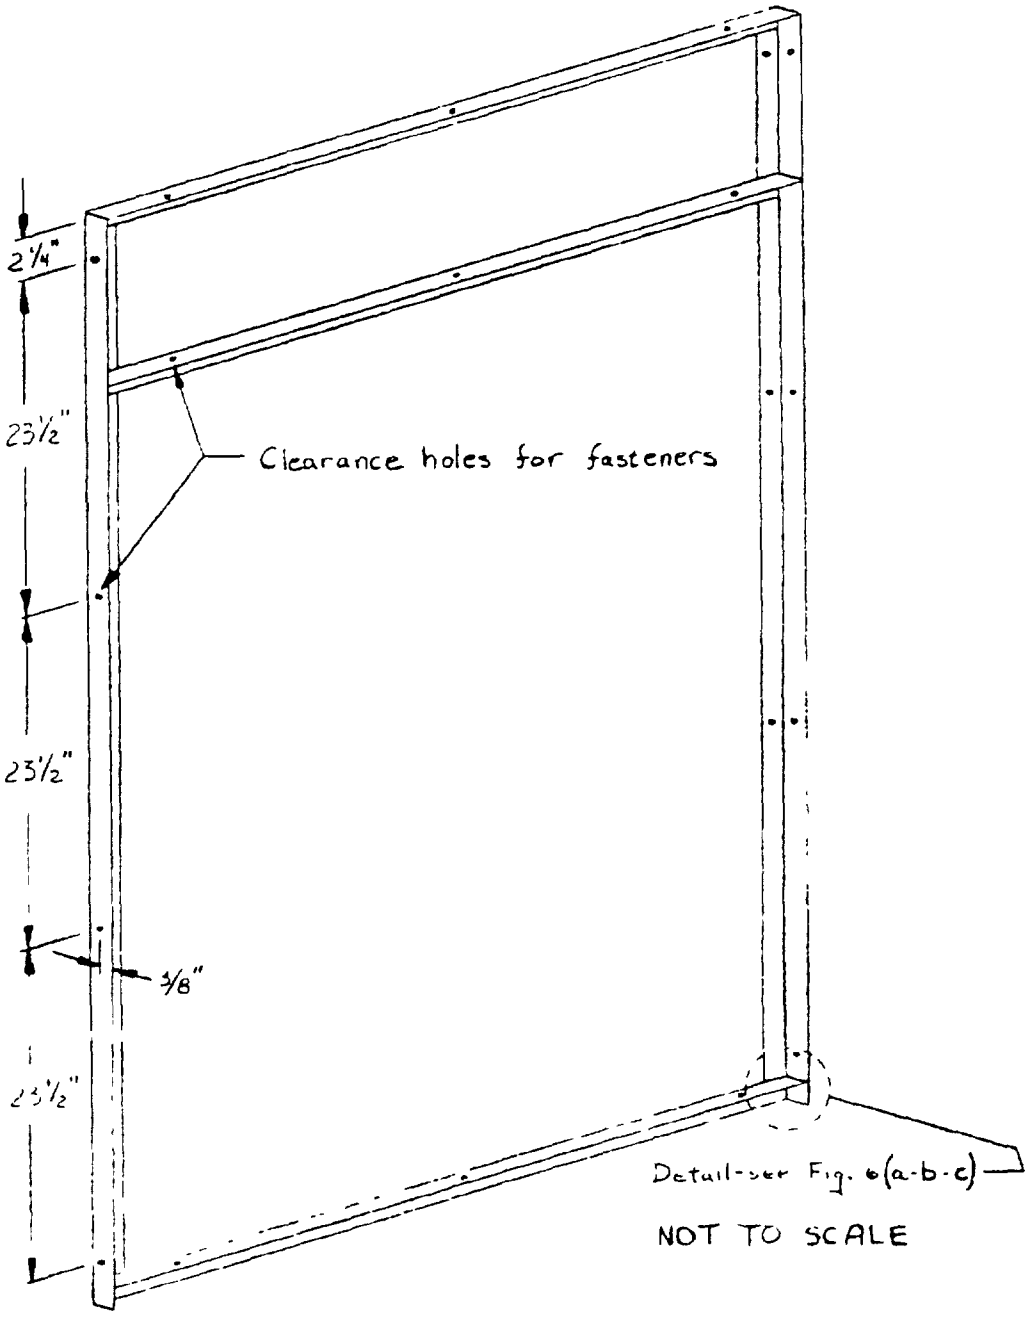


Rear frame assembly for [illegible]

Fig. 5A

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

DO NOT SCALE

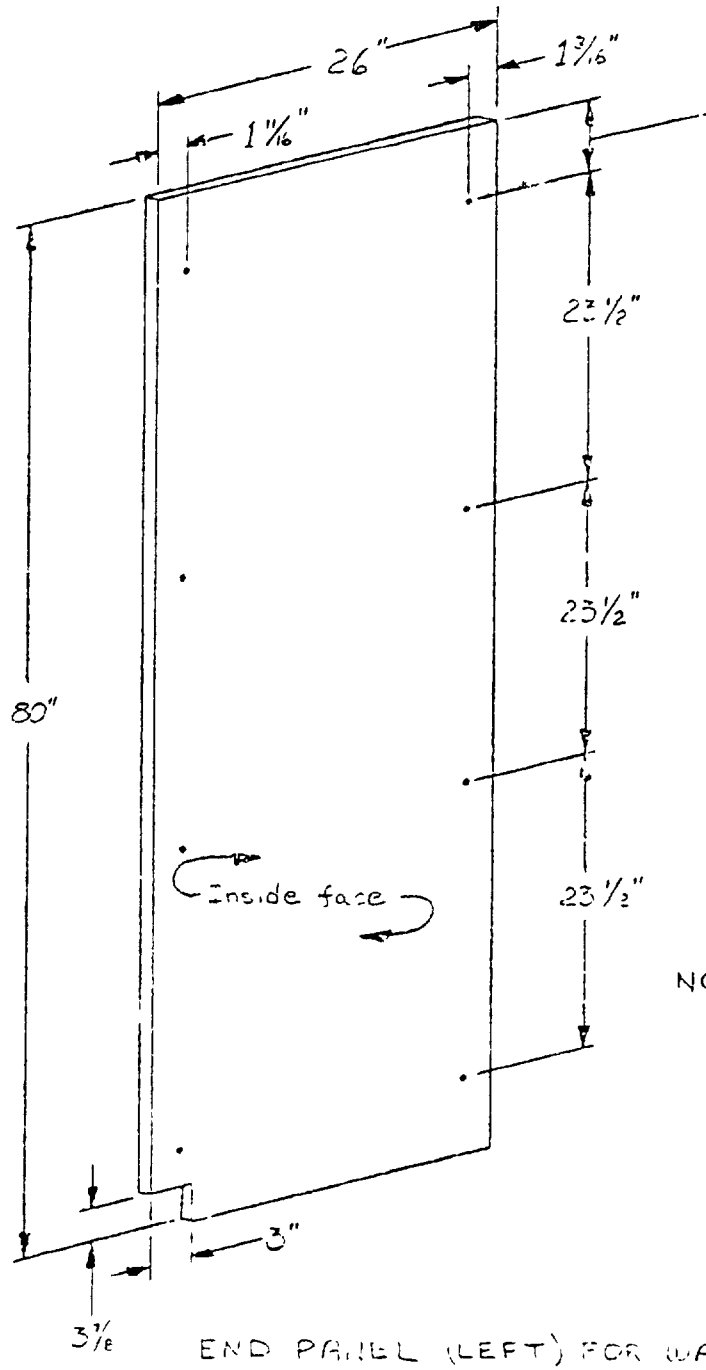


NOTE: Bore to receive caps... "Tee" nuts (... / 10) Additional ... required for hinges, clothes-rod brackets, toeboard.

END PANEL (LEFT) FOR WARDROBE

NOT TO SCALE


Figure 74

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

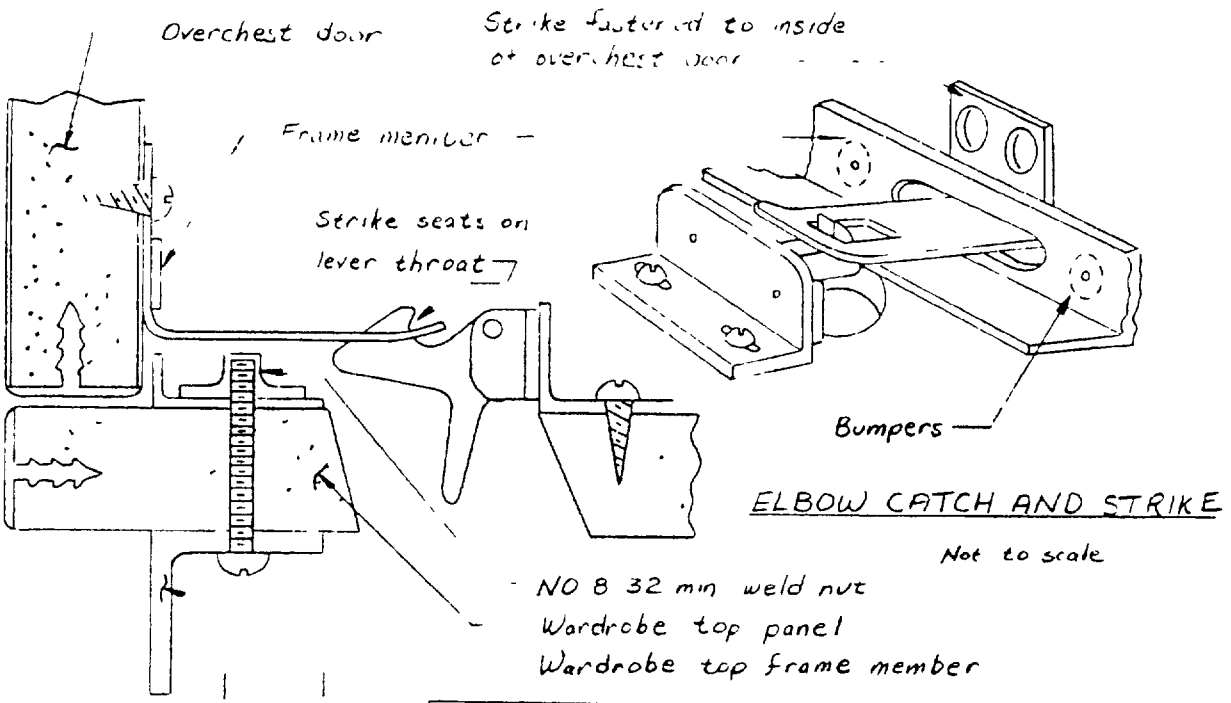



ELBOW CATCH AND STRIKE

Not to scale

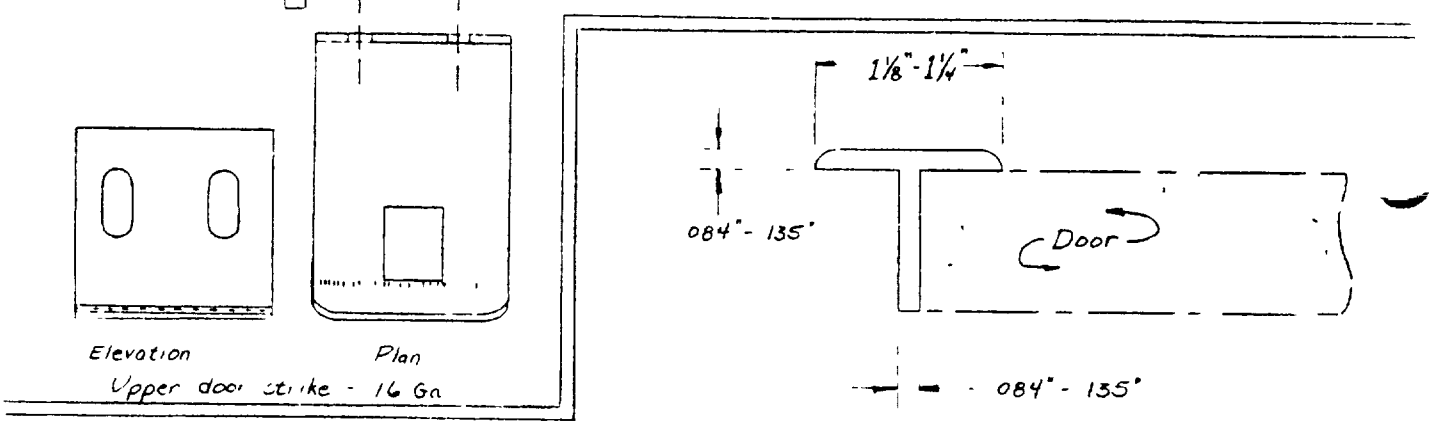

"T" Shaped aluminum door channel

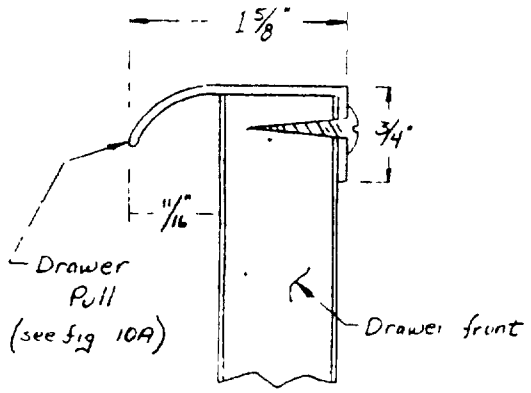

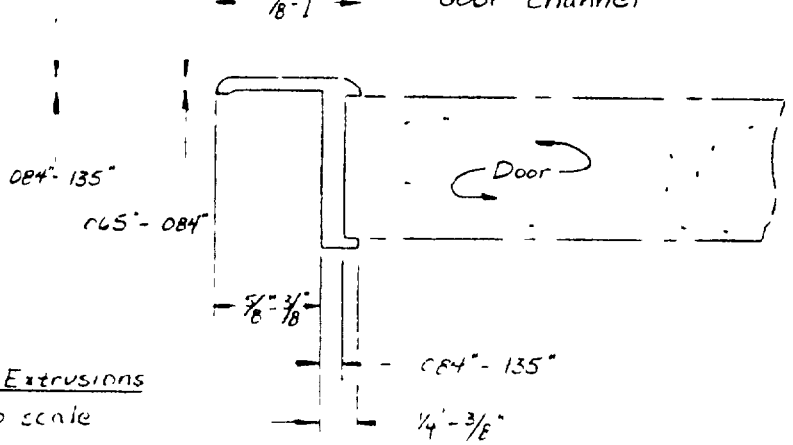


Aluminum Extrusions

Not to scale

Figure 8A

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

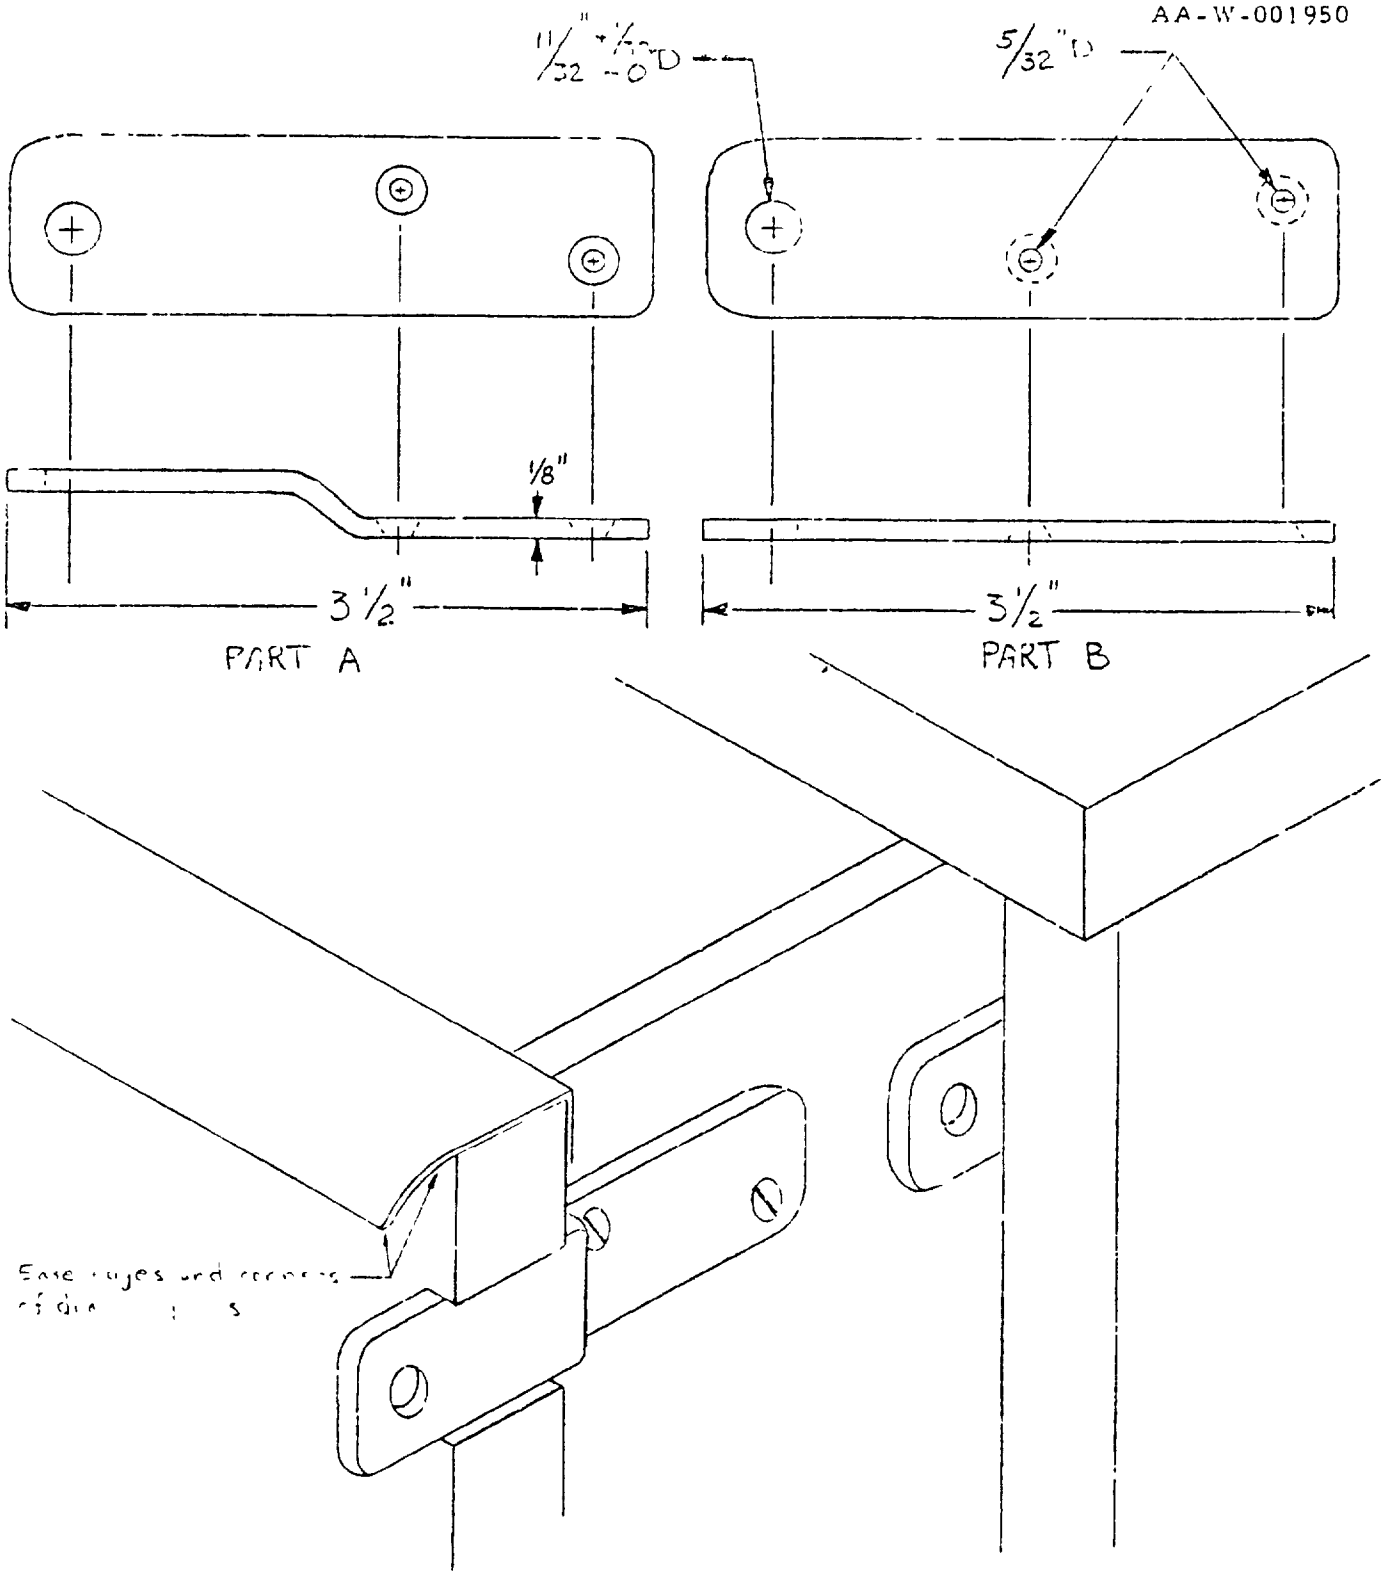


LOCKING HASP ON TOP DRAWER OF 3 DRAWER CHEST
NOT TO SCALE

FIGURE 10A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

AA-W-001950

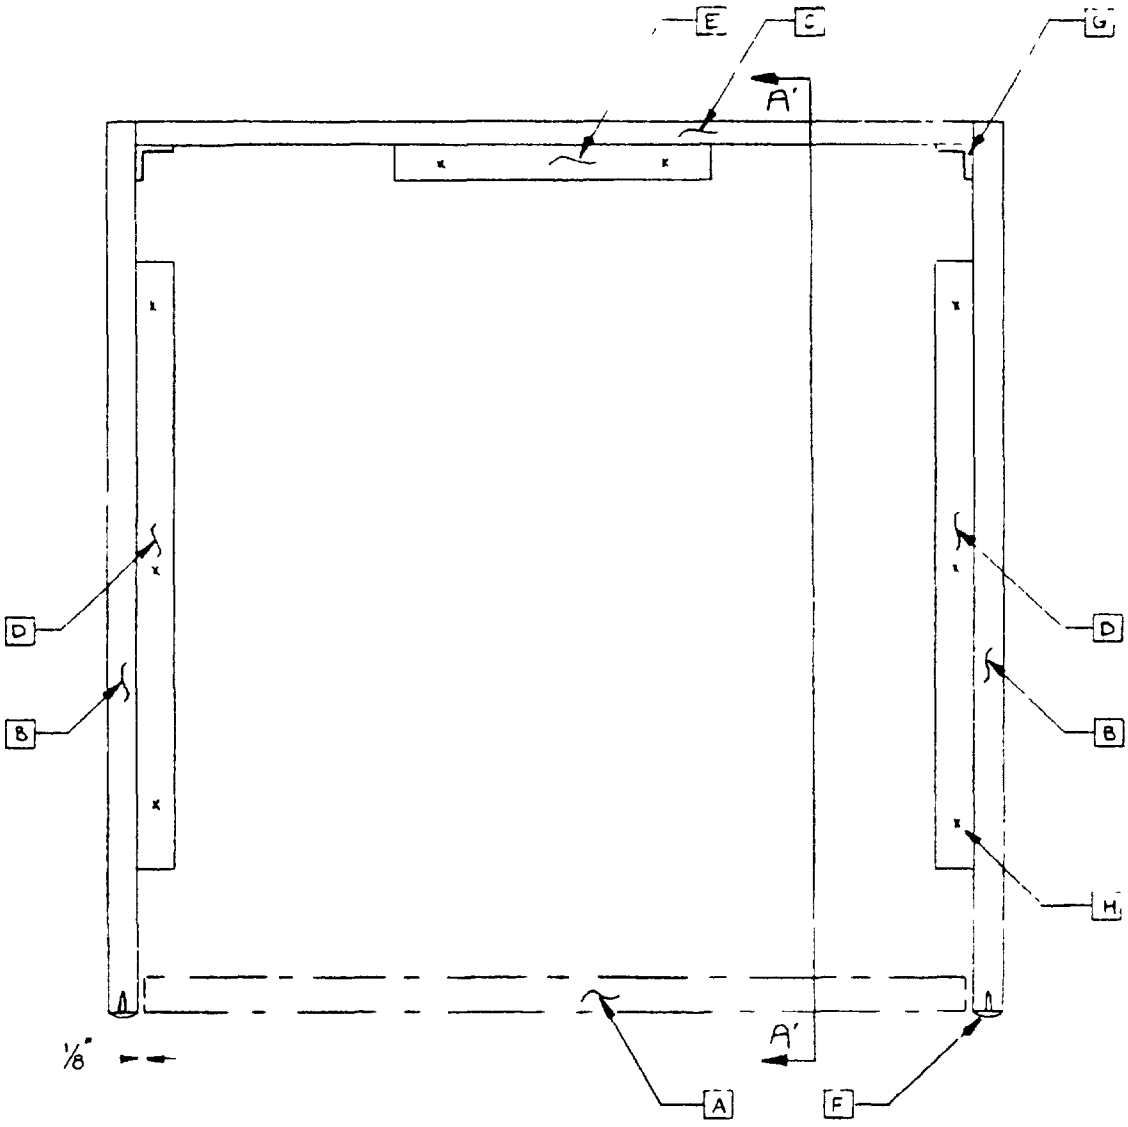


Notes

A Drawer Front (3.5.6.6)
B End Panels (3.5.6.2)
C Back Panel (3.5.6.3)
D Steel Angle - 14 Long min-ref
E Steel Angle 7' Long min ref.
F T molding (3.2.8) typ 2 plcs
G Steel Angle - ref
H Top secured to case with #10 SM Screws typ 8 plcs
J All fastening requirements are minimum

3 Drawer Chest - top view (top and drawers removed)

Figure 15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

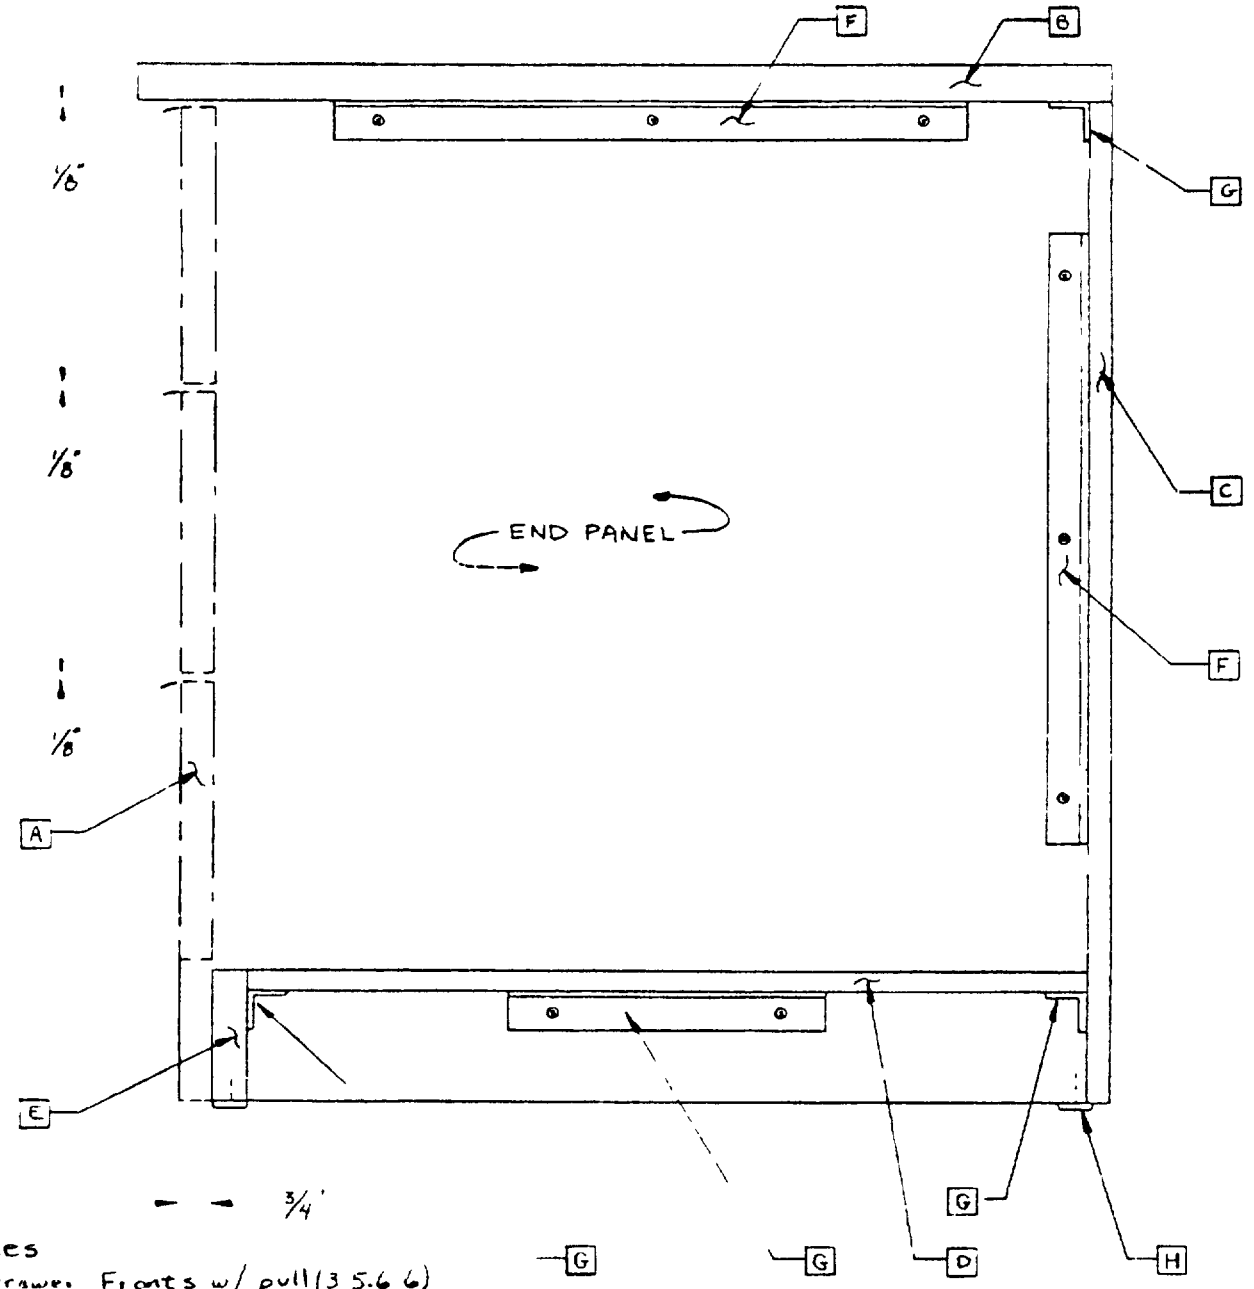

Notes

A Drawer Fronts w/ pull (3 5.6 6)
B Top (3 5 6.1)
C Back Panel (3 5 6 5)
D Bottom Panel (3 5 6 4)
E Toe board (3 5 6 5)
F Steel Plate 14 Long min, secured with a minimum of 3 screws along each flange (3 5 5)
G Steel Plate / Long min, secured with a minimum of 3 screws along each flange (3.5.5)
H 3/4 min thick plywood pull guide top plate one each corner
Cabinet constructed of solid, mdf, with steel cables - 2" long min secured with a minimum of 2 screws along each flange


SECTION "A-A" 5 drawer chest (drawers removed)

Figure 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTE:

[A] Top
[B] Shelf
[C] Bottom
[D] Back
[E] Rear bottom horiz frame member
[F] Rear vert frame member
[G] Rear shelf support frame member
[H] Rear top frame member
[J] Front top frame member
[K] Front half shelf support frame member
[L] Front vert frame member
[M] Front bottom horiz frame member
[N] Door
[P] Toe board

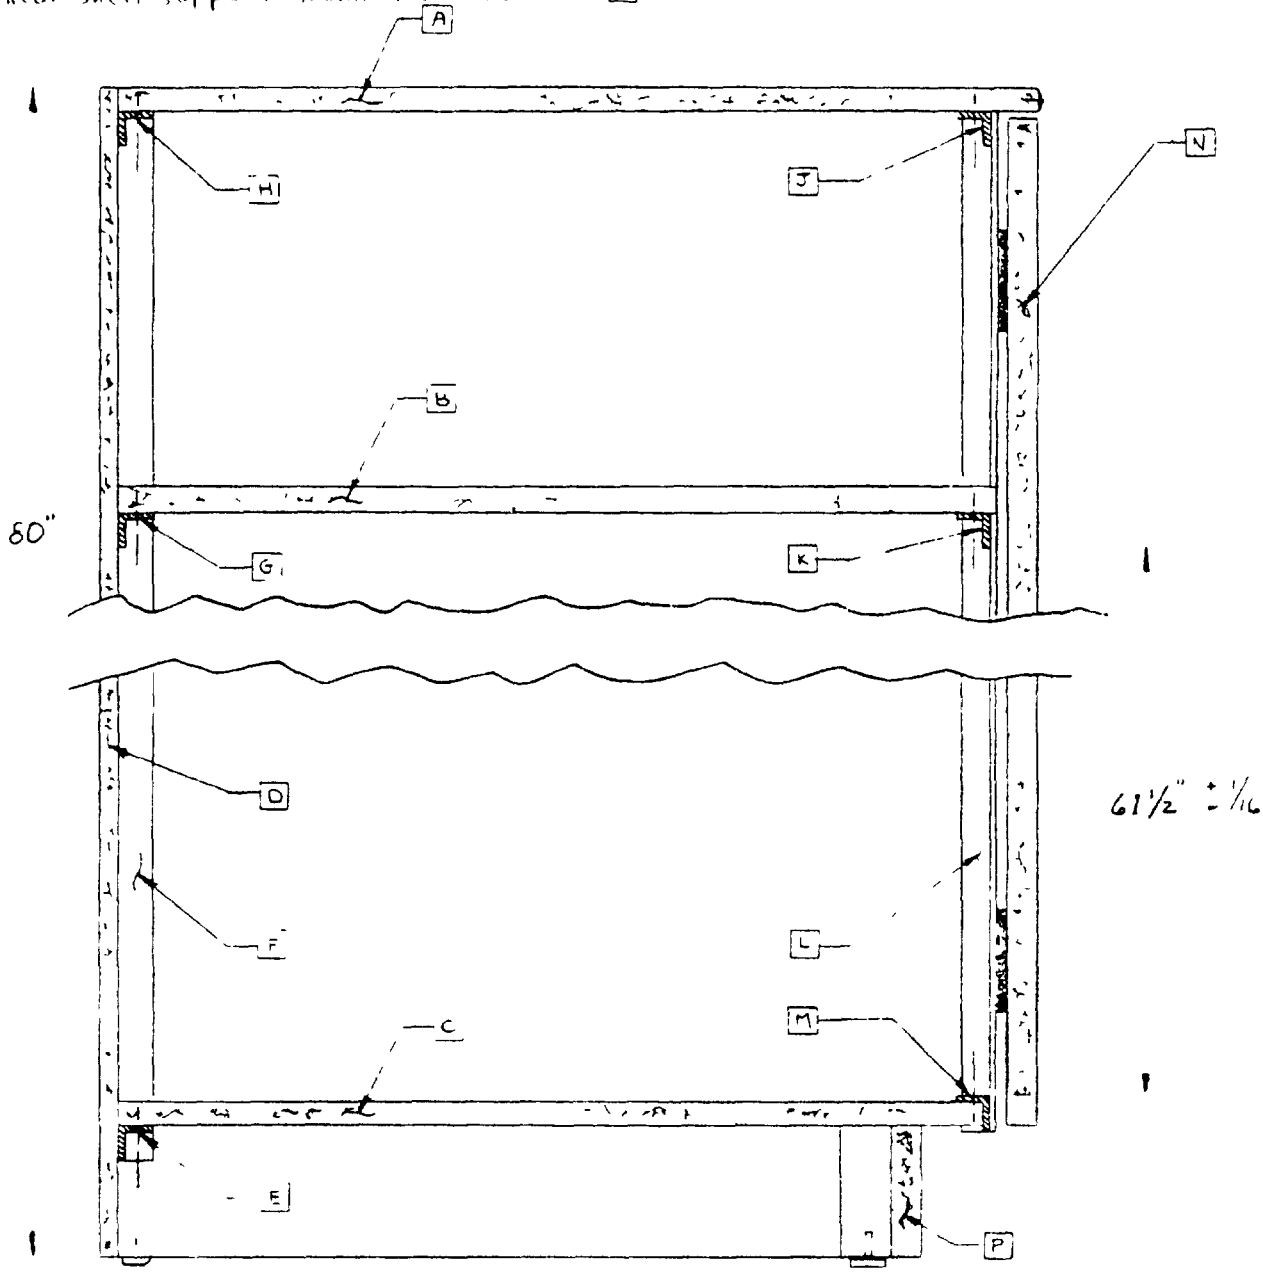

Wardrobe - Section view (side) w/o locking mechanism

Figure 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.