INCH-POUND

MIL-R-12571N
31 December 1991
SUPERSEDING
MIL-R-12571M
25 May 1988

MILITARY SPECIFICATION

REFRIGERATORS, MECHANICAL, FIELD, PORTABLE WALK-IN, PLUG-IN (150 CUBIC FOOT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers an aluminum alloy, portable, walk-in, plug-in, non-sectional, field refrigerator of 150 cubic foot capacity.

1.2 Part or identifying number (PIN). The PIN shall consist of the basic number of the specification, and the appropriate PIN structure as specified in 6.4.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 4110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-55057	-	Panels, Wood/Wood Based, Construction and Decorative
W-S-896/2-2a	-	Switches, Toggle and Lock, Flush Mounted (AC) (Detail Specification)
QQ-A-200/8	-	Aluminum Alloy 6061, Bar, Rod, Shapes, Tube and Wire, Extruded
QQ-A-200/9	-	Aluminum Alloy 6063, Bar, Rod, Shapes, Tube and Wire, Extruded
QQ-A-200/16	-	Aluminum Alloy Structural Shapes, Extruded, 6061
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet
QQ-Z-363	-	Zinc-Base Alloy; Die Castings
TT-L-58	-	Lacquer: Spraying, Clear and Pigmented, For Interior Use
TT-S-176	-	Sealer, Surface, Varnish Type, Floor, Wood and Cork
TT-V-121	-	Varnish, Spar, Water-Resisting
MMM-A-121	-	Adhesive, Bonding Vulcanized Synthetic Rubber to Steel
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-60	-	Tape: Packaging, Waterproof

MILITARY

MIL-P-116	-	Preservation, Methods Of
MIL-P-514	-	Plates, Identification, Instruction and Marking, Blank
MIL-T-704	-	Treatment and Painting of Materiel
MIL-A-8625	-	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-S-40144	-	Shelving, Storage, Stationary and Mobile, Food Service
MIL-C-46168	-	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-C-53039	-	Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards For Federal Services

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of US Military Property
MS 27211-2 - Thermometer, Indicating, Capillary Tube and Bulb, 2-1/2 Inch Dial Size
MS 35647-5 - Padlocks, Key Operated

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

UNITED STATES DEPARTMENT OF COMMERCE

PS-1 - For Construction and Industrial Plywood

(Copies may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

5-13-2709 - Assembly Complete
5-13-2710 - Section A-A
5-13-2711 - Section B-B and D-D
5-13-2712 - Subfloor and Skid Assembly
5-13-2713 - Frame Assembly
5-13-2714 - Panel Assembly
5-13-2715 - Floor and Breaker Strip Details
5-13-2716 - Door Assembly
5-13-2717 - Lifting Loop and Closure Plug Assemblies
10-1-452 - Packing Hood, Overseas Shipment for Refrigerator, Mechanical 150 Cubic Foot

(Copies of drawings are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-UX, Natick, MA 01760-5017.)

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

UNDERWRITERS LABORATORIES, INC. (UL)

UL 98 - Switches, Enclosed

(Copies should be obtained from the Underwriters Laboratories, Inc., 333 Pfingsten Road, Northbrook, IL 60662.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B 633 - Specification for Electrodeposited Coating of Zinc on Iron and Steel
D 2665 - Specification for Poly (Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings
D 3951 - Practice for Commercial Packaging
D 3953 - Specification for Flat Steel Strap and Connectors

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

Standard No. 70 - The National Electrical Code

(Copies should be obtained from the National Fire Protection Association, Batterymarch Park, Quincy, MA 02169.)

AMERICAN NATIONAL STANDARD/AMERICAN HARDBOARD ASSOCIATION (ANSI/AHA)

A 135.4 - Basic Hardboard

(Copies should be obtained from the American Hardboard Association, 520 North Hicks Road, Palatine, IL 60067.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Alternate components. Components offered as being equivalent to components specified hereinafter and on the reference drawings as a specific manufacturer's part number or equal shall be functionally equal, of equal or better quality, and shall have the manufacturer's part number identified. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other components, and shall not reduce ease of maintenance to it or any other components unless such modification or change is specifically approved by the contracting officer. Prior to manufacture of the first article, the contractor shall submit, for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified above. The contracting officer, at his option, may require a physical sample of the proposed substitute. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of first article manufacture and does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

* 3.3 Codes and standards. Refrigerator electrical components shall comply with applicable requirements of Underwriter Laboratories Standard 98 and NFPA Standard 70 (see 4.4.7, 4.4.7.1, and 4.4.7.2).

* 3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for refrigerators, provided the completed end item complies with all provisions of this document. The material shall have no adverse effect on the health of personnel when used for its intended purpose. Cadmium, antimony, bismuth, lead, or other toxic materials shall not be used on any hardware or components in the interior of the refrigerator. Commercial tolerances shall apply to all metal thicknesses and diameters unless otherwise specified hereinafter or on drawings.

* 3.4.1 Recycled material. Recycled or reclaimed materials may be used in the construction of the equipment described herein to the maximum extent possible. Recycled and reclaimed materials shall be defined as previously used material which has been reprocessed to become a source of new raw materials. Under no circumstances shall the contractor submit to the Government for acceptance, reconditioned or rebuilt components as part of the equipment described herein.

* 3.4.2 Insulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:02Z
Check the source to verify that this is the current version before use.

3.4.2.1 Foamed-in-place insulation. Foamed-in-place insulation shall be polyurethane material and have a manufacturer's rated "K" factor of not more than 0.15. Insulation shall have a free-rise density of not less than 1.7 pounds per cubic foot when tested as specified in 4.5.2 or an in-place density of not less than 2 pounds per cubic foot when tested as specified in 4.5.2.1. The foamed-in-place insulation shall be dimensionally stable at a temperature of 150°F when tested as specified in 4.5.1.

3.4.3 Zinc-alloy die castings. When die cast zinc-alloy is used, the zinc base alloy shall conform to alloy AG40A of QQ-Z-363.

3.4.4 Aluminum alloy.

3.4.4.1 Extruded shapes. Extruded aluminum alloy shapes shall conform to alloy 6061 - T6510 of QQ-A-200/8 or alloy 6063 - T6 of QQ-A-200/9.

3.4.4.2 Rolled or drawn shapes. Aluminum alloy for rolled or drawn shapes shall conform to alloy 6061 - T6 of QQ-A-200/16.

3.4.4.3 Sheet. Aluminum alloy sheet shall conform to alloy 3003, temper H 14 or H 16 of QQ-A-250/2 as specified on the drawings.

3.4.5 Gasket. The door sealing gasket shall conform to drawing 5-13-2716. Gasket shall be adhered in place using adhesive conforming to MMM-A-121. All joints and ends shall be sealed.

3.4.6 Fasteners. Unless otherwise specified herein, fastener hardware shall have the contractor's standard electrodeposited finish and threads shall be class 2 fit and conform to FED-STD-H28.

* 3.4.7 Building board. Material for breaker strips shall conform to class 4, (S1S) of ANSI/AHA A135.4, and the surface shall be unfinished plain board. Material for the door jambs and walk-in doors shall conform to class 4, (S1S) of ANSI/AHA A135.4, and the surface shall be unfinished plain board.

3.4.8 Plastic tubing. The plastic tubing used to shield the door latch plunger from insulation as shown on Drawing 5-13-2716 shall conform to ASTM D 2665.

3.4.9 Metal surface priming and coating.

3.4.9.1 Primer coat for metal surfaces. Primer for ferrous and non-ferrous metal surfaces shall conform to type F or G of MIL-T-704.

3.4.9.2 Finish coat for metal surfaces. The primed exterior metal surfaces shall be painted green 383, 34094, type II, III, or IV of MIL-C-46168 or green 383 of MIL-C-53039.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

* 3.4.9.3 Finish, panel; interior and floor. The interior panels (items 4-4, 4-5, 4-6, and 4-8 of Drawing 5-13-2714) and the inner floor (item 5 of Drawing 5-13-2715) are to be clear anodized after forming or welding and conform to type II, Class 1 of MIL-A-8625, as specified in MIL-T-704.

3.4.10 Sealer, varnish, and lacquer.

* 3.4.10.1 Hardboard sealer. Hardboard sealer shall conform to class 2 of TT-S-176.

3.4.10.2 Varnish. Varnish shall conform to TT-V-121. Varnish prepared for spraying shall have not more than 1 pint of varnish makers and painters naphtha (VM&PN) added to each gallon of varnish.

* 3.4.10.3 Lacquer. Lacquer shall conform to type I, class 2 of TT-L-58.

3.4.11 Plywood. Plywood shall be Douglas Fir or Southern Pine, exterior type, grade B-C, or better, conforming to PS-1.

3.4.12 Shelving. When specified (see 6.2), shelving conforming to MIL-S-40144 in the required type, style and size shall be furnished.

3.4.13 Floor racks. Fiberglass or plastic floor racks as shown on Drawing 5-13-2709 shall be provided.

3.5 Design. The design of the refrigerator covered by this document shall conform to the requirements herein and to the drawings listed in 2.1.2.

3.5.1 Heat leakage. The heat leakage of the refrigerator shall not exceed 15 Btuh/^{o}F when tested as specified in 4.5.5.

3.5.2 Exposure to weather - rainfall. The refrigerator, with internal light on, shall withstand a rainfall of 3 inches per hour without leaking or showing damage when tested as specified in 4.5.3.

3.6 Construction.

3.6.1 Metal construction. Metal seams shall present a smooth exposed surface. The refrigerator shall not show any damage when tested as specified in 4.5.4, using the lifting rings and with the refrigerator containing an evenly distributed load of 4000 pounds. Welded seams shall be made at inner floor and where metal sheets are notched to accommodate forming.

3.6.2 Breaker strips. The breaker strips shall be constructed of material specified in 3.4.6 and shall be removable with the insulation side treated to prevent adherence to insulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:02Z
Check the source to verify that this is the current version before use.

* 3.6.3 Insulation. All space within the walls, door, floor, and top shall be completely filled with foamed-in-place insulation conforming to 3.4.1 as shown on Drawing 5-13-2710. Prior to foaming, the inner and outer liner shall be treated in accordance with manufacturer's standard commercial practice to insure permanent bonding of the insulation to the liner material. The insulation shall be installed in a manner such that there will be no voids or empty pockets.

3.6.4 Doors.

* 3.6.4.1 Door latch and strike assembly. The walk-in-door latch and strike assembly shall be a commercial, adjustable type, as shown in Drawing 5-13-2716. The latch and strike assembly shall be fabricated of high strength zinc die cast conforming to 3.4.2, cast or forged brass, or malleable iron with zinc, chromium, or nickel finish. When the priming and coating requirements in 3.4.8.1 and 3.4.8.2 apply, the hardware components shall be supplied with a finish compatible for the priming and coating. The latch shall have provisions for holding the padlock specified in 3.6.4.3. When a diecast latch is furnished, the handle shall be forged brass or malleable iron and the striker tongue shall be extruded brass or forged steel. The strike shall be so constructed that removing the bolt or screw from the strike housing shall not allow the locked door to be opened. The door latch shall be provided with an internal release mechanism designed so that the door may be opened from the inside even though the latch may be secured or padlocked on the outside and in so doing no components shall become distorted, dismounted, or detached.

* 3.6.4.2 Hinges. Hinges for the walk-in-door shall be of the commercial selfclosing type as identified on Drawing 5-13-2716 and shall match the latch of the door in appearance. The hinge shall be not less than 10 inches long. The hinges shall be constructed of zinc die cast conforming to 3.4.2, steel, forged brass, or malleable iron. The hinge shall be finished with zinc, chromium, or nickel. When the priming and coating requirements of 3.4.8.1 and 3.4.8.2 apply, the hardware components shall be supplied with a finish compatible for the priming and coating. Lubrication shall be accomplished through the use of self-lubricating nylon cam and cam insert. Shims shall be provided behind door hardware to compensate for gasket set.

3.6.4.3 Padlocks. A padlock conforming to MS 35647-5 shall be supplied. The padlock shall be securely attached to the walk-in-door by chain as provided.

3.6.4.4 Two point latch. The walk-in-door shall be provided with two two-point latches as shown on Drawing 5-13-2716.

3.6.5 Tiedown assemblies. When specified (see 6.2), tiedown assemblies as shown on Drawing 5-13-2709 shall be furnished. Tiedown assemblies shall be finished in accordance with ASTM B 633, type II, and service condition SC3 of table 1 of this method.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the currenversion before use.

3.6.6 Electrical. Unless otherwise specified (see 6.2), all electrical devices and components shall be installed as shown on the applicable drawings and be capable of operating on a nominal 115 volt, 60 hertz, single phase power system. Electric wire shall be nonmetallic-sheathed cable conforming to type NMC or UF of the National Electric Code. The cable shall contain two conductors and a ground wire. The conductor size shall be No. 14 AWG (see 3.6.6.4).

3.6.6.1 Pilot lights. The pilot light shall be 6-watt, incandescent lamp having a candelabra screw base, commercial type S-6, enclosed in a vapor-tight housing. The lamp shall be supported within the enclosure and wired to illuminate a red jewel indicator in the cover of the box enclosure when the switch is in the "on" position (see 3.6.6.4).

3.6.6.2 Plug and receptacle. The plug and receptacle shall be provided and shall be weather tight, designed for 3-wire, 2-pole grounded service and shall be rated at not less than 15 amperes. The receptacle shall be of the recessed male, locking type. A cap or flap cover shall be provided to seal the receptacle housing when not in use and shall be secured to the housing to prevent loss. The plug shall contain a sealing ring to form a weather tight joint when the plug is inserted in the receptacle.

3.6.6.3 Grounding rod. For Navy procurements (see 6.2), provisions shall be made to permanently ground and bond all exposed metal sheathing of all refrigerator walls, ceiling, floor, and door, both inside and outside of the refrigerator, to a grounding rod.

3.6.6.4 Switch. The switch shall conform to W-S-896/2-03-A. The switch shall be housed in a vapor-tight enclosure conforming to UL 98 and shall be externally operated and mounted in the cover of the box enclosure (see 3.6.6.1).

3.6.6.5 Lighting fixture. The lighting fixture shall be a vapor proof, angle bracket type lamp fixture and shall be mounted as shown on Drawing 5-13-2711. The vapor proof lamp fixture shall be equipped with a shatterproof globe of the polycarbonate screw-type and shall be complete with a 100 watt, 120 volt, inside frosted, incandescent bulb having a medium screw base.

3.6.7 Thermometers. A thermometer shall be provided conforming to MS 27211-2 and shall be mounted as shown on Drawing 5-13-2709.

3.6.8 Finish. Unless otherwise specified (see 6.2), all external surfaces shall be finished.

3.6.8.1 Metal surfaces.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

3.6.8.1.1 Cleaning, conditioning, and surface preparation. All exposed outer surfaces shall be thoroughly cleaned, conditioned, and prepared for painting in conformance with MIL-T-704.

3.6.8.1.2 Primer coat. All metal surfaces prepared for painting shall receive a coat of primer in accordance with type F or G of MIL-T-704 (see 3.4.8.1), after having thoroughly dried from the cleaning and conditioning process (see 3.6.8.1.1).

3.6.8.1.3 Finish coat. Unless otherwise specified (see 6.2), the surfaces shall receive a coat of the finish paint specified in 3.4.8.2, after the primer has cured to the proper degree for painting.

3.6.8.2 Hardboard surfaces. The hardboard surfaces of the door jambs and walk-in-door, and the refrigeration unit opening shall be given one coat of sealer as specified in 3.4.9.1 followed by two coats of varnish specified in 3.4.9.2 or lacquer specified in 3.4.9.3.

3.6.9 Marking.

3.6.9.1 Data name plate. The refrigerator shall have a metal identification plate attached to the outside of the walk-in-door as shown on Drawing 5-13-2716. The metal plate shall conform to type III, composition A, class 1 or 2 of MIL-P-514 and shall be permanently attached with screws or rivets. The identification plate shall be marked in accordance with MIL-STD-130 as follows:

1. U.S.
2. Military model number and nomenclature.
3. National stock number (NSN).
4. Serial number.
5. Contract number.
6. Manufacturer's name and address.
7. Model number.
8. CAGE number.
9. Technical manual number (see 6.2).
10. Weight.

Each plate shall be placed so as to be readily visible to the operator during normal operation and use, and so as not to adversely affect the life or utility of the refrigerator.

3.6.9.2 Data plate. For Marine Corps acquisitions (see 6.2) a data plate shall be attached to each refrigerator. These plates may be obtained from the Commandant of the Marine Corps (Code CS6), Headquarters Marine Corps, Washington, DC 20380-0001. Data applicable to blank spaces 1, 3, 8, 9, and 10 shall be furnished with the plates. The contractor is required to imprint the data in all blank spaces and permanently affix the plate to the refrigerator.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

* 3.6.9.3 Chemical Agent Resisting Coating (CARC) paint identification. Following the application of the finish coat as specified in 3.6.8.1.3, when the finish coat has cured to the proper degree, the word "CARC", along with the month and year of coating application shall be stenciled in 1 inch block letters, using lusterless black paint 37030 conforming to type III or IV of MIL-C-46168. The CARC marking shall be located conspicuously near the data name plate (see 3.6.9.1) so as to be plainly visible during normal operation of the unit.

* 3.6.10 Workmanship. The refrigerators shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels (AQL's).

3.6.10.1 Welding. The surfaces of all parts to be welded shall be free from rust, corrosion, scale, paint, grease, or other foreign matter. Parts to be welded shall be cleaned, ground, shaped, and welded in such a manner as to be sound, smooth, free from flash, show good fusions, and provide strength comparable to that of the connected parts which have not been impaired.

3.6.10.2 Bolts and screws. Bolts and machine screws shall be securely fastened in place and torqued in accordance with standard industrial practice. Sheet metal screws shall be self-tapping, thread forming type, designed to form the mating thread. They shall be securely screwed into suitably punched or drilled holes in the sheet metal. Fasteners shall not be driven into sheet metal surfaces where no hole has been prepared by either punching or drilling operations.

3.6.10.3 Zinc-alloy die castings. Each die casting shall be of a uniform quality and condition, free from foreign matter, blow holes, porosity, hard spots, shrinkage defects, cracks, and other injurious defects that may affect the appearance or may adversely affect the serviceability. The castings shall be made smooth by filling and tumbling before the final finish is applied.

3.6.10.4 Sheet metal. Metal used in the fabrication of the container shall be free of kinks and unspecified bends. Forming and shearing shall not cause damage to the metal and shall be done neatly and accurately. Corners shall be square and true and all bends of a major character shall be made with dies or fixtures to insure uniformity of size and shape. Sharp edges, corners and burrs shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:02Z
Check the source to verify that this is the current version before use.

Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirement. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.2 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4 and tested for the characteristics specified in 4.5.1, 4.5.3, 4.5.4, and 4.5.5. It may be tested in any order of tests. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.2.1 In-process examination. Examination shall be made to establish that no deviation is made from the following requirements.

a. Examine hardboard and plywood for type specified (see 3.4.7 and 3.4.11).
b. Breaker strip treatment (see 3.6.2).
c. Insulation is installed with no voids (see 3.6.3).
d. Where applicable, metal surfaces properly treated for bonding with foamed insulation.
e. Electrical installation is in conformance with 3.6.6 and applicable drawings.
f. Finish.
   1. Cleaning, conditioning, and priming is as specified in 3.6.8.1.
   2. Sealer and lacquer is applied as specified in 3.6.8.2.
g. Welding is in conformance to 3.6.10.1 and applicable drawings.

4.4.2.2 In-process test of insulation. The density tests of foamed-in-place insulation shall be performed as specified in 4.5.2 or 4.5.2.1. The inspection lot shall be the amount of material used in one day's production. The sample unit shall be a 6-inch cube.

4.4.2.3 In-Process dimensional examination. Prior to assembly, components shall be examined for compliance with all specification and drawing dimensional requirements. The inspection lot shall be all like components offered for inspection at one time. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5 expressed in terms of defects per hundred units.

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of refrigerators. The sample unit shall be one refrigerator. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 2.5 for major and 6.5 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:02Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Classification Minor
Finish	Type of finish not as specified		201
	Blistered, peeled, chipped, area of no film, runs, wrinkles, or drops	101	
	Color not as specified		202
Construction and workmanship	Hardboard and plywood members not one piece		203
	Sharp seams on inner or outer skin (when applicable)	102	
	Kinks or unspecified bends	103	
	Seams not welded on inner floors	104	
	Joints of notched metal sheet not welded		204
	Corners and angles on inside surface not filled or rounded	105	
	Bolts, screws, defectively installed		205
	Defective casting		206
	Latch and strike assembly not adjustable (when applicable)		207
	Refrigerator door cannot be opened from inside when latch is secured or padlocked	106	
	Components are dismounted or detached when refrigerator door is opened from inside		208
	Latch cannot be locked with padlock		209
	Shims not provided behind door hardware		210
Electrical system	Defective pilot light		211
	Switch cannot be externally operated		212
	Switch not vapor tight		213
	Plug receptacle not as specified		214
	Plug not furnished		215
	Light fixture and thermometer not mounted as specified		216
	Not grounded when specified	107	
	Device capacity rating incorrect		217

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:02Z
Check the source to verify that this is the currentversion before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Welding	Missing, incomplete fusion	108	
	Rust or corrosion on areas to be welded	109	
	Scale, paint, or grease not removed		218
Marking	Missing, incomplete, illegible, not in proper location, not on correct data plate		219

* 4.4.4 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified on the drawings. Only those dimensions that can be evaluated without damaging or disassembling the end items shall be examined. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of refrigerators. The sample unit shall be one refrigerator. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 End item testing. When a first article is not required, the initial production unit shall be tested as specified in 4.5.1, 4.5.3, 4.5.4, and 4.5.5. Any nonconformance shall be cause for rejection of the initial production unit.

4.4.6 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or otherwise defective
Workmanship	Inadequate application of components, such as incomplete taping or plywood not flush against refrigerator (where required)

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

4.4.7 Certification compliance examination. Certifications, certified test reports, or listing marks for standards, submitted in accordance with 3.3, shall be examined and validated as proof of compliance. Prior to Government approval of first shipment, the contractor shall submit to the contracting officer or his authorized representative for approval, certification that the refrigerators he proposes to furnish meet the applicable requirements of UL as follows.

4.4.7.1 UL. Acceptable evidence of meeting the requirements of the Underwriters Laboratories standards shall be a UL listing mark, or a certified test report from a recognized independent laboratory, acceptable to the Government, indicating that the refrigerators have been tested and conform to the UL standards for safety.

* 4.4.7.2 NFPA. Acceptable evidence of meeting the requirement of NFPA shall be the manufacturer's certified statement that the electrical components conform to the applicable requirements of NFPA No. 70.

4.5 Methods of inspection.

4.5.1 Heat stability test. One complete production unit shall be dimensionally measured for wall thickness (include center of ceiling) and placed in an oven or heated room and held at 150°F for 24 hours. After removal of the unit from the oven, any indication of swelling shall require a measurement to determine if the foam had a swell of more than 5 percent to determine conformance to 3.4.1.1. Inability of the insulation to remain stable within 5 percent shall constitute failure of the test.

4.5.2 Free-rise density test for insulation. Prior to each day's production, one free foam sample of the insulation referenced in 3.4.1.1, a minimum 8-inch cube, shall be taken. From the center of the sample a 6-inch cube shall be cut and weighed. The density shall be determined as follows:

$$\text{Density (lbs/ft}^3\text{)} = \text{Weight of 6-inch cube (lbs) X 8}$$

Inability of sample to conform to density requirements of 3.4.1.1 shall constitute failure of the test.

4.5.2.1 In-place density test for insulation. Prior to each day's production the first refrigerator to be foamed shall be identified, weighed, and the weight recorded. The refrigerator shall then be foamed and upon completion, weighed and the weight recorded. Divide the total pounds of foam (weight differential before and after foaming) by the interior volume of the space being insulated to determine conformance with the in-place density requirement of 3.4.1.1. Inability to conform with the in-place density requirement shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:02Z
Check the source to verify that this is the currentversion before use.

4.5.3 Rainfall test. The door end of the refrigerator shall be sprayed with fresh water at a rate of approximately 3 inches per hour at an average angle of 45 degrees for 1 hour. Following the simulated rainfall, the refrigerator shall be carefully examined to determine compliance with 3.5.2. Leakage or damage shall constitute failure of this test.

4.5.4 Lift test. To determine conformance to the lifting requirements of 3.6.1 the following test shall be performed:

The interior of the refrigerator shall be loaded with an evenly distributed weight of 4000 pounds. The refrigerator shall be lifted approximately 5 feet using the four lifting rings, and then lowered to the ground. This shall be repeated two additional times, and then the refrigerator shall be examined for any damage.

Any damage to the refrigerator shall constitute failure of this test.

4.5.5 Heat leakage test. The refrigerator used for the heat leakage test shall have an insulated plug in the refrigeration unit opening. A heat leakage test shall be conducted with the refrigerator placed in a controlled temperature ambient and a monitored heat input supplied to the refrigerator to determine compliance with 3.5.1. All calculations, using the formula below, and all recorded data on time, temperature, and heat input shall be recorded.

* $$\text{Heat leakage} = \frac{\text{Total watt-hours input X Btu/watt-hour}}{\text{Length of test (hours) x temperature difference (F)}}$$

The temperature difference shall be not less than 50°F. The interior of the refrigerator temperature shall not exceed 140°F. The ambient temperature shall be the average of eight readings taken at points located 6 inches from each outside corner of the box. The internal, or box temperature, shall be the average of eight readings taken at points located 6 inches from the inner walls at each corner of the box. Eight ambient and box temperature readings shall be taken at consecutive one-half hour intervals with ambient temperature variations not more than ± 2°F and box temperature variations not more than ± 1°F. At least one interior and one exterior temperature reading shall be taken on a recording instrument. The refrigerator shall be no closer than 12 inches from any wall or ceiling. Inability to meet the heat leakage requirement of 3.5.1 shall constitute failure of this test.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A Preservation. The locking assembly on the door of the refrigerator shall be removed and together with the hardware, accessories, padlock, and keys shall be unit packed conforming to method III of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

in a snug-fitting fiberboard box conforming to style RSC, class domestic of PPP-B-636. The packed components shall be secured within the refrigerator in such a manner as to prevent movement or damage while in transit.

5.1.2 Commercial Preservation. The refrigerator shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Each refrigerator, preserved as specified in 5.1, shall be provided with a snug-fitting wood cleated, plywood hood as shown on Drawing 10-1-452, with material and nailing requirements conforming to overseas type PPP-B-601, and the following: The cleats for the top of the hood shall be placed on the inside of the hood, and the top of each refrigerator shall be either covered with a sheet of minimum 40-pound kraft paper or minimum 0.002 inch thick polyethylene. Each hood shall be strapped to the refrigerator by means of four straps, two encircling the girth of the hood and passing through the openings in the skid of refrigerator closest to the ends, and two encircling lengthwise over the hood and under the refrigerator and adjacent to the skids of the refrigerator. Strapping shall be minimum 3/4 inch by 0.023 inch steel strapping conforming to type 1 or 2, organic coated or galvanized per ASTM D 3953.

* 5.2.2 Level B packing. Each refrigerator shall have the plug panel mounted in the unit opening and secured in place with hardware furnished. The receptacle cap shall be screwed on finger tight. The thermometer and the pilot light assembly shall be covered and protected with plywood fitted to bear flush against the refrigerator. The plywood shall be secured in place by means of strips of tape covering all sides and extending onto the surfaces of the refrigerator. The tape shall be minimum 2 inch width conforming to type III or type IV, class 1 of PPP-T-60. The plywood shall be not more than 1/4 inch thick and shall conform to type A of A-A-55057. The plywood shall extend a minimum of 1/2 inch beyond the edges of the thermometer or pilot light on all sides. The door shall be closed and locked with a padlock when furnished, and the keys taped to the padlock with tape specified herein; or shall be wired shut with minimum 0.072 inch annealed wire.

5.2.3 Commercial packing. Each refrigerator, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipments shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:02Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The refrigerator is intended for use with the refrigeration units of MIL-R-12574 and is intended to be used to store temperature sensitive food items at temperatures ranging from 0° to 35°F under adverse climatic and operational conditions in the field without any further protection from the elements.


* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. When first article is required (see 3.2, 4.3, and 6.3).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When shelving is required (see 3.4.11).
e. When tiedown assemblies are required (see 3.6.5).
f. When electrical devices are to be installed other than specified (see 3.6.6).
g. When special ground for Navy is required (see 3.6.6.3).
h. When exterior finish is other than specified (see 3.6.8.1.3).
i. When technical manuals are required (see 3.6.9.1)
j. When procurement is for Marine Corps (see 3.6.9.2).
k. Levels of preservation and packing (see 5.1 and 5.2).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of Federal Acquisition Regulation (FAR) 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:02Z
Check the source to verify that this is the current version before use.

* 6.4 Part or identifying number (PIN) structure. The PINs to be used for items covered by this specification are formed as follows:

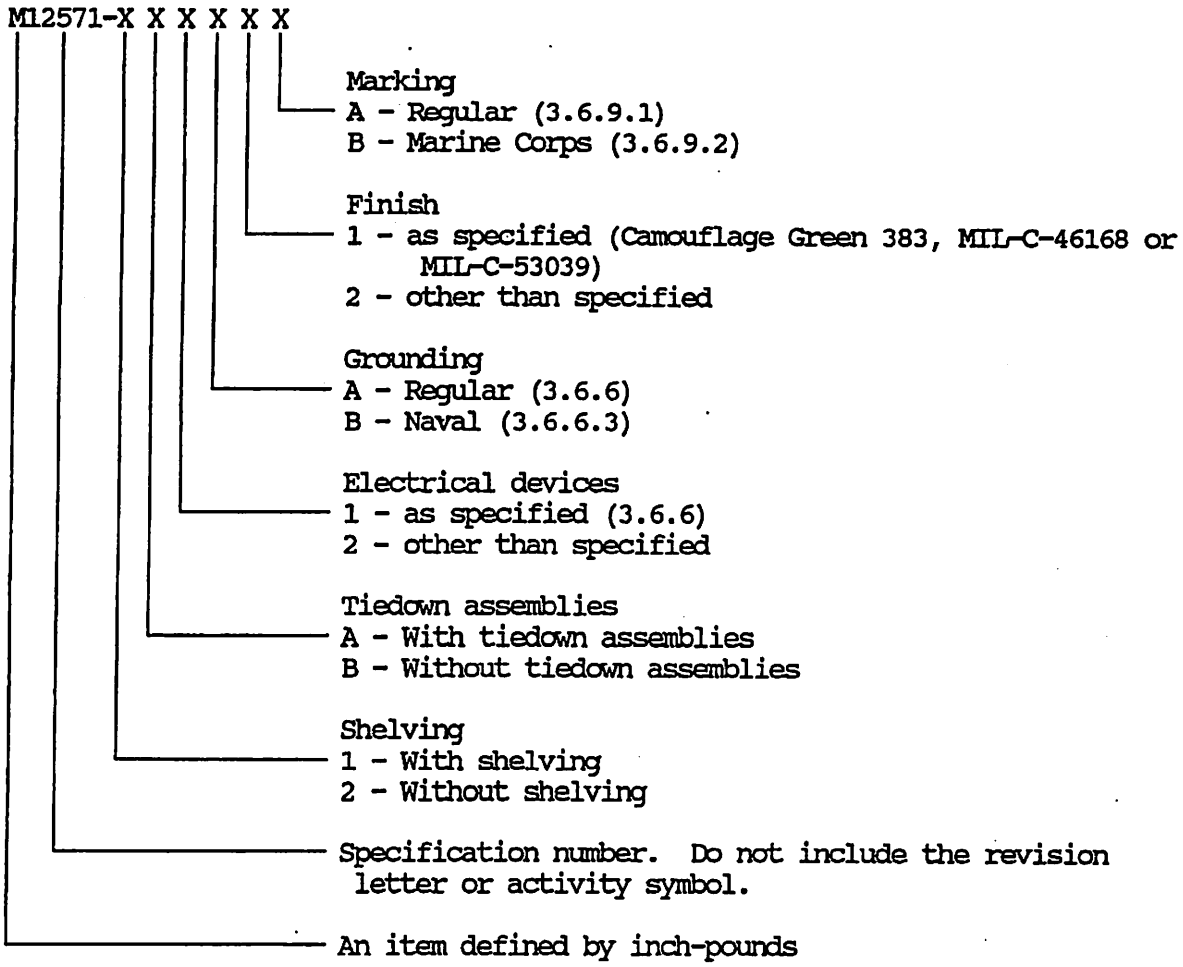

* 6.5 Subject term (key word) listing.

Kitchen equipment
Preservation of food
Storage, food

* 6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this specification based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:02Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - YD
Air Force - 99

Review activities:

Army - MD, TS
Air Force - 82
DLA - GS

User activities:

Army - CE
Navy - MC

Preparing activity:

Army - GL

Project 4110-0448

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:02Z
Check the source to verify that this is the current version before use.