MILITARY SPECIFICATION

PACKAGING OF MOTOR 7694288

1. SCOPE

1.1 This specification covers the preservation, packaging, packing and marking for interplant shipment, domestic shipment and storage, and overseas shipment for Motor 7694288.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications, standards, and drawings, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601	- Boxes, Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621	- Boxes, Wood, Nailed and Lock-Corner.
UU-T-111	- Tape, Paper, Gummed (Sealing and Securing).
LLL-B-631	- Boxes; Fiber, Corrugated (For Domestic Shipment).

Military

MIL-A-101	- Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	- Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106	- Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.
JAN-P-108	- Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
MIL-P-116	- Preservation, Methods of.
JAN-B-121	- Barrier-Materials, Greaseproof.
JAN-P-125	- Packaging and Packing for Overseas Shipment - Barrier-Materials, Waterproof, Flexible.
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
MIL-B-131	- Barrier-Material; Water-Vaporproof, Flexible.
JAN-P-139	- Packaging and Packing for Overseas Shipment - Plywood, Container Grade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

MIL-A-140 - Adhesive, Water-Resistant, Waterproof, Barrier-Material.
MIL-D-3464 - Desiccants (Activated) in Bags; For Static Dehumidification and Packaging.

STANDARD
Military
MIL-STD-129 - Marking of Shipments.

DRAWING
Army - Navy Aeronautical
AN7513 - Humidity Indicator, Small.

(Copies of specifications, standard, and drawing required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Cleaning and drying. - All exposed unpainted metal surfaces of the motor shall be thoroughly cleaned by process C-4 followed by process C-8, and dried in accordance with Specification MIL-P-116.

3.2 Prepackaging. - A plywood base 1/2 inch thick with runners 1/2 inch thick by 3 inches wide shall be constructed as illustrated in figure 1. A solid fiberboard support pad, 1/8 inch thick, and having a minimum bursting strength of 200 pounds per square inch shall be nailed to the base as illustrated in figure 1. The cables shall be secured to the motor with a strip of pressure-sensitive tape conforming to any type and grade of Specification JAN-P-127. Carriage bolts shall be placed through the holes in the base and the motor shall be positioned on the base and support pad and secured to the base. A flat washer and a lock washer shall be used under each nut. The exposed threads above the nuts shall be coated with asphalt sealer or unthinned paint to prevent the nuts from backing off. A sheet of greaseproof barrier material conforming to type I or II, grade A, class 1 of Specification JAN-B-121 shall be placed between the finished surfaces of the motor and the plywood base.

3.3 Packaging procedure

3.3.1 For domestic shipment with storage and overseas shipment. - Ref- (See figure 2.) The motor shall be packaged in accordance with method IITb of Specification MIL-P-116. The sequence of operations shall be as specified herein.

3.3.1.1 A humidity indicator conforming to drawing AN7513 shall be secured to the top of the motor with pressure-sensitive tape conforming to any type and grade of Specification JAN-P-127.

3.3.1.2 The required units of desiccant conforming to class 2 of Specification MIL-D-3464 shall be secured to the motor with pressure-sensitive tape conforming to any type and grade of Specification JAN-P-127.

(Since the desiccant will begin to absorb moisture upon exposure, the time lapse between the securing of the desiccant and the closure of the water-vaporproof barrier shall be kept to an absolute minimum.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

3.3.1.3 The mounted motor shall be placed in the inner fiberboard box. The plywood base shall fit snugly in the box. The fiberboard box shall conform to style RSC or OLC (full overlap) of Specification LL-B-631.

3.3.1.4 A one piece double-walled corrugated fiberboard liner, which will cover the end and side panels in the interior of the fiberboard box above the base, to within 1/8 inch from the top of the box shall be fabricated from material having a minimum bursting strength of 500 pounds per square inch and conforming to the fiberboard requirements of Specification LLL-B-631. The ends of the liner shall abut at the center of a side panel, and shall be secured with gummed tape 3 inches wide and conforming to class 2 or 3 of Specification UU-T-111. The corrugations shall be parallel to the score lines in the liner, and shall be any combination of A, B, and C flutes, except BB. The hold down liner shall be placed in the inner fiberboard box on the base.

3.3.1.5 A solid fiberboard top pad having a minimum bursting strength of 350 pounds per square inch shall be placed on top of the liner and shall press firmly against the liner and motor.

3.3.1.6 The inner fiberboard box shall be closed by applying water-resistant adhesive conforming to Specification MIL-A-101 over all areas of contact between the flaps and by covering the seams with gummed tape conforming to class 2 or 3 of Specification UU-T-111. To prevent rupture or abrasion of the barrier, the corners of the box shall be blunted; also, if the manufacturer's joint is stitched or stapled, the joint shall be covered with a strip of pressure-sensitive tape conforming to type I or II, any grade of Specification JAN-P-127.

3.3.1.7 The inner fiberboard box shall be placed in a water-vaporproof bag conforming to class 1 of Specification MIL-B-131. The bag shall be closed by heat sealing after the excess entrapped air is removed.

3.3.1.8 The outer fiberboard box shall conform to compliance symbol V2s, V3s, or V3c, any style except FTC of Specification JAN-P-108. The manufacturer's joint in the interior of the box shall be covered with a strip of pressure-sensitive tape conforming to type I or II, any grade of Specification JAN-P-127 to prevent rupture or abrasion of the water-vaporproof bag. The bagged item shall be immobilized in the outer fiberboard box. The box shall be closed by applying water-resistant adhesive conforming to Specification MIL-A-101 over all areas of contact between the flaps and by covering all seams with pressure-sensitive tape conforming to type II or III, any grade of Specification JAN-P-127.

3.3.2 For interplant shipment. - The motor shall be packaged in accordance with method IC-2 of Specification MIL-P-116. The sequence of operations shall be as indicated herein.

3.3.2.1 The prepackaged motor shall be placed in a unit container having a minimum bursting strength of 350 pounds per square inch and conforming to style RSC or OLC (full overlap) of Specification LLL-B-631. The base on which the motor is mounted shall fit snugly in the box and shall be immobilized as specified in 3.3.1.4 and 3.3.1.5 and as illustrated in figure 1. The box shall be closed as specified in 3.3.1.6.

3.3.2.2 The fiberboard box shall be overwrapped with waterproof barrier material conforming to type C-1, C-2, or E-1 of Specification JAN-P-125. The overwraps shall be sealed by applying water-resistant adhesive conforming to Specification MIL-A-140, over all areas of contact on the seams and between the flaps on the ends, and by covering all seams with pressure-sensitive

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

tape, at least 2 inches in width, and conforming to type II or III, any grade of Specification JAN-P-127.

3.4 Packing

3.4.1 For interplant shipment and domestic shipment with storage. - The packaged motors shall be immobilized in shipping containers conforming to style A or B of Specification NN-B-601 or style 2 or 4 of Specification NN-B-621. The gross weight of each shipping container shall not exceed 200 pounds. When plywood shipping containers are used they shall be strapped as required in Specification JAN-P-105, except that the straps shall not be stapled.

3.4.2 For overseas shipment. - Each packaged motor shall be immobilized in a shipping container conforming to style A or B of Specification JAN-P-105 or style 2 or 4 of Specification JAN-P-106. The minimum thickness of lumber for the sides, top, and bottom for nailed wood boxes shall be 11/16 inch when the shipment is to be made in an ocean-going vessel. The plywood used in plywood boxes shall conform to type A or B, condition 1 of Specification JAN-P-139.

3.5 Marking

3.5.1 Except as noted in 6.2 and as specified herein, marking shall be in accordance with Standard MIL-STD-129.

3.5.2 The serial numbers of the motors shall be included in the permanent marking below the nomenclature and shall be indicated as follows: "SERIAL NOS 122, 123 AND 124". The serial numbers may be omitted when an interplant shipment is to be made.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling. - A preproduction sample pack shall be made in accordance with this specification. The sample pack shall be inspected and approved by a Government inspector prior to packaging and packing the items for shipment. Production packs shall be tested at random where the Government inspector considers it necessary to conduct tests to assure conformance with the requirements of this specification.

4.2 Inspection. - All methods and materials shall be subject to inspection by a Government inspector.

4.3 Test procedures. - The preproduction sample pack and any production packs selected for tests shall, at the discretion of the Government inspector, be tested in accordance with the tests specified in Specification MIL-P-116.

5. PREPARATION FOR DELIVERY

5.1 (Not applicable)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the title, number, and date of this specification and the type of shipment (namely, interplant shipment, domestic shipment with storage, or overseas shipment) that is to be made.


6.2 Special marking. - The marking of overseas shipping containers by Army installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, Marking of Oversea Supply.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

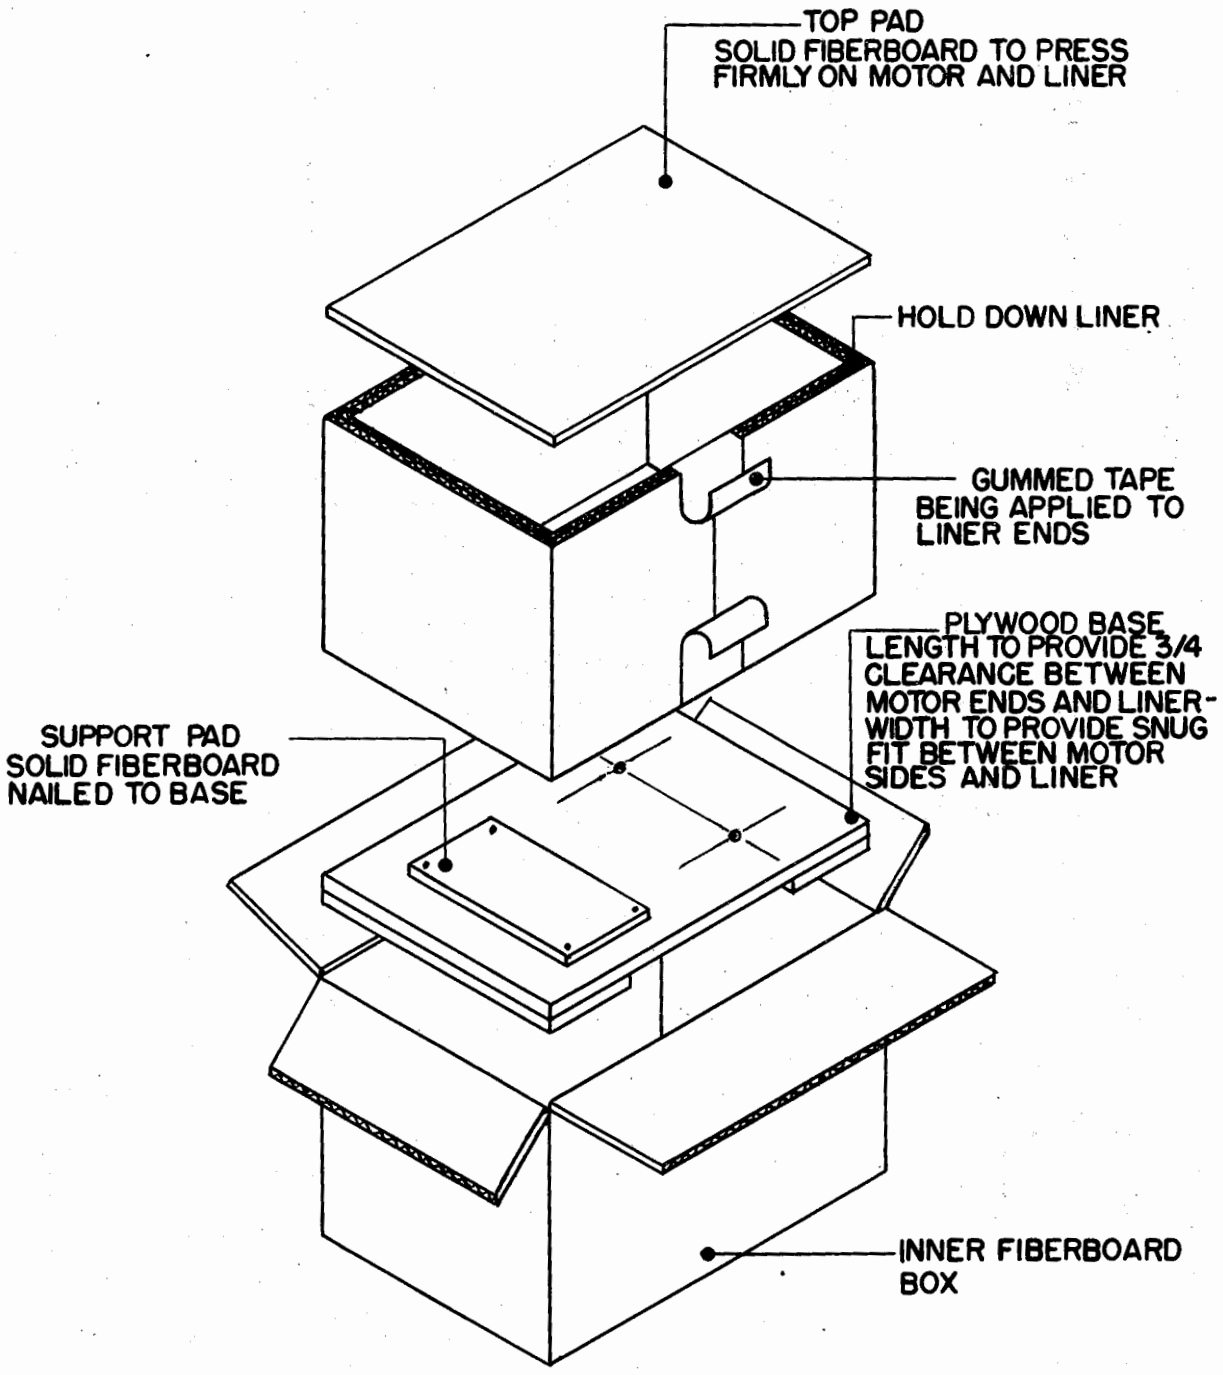

IMMOBILIZING MOTOR IN INNER FIBERBOARD BOX

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.

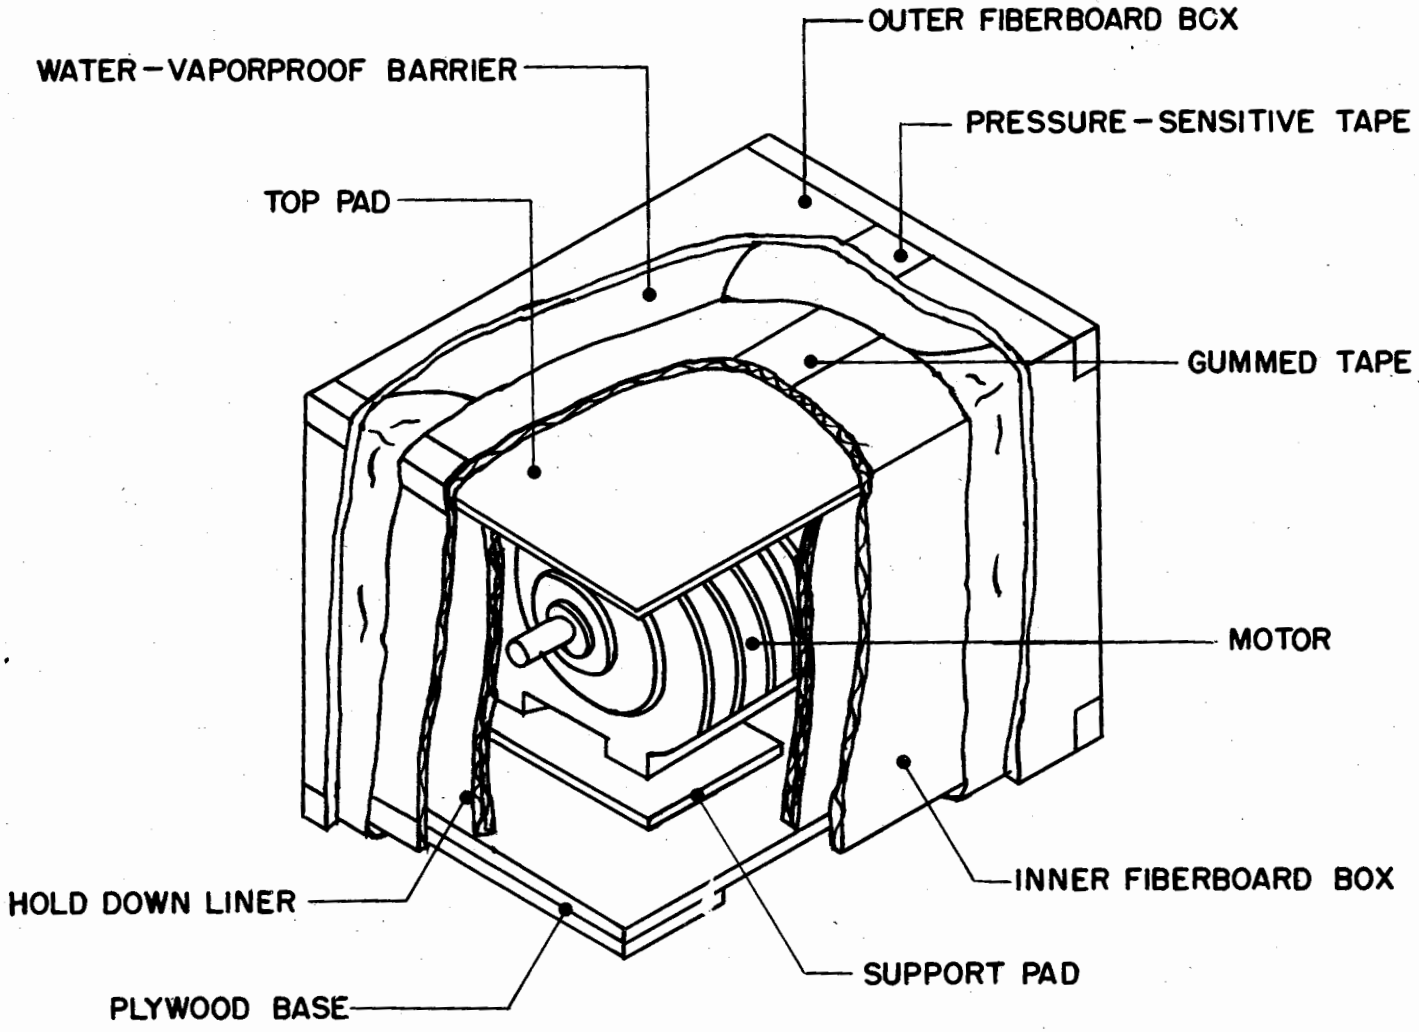

PACKAGING OF MOTOR, 7694288

FIGURE-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:03Z
Check the source to verify that this is the current version before use.