MIL-S-12610D
28 October 1975
SUPERSEDING
MIL-S-12610C
27 May 1969

MILITARY SPECIFICATION

SPOTLIGHT, 12-VOLT, DIRECT-CURRENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a portable spotlight to be used for either continuous or flash illumination.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

V-T-276	- Thread, Cotton.
QQ-W-428	- Wire, Steel, Carbon (High Carbon, Round, for Mechanical Springs, General Purpose).
QQ-Z-325	- Zinc Coating, Electrodeposited, Requirements for.
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

Military

MIL-W-76	- Wire and Cable, Hookup, Electrical, Insulated.
MIL-P-116	- Preservation-Packaging, Methods of.
MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-J-641	- Jacks, Telephone, General Specification for.
MIL-P-642	- Plugs, Telephone, and Accessory Screws; General Specification for.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-T-3530	- Thread and Twine; Mildew Resistant or Water Repellent Treated.

FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

MIL-P-15024 - Plates, Tags and Bands, for Identification of Equipment.
MIL-P-19644 - Plastic Molding Material (Polystyrene Foam, Expanded Bead).
MIL-S-43770 - Snap Hooks, General Specification for.
MIL-C-55040 - Cable, Special Purpose, Electrical (Retractile).

STANDARDS

Federal

FED. STD. No. 3 - Colors, Aeronautical Lighting.
FED. STD. No. 751 - Stitches, Seams, and Stitching.

Military

MIL-STD-100 - Engineering Drawing Practices.
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-889 - Dissimilar Metals.
MS25036 - Terminal, Lug, Crimp Style, Copper, Insulated, Ring - Tongue, Bell-Mouthed. Type II, Class 1.
MS51940 - Loops, Slide (for Equipage).

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 108 - Steel Bars, Carbon, Cold Finish, Standard Quality.
A 619 - Carbon Steel Sheet, Cold-Rolled, Drawing Quality.
B 85 - Aluminum Alloy Die Castings.
D 568 - Flammability of Flexible Plastics.
D 570 - Water Absorption of Plastics.
D 746 - Brittleness Temperature of Plastics and Elastomers by Impact.
D 747 - Stiffness of Plastics by Means of a Cantilever Beam.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

D 1003 - Haze and Luminous Transmittance of Transparent Plastics.
D 1525 - Vicat Softening Point of Plastics.
D 2000 - Elastomeric Materials for Automotive Applications.
G 23 - Operating Light- and Water-Exposure Apparatus (Carbon-Arc Type) for Exposure of Nonmetallic Materials, Recommended Practices for.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

COUNTY OF LOS ANGELES - AIR POLLUTION CONTROL DISTRICT

Rule 66 - Organic Solvents.

(Application for copies should be addressed to the County of Los Angeles - Air Pollution Control District, 434 S. San Pedro Street, Los Angeles, CA 90013.)

NATIONAL BUREAU OF STANDARDS (NBS)

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

AMERICAN NATIONAL STANDARDS INSTITUTE, INC (ANSI)

ANSI-C18.1 - NEDA 918.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15086.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Description. The spotlight shall be as specified herein including spotlight housing, stanchion rod, retractile cord carrying case and strap, and shall utilize the current drawn from two 6-volt batteries. The spotlight shall fit into a carrying case, with complete unit, including battery, weighing no more than 25 pounds.

3.2 First article (preproduction model). The supplier shall furnish one spotlight for examination and testing within the time frame specified (see 6.2) to prove prior to starting production that his production methods and choice of design detail will produce spotlights that comply with the requirements of this specification (see 6.3). Examination and tests shall be those specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.4 Construction. The spotlight shall be in accordance with Figures 1 through 7b.

3.5 Fabrication. The spotlight shall be fabricated so that parts will not work loose in service, and repairs and adjustments can be easily made by personnel of operating units without the use of special tools. The spotlight shall be constructed to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.5.1 Housing. The spotlight housing shall be of aluminum conforming to ASTM B 85, A 380, or high-impact plastic.

3.5.1.1 Hook. A folding hook formed of steel wire conforming to QQ-W-428, Type II, Class I, shall be fastened to the spotlight.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

3.5.1.2 Trigger. The trigger shall be steel conforming to SAE J403, 1008-1020.

3.5.1.3 Lamp. The lamp, as shown in Figure 2, shall be a Par 36, Industry No. 4405, sealed unit, conforming to SAE J573. A gasket of elastomeric material conforming to ASTM D 2000 - 2AA615, B14, F2, G2, J1, K31, and retainers conforming to ASTM D 2000 - 2BE410, A16, B3, C2, F2, R1, may be used to support the lamp in the housing, as necessary.

3.5.1.4 Switch. The switch shall be a three-position push-type unit, with one-two-off sequence, Leviton Part No. 585 or equal.

3.5.1.5 Flasher. The flasher shall conform to SAE J590.

3.5.1.6 Retractile cable. Retractile cable shall conform to MIL-C-55040, with a minimum extended length of 7 feet, fitted with a telephone plug conforming to MIL-P-642, Type PJ-055B, on one end. A strain relief shall be used at the point of contact between the cable and the spotlight housing as shown in Figure 2.

3.5.1.7 Wiring. Hook-up wiring shall be in accordance with MIL-W-76. Connectors shall be in accordance with MS25036.

3.5.1.8 Removable filter. Filter shall be thermoplastic, ethylene base and have the following properties:

Properties	Requirement
Stiffness	Min 3000 psi
Thermal	
Vicat Softening Point	Min 160° F
Brittleness	Min 160° F
Flammibility	Max 1.1 in per minute
Water Absorption	Max 1.4% at 75° F
Gasoline Absorption	Max 15.3% at 75° F
Haze Factor	Max 10%
Light Transmittance	Min 50%
Crazing Resistance	Min 350 hours

3.5.1.8.1 Filter color. Color definition shall be red in accordance with FED. STD. No. 3, Category II.

3.5.2 Case. The case shall be of carbon steel conforming to ASTM A 619, 20 gage (.036), with rolled or folded edges.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

3.5.2.1 Buffer pads and retainers. Buffer pads, retainers, or angles shall be securely fastened to the inside of the case so that the parts will be firmly held within the case. Adequate room shall be provided so that the batteries and other parts may be installed and removed readily without damage to the equipment.

3.5.2.2 Drawbolts and clips. Drawbolts and clips shall be securely fastened to the case.

3.5.2.3 Decal. A decal as shown in Figure 5 shall be placed in a prominent place on or adjacent to the battery compartment.

3.5.2.4 Telephone jack. A telephone jack conforming to MIL-J-641, Type JJ034, and a spring jack cover shall be attached to the case as shown in Figures 1 and 3.

3.5.2.5 Gasket. A case gasket of elastomer compound in accordance with ASTM D 2000, 4AA410B33C20F17, shall be securely fastened to the case to prevent dust and water from entering when closed.

3.5.3 Strap. The carrying strap shall be as shown in Figure 6.

3.5.3.1 Webbing. Webbing shall conform to MIL-W-530, Type IIA, Class 4, dyed forest green, water repellent and fungus resistant.

3.5.3.2 Tape. Tape shall conform to DDD-T-86, Type III, Class 3, and shall be dyed forest green in accordance with MIL-W-530.

3.5.3.3 Thread. Thread shall conform to V-T-276, Type IIIA, Ticket No. 10/3, 3 ply, dyed olive drab S-1, Cable No. 66022, and rendered fungus resistant in accordance with MIL-T-3530, Type I, Class 1.

3.5.3.4 Stitching and seams. Stitching and seams shall conform to FED. STD. No. 751, Type 401-EFA-2, 6-8 stitches per inch, strongly stitched, using two or more rows of stitching.

3.5.3.5 Slide loop. The slide loop shall be in accordance with MS51940-78, Construction B.

3.5.3.6 Snap. The snap shall conform to MIL-S-2578, Type I, Class 2, except "A" dimension indicated on MIL-S-43770 shall be 2 inches.

3.5.4 Stanchion rod. The stanchion rod (see Figure 1) shall be steel, SAE 1020, cold finished, conforming to ASTM A 108, and zinc coated in accordance with QQ-Z-325, Type I, Class 1.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

3.5.5 Batteries. Provision shall be made to accommodate, in the carrying case, two batteries conforming to ANSI-C18.1 - NEDA 918. Unless otherwise specified (see 6.2), batteries shall not be furnished with the spotlight.

3.5.6 Styrofoam insert. The styrofoam insert shall be of polystyrene material in accordance with MIL-P-19644, Type N, with a density of 2 to 3 pounds per cubic foot. The recesses in the insert shall be contoured in such a manner as to provide protection against damage of the indicated items.

3.6 Operation. With batteries installed in the case and the switch in the "OFF" position, one depression of the switch shall operate the spotlight in the "ON" position. The next depression of the switch shall operate the spotlight in the "FLASH" position, and the third depression of the switch shall operate the spotlight in the "OFF" position.

3.7 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. The identification of part numbers and changes thereto shall be in accordance with the item identification and part number requirements of MIL-STD-100. Common hardware and fasteners, such as bolts, nuts, and screws, shall be held to a minimum number of types and sizes. All screw threads shall be in accordance with NBS Handbook H28.

3.8 Identification marking. An identification plate of anodized aluminum, photosensitive, in accordance with MIL-P-15024, Type H, as shown in Figure 5, shall be fastened to the outside of the case in the position shown in Figures 1 and 3.

3.9 Treatment and painting. All parts of the case and spotlight housing normally painted, including, the stanchion rod, hook and trigger, shall be cleaned, treated, and painted in accordance with MIL-T-704, Type B. Where welding or soldering are done after painting, the damaged areas shall be cleaned and repainted in accordance with these requirements.

3.10 Protective coating. Materials used in the construction of the spotlight shall be protected against corrosion in oxygen, salt air, or other atmospheric conditions likely to accur during service usage. All metals used in the construction of the spotlight shall be corrosion resistant or shall be protected to resist corrosion. The use of dissimilar metals as defined in MIL-T-704 shall be avoided whenever practicable, or they shall be insulated in accordance with MIL-T-704, if used. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

3.11 Fungus and moisture resistance. The electrical circuitry, including all components and connections, except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, Composition I or II, as applicable (see 3.11.1), with 1 percent copper 8-quinolinolate (by weight) based on the non-volatile content of the varnish:

(a) Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
(b) Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.11.1 Composition. Composition II shall be used only in the case when local air pollution regulations governing the application of varnish precludes the use of Composition I. When Composition II is used, the supplier shall provide evidence to the Government that the use of Composition II is required, and shall certify that the Composition II material complies with Rule 66, Air Pollution Control District, County of Los Angeles, CA.

3.12 Workmanship. Joints and seams shall be a tight fit; edges shall be smooth without burrs, blemishes, or projections; welded and soldered surfaces shall be clean, and all electrical connections shall be tight.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:04Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction spotlight shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction spotlight shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and test shall be in accordance with MIL-STD-105, Inspection Level III.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 1.0 percent defective for major defects and 4.0 percent defective for minor defects.

4.4.3 Test. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 1.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The spotlight shall be examined as specified herein for the following characteristics:

Major

101. Dimensions not as specified.
102. Material or components not as specified.
103. Parts or components missing.

Minor

201. Identification marking missing or not as specified.
202. Treatment and painting not as specified.
203. Workmanship not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

4.5.2 Tests.

4.5.2.1 Operation. The spotlight shall be operated in each position, or "ON" and "FLASH", for a duration of not less than 10 seconds in each position for not less than four complete cycles. Nonconformance to 3.6 shall constitute failure of this test.

4.5.2.2 Removable filter. Filters shall be tested as follows:

Requirement	Test Method
Stiffness	ASTM D 747
Thermal	
Vicat Softening Point	ASTM D 1525
Brittleness	ASTM D 746
Flammability	ASTM D 568
Water Absorption	ASTM D 570
Gasoline Absorption	ASTM D 1003
Haze Factor	ASTM D 1003
Light Transmittance	ASTM D 1003
Crazing Resistance	ASTM G 23

Nonconformance to 3.5.1.8 shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined as specified herein for the following defects. AQL shall be 2.5 percent defective.

104. Spotlight not contained in the case.
105. Batteries not packaged as specified for Level A, when applicable.
106. Latches not protected and case immobilized within the box as specified for Level A.
107. Containers not as specified.
108. Strapping not as specified for Level A or B.
109. Fiberboard boxes not closed as specified for Level A or B.
110. Packing not as specified.
111. Marking illegible, incorrect,or incomplete.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C, as specified (see 6.2)

5.1.1 Level A. The spotlight shall be contained within the carrying case. The batteries, when provided (see 6.2), shall be individually packaged in accordance with MIL-P-116, Method IC-1. The case, together with the batteries when provided, shall be packaged in a close-fitting unit container conforming to PPP-B-636, W6c. Fiberboard inserts shall be used to protect the latches and immobilize the contents within the unit container. The box shall be closed in accordance with Method V of the appendix to the box specification.

5.1.2 Level C. Spotlights contained within the carrying case and the batteries, when provided (see 6.2), shall be packaged in a manner to afford adequate protection against corrosion, deterioration and physical damage during shipment from the supplier to the initial destination. The supplier's commercial practice may be used if it meets the requirements of this level.

5.2 Packing. Packing shall be Level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Spotlights, packaged as specified in 5.1, shall be packed in wood, cleated-plywood shipping containers conforming to PPP-B-601, Overseas Type, style optional, Grade B. As far as practicable, containers shall be uniform in shape and size and contain identical quantities. Unless otherwise specified (see 6.2), the gross weight shall not exceed 200 pounds. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable; and, unless otherwise specified, shall be Finish B. When specified (see 6.2), Finish A strapping shall be used.

5.2.2 Level B. Spotlights, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except boxes shall be Domestic Type, and strapping shall be either Finish A or B. As an alternate, boxes conforming to PPP-B-636, V3c, or equivalent, shall be used. Fiberboard boxes shall be closed in accordance with Method V of the appendix to the box specification.

5.2.3 Level C. Spotlights, packaged as specified in 5.1, shall be packed to assure carrier acceptance and safe delivery to destination at lowest ratings in containers complying with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T23:04Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The spotlight is intended for use as a lightweight, portable spotlight or flasher signal light, and is constructed to operate from its own integral batteries or through a vehicle panel jack from the vehicle 12-volt power source.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2).
(c) When batteries are required (see 3.5.5).
(d) Level of packaging and level of packing required (see 5.1 and 5.2).
(e) When gross weight of shipping containers is allowed to exceed 200 pounds (see 5.2.1).
(f) When strapping shall be Finish A (see 5.2.1).

6.3 Preproduction model. Any changes or deviations of production spotlights from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish spotlights conforming to this specification

6.4 Information figures. Figures 1 through 7b show types of spotlights and accessories that have been found acceptable; however, the figures are included for illustration only and are not intended to preclude the furnishing of other spotlights which conform to this specification.

Custodians:

Army - ME
Air Force - 82

User activities:

Army - EL
Navy - SH

Review activity:

DSA - GS

Preparing activity:

Army - ME

Project No. 6230-0220

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

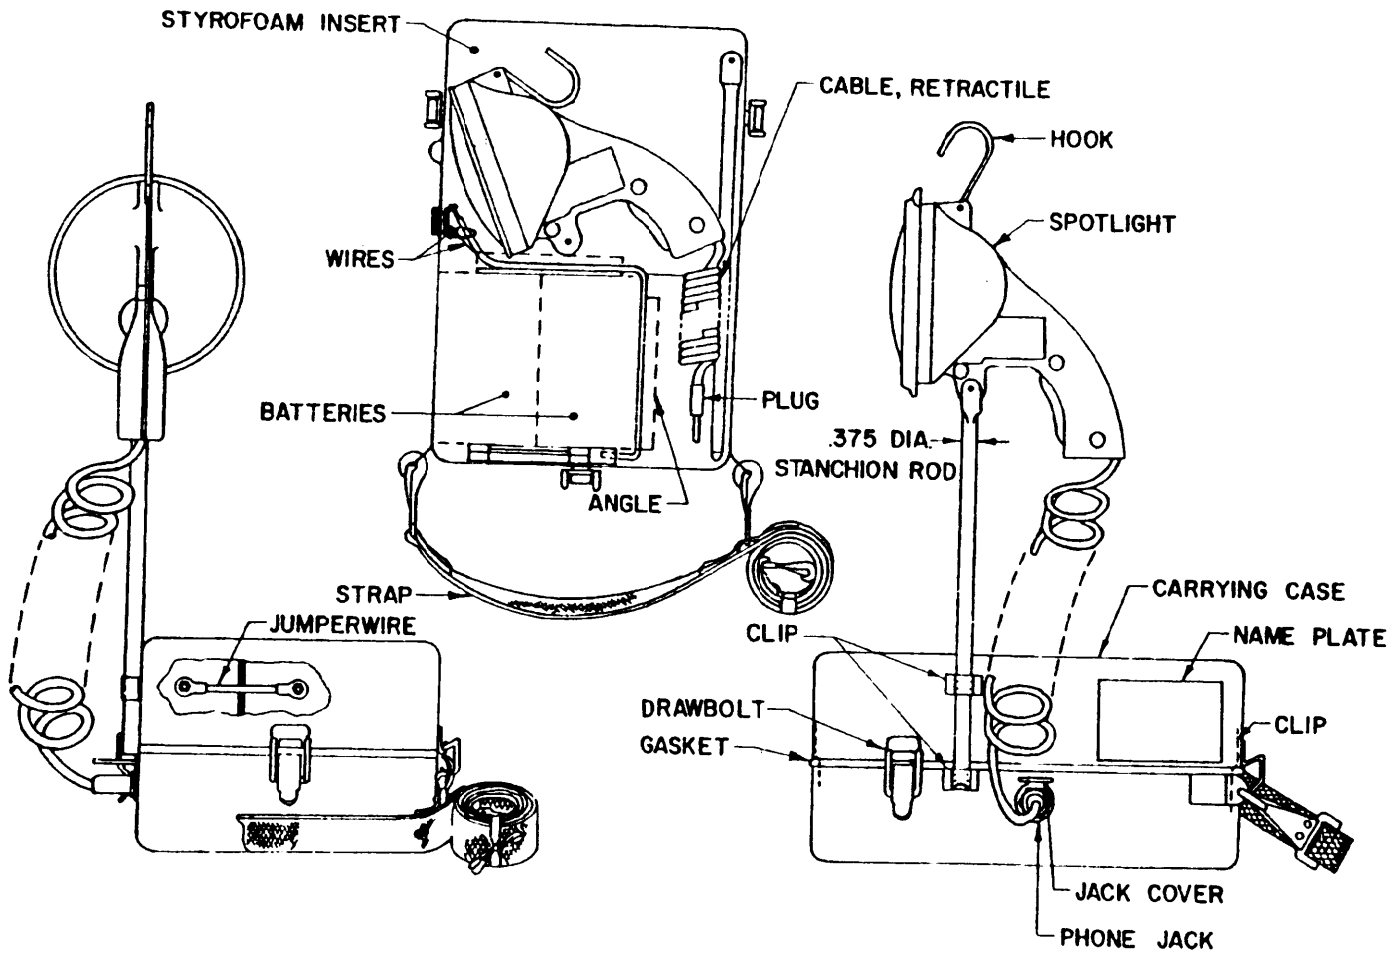
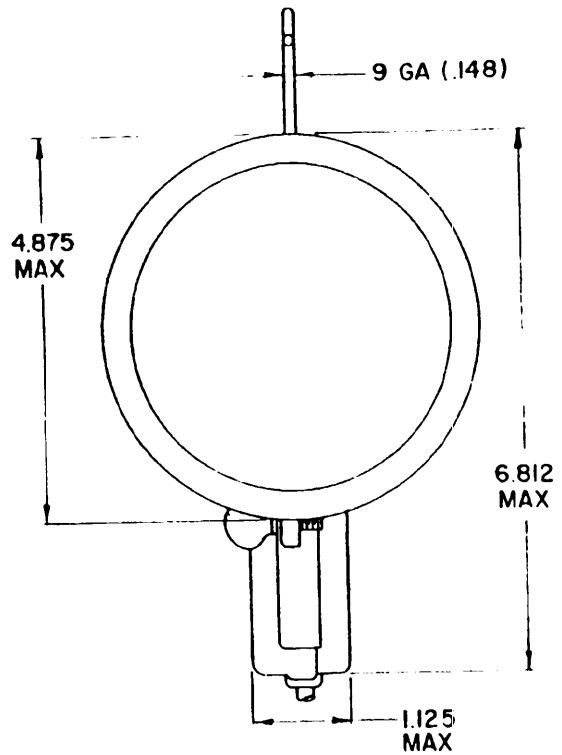


Figure 1. SPOTLIGHT, 12 VDC

CX1734

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.



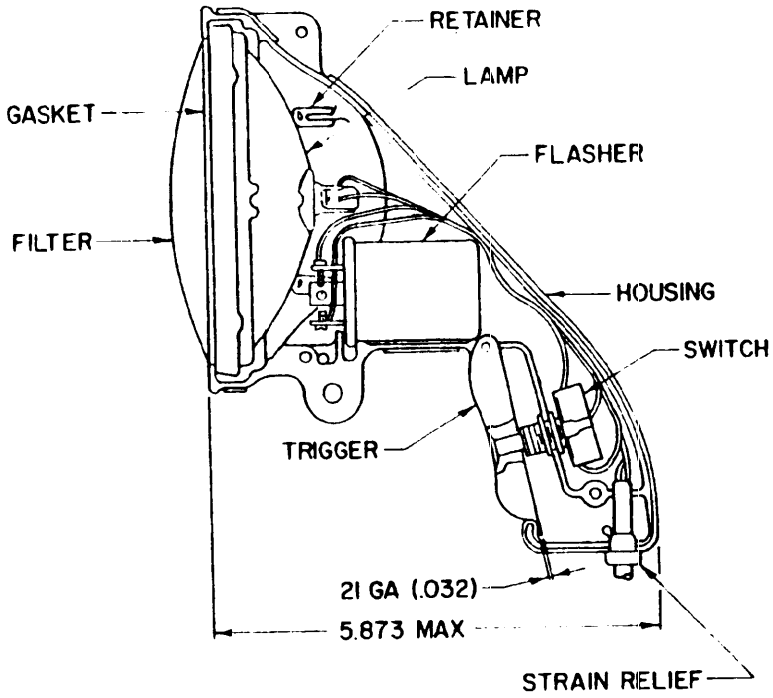


Figure 2. SPOTLIGHT, 12 VDC.

CX1691

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

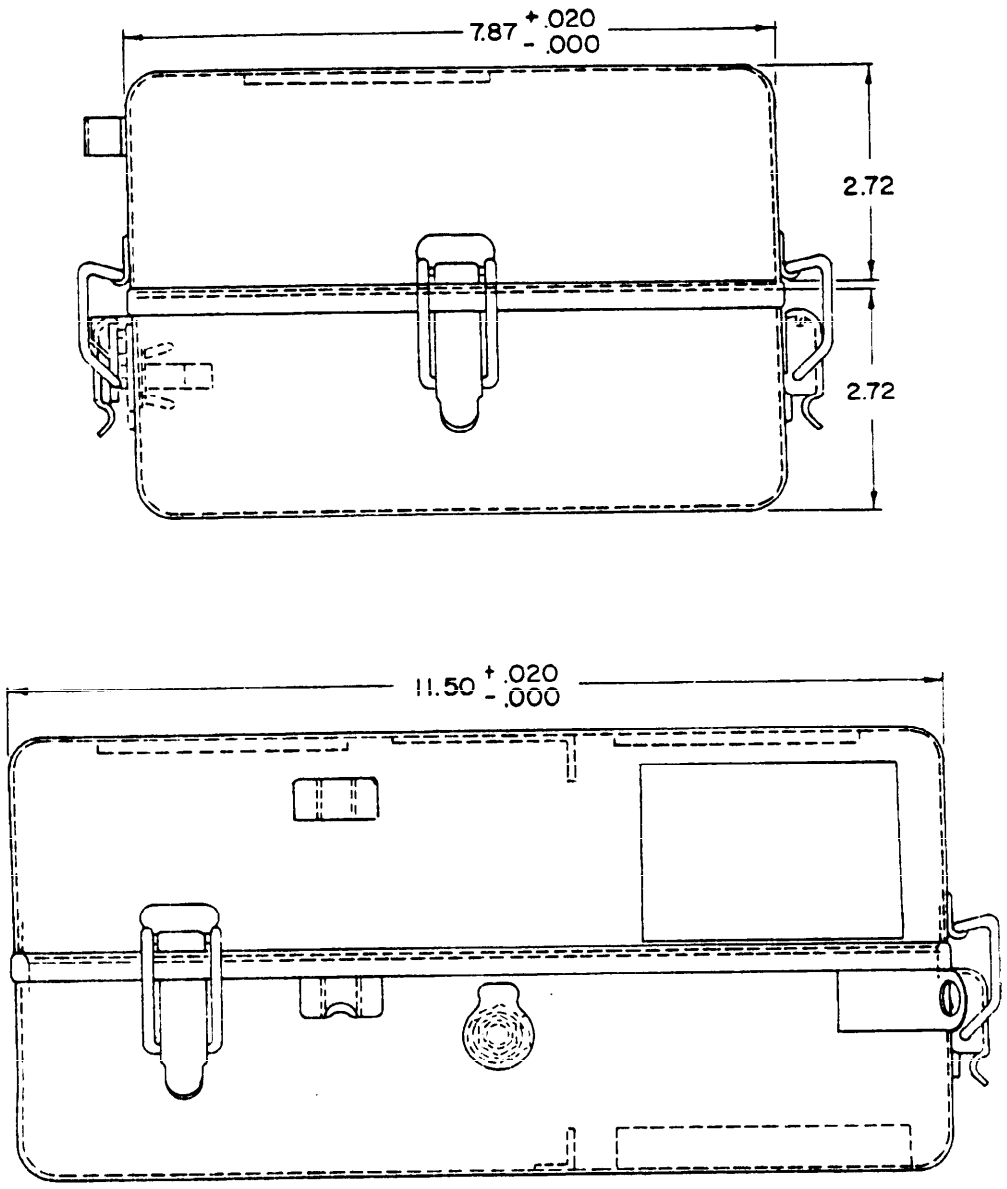


Figure 3. CARRYING CASE.

CX1692

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

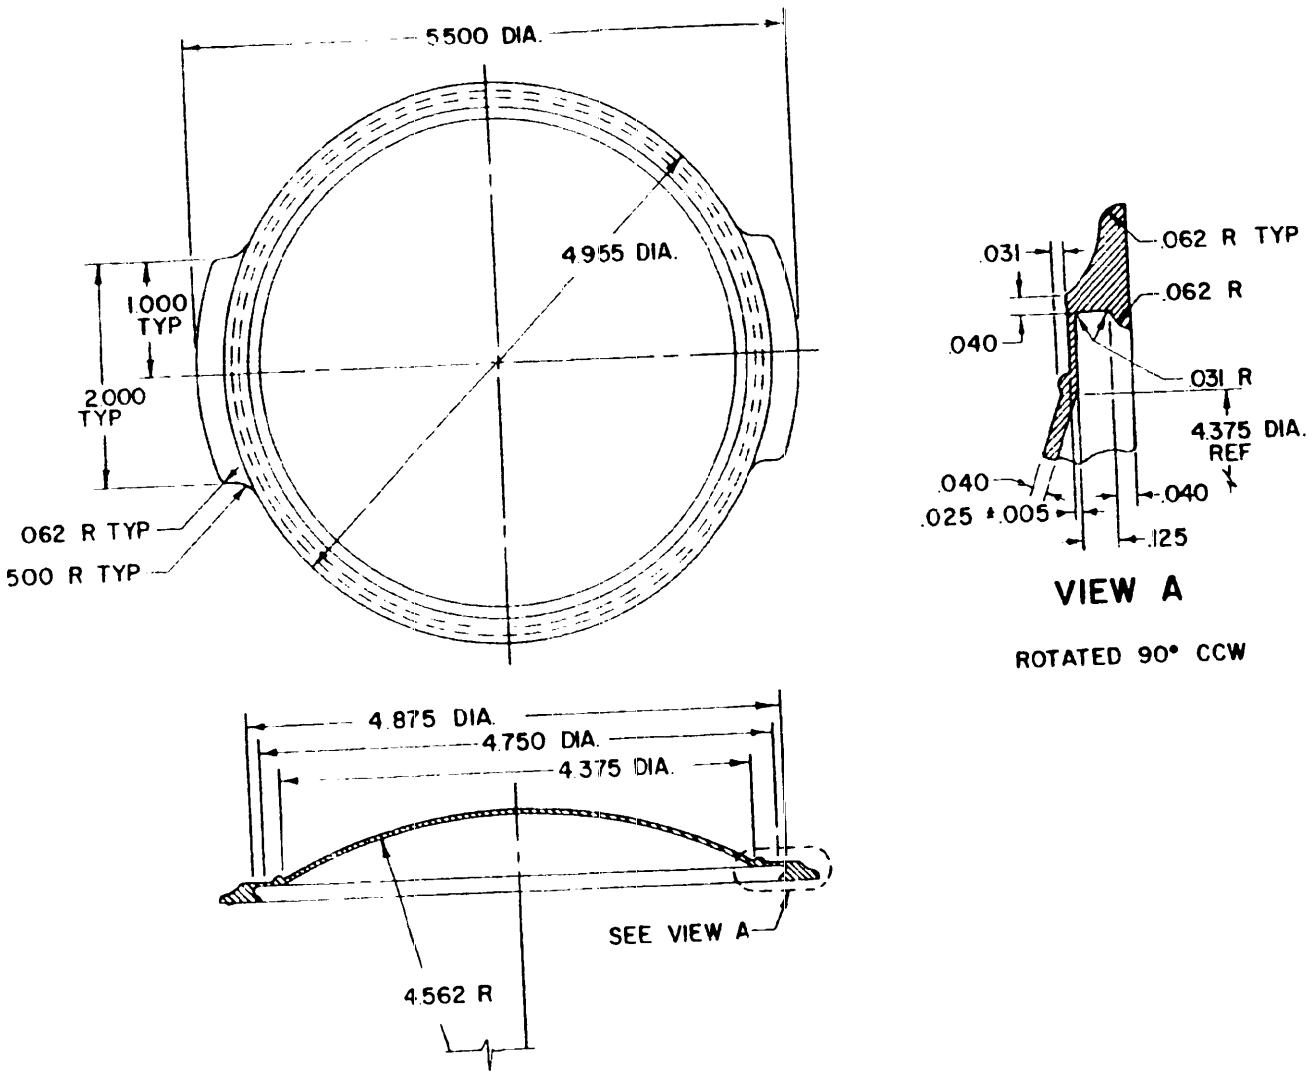
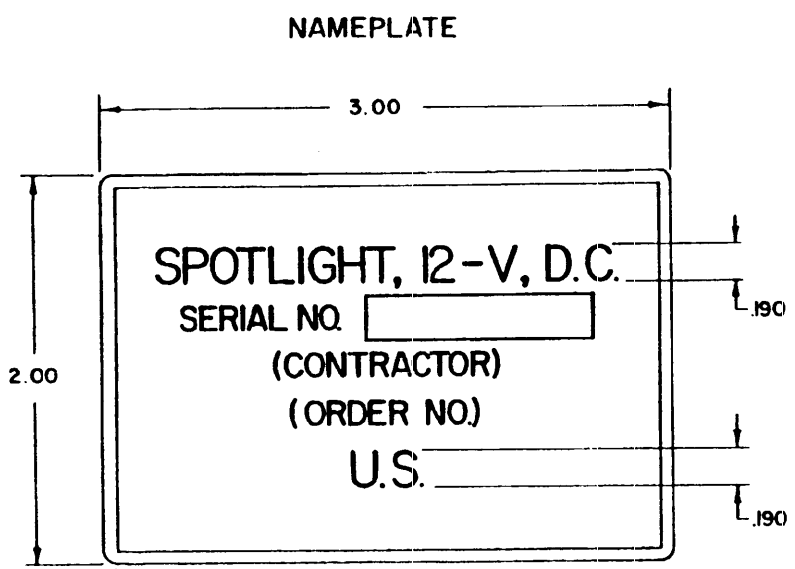


Figure 4. FILTER.

CX1693

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20240-17T23:04Z
Check the source to verify that this is the current version before use.




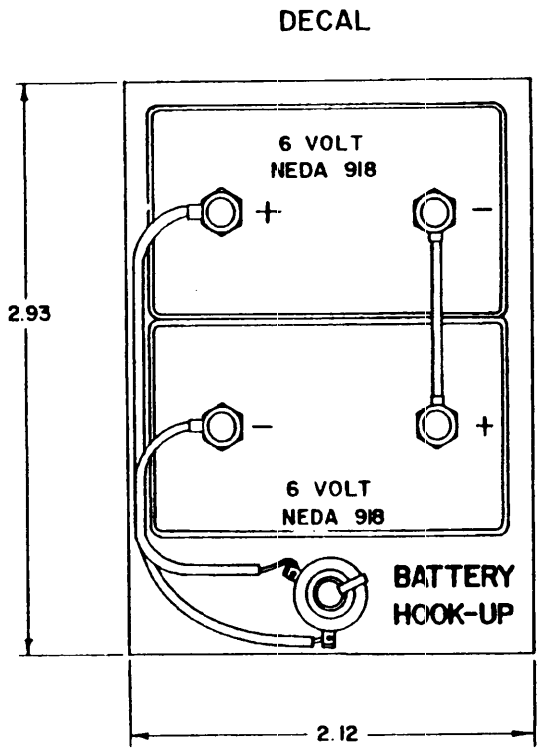


Figure 5. NAMEPLATE AND DECAL.

CX1694A

Source: https://assist.dla.mil -- Downloaded: 20260-17T23:04Z
Check the source to verify that this is the current version before use.

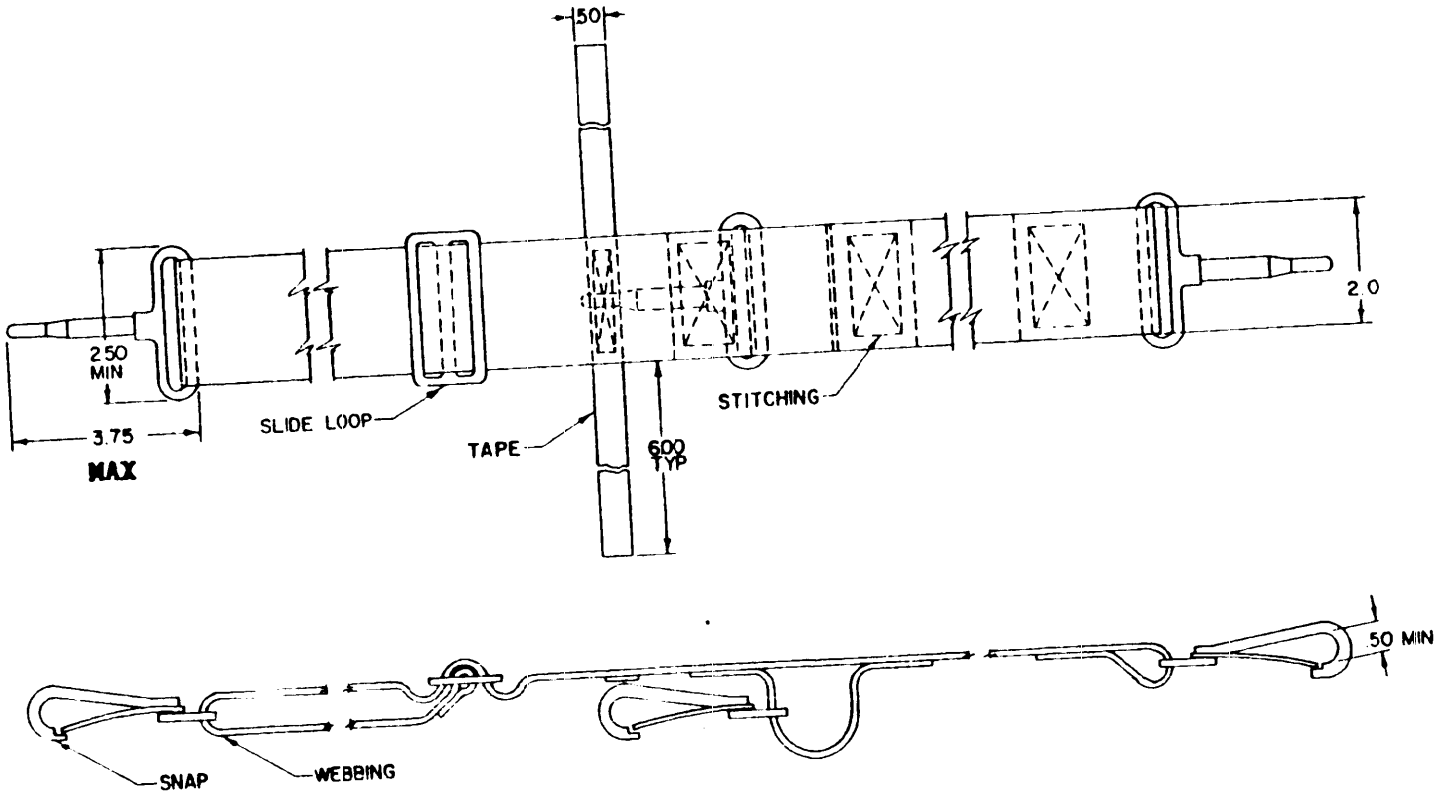

NOTE:
1. LENGTH OF STRAP MUST BE ADJUSTABLE FROM 42 TO 54 INCHES

Figure 6. STRAP.

CX1695

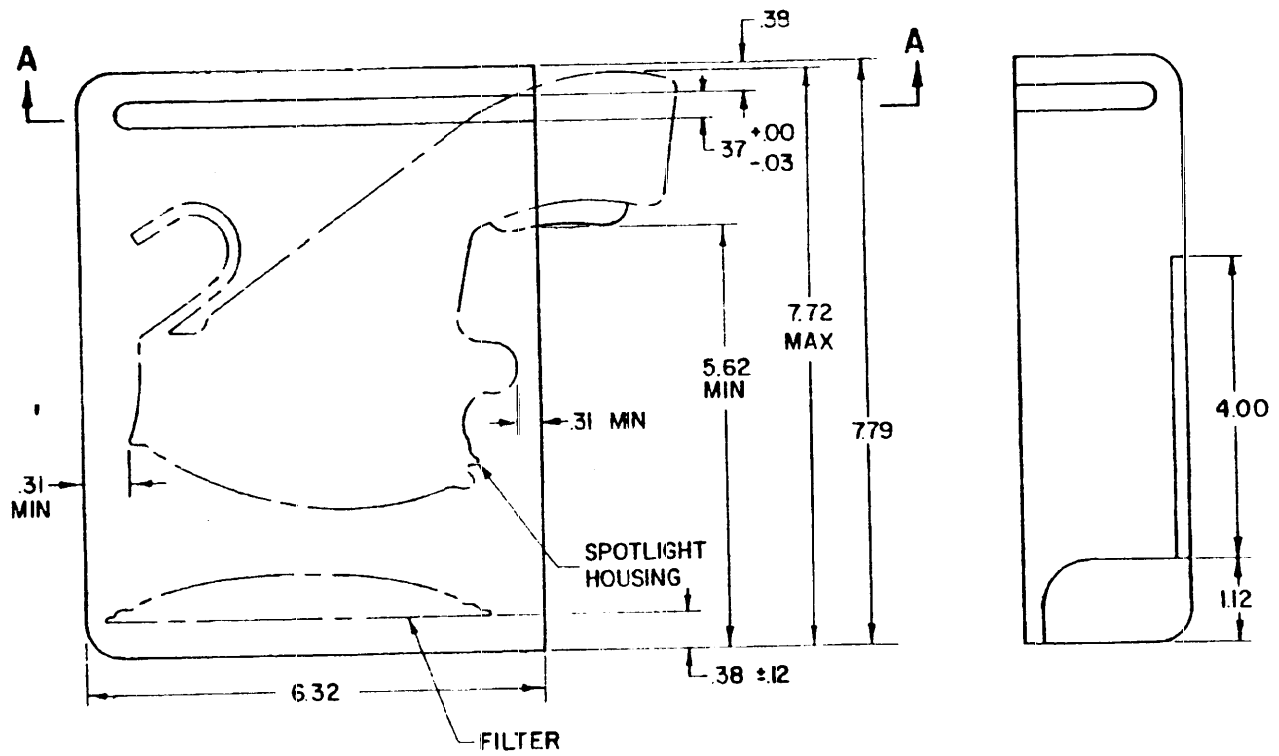
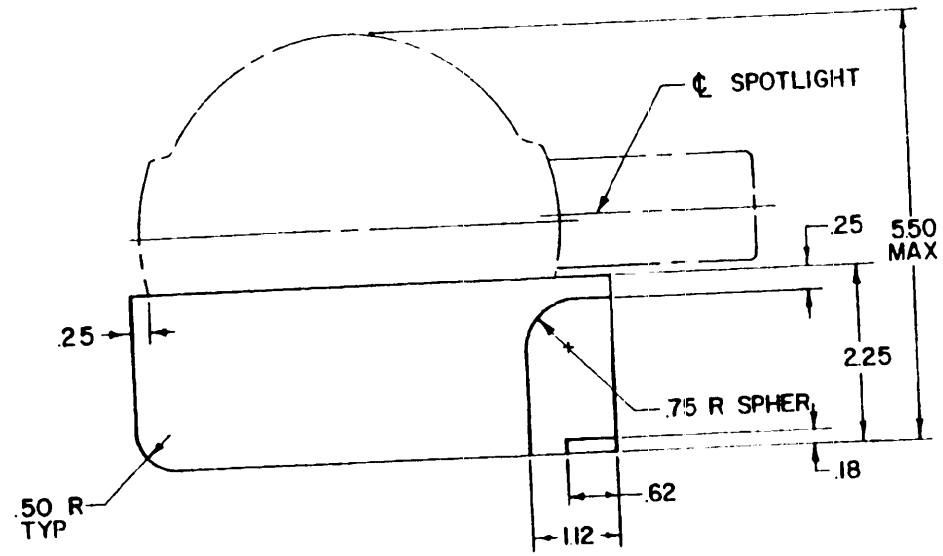


Figure 7a. STYROFOAM INSERT.

CX1696

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:04Z
Check the source to verify that this is the current version before use.



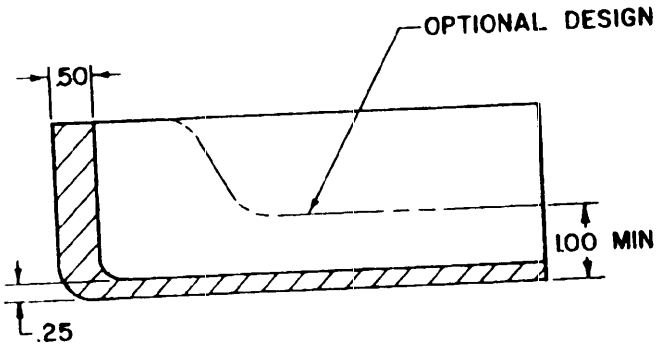


Figure 7b. STYROFOAM INSERT.

CX1697

Source: https://assist.dla.mil -- Downloaded: 20260-17T23:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-12610D Spotlight, 12-Volt, Direct-Current

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
ATTN: AMXFB-DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:04Z
Check the source to verify that this is the current version before use.