NOT MEASUREMENT SENSITIVE

MIL-L-11484/143B
9 June 1992
SUPERSEDING
MIL-L-11484/143A
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, COMMUNITY AND FAMILY SUPPORT CENTER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

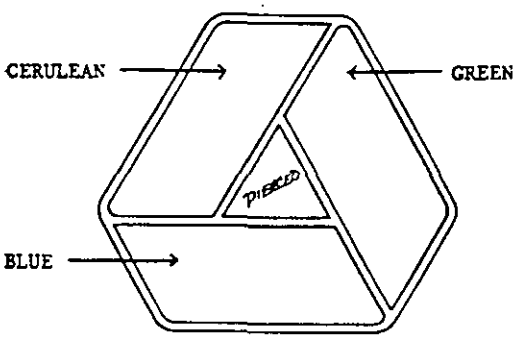

MATERIAL: Gilding Metal

DIMENSIONS:
HEIGHT (Overall): 5/8 inch (1.59 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS: 0.055 inch ± .010 inch (0.140 cm ± 0.025 cm)

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished

NOTES:
1. Attaching devise shall be prong with pick and wing type clutch. The prong shall be located on the vertical center line 1/8 inch (0.32 cm) below the top edge of the lapel button. The prong shall be fused or hard soldered to the reverse of the lapel button.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:58Z
Check the source to verify that this is the current version before use.

2. Enameled colors shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Green	10
Blue	30
Cerulean	T&T 866

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Pierced areas shall be as indicated.

5. Attaching device shall be prong with pick and wing type clutch. The prong shall be located on the vertical center line 1/8 inch (0.32 cm) below the top edge of the lapel button. The prong shall be fused or hard soldered to the reverse of the lapel button.

Custodians:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0745)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:58Z
Check the source to verify that this is the current version before use.