The documentation and process conversion measures necessary to comply with this amendment shall be completed by 25 July 1994

INCH-POUND

MIL-S-19500/181E
AMENDMENT 1
25 April 1994

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, LOW-POWER
TYPES 2N718A, 2N1613 AND 2N1613L, JANTX AND JANTXV

This amendment forms a part of MIL-S-19500/181E, dated 25 October 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 17

Delete and substitute "CONCLUDING MATERIAL" as printed herein.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
15	REPRINTED WITHOUT CHANGE
16	16

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC, OS, SH
Air Force - 13, 15, 19, 85, 99

Preparing activity:
DLA -ES

Agent:
DLA - ES

(Project 5961-1619)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:33Z
Check the source to verify that this is the current version before use.

TABLE II. Groups B, C, and E electrical end-point measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Collector to base cutoff current	3036	Bias condition D, V_{CB} = 60 V dc	I_{CBO1}		10	nA dc
2.	Collector to base cutoff current	3036	Bias condition D, V_{CB} = 60 V dc	I_{CBO1}		20	nA dc
3.	Collector to emitter voltage (saturated)	3071	I_B = 150 mA dc, I_C = 15 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)1}$		1.5	V dc
4.	Forward-current transfer ratio	3076	V_{CE} = 10 V dc, I_C = 150 mA dc, pulsed (see 4.5.1)	h_{FE3}	40	120	
5.	Forward-current transfer ratio	3076	V_{CE} = 10 V dc, I_C = 150 mA dc, pulsed (see 4.5.1)	Δh_{FE3}	± 15 percent change from initial value		

1/ The electrical measurements for table IVb (JANTX and JANTXV) of MIL-S-19500 are as follows:

a. Subgroup 2, see table III herein, steps 1, 3, and 5.

b. Subgroup 3, see table III herein, steps 2 and 4.

c. Subgroup 6, see table III herein, steps 2 and 4.

2/ The electrical measurements for table V of MIL-S-19500 are as follows:

a. Subgroup 2, see table III herein, steps 1, 3, and 5.

b. Subgroup 3, see table III herein, steps 2 and 4.

c. Subgroup 6, see table III herein, steps 2 and 4.

3/ The electrical measurements for table VII of MIL-S-19500 are as follows:

a. Subgroup 1, see table III herein, steps 1 and 2.

b. Subgroup 2, see table III herein, steps 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:33Z
Check the source to verify that this is the current version before use.

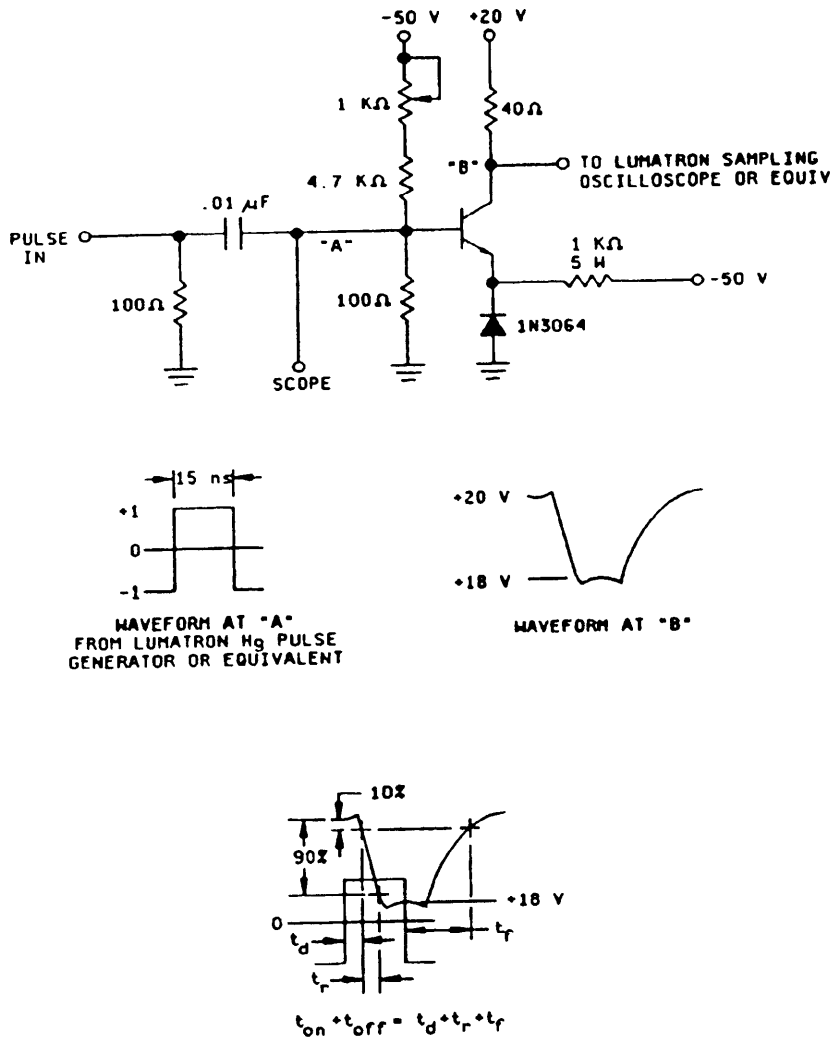


FIGURE 5. Pulse response (turn-on plus turn-off) measurement circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:33Z
Check the source to verify that this is the current version before use.