The documentation process conversion measures necessary to comply with this revision shall be completed by 29 September 1999.

INCH POUND

MIL-PRF-19500/182E
29 July 1999
SUPERSEDING
MIL-S-19500/182D
22 April 1994

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, LOW-POWER
TYPES 2N720A, 2N1893, 2N1893S, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN silicon, low-power transistors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-18), figure 2 (similar to TO-5).

1.3 Maximum ratings.

Type	P_T 1/ T_C = +25°C	P_T 2/ T_A = +25°C	V_{CBO}	V_{EBO}	V_{CEO}	I_C	V_{CER} R_{BE} = 10 Ω	T_J and T_{STG}
	W	W	V dc	V dc	V dc	mA dc	V dc	°C
2N720A	1.8	0.5	120	7	80	500	100	-65 to +200
2N1893	3.0	0.8	120	7	80	500	100	-65 to +200
2N1893S	3.0	0.8	120	7	80	500	100	-65 to +200

1/ Derate linearly at 10.3 mW/°C for type 2N720A and 17.2 mW/°C for type 2N1893 and 2N1893S for T_C > +25°C.
2/ Derate linearly at 2.86 mW/°C for type 2N720A and 4.57 mW/°C for type 2N1893 and 2N1893S for T_A > +25°C.

1.4 Primary electrical characteristics.

Limits	h_{FE1} 1/	h_{FE2} 1/	h_{FE3} 1/	$\lvert h_{fe} \rvert$	$V_{CE(SAT)}$
	V_{ce} = 10 V dc I_C = 0.1 mA dc	V_{ce} = 10 V dc I_C = 10 mA dc	V_{ce} = 10 V dc I_C = 150 mA dc	f = 20 MHz V_{ce} = 10 V dc I_C = 50 mA dc	I_C = 50 mA dc I_B = 5.0 mA dc
					V dc
Min	20	35	40	3.0	
Max			120	10	1.2

1/ Pulsed (see 4.5.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Performance Specification Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Sevice, 700 Robbins Avenue, Building 4D (DPM-DODSSP), Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.4).

3.2 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-19500.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, and figure 1 herein.


3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-STD-750 and MIL-PRF-19500.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the transistor.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in Table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

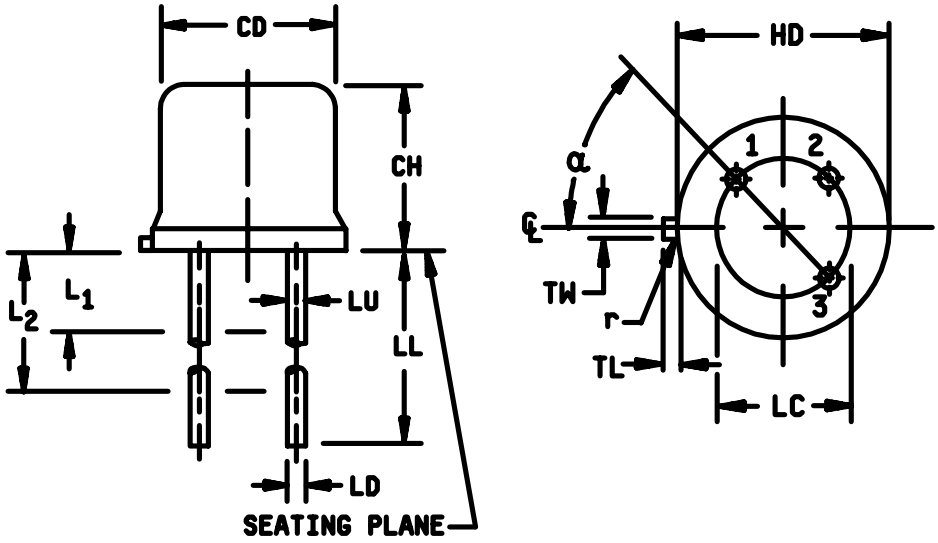


Dimensions					
Symbol	Inches		Millimeters		Notes
CD	0.178	0.195	4.52	4.95	
CH	0.065	0.085	1.65	2.16	
HD	0.209	0.230	5.31	5.84	
LC	0.100 TP		2.54 TP		4
LD	0.016	0.021	0.41	0.53	5, 6
LL	0.500	0.750	12.7	19.05	5, 6
LU	0.016	0.019	0.41	0.48	5, 6
L1		0.050		1.27	5, 6
L2	0.250		6.35		5, 6
r		0.010		0.25	8
TL	0.028	0.048	0.71	1.22	2, 3
TW	0.036	0.046	0.91	1.17	2
α	45°TP		45° TP		4

NOTES:

1. Dimension are in inches. Metric equivalents are given for general information only.
2. Beyond r (radius) maximum, TW shall be held for a minimum length of .011 (0.28 mm).
3. Dimension TL measured from maximum HD.
4. Leads at gauge plane 0.054 +0.001 -0.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within 0.007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown in MIL-HDBK-6100.
5. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
6. All three leads.
7. The collector shall be internally connected to the case.
8. Dimension r (radius) applies to both inside corners of tab.
9. In accordance with ANSI Y14.5M, diameters are equivalent to Φx symbology.
10. Lead 1 = emitter, lead 2 = base, lead 3 = collector.

FIGURE 1. Physical dimensions for device type 2N720A(TO-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

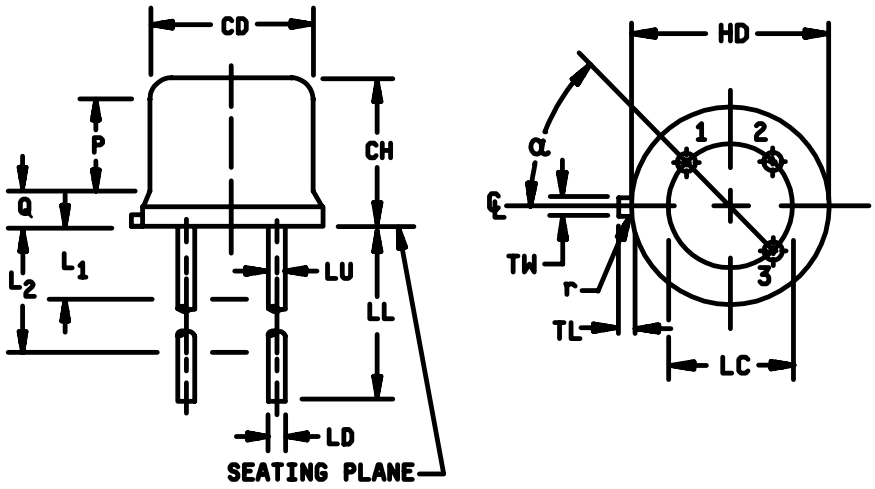

Dimensions					
Symbol	Inches		Millimeters		Notes
CD	0.305	0.335	7.75	8.51	
CH	0.240	0.260	6.10	6.60	
HD	0.335	0.370	8.51	9.40	
LC	0.200 TP		5.08 TP		6
LD	0.016	0.021	0.41	0.53	7, 8
LL	See notes				7, 8, 11,12
LU	0.016	0.019	0.41	0.48	7, 8
L1		0.050		1.27	7, 8
L2	0.250		6.35		7, 8
P	0.100		2.54		5
Q		0.050		1.27	4
r		0.010		0.25	10
TL	0.029	0.045	0.74	1.14	3
TW	0.028	0.034	0.71	0.86	2
α	45° TP		45°TP		6

NOTES:
1. Dimension are in inches.
2. Metric equivalents are given for general information only.
3. Beyond r (radius) maximum, TH shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane 0.054 +0.001 -0.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within 0.007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown in MIL-HDBK-6100.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The collector shall be internally connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. For transistor type 2N3019, dimension LL shall be 1.5 inches (38.1) mm minimum and 1.75 inches (44.4 mm) maximum.
12. For transistor type 2N3019S, dimension LL shall be 0.5 inches (12.7) mm minimum and 0.75 inches (19.0 mm) maximum.
13. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.
14. Lead 1 = emitter, lead 2 = base, lead 3 = collector.

FIGURE 2. Physical dimensions for device types 2N1893, 2N1893S(TO-5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

4. VERIFICATIONS

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and table I herein.

4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement
	JANTX and JANTXV levels only
1/	Thermal impedance (see 4.3.2)
9	Not applicable
11	h_{FE3}; I_{CBO1}
12	See 4.3.1
13	ΔI_{CBO1} = 100 percent of initial value or 5 nA dc; whichever is greater; Δh_{FE3} = "15 percent of initial value; subgroup 2 of table I herein.

1/ Thermal impedance shall be performed anytime after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

T_A = room ambient as defined in the general requirements of MIL-STD-750.
V_{CB} = 60 V dc.
2N720A, P_T = 500 mW dc.
2N1893, 2N1893S, P_T = 800 mW dc.

NOTE: No heat sink or forced air cooling of the devices shall be permitted.

4.3.2 Thermal imedance $Z_{\theta JC}$ measurements (for qualification only). The $Z_{\theta JC}$ measurements shall be performed in accordance with MIL-STD-750, method 3131.

a. I_M measuring current: 10 mA.

b. I_H forward heating current: 28 mA for 2N720A
47 mA for 2N1893 and 2N1893S.

c. t_H heating time: 10 ms.

d. t_{MD} measurement delay time: 100 µs maximum.

e. V_{CE} collector - emitter voltage 10 V dc.

The maximum limit for $Z_{\theta JC}$ in group A, subgroup 2 for 2N720A = 97°C/W, for 2N1893 and 2N1893S = 58°C/W.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

4.4.2.2 Group B inspection, (JAN, JANTX, and JANTXV). 1/ Electrical endpoints shall be in accordance with Group A, subgroup 2, herein.

Step	Method	Condition
1	1039	Steady-state life: Test condition B, 340 hours, V_{CB} = 60 V dc 2N720A adjust P_T to achieve T_J = 150°C min. $T_A \leq 35°C$. n = 45 devices, c = 0.
2	1039	The steady state life test of step 1 shall be extended to 1000 hours for each die design. Samples shall be selected from a wafer lot ever twelve months of wafer production, however, Group B shall not be required more than once for any single wafer lot. n = 45, c = 0.
3	1032	High-temperature life (non-operating), T_A = +200°C. n = 22, c = 0.

1/ Separate samples may be used for each step. In the event of a group B failure, the manufacturer may pull a new sample at double size from either the failed assembly lot or from another assembly lot from the same wafer lot. If the new "assembly lot" option is exercised, the failed assembly lot shall be scrapped.

4.4.2.3 Group B sample selection. Samples selected from group B inspection shall meet all of the following requirements:

a. For JAN, JANTX, and JANTXV samples shall be selected randomly from a minimum of three wafers (or from each wafer in the lot) from each wafer lot.

b. Must be chosen from an inspection lot that has been submitted to and passed group A, subgroup 2, conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for life test (group B for JAN, JANTX, and JANTXV) may be pulled prior to the application of final lead finish.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and 4.4.3.1 (JAN, JANTX, and JANTXV) herein for group C testing. Electrical measurements (end-points) shall be in accordance with group A, subgroup 2 herein.

4.4.3.1 Group C inspection, table VII (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Conditions
C2	2036	Test condition E.
C6	1037	Not applicable

4.4.3.2 Group C inspection sample selection. Samples for subgroups in group C shall be chosen at random from any lot containing the intended package type and lead finish procured to the same specification which is submitted to and passes group A tests for conformance inspection. Testing of a group using a single device type enclosed in the intended package type shall be considered as complying with the requirements for that subgroup.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

Subgroup	Method	Condition
E1	1051	Condition C, 500 cycles; 22 devices, c = 0.
E1	1071	
E2	1039	80 to 85% of rated V_R, T_A = 150°C, t = 1,000 hours
E3	----	Not Applicable.
E4	3131	See 4.5.2, 22 devices, c = 0.
E5	----	Not Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

4.5 Method of inspection. Methods of inspection shall be as specified in appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance (qualification only). Thermal resistance measurements shall be conducted in accordance with method 3131 of MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power applications shall be 28 mA dc (2N720A), and 50 mA dc (2N1893 and 2N1893S).

b. Collector to emitter voltage magnitude $\geq$ 20 V dc.

c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be 25°C $\leq T_R \leq$ 75°C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to case.

f. Maximum limit shall be $R_{\theta JC}$ = (2N720A) 97°C/W, and (2N1893 and 2N1893S) 58°C/W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Collector to base cutoff current	3036	Bias conditions D, V_{CB} = 120 V dc, pulsed (see 4.5.1)	I_{CBO1}		10	µA dc
Emitter to base cutoff current	3061	Bias conditions D, V_{EB} = 7 V dc, pulsed (see 4.5.1)	I_{EBO1}		10	µA dc
Breakdown voltage collector-emitter	3011	Bias conditions D, I_C = 30 mA dc, pulsed (see 4.5.1)	$V_{(BR)CEO}$	80		V dc
Breakdown voltage collector-emitter	3011	Bias conditions D, I_C = 10 mA dc, pulsed (see 4.5.1), R_{BE} = 10 ohms	$V_{(BR)CER}$	100		V dc
Collector to base cutoff current	3036	Bias condition D V_{CB} = 90 V dc	I_{CBO2}		10	nA dc
Emitter to base cutoff current	3061	Bias condition D V_{EB} = 5 V dc	I_{EBO2}		10	nA dc
Collector to emitter saturated voltage	3071	I_C = 150 mA dc, I_B = 15 mA dc, pulsed (see 4.5.1)	$V_{CE(sat)1}$		5.0	V dc
Base emitter saturated voltage	3066	Test condition A, I_C = 150 mA dc, I_B = 15 mA dc, pulsed (see 4.5.1)	$V_{BE(sat)1}$		1.3	V dc
Forward-current transfer ratio	3076	V_{CE} = 10 v dc, I_C = 0.1 mA dc, pulsed (see 4.5.1)	h_{FE1}	20		
Forward-current transfer ratio	3076	V_{CE} = 10 v dc, I_C = 10 mA dc, pulsed (see 4.5.1)	h_{FE2}	35		
Forward-current transfer ratio	3076	V_{CE} = 10 v dc, I_C = 150 mA dc, pulsed (see 4.5.1)	h_{FE3}	40	120	

See footnotes at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.


TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation:		T_A = +150°C				
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 90 V dc	I_{CBO3}		15	µA dc
Low temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 10 V dc, I_C = 10 mA dc, pulsed (see 4.5.1)	h_{FE1}	20		
Subgroup 4						
Small-signal short-circuit forward-current transfer ratio	3206	V_{CE} = 5 V dc, I_C = 1 mA dc.	h_{fe}	35	100	
		V_{CE} = 10 V dc, f = 1 kHz, I_C = 5 mA dc	h_{fe}	45		
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 10 V dc, I_C = 50 mA dc, f = 20 MHz	$\lvert h_{fe} \rvert$	3	10	
Small-signal short-circuit input impedance	3201	V_{CB} = 10 V dc, I_C = 5 mA dc,	h_{ib}	4	8	ohms
Small-signal open-circuit output admittance	3216	V_{CB} = 10 V dc, I_C = 5 mA dc,	h_{ob}	0	0.5	µohms
Small-signal open-circuit reverse voltage-transfer ratio	3211	V_{CB} = 10 V dc, I_C = 5 mA dc,	h_{rb}		1.5×10^{-4}	
Open-circuit output capacitance	3236	V_{CB} = 10 V dc, I_E = 0, 100 kHz ≤ f ≤ 1 MHz	C_{obo}	2	15	pF
Pulse response	3251	Test condition A, except test circuit and pulse requirements See figure 3 herein.	$t_{on} + t_{off}$		30	ns
Subgroups 5, 6, and 7 Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

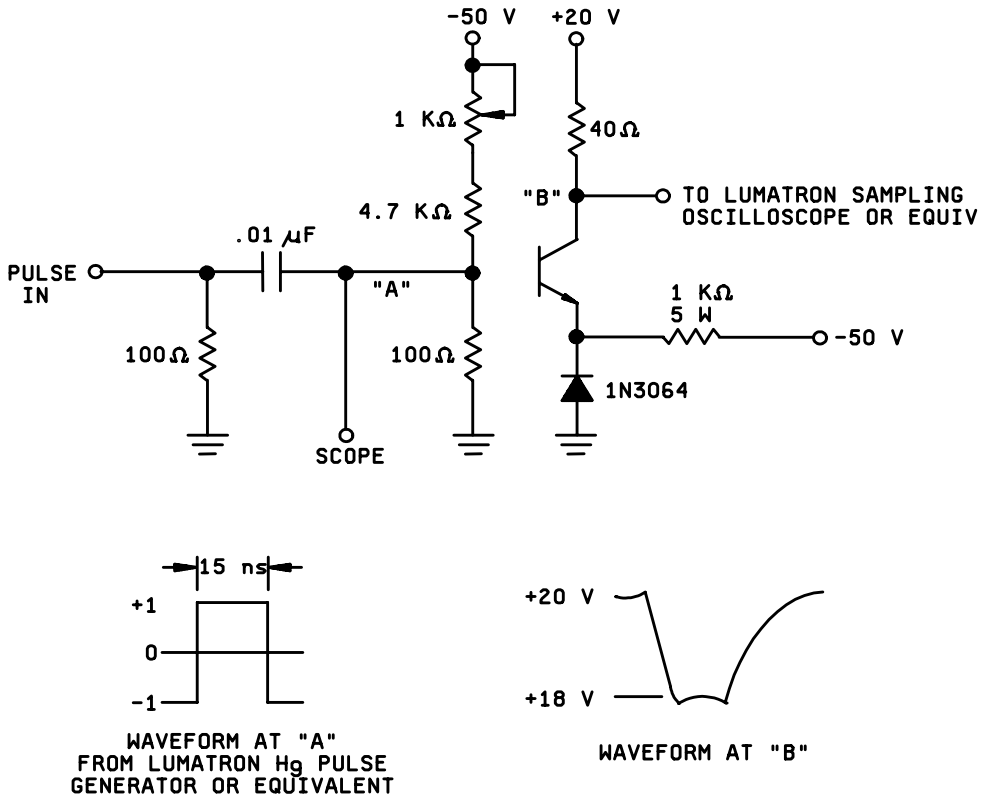

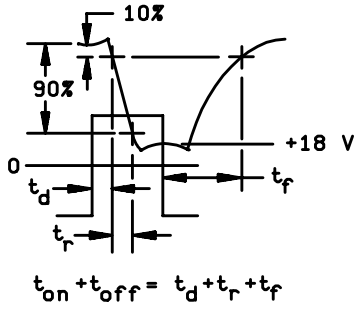

NOTES:

1. The rise time (T_r) of the applied pulse shall be 2.0 ≤ nanoseconds, duty cycle ≤ 2%, and the generator source impedance shall be 50 ohms.
2. Sampling oscilloscope: Z_{in} 100 K ohms, C_{in} ≤ 12 pF, rise time ≤ 5 nsec.

FIGURE 3. Pulse response (turn-on plus turn-off) measurement circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or purchase order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.4.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA – CC

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 13, 19, 99

Preparing activity:
DLA - CC

(Project 5961-2020)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/182E	**2. DOCUMENT DATE (YYMMDD)**

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, LOW-POWER TYPES 2N720A, 2N1893, 2N1893S, JAN, JANTX, and JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (If applicable) (3) E-mail	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE (Include Area Code) (1) Commercial: 614-692-0510 (2) DSN: 850-0510 (3) E-mail: alan_barone@dscc.dla.mil
c. ADDRESS (Include Zip Code) Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6888 Telephone (703) 767-6888 DSN 427-6888

DD Form 1426, FEB 1999 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.