MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, RF MIXER

TYPE JAN-1N25WA

This amendment forms a part of Military Specification MIL-S-19500/183A, dated 12 February 1965, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* After the preamble, insert the following:

" THIS SPECIFICATION INACTIVE FOR NEW DESIGN AFTER DATE OF THIS AMENDMENT. "

PAGE 2

* 3.3: At end of paragraph, add "Organic package sealants may be used at the option of the manufacturer."

PAGE 3

FIGURE 1: Delete and substitute new figure 1 as printed on page 2 of this amendment.

PAGE 4

FIGURE 2: Delete and substitute new figure 2 as printed on page 3 of this amendment.

NOTE: The margin of this amendment is marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 85
DLA - ES

User activities:
Army - SM
Navy - AS, OS, MC, CG,
Air Force - 13, 15, 19, 99


Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5961-0682)

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

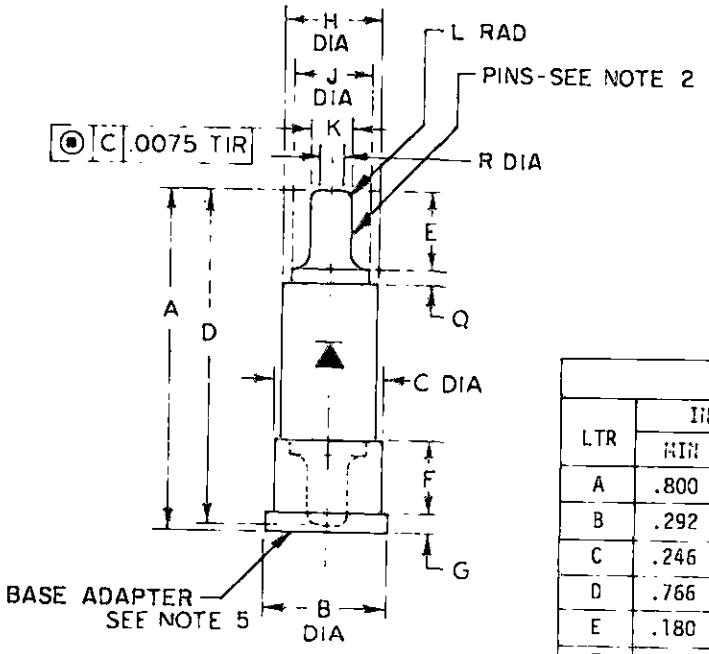


DIMENSIONS					
LTR	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	.800	.840	20.32	21.34	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D	.766	.792	19.46	20.12	
E	.180	.190	4.57	4.83	6
F	.193	.199	4.90	5.05	
G	.047	.057	1.19	1.45	
H	.222	.240	5.64	6.10	
J	.195	.215	4.95	5.46	6
K	.092	.094	2.34	2.39	2,5,6
L	.030	.046	.76	1.17	6
Q	.020	.030	.51	.76	6
R	---	.030	---	.76	6


NOTES:
1. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
2. The ends of both pins shall be smooth with no burrs or sharp edges. Within the diameter R a recess is allowed on the ends of the pins.
3. Metal parts shall be gold plated 10 msi minimum.
4. The polarity shall be indicated by an arrow, with the arrow pointing in the direction of easier current flow.
5. Removable base adapter shall establish the forward or reverse polarity.
6. Applies to both pins.

FIGURE 1. Semiconductor device, diode, type JAN-1N25WA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

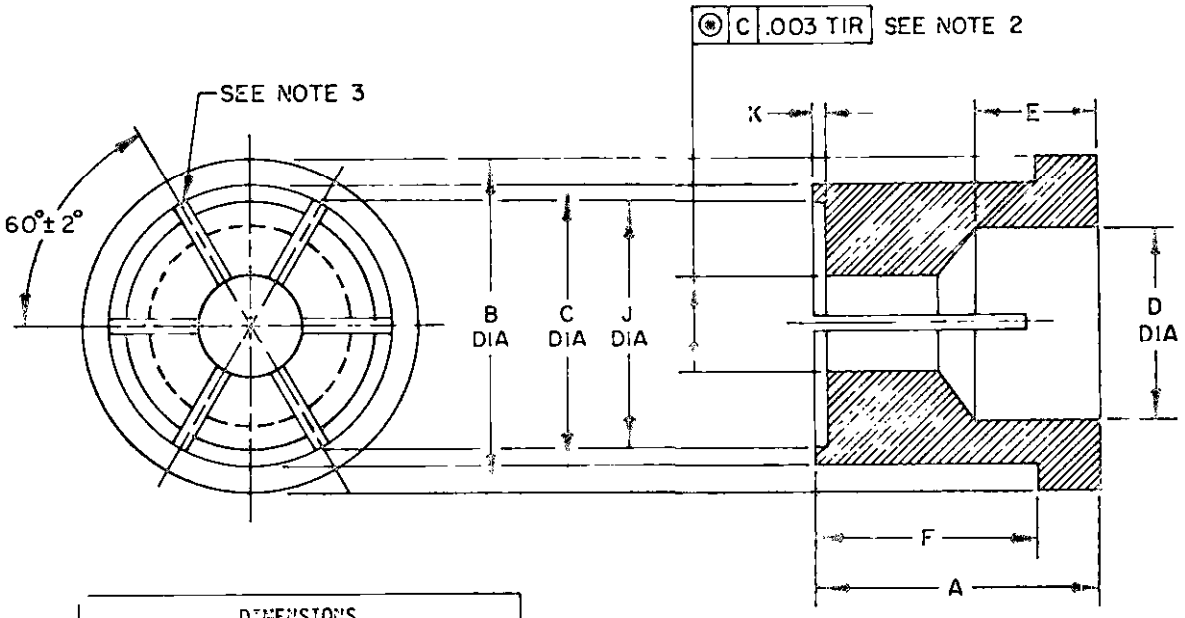

DIMENSIONS				
LTR	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.246	.254	6.25	6.45
B	.292	.296	7.42	7.52
C	.246	.250	6.25	6.35
D	---	.187	---	4.75
E	---	.100	---	2.54
F	.195	.199	4.95	5.05
G	.0915	.0920	2.324	2.337
H	.0940	.0945	2.388	2.400
J	.216	.221	5.49	5.61
K	.031	.036	.79	.91

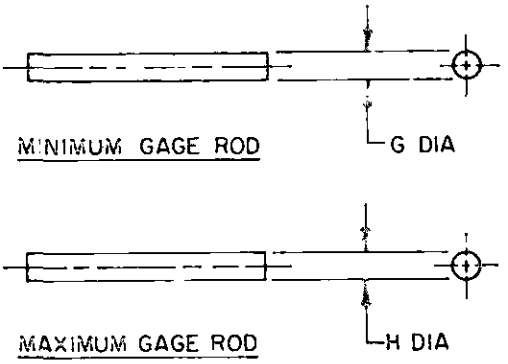

NOTES:
1. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
2. This diameter should be .100 (2.54 mm) max diameter before closing jaws. This diameter shall then be sufficiently closed, and the adapter so tempered that it will fit on the minimum gage rod and also on the maximum gage rod, in each case with a snug fit (for hand assembly).
3. Each slot shall be .013 (.33 mm) min, .017 (.43 mm) max wide by .185 (4.70 mm) deep before closing. The 6 slots are equally spaced.
4. The material for the adapter shall be beryllium copper or half-hard brass per QQ-B-626, composition 22, and shall be gold plated 10 msi minimum.
5. All burrs and sharp edges shall be removed.

FIGURE 2. Removable base adapter, included as a part of type JAN-1N25WA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.