The documentation and process conversion measures necessary to comply with this amendment shall be completed by 30 January 1995

INCH-POUND

MIL-S-19500/183A
AMENDMENT 3
31 August 1994

SUPERSEDING
AMENDMENT 2
1 June 1978

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, RF MIXER
TYPE JAN-1N25WA

This amendment forms a part of MIL-S-19500/183A, dated 12 February 1965, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

After the preamble, insert the following:

"THIS SPECIFICATION INACTIVE FOR NEW DESIGN AFTER 1 JUNE 1978"

PAGE 2

3.3, at the end of the paragraph, add: "Organic package sealants may be used at the option of the manufacturer."

PAGE 7

CONCLUDING MATERIAL; delete and substitute as printed below.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
3	3
4	4

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

"CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 13, 15, 19, 85, 99
DLA - ES"

Preparing activity:
Army - ER


Agent:
DLA - ES

(Project 5961-1597)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

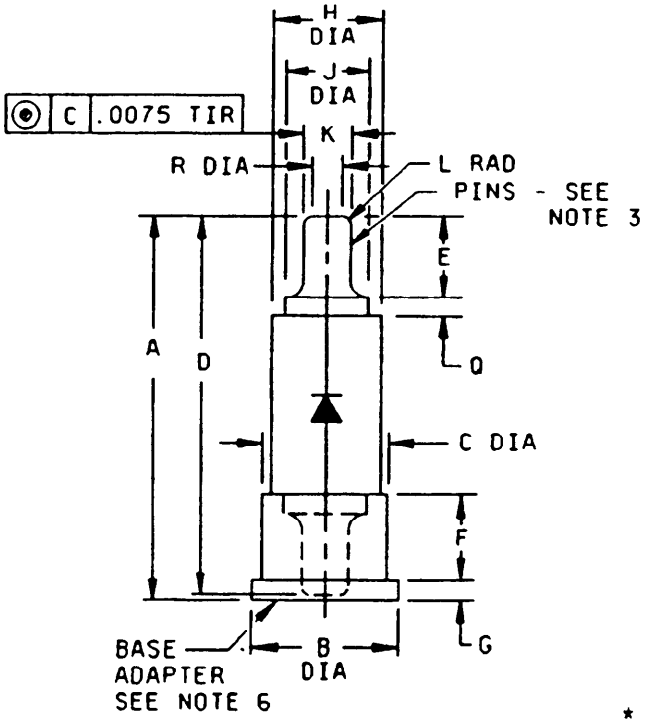


Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.800	.840	20.32	21.34	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D	.766	.792	19.46	20.12	
E	.180	.190	4.57	4.83	7
F	.193	.199	4.90	5.05	
G	.047	.057	1.19	1.45	
H	.222	.240	5.64	6.10	
J	.195	.215	4.95	5.46	7
K	.092	.094	2.34	2.39	3,6,7
L	.030	.046	.76	1.17	7
* Q	.017	.030	.43	.76	7
R		.030		.76	7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The ends of both pins shall be smooth with no burrs or sharp edges. Within the diameter R a recess is allowed on the ends of the pins.
4. Metal parts shall be gold plated 10 msi minimum.
5. The polarity shall be indicated by an arrow, with the arrow pointing in the direction of easier current flow.
6. Removable base adapter shall establish the forward or reverse polarity.
7. Applies to both pins.

FIGURE 1. Semiconductor device, diode, type JAN-1N25WA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.

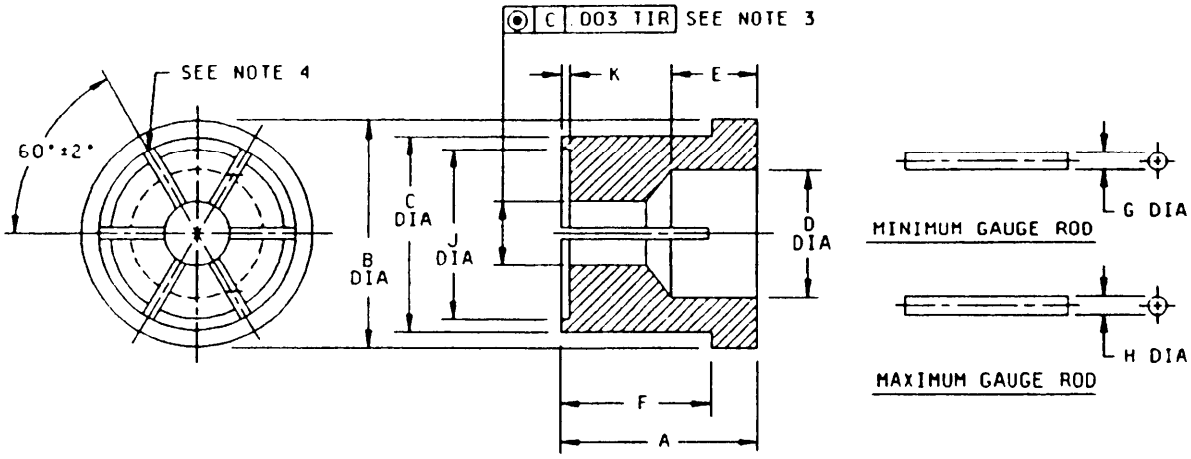

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
A	.246	.254	6.25	6.45	
B	.292	.296	7.42	7.52	
C	.246	.250	6.25	6.35	
D		.187		4.75	
E		.100		2.54	
F	.195	.199	4.95	5.05	
G	.0915	.0920	2.324	2.337	
H	.0940	.0945	2.388	2.400	
J	.216	.221	5.49	5.61	
K	.031	.036	.79	.91	

NOTES:

* 1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. This diameter should be 0.100 inch (2.54 mm) maximum diameter before closing jaws. This diameter shall then be sufficiently closed, and the adapter so tempered that it will fit on the minimum gauge rod and also on the maximum gauge rod, in each case with a snug fit (for hand assembly).
4. Each slot shall be .013 inch (0.33 mm) minimum, .017 inch (0.43 mm) maximum wide by .185 inch (4.70 mm) deep before closing. The six slots are equally spaced.
5. The material for the adaptor shall be beryllium copper or half-hard brass in accordance with QQ-B-626, composition 22, and shall be gold plated 10 msi minimum.
6. All burrs and sharp edges shall be removed.

FIGURE 2 Removable base adapter, included as a part of type JAN 1N25WA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:34Z
Check the source to verify that this is the current version before use.