MILITARY SPECIFICATION

COUPLING HALVES, LOW PRESSURE, AIR HOSE, QUICK-DISCONNECT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers quick-disconnect coupling halves designed to operate at pressure up to 150 psi, for use with all hose and portable pneumatic tools.

1.2 Classification.

* 1.2.1 Part number. Specification part number for items described in this document will be formulated as shown in Section 6.3.

1.2.1.1 Type, class, style. The type, class and style of coupling half is identified by the two numeric digits which indicate its application characteristics (see Table I).

TABLE I. Type, class, style code number.

	Type I		Type II	
Style	Class A	Class C	Class A	Class C
1	01	05	09	13
2	02	06	10	14
3	03	07	11	15
4	04	08	12	16

Types

Type I Halves - Female quick-disconnect half

Type II Halves - Male quick-disconnect half

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: San Antonio Air Logistics Center, Engineering Division, ATTN: MMEDO, Kelly AFB, TX 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:23Z
Check the source to verify that this is the current version before use.

Classes

Class A - Low capacity

Class C - High capacity

Styles

Style 1 - Male thread end
Class A sizes - 1/8, 1/4, 3/8 inch NPT.
Class C sizes - 1/8, 1/4, 3/8, 1/2, 3/4 inch NPT

Style 2 - Female threaded end
Class A sizes - 1/8, 1/4, 3/8 inch NPT
Class C sizes - 1/8, 1/4, 3/8, 1/2, 3/4 inch NPT

Style 3 - Standard hose end
Class A sizes - for .1875, .25, .3125, .375 inch I.D. hose
Class C sizes - for .1875, .25, .3125, .375 inch, .5, .625, .75 inch I.D. hose.

Style 4 - Reusable hose end with hose locking sleeve
Class A sizes - for .1875, .25, .3125, .375 inch I.D. hose
Class C sizes - for .1875, .25, .3125, .375, .5, .625, .75 inch I.D. hose

1.2.1.2 Size. The size of the coupling half is identified by the two numeric digits which indicate nominal pipe size for Styles 1 and 2 or the hose I.D. for Styles 3 and 4 (see Table II).

1.2.1.3 Hose O.D. For Style 4 coupling halves the hose O.D. must be identified by two numeric digits (see Table II). All styles other than Style 4 use ØØ.

1.2.1.4 Material. The material of the coupling half is identified by a single alphabetic character. (See Table III and 3.1).

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:23Z
Check the source to verify that this is the current version before use.

TABLE II. Size and hose O.D. code number.

Size		Code	Size		Code
1/32	(.03125)	01	25/32	(.78125)	25
1/16	(.0625)	02	13/16	(.8125)	26
3/32	(.09375)	03	27/32	(.84375)	27
1/8	(.125)	04	7/8	(.875)	28
5/32	(.15625)	05	29/32	(.90625)	29
3/16	(.1875)	06	15/16	(.9375)	30
7/32	(.21875)	07	31/32	(.96875)	31
1/4	(.25)	08	1		32
9/32	(.28125)	09	1-1/32	(1.03125)	33
5/16	(.3125)	10	1-1/16	(1.0625)	34
11/32	(.34375)	11	1-3/32	(1.09375)	35
3/8	(.375)	12	1-1/8	(1.125)	36
13/32	(.34375)	13	1-5/32	(1.15625)	37
7/16	(.4375)	14	1-3/16	(1.1875)	38
15/32	(.46875)	15	1-7/32	(1.21875)	39
1/2	(.5)	16	1-1/4	(1.25)	40
17/32	(.53125)	17	1-9/32	(1.28125)	41
9/16	(.5625)	18	1-5/16	(1.3125)	42
19/32	(.59375)	19	1-11/32	(1.34375)	43
5/8	(.625)	20	1-3/8	(1.375)	44
21/32	(.65625)	21	1-13/32	(1.34375)	45
11/16	(.6875)	22	1-7/16	(1.4375)	46
23/32	(.71875)	23	1-15/32	(1.46875)	47
3/4	(.75)	24	1-1/2	(1.5)	48

TABLE III. Material code letter.

Material	Code
Brass	B
Steel	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

FEDERAL

QQ-B-626	Brass, Leaded and Non-Leaded Rod, Shapes, Forgings, and Flat Product TH Finished Edges (Bar and Strip).
QQ-C-320	Chromium Plating (Electrodeposited).
QQ-N-290	Nickel Plating (Electrodeposited).
QQ-S-763	Steel Bars, Wire, Shapes and Forging, Corrosion Resisting.
QQ-W-423	Wire, Steel, Corrosion Resisting.

MILITARY

MIL-P-775	Packaging of Hose, Hose Assemblies, Rubber Plastic, Fabric, or Metal (including tubing), and Fittings Nozzles, and Strainers).

STANDARDS

FEDERAL

FED-STD-H28	Screw Thread, Standard for Federal Services.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-130	Identification Marking of U.S. Military Property.
MIL-STD-147	Palletized Unit Loads.
MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing of.
MS28775	Packing, Preformed, Hydraulic, Plus 275 Deg F (O, Ring).

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-government documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

*ASTM A-108	Steel Bar, Carbon, Cold Finished, Standard Quality.
*ASTM A-575	Steel Bar, Carbon, Merchant Quality, M-grade.
*ASTM A-576	Steel Bar, Carbon, Hot Wrought, Special Quality.
*ASTM B-633	Zinc on Iron and Steel, Electrodeposited Coatings of.
*ASTM D-3951	Packaging, Commercial.

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Material shall be as specified herein (see 3.3.2 and 3.3.3).

* 3.1.1 Metal surface. Wherever steel other than stainless is used in the construction, all surfaces shall be plated with nickel, zinc (type II, SC 3), or chromium in accordance with QQ-N-290, ASTM B-633, or QQ-C-320, respectively.

3.2 Design. Engagement of the type I and type II halves shall be accomplished by manually pushing the type II half into the type I socket until secure. Such engagement shall be done without tools and without manually rotating or manually retracting the type I actuating sleeve. It shall not be necessary to rotate the coupling halves with respect to each other in order to engage or disengage them. When engaged, the coupling halves shall be free to rotate with respect to each other under rated working air pressure.

3.2.1 Type I half design. Type I halves shall be designed to properly engage type II halves of the same class and size (see 1.2).

3.2.1.1 Style 1. Style 1, type I halves shall be similar to figure 1.

3.2.1.2 Style 2. Style 2, type I halves shall be similar to figure 2.

3.2.1.3 Style 3. Style 3, type I halves shall be similar to figure 3. The hose end shall conform to the manufacturer's standard commercial practice and shall be suitable for the ID hose specified (see 6.2 and 6.3).

3.2.1.4 Style 4. Style 4, type I halves with hose locking sleeves shall be similar to figure 4. The hose end shall be suitable for the ID hose specified (see 6.2 and 6.3). The locking sleeve shall be suitable for the OD hose specified (see 6.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

3.2.2 Type II half design.

3.2.2.1 Style 1. Style 1, type II halves shall be similar to Figure 5 and shall conform to Table IV.

3.2.2.2 Style 2. Style 2, type II halves shall be similar to Figure 6 and shall conform to Table IV.

TABLE IV. Dimensional Requirements - Type II Halves.

Class	Dimensions (inches)										Deg
	A	B	C	D	E	F	G	H	J	R	X
A	.427	.317	.307	.462	.211	.369	.109	.937	.191	.015	45
C	.655	.560	.560	.655	.375	.577	.109	1.375	.375	.015	45

Tolerance A, B, C, D, J ± .002; E, F, G, H, R, ± .005; X, ± 1°

3.2.2.3 Style 3. Style 3, type II halves shall be similar to Figure 7, and shall conform to Table IV. The hose end shall conform to the manufacturer's standard commercial practice and shall be suitable for the ID hose specified (see 6.2 and 6.3).

3.2.2.4 Style 4. Style 4, type II halves with hose locking sleeves shall be similar to Figure 8. The hose end shall be suitable for the ID hose specified (see 6.2 and 6.3). The locking sleeve shall be suitable for the OD hose specified (see 6.2 and 6.3).

3.3 Construction.

3.3.1 Type I half construction. Type I halves shall consist essentially of a body (including end fittings), actuating sleeve, shut-off valve, and locking mechanism.

* 3.3.2 Type I half material. Coupling springs shall be made of corrosion-resistant steel conforming to QQ-W-423. "O" rings, if used, shall conform to MS28775. Coupling valves and locking mechanism components shall be made of corrosion-resistant steel conforming to QQ-S-763, heat treated as necessary to provide suitable hardness and wear characteristics in accordance with good commercial practice. Material code B halves shall have actuating sleeves and bodies (including end fittings) made of brass conforming to QQ-B-626. Material code C halves shall have actuating sleeves and bodies (including end fittings) made of steel conforming to ASTM A-575, ASTM A-576 or ASTM A-108. An exception is that the Style 4 hose locking sleeves may be made of brass conforming to QQ-B-626.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

* 3.3.3 Type II half material. Material code B halves (including end fittings) shall be made of brass conforming to QQ-B-626. Material code C halves shall be made of steel conforming to ASTM A-575, ASTM A-576 or ASTM A-108. An exception is that the style 4 hose locking sleeve may be made of brass conforming to QQ-B-626.

3.3.4 Actuating sleeve. The coupling actuating sleeve shall be provided with a knurled, ribbed, or beaded surface to facilitate manual retraction of the sleeve during disconnect. The sleeve shall be beveled or have a radius at the front end to forestall accidental retraction.

3.3.5 Shut-off valve. The internal automatic shut-off valve shall be actuated by a spring or other suitable means of sufficient strength to automatically shut off all air flow upon disengagement from the connector. Where "O" rings are used for sealing purposes, they shall be constructed to conform to MS28775.

3.3.6 Locking mechanism. The locking mechanism shall be of sufficient strength to prevent accidental release because of vibration or impact.

3.3.7 Threads. Tapered pipe threads shall be Type NPT American Standard Pipe Threads conforming to Part II, Section VII of FED-STD-H28.

3.4 Performance. Type I halves must conform to Table V.

TABLE V. Performance.

Class	At 100 psi and 70°F. (21°C) ambient temperature	
	Minimum flow (CFM)	Maximum pressure drop at specified minimum flow (PSI)
A	10	2-1/2
C	35	2-1/2

3.4.1 Leakage. Type I halves shall not leak while engaged with or while disengaged from type II halves of the same class when tested as specified in 4.4.1.

3.4.2 Structural rigidity.

3.4.2.1 Type I halves. While engaged with a type II half of the same class, the type I half shall withstand without permanent deformation or failure, a crush load of 500 pounds applied uniformly to an area of the actuating sleeve surface not exceeding one square inch. The type I half shall be capable of functioning in accordance with 3.2 after removal of the load. The type I half shall not leak after removal of load when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:23Z
Check the source to verify that this is the current version before use.

3.4.2.2 Type I half locking mechanism. The type I half locking mechanism contained in the type I half shall withstand a tensile load of 500 pounds applied directly to an engaged type II half of the same class without releasing the type II half, or without deformation or failure of the type I half. The coupling shall not leak after removal of load when tested as specified in 4.4.1.

3.5 Marking. Types I and II halves shall be marked for identification in accordance with the applicable requirements of MIL-STD-130.

3.6 Workmanship. Workmanship shall be in accordance with high grade commercial practice covering this class of equipment.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection.

4.2.1 Lot. All type I and II halves of the same type, class, style and materials offered for delivery at one time shall be considered a lot for purposes of inspection.

4.2.2 Sampling for examination. A random sample of type I and type II halves shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level II. The acceptable level shall be 1.5 percent defective.

4.2.3 Sampling for test. A random sample of type I and type II halves shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-1.

4.2.4 Material and metal surface. Unless otherwise specified, certification showing conformance to the material and metal surface requirements of this specification shall be available to the Government Inspector for each lot.

4.3 Examination. Each of the samples selected in accordance with 4.2.2 shall be examined to verify compliance with this specification. The acceptance or rejection of halves containing defects classified in Table VI shall be in accordance with Standard MIL-STD-105, Acceptable Quality Level (AQL) of 1.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

4.4 Test procedure. Type I halves selected in accordance with 4.2.3 shall be assembled with mating type II halves of the same class and subjected to the following tests: Leak test (4.4.1), transverse load test (4.4.2) and locking mechanism test (4.4.3). Failure of any samples to pass any of these tests shall be cause for rejecting the lot. A mating coupling half of the same size, alternate to the type being procured will be furnished by the Government when requested by the contractor for conducting tests specified herein.

4.4.1 Leak test. While engaged with a type II half from the same class, each of the type I halves selected in accordance with 4.2.3 shall be connected to an air source of 300 psi and immersed in water for a minimum of 5 minutes to determine compliance with 3.4.1. This test shall be repeated with the mating type II half disengaged for a period of 10 minutes. Any leakage of air from the type I half under either condition shall be cause for rejection.

TABLE VI. Classification of defects in accordance with MIL-STD-105.

Categories	Defects
Critical:	None defined.
Major:	
101	Not finished as required.
102	Dimensions do not conform to illustrations.
103	Sharp burrs, sliver, or splinter affecting serviceability.
104	Marking identification incomplete, illegible or missing; hose or pipe connecting size not as specified in contract or order.
105	Pipe threads do not conform to the requirement of 3.3.7.
106	Visual inspection revealing material or metal surface not as specified in 3.3.2 or 3.3.3 as applicable.
107	Type I and Type II halves do not engage by manual pushing only.
108	Coupling and connector is not free to rotate as specified in 3.2.
109	Type I and II halves do not separate without the use of hand tools.
Minor:	None defined.

4.4.2 Transverse load test. Type I halves assembled with type II halves shall be subjected to a transverse crushing load of 500 pounds applied at the exterior surface of coupling actuator sleeve over an area of one square inch maximum for a period of 10 seconds minimum. Permanent deformation or failure of coupling to function properly in accordance with 3.2, after removal of load, shall be cause for rejection. Couplings and type I halves shall be tested for leakage in accordance with 4.4.1 after completion of locking mechanism test.

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:23Z
Check the source to verify that this is the current version before use.

4.4.3 Locking mechanism test. A tensile load of 500 pounds shall be applied for not less than 10 minutes to a type II half of the same class engaged to each sample type I half. Release of the type II half under load, or failure of coupling to function properly in accordance with 3.2 after removal of load, shall be cause for rejection. The coupling and type I halves shall then be tested in accordance with 4.4.1 for leakage caused by deformation.

4.5 Inspection of packaging. An examination shall be made to determine that preservation, packaging, packing, and marking, as required by Section 5 of this specification, are complied with. Sampling shall be accomplished in accordance with MIL-STD-105 at inspection level S-4 with an acceptable quality level of 4.0 percent defective. Defects will be as specified in Table VII.

TABLE VII. Defects.

Examination	Defect
Marking exterior and interior	Omitted; incorrect, illegible; or improper size, location, sequence or method of application.
Preservation	Preservation improperly applied or missing, or incorrect type.
Material	Component missing, damaged, type defective, or not as specified.
	Inadequate application of components such as incomplete closure of case liner, container flaps, loose strapping, inadequate stapling, bulging or distortion of containers, blocking and cushioning inadequate, improper or missing.
Content	Contents per container is more or less than required.

* 5. PACKAGING

5.1 Preservation. Preservation shall be level A, C, or Commercial as specified (see 6.2).

5.1.1 Level A. The coupling halves shall be preserved in accordance with MIL-P-775.

5.1.2 Level C. The level C preservation for the coupling halves shall conform to the MIL-STD-794 requirements for this level.

5.1.3 Commercial. The commercial preservation of the coupling halves shall be in accordance with the requirements of ASTM-D-3951.

5.2 Packing. Packing shall be Level A, B, C or commercial, as specified (see 6.2).

5.2.1 Levels A and B. The preserved coupling halves shall be packed for shipment in accordance with MIL-P-775 except fiberboard boxes shall not be used for Level A packing.

Source: https://assist.dla.mil Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

5.2.2 Level C. The Level C packing for the coupling halves shall conform to the MIL-STD-794 requirements this level.

5.2.3 Commercial. The preserved coupling halves shall be packed in accordance with the requirements of ASTM-D-3951.

5.2.4 Palletization. When specified (see 6.2) unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized in accordance with MIL-STD-147. Palletized loads shall be uniform in size and quantities to the greatest extent possible. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking.

5.3.1 Levels A, B, and C. In addition to any special or other identification marking required by the contract (see 6.2), each unit pack, intermediate and exterior container and unitized load shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial markings shall be in accordance with the requirements of ASTM-D-3951.

5.4 General.

5.4.1 Exterior containers. Exterior containers (see 5.2.1, 5.2.2, 5.2.3 and 5.2.4) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.5.

6. NOTES

6.1 Intended use. Coupling halves covered by this specification are intended to be used in all areas where a low pressure (up to 150 psig), quick-disconnect connection for air hose and portable pneumatic tools is needed. Water use and other service are not intended. Brass coupling halves are intended where corrosion or sparking are of prime consideration. Otherwise, steel is intended for durability. Engagement without sleeve actuation is intended to facilitate connection under difficult or awkward work conditions.

* 6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Definitive military specification part number required (see 1.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:23Z
Check the source to verify that this is the current version before use.

c. Selection of applicable levels of preservation, packaging, packing, marking and commercial/industrial (see 5.1, 5.2 and 5.3).

d. When palletized loads are required (see 5.2.5).

6.3 Definitive military specification part number. The military specification part number is a definitive part number which corresponds to the type, class, style, and size of coupling halves covered by this specification and defines the requirements of the options presented under this specification. The military specification number, type, class, style code number, size code number, hose O.D. code number, and material code letter are combined to form the definitive military specification part number as shown below:

M4109 - XX - XX - XX - X

Type, class, style code number (see Table I and 1.2.1.1)

Size code number (see Table II and 1.2.1.2)

Hose O.D. code number for style 4 halves (see Table II and 1.2.1.3 - all styles other than style 4 use ØØ)

Material code letter (see Table III and 1.2.1.4)

* Example P/N: M4109-09-20-00C Style I, type II, class A, 5/8 O.D.; carbon steel half.

* 6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.5 Subject term (key word) listing.

Quick-Disconnect
Coupling Halves
Low Pressure
Air Hose
Actuating Sleeve
Shut-off Valve

Custodians:
Army - ME
Navy - AS
Air Force - 99

Reviewing activity:
DLA - CS

Using activity:
Army - AR, GL

Preparing activity:
Air Force - 82

(Project 4730-0773)

Source: https://assist.dla.mil - Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

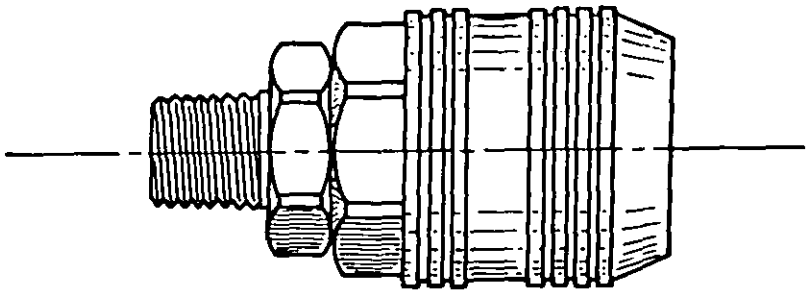


FIGURE 1. Style 1, type I half.

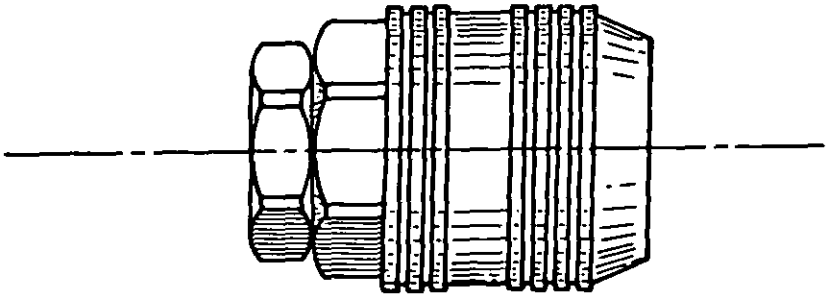


FIGURE 2. Style 2, type I half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

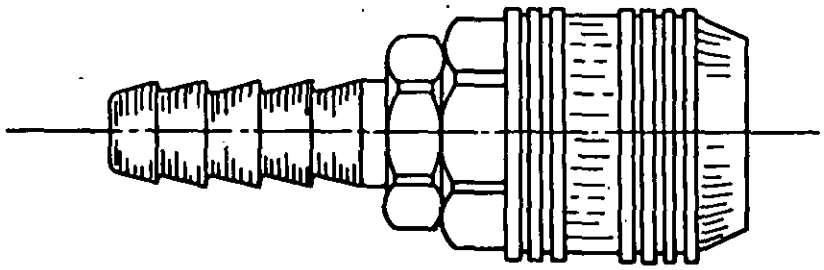


FIGURE 3. Style 3, type I half.

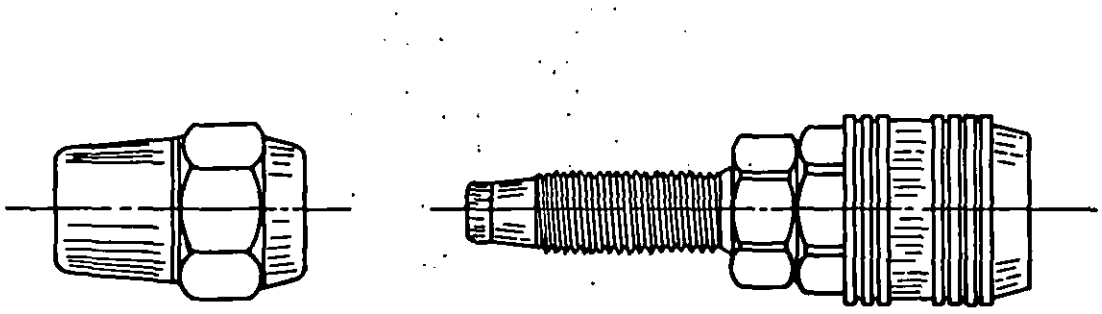


FIGURE 4. Style 4, type I half with hose locking sleeves.

Source: https://assist.dla.mil/ -- Downloaded: 202640-17T03:23Z
Check the source to verify that this is the current version before use.

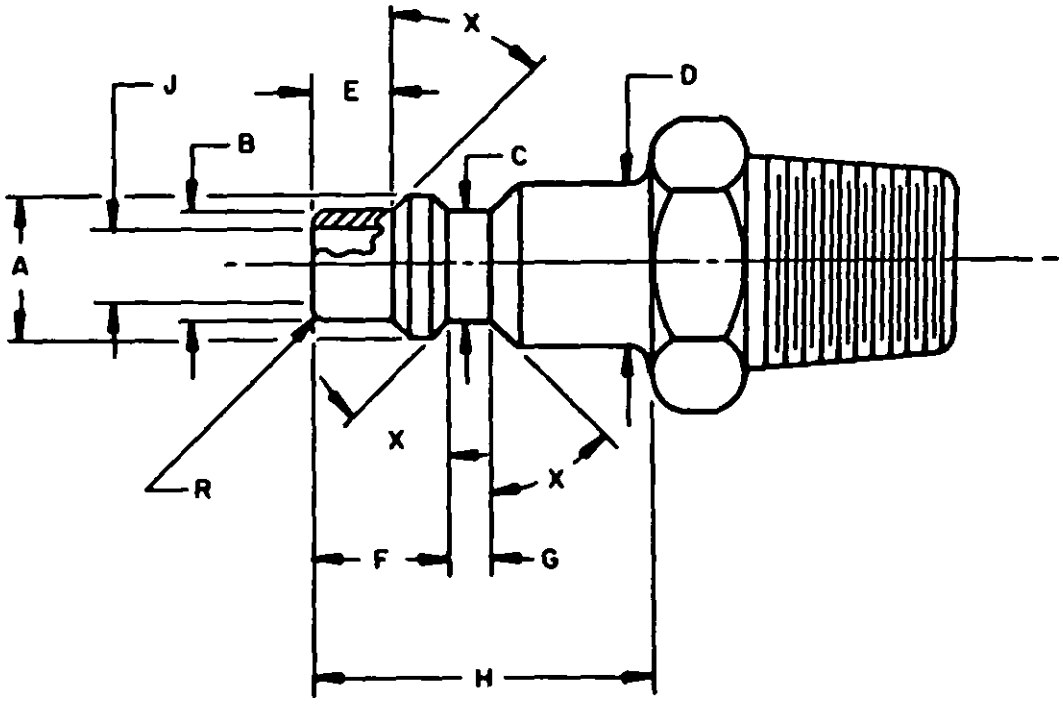


FIGURE 5. Style 1, type II half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

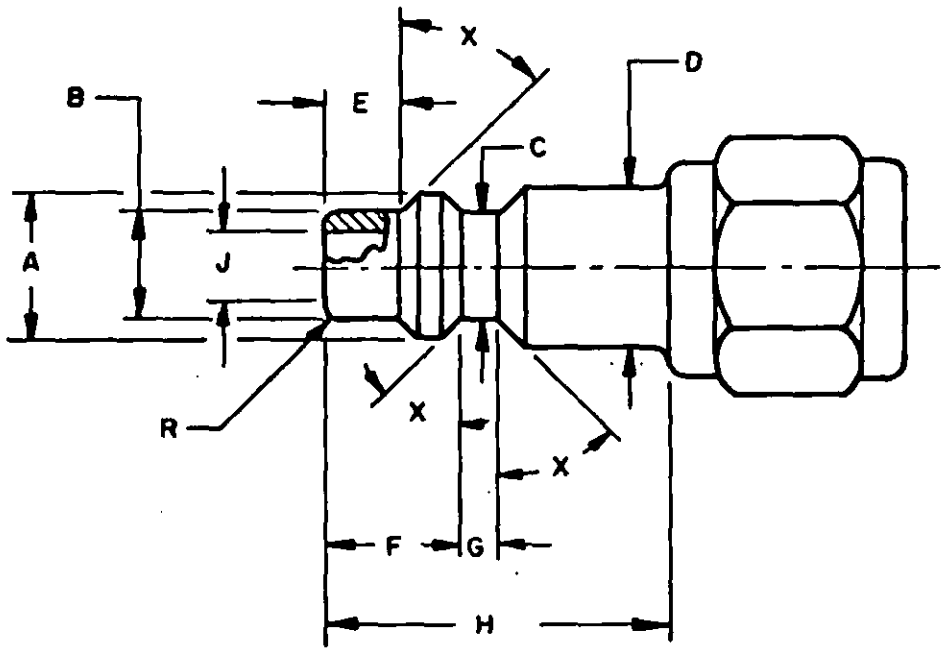


FIGURE 6. Style 2, type II half.

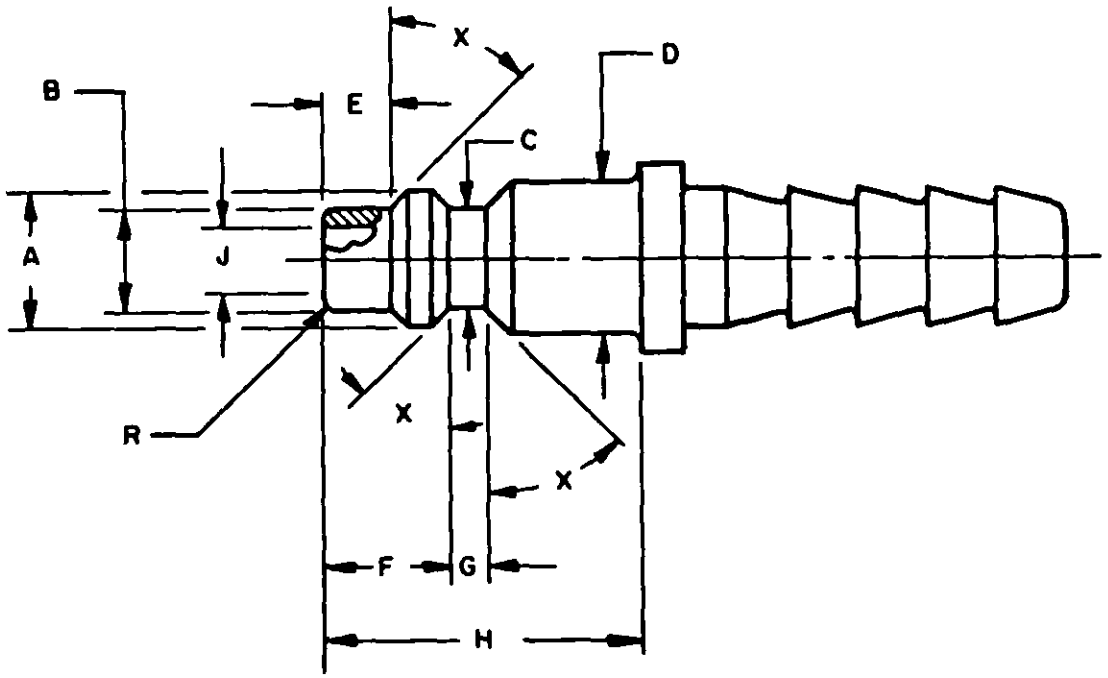


FIGURE 7. Style 3, type II half.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

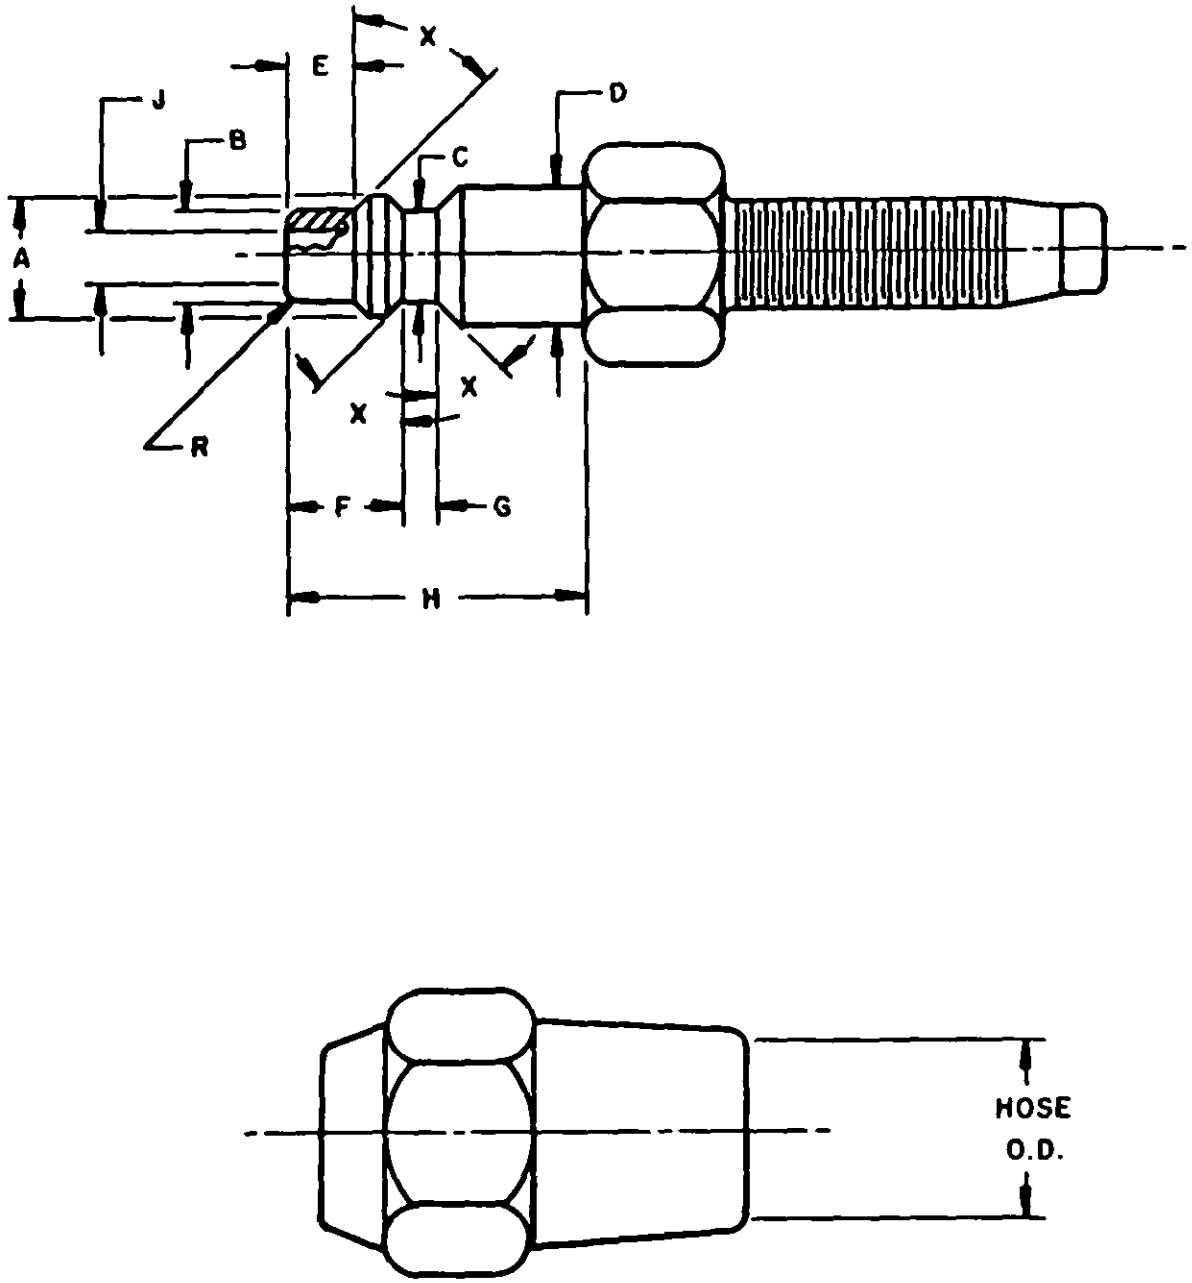


FIGURE 8. Style 4, type II halves with hose locking sleeves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office: 1982—360-878/5804

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

San Antonio ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-4109F	Coupling Halves Low Pressure Air Hose, Quick Disconnect

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:23Z
Check the source to verify that this is the current version before use.